Enclosure systems and accessories
Klippon® Protect

Version 2024

Weidmüller

Enclosure systems and accessories
Catalogue 5

Enclosure systems and accessories

Introduction

Klippon® Protect

Enclosures

Cable entries

Cable entry system

Tools

Appendix

Service and support

Technical appendix

Index Search according to type or order number

Enclosure systems and accessories

Introduction
Page A.2

Klippon® Protect
Page B.2

Klippon® TB
Page C.12

Klippon® EBx
Page C.94

Klippon® EBi
Page C.122

Klippon® STB
Page C.138

Klippon® K
Page C.172

Klippon® POK
Page C.208

TBF Range
Page C.254

MPC Range
Page C.262

FPC Range
Page C.274

Standard cable glands - Plastic
Page D.6

Standard cable glands - Brass
Page D.8

EMC cable glands
Page D.11

Cable glands - stainless steel
Page D.13

Ex-cable glands
Page D.16

Accessories
Page D.34

Blanking plugs
Page D.45

Compensating elements
Page D.50

Adapter
Page D.54

Cable entry system
Page E.2

Cable entry plates
Page E.16

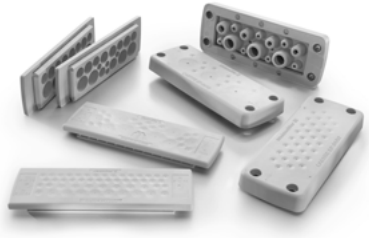

Tools
Page F.2

Introduction

Introduction	Introduction	A.2
	Klippon® Services	A.8

Digitalisation presents you with many new challenges
We will support you to master them

The social and economic changes being caused by digitalisation are also pushing industrial production towards new, data-based services that need to be integrated into the value creation chains in a profitable manner.

Our objective is to support you with the implementation of these new structures and processes right from the start, and to successfully accompany you on new paths in the Industry 4.0 era.

Thanks to the entire range of Weidmüller products, the use of our local production and assembly facilities, and our global sales network, we can lay the very best foundations for a successful partnership with you, our customer.

Whether decentralisation, modularisation, data consistency and transparency or the implementation of completely individual applications in the IoT environment: the factory of the future needs to be able to take on a wide variety of challenges.

With our Klippon® products and services, we have created innovative and future-oriented solutions while setting new standards for applications within a wide range of industries.

More information about our Klippon® products and services at www.weidmueller.com/KlipponProtect

Dive into the Klippon® world and discover our innovative products and services.

KLIPPON®
PROTECT

It's Klippon®
Bringing excellence together

For more than 50 years, Klippon® has been synonymous with innovation, competence, and quality of products and services in the automation technology. Klippon® Services is the most recent extension to the well known, proven Klippon® Connect and Klippon® Protect products. Klippon® Services provides innovative software and assembly services. With Klippon® we are your reliable partner throughout the complete value creation process. Create your competitve advantage with Klippon®.

Your special advantages:
The flexible Klippon® Protect enclosure system is the perfect addition to our Klippon® Connect range of terminal blocks. You can rely on our mounted enclosures to offer a custom fit to your requirements and provide excellent protection. Klippon® Services completes our products range with optimal support for your processes.

Klippon® Services combines consultancy, planning, application expertise and industry know-how. You benefit from our one-stop production services. Thereby you will reduce costs, increase efficiency, and simplify quality management. We guarantee quick, quality-focused production and order-based availability. We deliver even individually assembled products anywhere within a short time.

Klippon® Connect offers a wide range of tailored application products, universal terminals and in-process services. A complete range of standard solutions and application-specific products, including all conventional connection technologies and functions for your individual application.

With Klippon® Protect, you can choose from a wide range of universal and application-specific enclosures. These products cover all relevant approvals required for use in industrial and explosive risk zones. They are flexible enough for optimal adaptation to your requirements.

Klippon® Services – expertise for your requirements
Our service connects worldwide

Planning, engineering, and production processes have to be completed with ever greater speed, precision, and efficiency. Such an increase in efficiency needs innovative tools and processes that optimally support the entire process of product creation and assembly.

With Klippon® Services, we offer a comprehensive, digitalised support for planning and developing, offering and ordering, and assembly and delivery of your distinct product.

By bringing together the entire value chain – backed by efficient software tools, extraordinary expertise, and a technologically leading production – we are answering your requirements concerning a future-orientated, ready-to-install assembly.

Your special advantages:
One-stop configuring, ordering, and delivery of the assembled product: With Klippon® Services you benefit from greater flexibility in your project business. Our services span from reliable planning and professional engineering to manufacturing in perfect quality.

An order will dispatch after just four days from Germany when a certain service level is selected. Order quantities start at one.

Configuration and ordering are simple with the Weidmüller Configurator
www.weidmueller.com/wmc

Fast Delivery Service
Obtain offers 24/7 and within minutes, including directly orderable article numbers. The Weidmüller Configurator (WMC) for planning and configuration is key for consistent processes.

Engineer to Order
We offer highly qualified engineering service for standard or modified products.

Customised Solutions
Our extensive customer consulting, powerful project management, and flexible production enable individual, customised solutions.

Efficient digital engineering

Weidmüller Configurator (WMC) integrates CAE access and direct offer

The choice is yours

Within Klippon® Services the WMC supports you step-by-step as you select and configure your assembled terminal strips and an extensive range of enclosures, including accessories and further Weidmüller products. You decide whether you want to carry out the complete configuration in WMC or whether you want to import data sets from your CAE system and simply transfer them back again after making final adjustments in the WMC. Whichever way you decide to go, you will benefit from centralised documentation that is always up to date, you will avoid transmission errors and you will no longer have to share your sensitive data with a third party. Using STEP, the universal 3D CAD exchange format, you can now also export your WMC solution directly into your CAE system, ensuring complete data consistency in all your systems.

Your special advantages:
Configuration is simple, safe, and convenient because of user-friendly operation, distinct design, and integration in your engineering workflows from planning with CAE to documentation.

Three reasons to start using the Weidmüller Configurator now:

1. Proven configuration designs in real 3D
Digital product information is based on the classification standard eCl@ss advanced. An integrated plausibility and collision control with full digital documentation ensure that your configuration is 100 % reliable.

2. Seamless CAE integration
Integrated interfaces enable the simple exchange of product data between the WMC and all common engineering tools, such as Zuken E³, EPLAN ElectricP8 or ProPanel.

3. Interfaces for automated manufacturing
The WMC provides all necessary digital information for a full automation, such as subsequent assembly, marking with M-Print® PRO, and wiring. This is the key for the fast delivery service.

Configuration and ordering are simple with the Weidmüller Configurator
www.weidmueller.com/wmc

WMC

E3. series

ePLAN electric P8

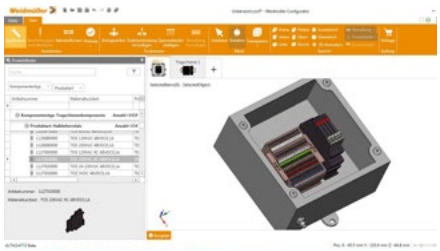

Full engineering support
The product data can be used in engineering systems such as EPLAN Electric P8 or Zuken E³. series. 3D models are available for panel set-up.

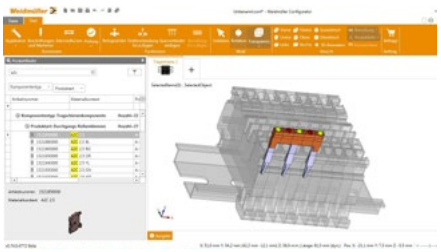

Helpful wizard system
The intelligent wizard function documents every step in which a component is assembled and only allows permissible configurations. Mistakes are corrected automatically.

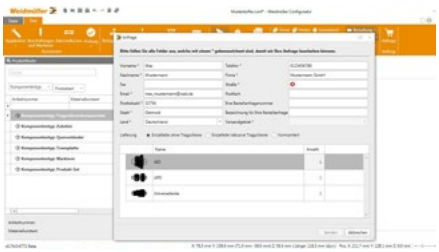

Integrated request function
The selected components can be requested directly – as individual components, pre-installed on a terminal rail, or as an assembled enclosure.

Klippon® Services – focus on your core business

„Fast Delivery Service“ enables the delivery of assembled products at short notice, even with Ex approval

Today you are confronted with tough challenges in mechanical and plant engineering as well as in control cabinet production. On the one hand, the production of your products is becoming increasingly made to order/ custombuilt and a lot more complex. On the other hand, you have to deal with high price pressures, tight deadlines and short-term change requests. In addition, many products are requested in small quantities.

To meet these growing demands, you need ever more efficient planning and manufacturing processes - and you need to be able to rely on 100% fast and reliable delivery. With our Fast Delivery Service, we offer you both. The integrated concept simplifies your planning, accelerates your manufacturing processes and guarantees the delivery of individually assembled and ready-to-install terminal strips or enclosures within the shortest possible time. In this way, you reduce your costs, increase your flexibility and stay one step ahead of your competitors.

Klippon® Connect and Klippon® Protect
Assembled enclosures with terminal strip, add-on components and optional Ex approval.

Klippon® Protect
Individual empty enclosures with holes, threads or cut-outs according to your specifications – optionally unassembled, equipped or with add-on parts.

WMC – Digital Engineering
Our Weidmüller Configurator (WMC) gives you access to the "Fast Delivery Service". You can import directly your CAE data.

Klippon® Connect
Ready-to-install assembled terminal strips including electronic components - individually manufactured according to your specifications.

Determine your own delivery time thanks to Fast Delivery Service

We offer the choice between 3 service levels

Your assembled product

Simply configure your assembled terminal strip, your empty enclosure or your assembled enclosure with our **Weidmüller Configurator.**

Ready for shipment after 4 working days

Ready for shipment after 9 working days

Shipping time depends on the destination region

Fast Delivery

The ideal solution for very demanding delivery schedules

- **5* Day Delivery europe-wide**
- Selected product range

- **10* Day Delivery europe-wide**
- Wide range of products

* Valid for orders from Germany

Fast Offer

Fast price for full bandwidth

- Individual configuration
- Direct offer

Added value

Offer provided in minutes

Available 24/7, including order numbers for direct ordering

Assembly in quantities of 1

Ready-to-install assembly that meets your individual specifications

Reliable delivery

Automated manufacturing and direct shipment from Germany

Your advantages at a glance

with our Fast Delivery Service

Reduce your costs

Your plants are becoming more and more specific and complex. Therefore, you have to stock many required components in your warehouse. With Fast Delivery, you receive complete assembled products – and can significantly minimise your purchasing and storage costs.

Increase your flexibility

More and more often you have to manufacture small quantities of plants and be prepared for shortterm changes. With Fast Delivery, you get individual terminal strips and enclosures from batch size 1 – and you receive them ready for installation. This increases your flexibility.

Meet your delivery commitments

You must complete and deliver your individual plants within tight time frames. Otherwise, your customers face high costs due to delays and production downtimes. With Fast Delivery, you can speed up all your processes and reliably meet your delivery commitments.

With Klippon® Services you benefit from optimal support

"Engineer to Order" – applications, based on your design

In a globally-orientated world, automation technology functions are becoming more complex by facing ambitious goals toward energy efficiency and smart production. We are your reliable partner for the best connections in Industrial Connectivity with our standard or customised products.

Planning
You can rely on the support of our worldwide network of industrial managers, who know the challenges you face and who can assist with your particular applications.

Engineering
After receiving your requirements, our experts analyse together with you the individual application and start the development process.

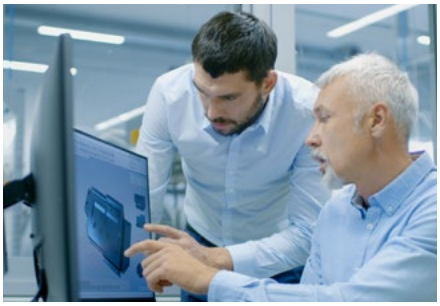

Worldwide engineering network
Within our global engineering network, we are combining our expertise with your requirements – worldwide. This expertise allows us to assist you with advice and planning support toward resolving together the everyday challenges of your applications.

Klippon® Services – plan, install, operate
Individual projects need "Customised Solutions"

Our drive is your efficiency. Therefore we accompany you in all phases of your individual project and continuously develop our Klippon® Services product range. Throughout the entire duration of the project, professional project management is at your side so that you know that your products are in good hands up to delivery and beyond. The result are tailor-made products that are precisely tailored to the specific requirements of your project.

Designing and Prototyping
Engineers create design studies and prototypes together with our experienced designers.

Consulting
Our application experts advise you on the development of your individual project solution.

Planning
A flexible, automised production process ensures high quality products, whether standard or customised.

Operation
Count on our solution-orientated after sales service combined with a complete traceability of the assembled products.

Installation
Reduce your single part orders and stock while we focus on your final product.



Assembly
We combine excellent products for your individual solution. Bringing added value for you and your customers.

Manufacturing expertise at the highest level
Precision and reliability for your products

Our engineering and manufacturing expertise influences decisions in all areas of modern connection technology. It therefore plays an integral part of every solution. A variety of customised configurations can be constructed and produced at our worldwide assembly facilities according to individual requirements. All this based on maximum process and manufacturing reliability.

Continuous data management enables automated production and makes Industry 4.0 tangible.

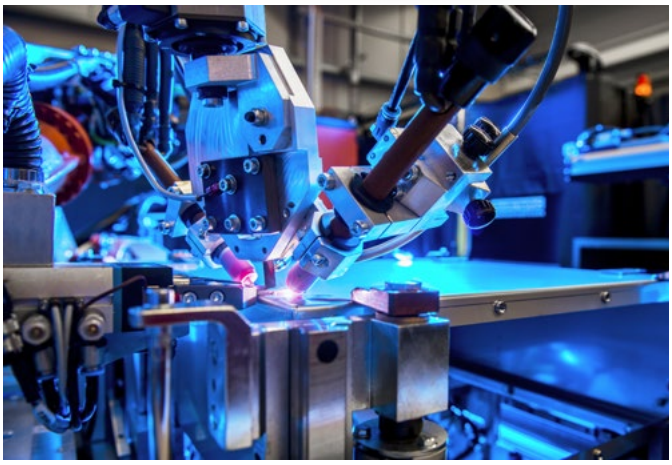

Automated processes – here shown for our Klippon® TB enclosure range – ensures a reliable and consistent production process.

Whether you need modified products, pre-assembled terminal rails or complete devices for individual applications: we produce the solutions developed for your application quickly and flexibly.

When quality is the key

You demand perfection – we take care of every detail

In the face of the international competition, you demand that all your equipment meets high safety, quality, and performance standards. Our products and services will support you to achieve these goals. We support you to advance new ideas that provide real value for your plant operation. After over 50 years of experience, we can determine the ideal combination of electrotechnical components which best suit your plant. We take into account your plant's specific conditions, including the local standards at its operation site. That's our definition of service.

Our laboratory assures the high quality and functionality of products.

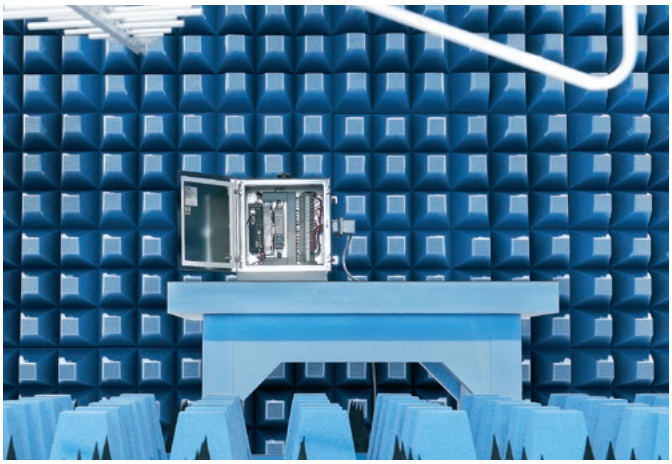

Right from the start, we check exactly which components, materials, and systems are suitable for your application.

With our state-of-the-art processing technology, we ensure the highest quality during production and assembly.

We guarantee fast, quality-orientated production and order-ready product availability.

Klippon® Protect

Klippon® Protect	Universal program	B.2
	Application program	B.4
	Industrial applications	B.6

Klippon® Protect universal enclosure

Functional - For the highest demands

We designed the Klippon® Protect enclosure ranges to satisfy the extraordinary protection requirements for field applications. They provide outstanding high-performance features that satisfy the toughest demands within every industry and every application. The universal enclosures Klippon® Protect are made of stainless steel, aluminium, or plastic. Either one guarantees excellent protection for your assembly. With these robust enclosures, you can implement various field applications to suit your requirements. The matching system accessories enable simple integration, expansion, and customisation.

Your special advantages:

- Outstanding performance even in extreme environmental conditions
- Robust and secure for maximum protection requirements
- Approved based on the latest international quality and safety standards

Reliable protection
The Klippon® TB has an integrated duct keeping contamination and moisture from penetrating when the enclosure is open. The outer earthing bolt is equipped with an IP67-certified seal mechanism and is protected against accidental rotation.

Temperature and sealing characteristics
All Klippon® TB and Klippon® STB enclosures are equipped with a silicone seal. It protects applications in extreme temperature conditions.

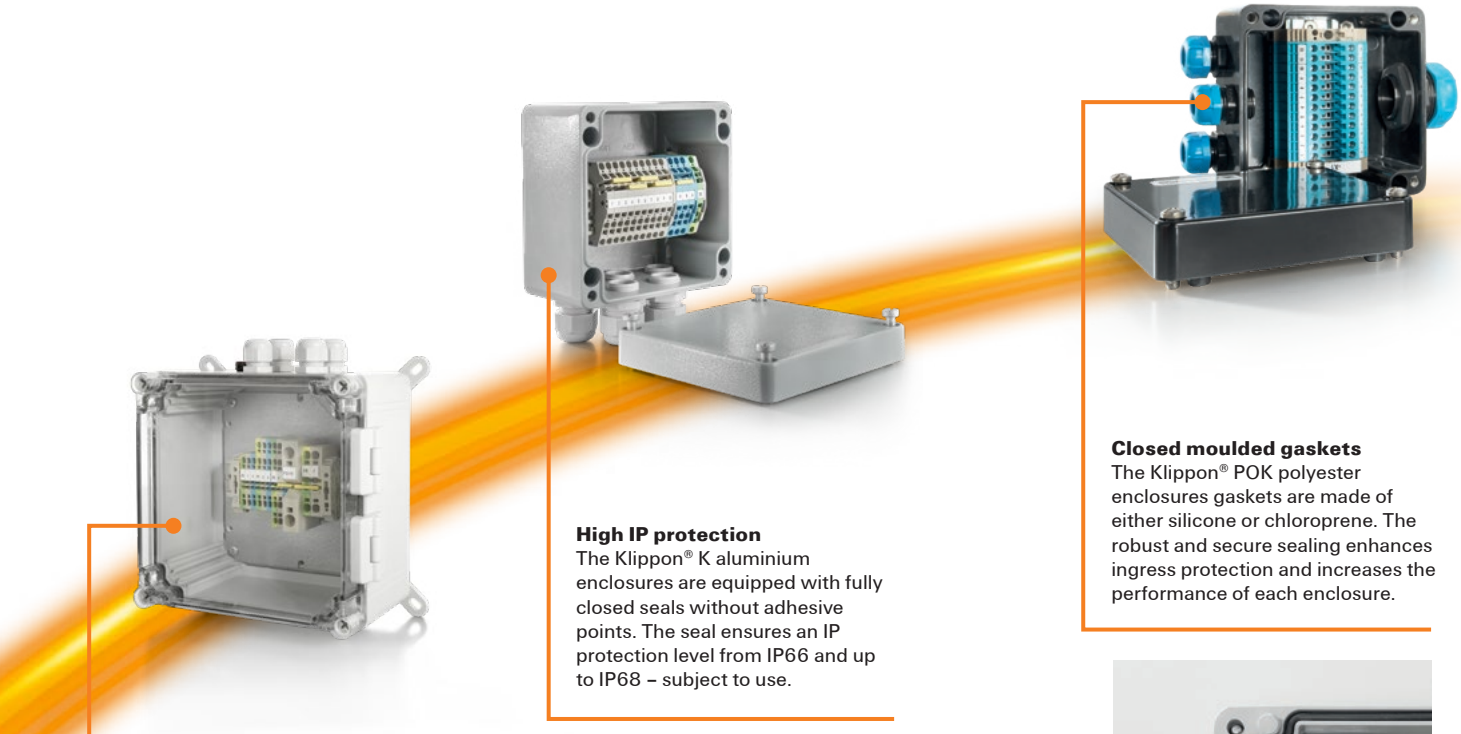

Versatile lid design
The TBF, FPC and MPC enclosures are available with either transparent or grey lids.

High IP protection
The Klippon® K aluminium enclosures are equipped with fully closed seals without adhesive points. The seal ensures an IP protection level from IP66 and up to IP68 – subject to use.

Closed moulded gaskets
The Klippon® POK polyester enclosures gaskets are made of either silicone or chloroprene. The robust and secure sealing enhances ingress protection and increases the performance of each enclosure.

Robust for harsh environments
The Klippon® EBi series for industrial and Klippon® EBx series for hazardous areas are characterized by attractive performance features such as rain gutter and pressure control and allow a very cost-efficient calculation.

Cable Glands and Cable Entry Systems: perfectly fulfiling your application needs

We offer a variety of add-on components such as cable glands for a multitude of purposes and applications in addition to our extensive Klippon® Protect range. The supplementary cable entry system Cabtite allows connecting a pre-assembled cable to an installation enclosure or cabinet.

Klippon® Protect application enclosure
At home in your markets

The Klippon® Protect solutions offer a wide range of standard industrial applications and explosive environments applications. The following overview of our Klippon® Protect range will give you an insight into its possibilities, including finding an individual solution.

Application range
Our Klippon® Protect application range provides solutions for monitoring and safety, measurement and control technology, and power distribution. These application solutions are based on high quality and comprehensive approvals for explosive risk zones.

Your special advantages:
- Consistent enclosure design for a wide range of applications
- Various standard solutions for maximum safety, reliable functionality and low follow-up costs
- Certified for potentially explosive atmospheres and standard industrial applications

Power distribution boxes and interfaces
In a complex environment, the efficient and reliable distribution of electrical energy requires optimally designed interface solutions that respond to the special features of the application. Our high-current terminal solutions offer an excellent interplay with our certified terminals with weather-resistant Klippon® Protect enclosures.

Monitoring and Safety
Through the assembly of units, we provide a myriad of monitoring and safety solutions; including proximeters for vibration measurement, temperature transmitters for monitoring of operating temperature, and eddy current sensors for non-contact distance measurement chains.

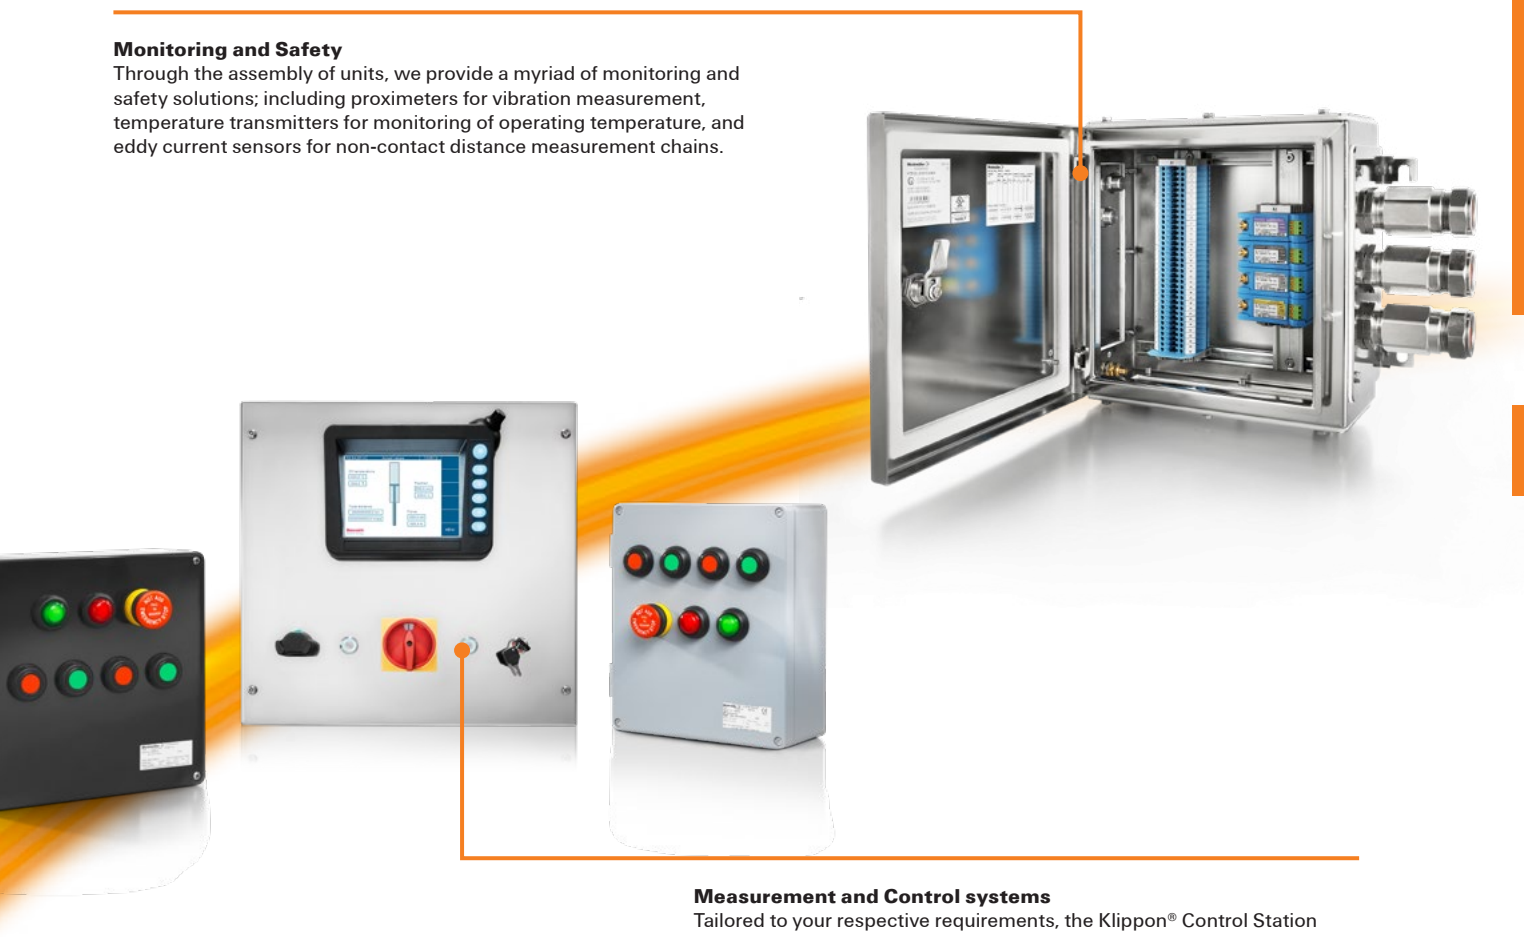

Measurement and Control systems
Tailored to your respective requirements, the Klippon® Control Station combines control devices and status displays with various electronic components. You receive a turnkey plug-and-play solution – including all required approvals.

Harmonisation – the key to market success

Klippon® Protect is individually tailored to meet the changing and extremely harsh environments of the different industries. Certified to international standards, they also meet the latest ATEX and IECEx regulations for potentially explosive atmospheres in process industries. They have certifications for use in various standard industrial applications, such as automation, railway, transportation, and energy.

Benefit from innovative automation concepts as a success factor

Klippon® products for better performance and more efficient processes

The advancing digitalisation of industrial manufacturing processes places ever higher demands on automation technology. Decentralised systems with high flexibility and easy operation are trend. System design, installation process, and plant operation are becoming more complex.

Klippon® products and services are optimally adapted to the requirements of modern automation concepts. They combine highest quality with excellent flexibility and performance – and thus become an integral part of your automation solutions. In the versatile Klippon® product portfolio you will find everything you need to optimise your production systems. The choice is yours.

Your special advantages:

- Wide range of products and services for every application
- Optimised for convenient planning, simple installation and efficient maintenance
- Highest product quality for reliable function and high durability
- Tested safety and conformity to standards
- Perfectly suited for flexible, decentralised automation concepts

Klippon® K
Klippon® K aluminium enclosures ensure a high level of system availability as well as the quick commissioning of your machines. Excellent shock, vibration, and temperature resistance combined with corrosion-resistant materials and surfaces make these enclosures particularly secure and long-lasting.

Klippon® EBi
Klippon®EBi stainless steel enclosures are suitable for both indoor and outdoor use, and can be combined with Klippon® Connect and Klippon® Protect components. They are extremely corrosion resistant and insensitive to dust and spray water. Ideally suited to the decentralised control of your system.

Cabtite
The Cabtite cable management system allows quick cabling adjustment in the event of system modifications or during service and maintenance work. Modular components guarantee maximum flexibility while simultaneously ensuring a high level of protection.

Create real added value for railway applications

Klippon® Protect enclosure solutions for trains, track systems, and signalling equipment

In critical applications such as the railway industry, safety and reliability play a decisive role. With Klippon® Protect, we as experts in the transmission of power, signals and data in industrial environments offer optimal enclosure solutions for state-of-the-art systems for production, power generation and railway engineering. We work closely with our customers to optimise their distribution of power, signals and data, to promote their digital transformation or to support them in the development of new business models.

Customised development at the highest level
Our team of experts work with you to develop customised solutions that meet the high demands of the railway industry. We are on hand to assist you in everything from application consulting to solution-oriented development and certification to IRIS-qualified project management. This makes Weidmüller your competent partner for demanding railway applications.

Your special advantage:
- Vibration and shock-resistant components
- Compliance with all relevant railway standards
- IRIS-certified project management
- Solution-oriented development with a professional project team

IRIS™ Certification

Digital transformation –
IoT for railway applications

Secure electrical interfaces
Customised solutions for trains and routes

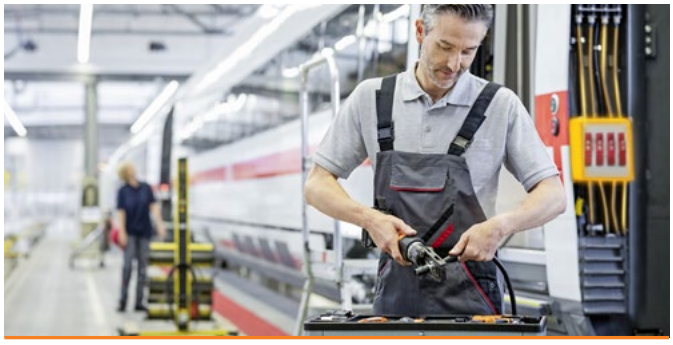

Flexible power distribution –
Efficient solutions for railway vehicles

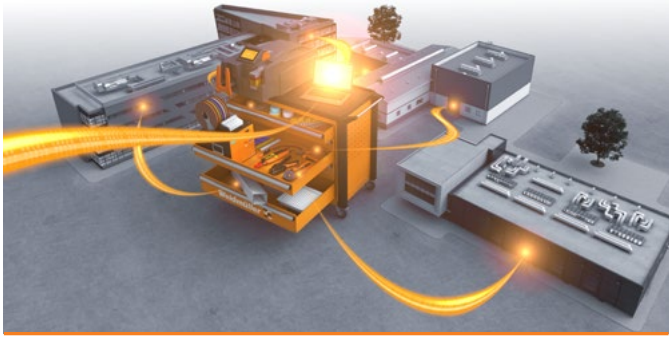

Workplace solutions
Optimised processes in panel building

Customised solutions for power distribution
We develop customer-specific solutions based on our extensive portfolio. These include the robust Klippon® enclosure and the tried-and-tested terminals of the W and HV series, which can withstand high mechanical loads. All solutions are certified according to current railway standards and are resistant to vibrations, shocks and climactic influences.

Klippon® Fire Rated Box
Our robust terminal boxes for the safe supply of power to emergency systems in case of fire. In accordance with DIN 4102-12, they ensure the further functioning, for example, of emergency lighting or tunnel ventilation systems for up to 90 minutes. The assembled enclosures of the Klippon® POK and Klippon® STB series are particularly suitable for locations requiring corrosion resistance, impact resistance and high protection classes.

Klippon® TB Railway
Our optimal enclosure solutions for use in tunnels and trains and on tracks. The new certified Klippon® TB Railway portfolio is the perfect basis for customised solutions. With this product range as a basis, our team of international experts can realise customer-specific projects especially quickly and efficiently.

Comply with international standards in the energy supply sector

Efficient and safe solutions with Klippon®

Alongside renewable energies such as wind and solar, the generation of energy from gas, coal and nuclear power will remain a key part of the world's energy mix for a long time to come. Our range of products therefore also features solutions for the specific requirements of the traditional energy sector.

With our complete solutions for all types of energy generation and supply, we can help you to guarantee the safe and reliable operation of your systems while also ensuring maximum availability. We provide you with the right Klippon® products for industrial solutions, harsh environments, explosive risk zones and safety-relevant applications – naturally with all of the market-specific certifications and approvals.

Your special advantages:

- International approvals and certifications
- Modified products for industry-specific requirements
- High resistance to weathering and corrosion
- Resistance to vibration, shock, and climatic conditions
- Compliance with explosion protection guidelines

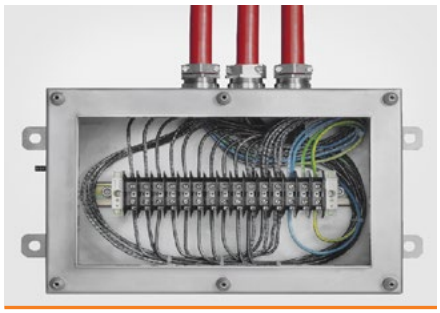

Customer-specific solutions
Klippon® products are modified, assembled and approved in line with the respective sector. They comply with all of the required standards and guidelines on explosion protection and are resistant to vibrations, shock, and climatic conditions. For safe use in containment or non-containment areas.

Robust plastic enclosure
Klippon® plastic enclosures are extremely resistant to weather and corrosion, making them perfectly suited for use in the photovoltaic sector. International approvals and standards guarantee maximum security.

Intelligent accessories
Cable glands in protection classes IP54 to IP66, IP67 and IP69k are available as accessories. These cable glands are suitable for the most diverse applications and also cover high temperature ranges.

Safely control work processes in hazardous areas on site

Certified Klippon® Protect control and display elements

Global demand for energy sources is on the rise. This presents a range of new challenges for the process industry: from research into new energy sources through to their processing and consumption.

Klippon® products satisfy these requirements with innovative technologies and active safety concepts. They ensure secure connections between the interfaces for different areas and guarantee safe, effective, and sustainable operation within the processes. Klippon® Protect control and display elements support all areas of automation within the process industry.

Your special advantages:

- Innovative control and display elements for an extremely wide range of automation applications
- Robust enclosure solutions with comprehensive protection for the assembled components
- Convenient independent engineering with the Weidmüller Configurator
- Professional advice during the engineering process on request
- Certified products that comply with the latest local and international standards including ATEX and IECEx.

Klippon® Control Station
The robust "on-site control station" is available in customer-specific optimised versions, with different enclosure materials and assembled components. Perfect for individual project solutions with international approvals for explosive risk zones.

Klippon® TB
The robust enclosures with electro-polished surfaces are perfectly suited to harsh environments, e.g. for use as distributor enclosures in offshore, food and beverage applications. The sealing system can withstand high operating temperatures and offers IP66/67 protection against moisture and dust.

Klippon® Services
Order specific enclosure solutions with explosion protection for your application, and make the most of the professional consulting and engineering services offered by our advisors – or carry out the engineering work yourself using the Weidmüller Configurator.

Increase efficiency and reliability in shipbuilding

Robust enclosure solutions with Klippon® Protect

Mobility plays a central role in our globalised world. As a result, the movement of people and goods between continents is becoming increasingly important. Maritime transport in particular faces the challenge of offering maximum performance at low prices. To meet this requirement, efficient and reliable solutions are in ever greater demand in the shipbuilding industry. We support the maritime transport of the future with a broad portfolio of safe connection solutions and individually configurable components for every need. Our products and solutions are certified according to current industry standards. They are produced using cutting-edge manufacturing processes and stand for quality, durability and reliability.

Your special advantage:

- Particularly robust and durable solutions
- Future-proof thanks to certification according to the latest industry standards
- Resistant to a wide range of external influences
- Optimally suited for harsh environments
- Versatile use

Klippon® K
Our robust and resistant enclosures offer IP protection classes from IP66 to IP68 – depending on the requirements. The customer-specific production in our Application Centers ensures quick assembly and a low risk of failure.

Klippon® STB
Extremely stable and corrosion-resistant, Klippon® STB enclosure solutions offer reliable protection for equipment and control components – even in the harsh environments typical for the rail and shipping industries. Optimal sealing properties allow use in a broad temperature range of between -60 °C to +100 °C.

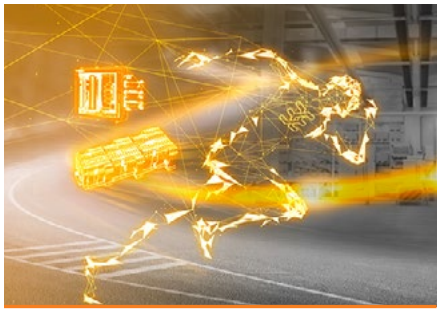

Fast delivery service
Quotations in a manner of minutes, all articles numbers at a glance, articles for immediate order, available 24 hours a day every day. The planning and configuration of terminal strips and enclosures with the Weidmüller Configurator (WMC) are the key to efficient and consistent processes.

Enclosures

Enclosures

Introduction	C.2
Klippon® TB enclosure series	C.12
Klippon® TB MH – Multi Hinge	C.14
Klippon® TB QL – Quarter Lock	C.62
Klippon® TB FS – Fixing Screw	C.66
Klippon® Protect – Terminal Boxes – Klippon® TB	C.68
Klippon® TB FS – Railway	C.74
Klippon® TB – Large	C.86
Klippon® EB	C.90
Klippon® EBx	C.94
Klippon® EBx HS – Hinged Screws	C.96
Klippon® EBx QL – Quarter Lock	C.110
Klippon® EBi QL – Quarter Lock	C.122
Klippon® EBi HS – Hinged Screws	C.130
Klippon® STB – Stainless steel & Sheet steel enclosures	C.138
Klippon® Protect – Terminal Boxes – Klippon® STB	C.150
Klippon® Control Station – Klippon® STB	C.156
Klippon® Fire Rated Box – Klippon® STB	C.166
Klippon® K – Aluminium enclosures	C.172
Klippon® Protect – Terminal Boxes – Klippon® K	C.196
Klippon® Control Station – Klippon® K	C.198
Klippon® POK – Polyester enclosures	C.208
Klippon® Protect – Terminal Boxes – Klippon® POK	C.230
Klippon® Control Station – Klippon® POK	C.238
Klippon® Fire Rated Box – Klippon® POK	C.248
TBF – Polyester enclosures	C.254
MPC – Polycarbonate enclosures	C.262
FPC – Polycarbonate enclosures	C.274

Metal enclosures

	Klippon® TB MH	Klippon® TB QL	Klippon® TB FS	Klippon® EBi QL	Klippon® EBi HS
	Ex	Ex	Ex		
Material	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Material Specification	Stainless steel 1.4404 (316L), enclosure 1.50 mm	Stainless steel 1.4404 (316L), enclosure 1.50 mm	Stainless steel 1.4404 (316L), enclosure 1.50 mm	Stainless steel 1.4301 (304)	Stainless steel 1.4301 (304)
Sea water resistance	very good	very good	very good	very good	very good
UV resistance	very good	very good	very good	very good	very good
Halogen free / cadmium free	x / x	x / x	x / x	x / x	x / x
Surface finish	electropolished	electropolished	electropolished	untreated	untreated
Intended use	Explosive hazard areas, offshore, oil and gas industry, chemical industry, process industry	Explosive hazard areas, offshore, oil and gas industry, chemical industry, process industry	Explosive hazard areas, offshore, oil and gas industry, chemical industry, process industry	Machine construction, transport, power	Machine construction, transport, power
Dimensions					
H x W x D (min.) in mm	229x152x133	229x152x133	229x152x133	200x200x150	200x200x150
H x W x D (max.) in mm	980x740x200	980x740x200	980x740x200	500x400x200	500x400x200
Geometry	3 standard depths	3 standard depths	3 standard depths	2 standard depths	2 standard depths
Specific characteristics					
Gland plates	0,1,2,3,4	0,1,2,3,4	0,1,2,3,4	0,1	0,1
Type of gasket	Flat gasket	Flat gasket	Flat gasket	Flat gasket	Flat gasket
Seal material	Silicone	Silicone	Silicone	Chloroprene	Chloroprene
Enclosure attachment	4 or 6 mounting feet with 11 mm hole size	4 or 6 mounting feet with 11 mm hole size	4 or 6 mounting feet with 11 mm hole size	Direct mounting (9 mm mounting holes on rear wall) or via mounting feet (optionally available)	Direct mounting (9 mm mounting holes on rear wall) or via mounting feet (optionally available)
Installation mounting	4 or 6 mounting bolts with M6 threaded holes	4 or 6 mounting bolts with M6 threaded holes	4 or 6 mounting bolts with M6 threaded holes	4 or 6 mounting bolts with M6 threaded holes	4 or 6 mounting bolts with M6 threaded holes
Temperature range	-60 °C...+135 °C (IP66) -60 °C...+105 °C (IP67)	-60 °C...+135 °C	-60 °C...+135 °C (IP66) -60 °C...+105 °C (IP67)	-40 °C...+85 °C	-40 °C...+85 °C
Impact resistance	IK 09 (10J) in accordance with DIN EN 50102 / 7J in accordance with IEC 60079-0	IK 09 (10J) in accordance with DIN EN 50102 / 7J in accordance with IEC 60079-0	IK 09 (10J) in accordance with DIN EN 50102 / 7J in accordance with IEC 60079-0	IK 09 (10J) in accordance with DIN EN 50102	IK 09 (10J) in accordance with DIN EN 50102
IP - protection class	IP66, IP67 /	IP66 /	IP66, IP67 /	IP66	IP66
NEMA protection class	Nema 3, Nema 4x, Nema 12	Nema 3, Nema 4x, Nema 12	Nema 3, Nema 4x, Nema 12		
Flammability rating					
Surface resistance (in ohms)					
Approvals					
ATEX	x	x	x		
AEx	x	x	x		
CCOE / INMETRO	x / x	x / x	x / x		
cULus	x	x	x		
IECEx	x	x	x		
CCC / KOSHA	x / x	x / x	x / x		
LR / DNV	- / x	- / x	- / x		
Configuration					
	Lid hinges Removable lid Gland plates Welded mounting feet Fitting for a padlock	Lid hinges Gland plates Welded mounting feet Quarter lock	Removable lid Gland plates Welded mounting feet	Lid hinges Gland plates Direct mounting, Optional mounting feet Quarter lock	Lid hinges Gland plates Direct mounting, Optional mounting feet

	Klippon® EBx HS	Klippon® EBx QL	Klippon® TB Large	Klippon® TB Landscape
	Ex	Ex	Ex	Ex
Material	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Material Specification	Stainless steel 1.4404 (316L), enclosure 1,5 mm	Stainless steel 1.4404 (316L), enclosure 1,5 mm	Stainless steel 1.4404 (316 L), enclosure min. 2,0 mm	Stainless steel 1.4404 (316L), enclosure 1,5 mm
Sea water resistance	good	good	good	very good
UV resistance	very good	very good	very good	very good
Halogen free / cadmium free	x / x	x / x	x / x	x / x
Surface finish	Brushed	Brushed	Brushed	electropolished
Intended use	Explosive hazard areas, oil and gas industry, chemical industry, process industry	Explosive hazard areas, oil and gas industry, chemical industry, process industry	Explosive hazard areas, oil and gas industry, chemical industry, process industry, Industry, infrastructure	Explosive hazard areas, offshore oil and gas industry, chemical industry, process industry, Industry, infrastructure
Dimensions				
H x W x D (min.) in mm	200x200x150	200x200x200	1000x500x300	350x550x200
H x W x D (max.) in mm	800x600x300	800x600x300	1500x1000x500	508x762x200
Geometry	2 standard depths	2 standard depths	3 standard depths	1 standard depths
Specific characteristics				
Gland plates	1	1	1	0, 1
Type of gasket	Flat gasket	Flat gasket	Foamed gasket and flat gasket for flange plates	Flat gasket
Seal material	Silicone	Silicone	Silicone	Silicone
Enclosure attachment	4 mounting feet (optionally)	4 mounting feet (optionally)	4 or 6 welded mounting feet with 14 mm hole size	4 or 6 mounting feet with 11 mm hole size
Installation mounting	4 or 6 mounting bolts with M6 threaded holes	4 or 6 mounting bolts with M6 threaded holes	Several M8 mounting bolts	4 or 6 mounting bolts with M6 threaded holes
Temperature range	-55 °C...+135 °C	-55 °C...+135 °C	-50 °C...135 °C	-60 °C...+135 °C (IP66) -60 °C...+105 °C (IP67)
Impact resistance	IK 09 (10J) in acc. with DIN EN 50102 / 7J in acc. with IEC 60079-0	IK 09 (10J) in acc. with DIN EN 50102 / 7J in acc. with IEC 60079-0	IK 09 (10J) in acc. with DIN EN 50102 / 7J in acc. with IEC 60079-0	IK 09 (10J) in acc. with DIN EN 50102 / 7J in acc. with IEC 60079-0
IP - protection class NEMA protection class	IP66 / Nema 4x	IP66 / Nema 4x	IP66 / Nema 3, Nema 4x, Nema 5	IP66, IP67 / Nema 3, Nema 4x, Nema 12
Flammability rating	UL94 V0	UL94 V0	UL94 V0	UL94 V0
Surface resistance (in ohms)				
Approvals				
ATEX	x	x	x	x
AEx	-	-	x	-
CCOE / INMETRO	- / x	- / x	- / x	- / x
cULus	-	-	x	x
IECEx	x	x	x	x
CCC / KOSHA	- / -	- / -	x / -	x / x
LR / DNV	- / -	- / -	- / x	- / x
Configuration				
	Lid hinges Removable lid Gland plates	Lid hinges Removable lid Gland plates	Lid hinges Removable lid Gland plates Welded mounting feet	Lid hinges Removable cover. no tools needed Gland plates Welded mounting feet Fitting for a padlock

Metal enclosures

	Klippon® STB		Klippon® K	
	Ex		Ex	
Material	Stainless steel	Sheet steel	Aluminium	
Material Specification	Stainless steel 1.4404 (316L) 1.50 mm	Powder-coated steel sheet 1.0330	High quality aluminium alloy (Al-Si12)	
Sea water resistance	very good	good	good	
UV resistance	very good	insufficient	very good	
Halogen free / cadmium free	x / x	x / x	x / x	
Surface finish	electropolished, Mirror-polish	powder-coated	neutral, powder-coated	
Intended use	Ex areas, packing industry, railways, shipping, process industry	Packing industry, railways, shipping, process industry	Ex-areas, process industry, transport, railways, shipping, port facilities, packaging, mechanical engineering	
Dimensions				
H x W x D (min.) in mm	120x120x80		50x45x30	
H x W x D (max.) in mm	250x400x130		310 x 400 x 180	
Geometry	5 standard depths		12 standard depths	
Specific characteristics	**Ex-version**	**Industrial version**	**Ex-version**	**Industrial version**
Gland plates	none	none	none	none
Type of gasket	Flat gasket	Flat gasket	Shaped gasket	Shaped gasket
Seal material	Silicone	Silicone	Silicone	Chloroprene, Silicone
Enclosure attachment	External holders with 8 mm holes	External holders with 8 mm holes	4 holes for M4 to M6 screws	4 holes for M4 to M6 screws
Installation mounting	20 mm C-rail welded to the enclosure	20 mm C-rail welded to the enclosure	M4 to M6 threaded holes	M4 to M6 threaded holes
Temperature range	-60 °C...+100 °C	-60 °C...+120 °C	-60 °C...+135 °C	-40 °C...+80 °C (CR); -60 °C...+135 °C (VMQ)
Impact resistance	7J in accordance with IEC 60079-0	IK 09 (10J) in accordance with DIN EN 50102	7J in accordance with IEC 60079-0	IK 09 (10J) in accordance with DIN EN 50102
IP – protection class NEMA protection class	IP66 / Nema 4, 4x	IP66	IP66, IP67 / Nema 4x	IP66, IP67, IP68 / Nema 4x
Flammability rating				
Surface resistance (in ohms)				
Approvals				
ATEX	x		x	
AEx	x			
CCOE / INMETRO	– / x			
cULus	x			x
IECEx	x		x	
CCC / KOSHA	– / x			
LR / DNV	x / -	x / –	– / x	– / x
Configuration				
	TAS 20 C-profile rail Welded mounting feet Earth studs in enclosure lid and base		Internal earthing screw in the enclosure base an external earth stud	internal earthing screw in the enclosure base

Plastic enclosures

	Klippon® POK		TBF	MPC	FPC
	Ex				
Material	Polyester		Polyester	Polycarbonate	Polycarbonate
Material Specification	Glass-fibre reinforced polyester in accordance with DIN 16913		Glass-fibre reinforced polyester, polycarbonate transparent cover		
Sea water resistance	very good		very good	very good	very good
UV resistance	good		good	good	good
Halogen free / cadmium free	x / x		x / x	x / x	x / x
Surface finish	Grey (industrial version), Black (Ex version)		grey	grey	grey
Intended use	Ex-areas, energy production, transportation, process industries, port facilities, railway industry		Building installation, transportation, energy production, building sites, manufacturing industry, packaging industry	Building installation, transportation, energy production, building sites, manufacturing industry, packaging industry	Building installation, transportation, energy production, building sites, manufacturing industry, packaging industry
Dimensions					
H x W x D (min.) in mm	75x80x55		186x151x140	125x75x75	200x200x132
H x W x D (max.) in mm	250x600x120		603x603x175/210	250x175x150	600x400x132
Geometry	5 standard depths		3 standard depths	4 standard depths	1 standard depth
Specific characteristics	**Ex version (black)**	**Industrial version (grey)**			
Gland plates	none	none	none	none	none
Type of gasket	Shaped seal	Shaped seal	O-ring	Foam seal	Foam seal
Seal material	Silicone	Chloroprene	Polyurethane	Polyurethane	Polyurethane
Enclosure attachment	4 holes for M4 to M6 screws	4 holes for M4 to M6 screws	4 holes or external mounting brackets (accessory)	4 holes or external mounting brackets (accessory)	4 holes or external mounting brackets (accessory)
Installation mounting	M4 to M6 threaded holes	M4 to M6 threaded holes	4 or 6 clamping screws M4	Self-tapping screws	Self-tapping screws
Temperature range	-55 °C...+100 °C	-40 °C...+100 °C	-50 °C...+130 °C (Continuous temperature max. 70 °C) (grey); -35°C ...+120°C ((Continuous temperature max. 70 °C) (transparent)	-50 °C...+100 °C (grey); -40 °C...+60 °C (transparent)	-50 °C...+100 °C (grey); -40 °C...+60 °C (transparent)
Impact resistance	7J in accordance with IEC 60079-0	IK 08 (5J) in accordance with DIN EN 50102	IK08 (5J) in accordance with IEC 62208, IK10 (20J) in accordance with IEC 62262	IK 08 in accordance with EN 60529	IK 08 in accordance with EN 60529
IP – protection class	IP66	IP66	IP66 (transparent lid) IP67 (grey lid)	IP66, IP67	IP66, IP67
Flammability rating	UL94 V0	UL94 V0, HL 3 acc. to EN 45545-2 on request	UL94 HB (grey), V2 (transparent)	V2	V2
Surface resistance (in ohms)	$<10^9$	10^{12}	10^{12}	10^{16}	10^{16}
Approvals					
ATEX	x				
AEx	x				
CCOE / INMETRO					
cULus	x	x			
IECEx	x				
NEPSI / KOSHA	- / x				
LR / DNV	x / x	x / x			
Configuration					
	Fastening screws for the mounting plate		grey or transparent lid	grey or transparent lid	grey or transparent lid

Drawing design – For chapter C

The drawings contained in chapter C are constructed in the following way.

To identify the enclosure side views, these are marked with the letters A, B, C, D, E, and F. The schematic 3D representations shown underneath are of an enclosure that has been wall mounted.

F shows the view of the enclosure lid (front aspect),
E shows the interior surface of the enclosure (rear wall of the enclosure with the cover removed).
A shows the view of the enclosure from above and
B the view of the enclosure from underneath.
C shows the left and
D the right side of the enclosure.
E is the front view of the enclosure interior with the cover removed (enclosure rear wall).

You can find the dimensions of the enclosure sides for all enclosure sizes in each drawing.

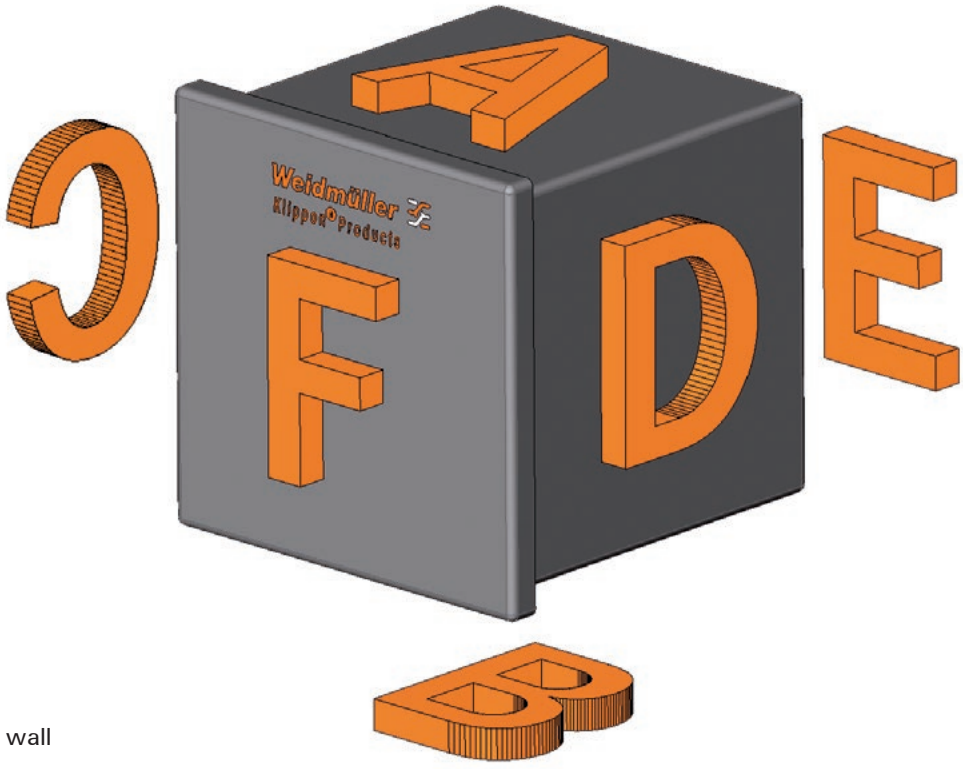

A = Top
B = Bottom
C = Left
D = Right
E = Enclosure rear wall
F = Enclosure lid

Overview of dimensions

Klippon® TB MH – Multi Hinge /
Klippon® TB QL – Quarter Lock / Klippon® TB FS – Fixing Screw Page C.12

		Dimensions in mm Height x width x depth
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	229 x 152 x 133
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	260 x 260 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	260 x 260 x 200
	Klippon® TB MH Klippon® TB QL	306 x 203 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	306 x 306 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	306 x 306 x 200
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	350 x 260 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	350 x 260 x 200
	Klippon® TB MH Klippon® TB QL	350 x 350 x 150
	Klippon® TB MH Klippon® TB QL	350 x 350 x 200
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	400 x 300 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	400 x 300 x 200
	Klippon® TB MH Klippon® TB QL	406 x 406 x 150
	Klippon® TB MH Klippon® TB QL	406 x 406 x 200
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	458 x 382 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	458 x 382 x 200
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	480 x 480 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	480 x 480 x 200
	Klippon® TB MH Klippon® TB QL	508 x 406 x 150
	Klippon® TB MH Klippon® TB QL	508 x 406 x 200
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	550 x 350 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	550 x 350 x 200

Note Additional enclosure sizes available on request.

Klippon® TB MH – Multi Hinge /
Klippon® TB QL – Quarter Lock / Klippon® TB FS – Fixing Screw Page C.12

		Dimensions in mm Height x width x depth
	Klippon® TB MH Klippon® TB QL	620 x 406 x 200
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	620 x 450 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	620 x 450 x 200
	Klippon® TB MH Klippon® TB QL	620 x 508 x 150
	Klippon® TB MH Klippon® TB QL	620 x 508 x 200
	Klippon® TB MH Klippon® TB QL	620 x 620 x 150
	Klippon® TB MH Klippon® TB QL	620 x 620 x 200
	Klippon® TB MH Klippon® TB QL	760 x 620 x 150
	Klippon® TB MH Klippon® TB QL	760 x 620 x 200
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	762 x 508 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	762 x 508 x 200
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	914 x 610 x 150
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	914 x 610 x 200
	Klippon® TB MH Klippon® TB QL	914 x 762 x 200
	Klippon® TB MH Klippon® TB QL	914 x 914 x 200
	Klippon® TB MH Klippon® TB QL Klippon® TB FS	980 x 740 x 200

Note Additional enclosure sizes available on request.

Overview of dimensions

Klippon® TB MH – Multi Hinge

Page C.12

		Dimensions in mm Height x width x depth
	Klippon® TB MH	350 x 550 x 200
	Klippon® TB MH	450 x 620 x 200
	Klippon® TB MH	508 x 762 x 200
Hinweis:		QL- und FS-Varianten gibt es für diese Größen nicht. Weitere Gehäusegrößen auf Anfrage.

Klippon® TB Large QL - Quarter Lock

Page C.86

		Dimensions in mm Height x width x depth
	Klippon® TBL QL	1000 x 500 x 300
	Klippon® TBL QL	1250 x 800 x 400
	Klippon® TBL QL	1500 x 1000 x 500
Hinweis:		Weitere Gehäusegrößen auf Anfrage.

Klippon® EBx HS – Hinged Screws / Klippon® EBx QL – Quarter Lock

Page C.96

		Dimensions in mm Height x width x depth
	Klippon® EBx HS	200 x 200 x 150
	Klippon® EBx QL	200 x 200 x 200
	Klippon® EBx HS	300 x 300 x 150
	Klippon® EBx HS Klippon® EBx QL	300 x 300 x 200
	Klippon® EBx HS	400 x 300 x 200
	Klippon® EBx QL	400 x 300 x 300
	Klippon® EBx HS	400 x 400 x 200
	Klippon® EBx QL	400 x 400 x 300
	Klippon® EBx HS	400 x 600 x 200
	Klippon® EBx QL	400 x 600 x 300
Note		Additional enclosure sizes available on request.

Klippon® EBx HS – Hinged Screws / Klippon® EBx QL – Quarter Lock

Page C.96

		Dimensions in mm Height x width x depth
	Klippon® EBx HS	500 x 400 x 200
	Klippon® EBx QL	500 x 400 x 300
	Klippon® EBx HS	500 x 500 x 200
	Klippon® EBx QL	500 x 500 x 300
	Klippon® EBx HS	500 x 600 x 200
	Klippon® EBx QL	500 x 600 x 300
	Klippon® EBx HS	600 x 400 x 200
	Klippon® EBx QL	600 x 400 x 300
	Klippon® EBx HS	800 x 600 x 200
	Klippon® EBx QL	800 x 600 x 300
Note		Additional enclosure sizes available on request.

Klippon® EBi QL – Quarter Lock / Klippon® EBi HS – Hinged Screws

Page C.130

		Dimensions in mm Height x width x depth
	Klippon® EBi QL Klippon® EBi HS	200 x 200 x 150
	Klippon® EBi QL Klippon® EBi HS	300 x 300 x 150
	Klippon® EBi QL Klippon® EBi HS	300 x 300 x 200
	Klippon® EBi QL Klippon® EBi HS	400 x 300 x 200
	Klippon® EBi QL Klippon® EBi HS	400 x 400 x 200
	Klippon® EBi QL Klippon® EBi HS	500 x 400 x 200
Note		Additional enclosure sizes available on request.

Klippon® STB

Page C.138

		Dimensions in mm Height x width x depth
	1.4404 (316L), mirror polished 1.4404 (316L), electropolished MS RAL 7032	**120 x 120 x 80**
	1.4404 (316L), mirror polished 1.4404 (316L), electropolished MS RAL 7032	**150 x 120 x 80**
	1.4404 (316L), mirror polished 1.4404 (316L), electropolished MS RAL 7032	**150 x 150 x 90**
	1.4404 (316L), mirror polished 1.4404 (316L), electropolished MS RAL 7032	**190 x 150 x 90**
	1.4404 (316L), mirror polished 1.4404 (316L), electropolished MS RAL 7032	**190 x 190 x 100**
	1.4404 (316L), mirror polished 1.4404 (316L), electropolished MS RAL 7032	**250 x 250 x 120**
	1.4404 (316L), mirror polished 1.4404 (316L), electropolished MS RAL 7032	**160 x 380 x 120**
	1.4404 (316L), mirror polished 1.4404 (316L), electropolished MS RAL 7032	**250 x 400 x 130**

Information on the net weight of the enclosures can be found in the online catalogue. MS: Mild steel

Klippon® K

Page C.172

		Dimensions in mm Height x width x depth
	unpainted (S) unpainted (CR) RAL 7001 (CR) RAL 7001 (S)	**45 x 50 x 30**
	unpainted (S) unpainted (CR) RAL 7001 (CR) RAL 7001 (S)	**64 x 58 x 34**
	unpainted (S) unpainted (CR) RAL 7001 (CR) RAL 7001 (S)	**64 x 98 x 34**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**70 x 70 x 45**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**80 x 75 x 57**

Information on the net weight of the enclosures can be found in the online catalogue.

Klippon® K

Page C.172

		Dimensions in mm Height x width x depth
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**70 x 100 x 45**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**80 x 125 x 57**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**70 x 165 x 45**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**80 x 175 x 57**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**80 x 250 x 55**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**82 x 130 x 72**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**120 x 122 x 81**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**130 x 170 x 90**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**120 x 220 x 81**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**160 x 160 x 91**

Information on the net weight of the enclosures can be found in the online catalogue.

Overview of dimensions

Klippon® K

Page C.172

		Dimensions in mm Height x width x depth
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**160 x 200 x 100**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**160 x 260 x 91**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**160 x 350 x 100**
	unpainted Ex (S) unpainted (CR) unpainted (S) RAL 7001 Ex (S) RAL 7001 (CR) RAL 7001 (S)	**230 x 280 x 111**

Information on the net weight of the enclosures can be found in the online catalogue.

Klippon® POK

Page C.208

		Dimensions in mm Height x width x depth
	RAL 7001 RAL 9011	**75 x 80 x 56**
	RAL 7001 RAL 9011	**75 x 110 x 55**
	RAL 7001 RAL 9011	**75 x 160 x 55**
	RAL 7001 RAL 9011	**75 x 190 x 55**
	RAL 7001 RAL 9011	**75 x 230 x 55**
	RAL 7001 RAL 9011	**120 x 122 x 91**
	RAL 7001 RAL 9011	**120 x 220 x 91**
	RAL 7001 RAL 9011	**160 x 160 x 91**
	RAL 7001 RAL 9011	**160 x 260 x 91**
	RAL 7001 RAL 9011	**160 x 360 x 91**

Information on the net weight of the enclosures can be found in the online catalogue.

Klippon® POK

Page C.208

		Maße [mm] Höhe x Breite xTiefe	Gewicht [g]
	RAL 7001 RAL 9011	**160 x 560 x 91**	
	RAL 7001 RAL 9011	**250 x 255 x 121**	
	RAL 7001 RAL 9011	**250 x 400 x 121**	
	RAL 7001 RAL 9011	**250 x 600 x 121**	
	RAL 7001 RAL 9011	**405 x 400 x 121**	
	RAL 7001 RAL 9011	**250 x 255 x 161**	
	RAL 7001 RAL 9011	**250 x 400 x 161**	

Information on the net weight of the enclosures can be found in the online catalogue.

TBF

Page C.254

		Dimensions in mm Height x width x depth
	grey lid (RAL7035)	**186 x 151 x 140**
	grey lid (RAL7035) transparent lid	**302 x 186 x 175**
	grey lid (RAL7035) transparent lid	**302 x 302 x 175**

Information on the net weight of the enclosures can be found in the online catalogue.

TBF

Page C.254

		Dimensions in mm Height x width x depth
	grey lid (RAL7035) transparent lid	**372 x 302 x 175**
	grey lid (RAL7035) transparent lid	**488 x 302 x 175** **488 x 302 x 210**
	grey lid (RAL7035) transparent lid	**558 x 302 x 175** **558 x 302 x 210**
	grey lid (RAL7035) transparent lid	**603 x 302 x 175** **603 x 302 x 210**
	grey lid (RAL7035) transparent lid	**603 x 372 x 175** **603 x 372 x 210**
	grey lid (RAL7035) transparent lid	**603 x 605 x 175** **603 x 605 x 210**

Information on the net weight of the enclosures can be found in the online catalogue.

MPC

Page C.262

		Dimensions in mm Height x width x depth
	grey lid (RAL7035) transparent lid	**75 x 125 x 75**
	grey lid (RAL7035) transparent lid	**75 x 125 x 100/120**
	grey lid (RAL7035) transparent lid	**120 x 120 x 75/100/120**
	grey lid (RAL7035) transparent lid	**120 x 175 x 75/100/120/150**
	grey lid (RAL7035) transparent lid	**175 x 175 x 75 /100/120/150**
	grey lid (RAL7035) transparent lid	**175 x 250 x 100**
	grey lid (RAL7035) transparent lid	**180 x 250 x 75/150**

FPC

Page C.274

		Dimensions in mm Height x width x depth
	grey lid (RAL7035) transparent lid	**200 x 200 x 132**
	grey lid (RAL7035) transparent lid	**200 x 300 x 132**
	grey lid (RAL7035) transparent lid	**200 x 400 x 132**
	grey lid (RAL7035) transparent lid	**300 x 300 x 132**
	grey lid (RAL7035) transparent lid	**300 x 400 x 132**
	grey lid (RAL7035) transparent lid	**400 x 600 x 132**

Information on the net weight of the enclosures can be found in the online catalogue.

Klippon® TB enclosure series

Stainless steel enclosures for use within hazardous areas

The Klippon® TB enclosure series offers excellent performance characteristics and meets the stricter requirements of hazardous areas.
The enclosures are available in twelve sizes and three standard depths. They consist of 1.4404 (316L) stainless steel and meet the requirements of the IP66 and IP67 protection classes. The enclosures are tested with this equipment to the latest international standards, including EN 62208 and EN 60079.

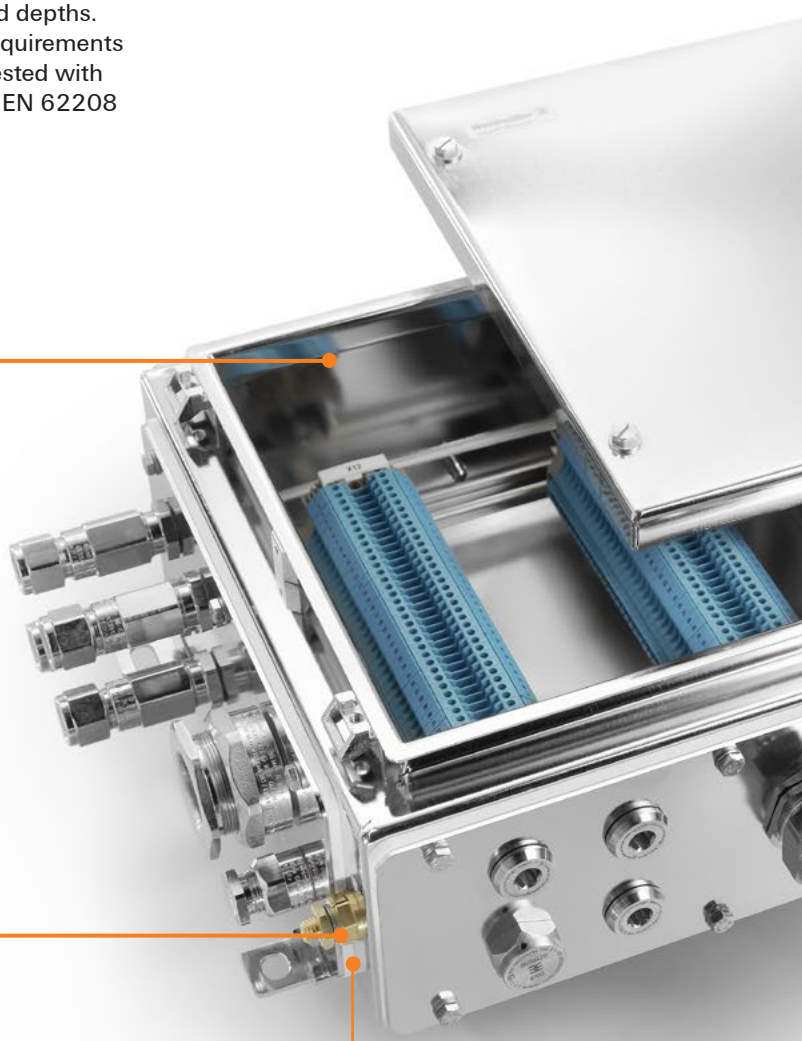

Temperature and sealing characteristics
The enclosures come standard with a silicone seal for use under extreme temperatures.

Safe protection
An integrated dust and moisture channel prevents dirt and moisture from penetrating when the enclosure is opened. The external earthing stud is equipped with an IP66/67 certified sealing mechanism and is protected against twisting.

Versatile installation options
Mounting bolts are located within the enclosure for installing rails and mounting plates. Welded-on mounting feet provide for a fast, secure and stable wall mounting.

Safety and stability
The different sealing systems prevents unauthorized access to the enclosure. Welded on inner thread sockets provide a stable attachment mechanism for gland plates and protect against leaks.

Easy installation
The enclosures are delivered with up to four gland plates so that cable glands can be easily and quickly installed and attached.

Klippon® cable glands
Our complete series of IP66 and IP68 cable glands and accessories are an excellent compliment to the Klippon® TB enclosure series. Cable glands enable the connection of armoured and unarmoured cables from M20 to M75.

Approvals
The Klippon® TB range of enclosures has been awarded international approvals.

Industrial segments
The enclosures are designed for use in a variety of applications and for use in hazardous areas in particular. Typical applications include the process industry, the petrochemicals and power generation. All enclosures are tested and approved in compliance with the latest international standards, including ATEX and IECEx according to EN 60079.

Customer-specific solutions
Weidmüller's customer-specific-service provides comprehensive consultation, engineering and installation for modified enclosures. The enclosures can be modified during the production process according to customer demands and completed with various accessory components. There is a wide range of customer specific options available, such as enclosures with pre drilled holes and cutouts, various surfaces and materials, locking options and alternative sizes. Holders for documents and rating labels, door retainers, rain shields and many more accessories can also be installed on the enclosures per customer request.

Klippon® TB MH – Multi Hinge

Steel enclosures
for use in industrial and in potentially explosive atmospheres

The Klippon® TB enclosure range features excellent performance characteristics, even under the most difficult environmental conditions, and also comply with the stricter requirements of potentially explosive atmospheres found in the process or power generation industries. The Klippon® TB MH enclosure range offers further improvements to a product line that is already successfully leading the market.

Weidmüller manufactures and supplies the enclosures to match customer specifications – fully fitted with terminals, electronics and cable glands.

Features:

- Available in 25 sizes and 3 standard depths, with customer-specific sizes on request
- The gasket is protected against compression
- Completely removable padlock tab
- Cover lock outside the sealed zone
- Improved temperature performance
- IP66/IP67 protection
- Lid can be removed without a tool
- Welded mounting feet
- International approvals

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klippontb

WMC

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Height x width x depth in mm	0 Gland Plates	1 Gland Plate (below)	2 Gland Plates (above + below)	3 Gland plates (below + sides)	4 Gland plates (all sides)	Reference product
KTB MH 221513 S4E_*	229 x 152 x 133	1194550000	1194560000	1194570000	1194580000	1194590000	Klippon® TB10
KTB MH 262615 S4E_*	260 x 260 x 150	1194600000	1194610000	1194620000	1194630000	1194640000	Klippon® TB10A
KTB MH 262620 S4E_*	260 x 260 x 200	1194650000	1194660000	1194670000	1194680000	1194690000	Klippon® TB10A
KTB MH 302015 S4E_*	306 x 203 x 150	8000108831	8000108832	–	8000108833	–	–
KTB MH 303015 S4E_*	306 x 306 x 150	1194700000	1194710000	1194720000	1194730000	1194740000	Klippon® TB11
KTB MH 303020 S4E_*	306 x 306 x 200	1194750000	1194760000	1194770000	1194780000	1194790000	Klippon® TB11
KTB MH 352615 S4E_*	350 x 260 x 150	1194800000	1194810000	1194820000	1194830000	1194840000	Klippon® TB11A
KTB MH 352620 S4E_*	350 x 260 x 200	1194850000	1194860000	1194870000	1194880000	1194890000	Klippon® TB11A
KTB MH 353515 S4E_*	350 x 350 x 150	8000108834	8000108835	–	8000108836	–	–
KTB MH 353520 S4E_*	350 x 350 x 200	8000108837	8000108838	–	8000108839	–	–
KTB MH 355520 S4E_*	350 x 550 x 200	2698040000	2698050000	–	–	–	–
KTB MH 403015 S4E_*	400 x 300 x 150	1194900000	1194910000	1194920000	1194930000	1194940000	–
KTB MH 403020 S4E_*	400 x 300 x 200	1194950000	1194960000	1194970000	1194980000	1194990000	–
KTB MH 404015 S4E_*	406 x 406 x 150	8000108840	8000108841	–	8000108842	–	–
KTB MH 404020 S4E_*	406 x 406 x 200	8000108843	8000108844	–	8000108845	–	–
KTB MH 453815 S4E_*	458 x 382 x 150	1195000000	1195010000	1195020000	1195030000	1195040000	Klippon® TB12
KTB MH 453820 S4E_*	458 x 382 x 200	1195050000	1195060000	1195070000	1195080000	1195090000	Klippon® TB12
KTB MH 456220 S4E_*	450 x 620 x 200	2698060000	2698070000	–	–	–	–
KTB MH 484815 S4E_*	480 x 480 x 150	1195100000	1195110000	1195120000	1195130000	1195140000	Klippon® TB12A
KTB MH 484820 S4E_*	480 x 480 x 200	1195150000	1195160000	1195170000	1195180000	1195190000	Klippon® TB12A
KTB MH 504015 S4E_*	508 x 406 x 150	8000108846	8000108847	–	8000108848	–	–
KTB MH 504020 S4E_*	508 x 406 x 200	8000108849	8000108850	–	8000108851	–	–
KTB MH 507620 S4E_*	508 x 762 x 200	2698080000	2698090000	–	–	–	–
KTB MH 553515 S4E_*	550 x 350 x 150	1195200000	1195210000	1195220000	1195230000	1195240000	Klippon® TB12B
KTB MH 553520 S4E_*	550 x 350 x 200	1195250000	1195260000	1195270000	1195280000	1195290000	Klippon® TB12B
KTB MH 624020 S4E_*	620 x 406 x 200	8000108852	8000108853	–	8000108854	–	–
KTB MH 624515 S4E_*	620 x 450 x 150	1195300000	1195310000	1195320000	1195330000	1195340000	Klippon® TB12D
KTB MH 624520 S4E_*	620 x 450 x 200	1195350000	1195360000	1195370000	1195380000	1195390000	Klippon® TB12D
KTB MH 625015 S4E_*	620 x 508 x 150	8000108855	8000108856	–	8000108857	–	–
KTB MH 625020 S4E_*	620 x 508 x 200	8000108858	8000108859	–	8000108860	–	–
KTB MH 626215 S4E_*	620 x 620 x 150	8000108861	8000108862	–	8000108863	–	–
KTB MH 626220 S4E_*	620 x 620 x 200	8000108864	8000108865	–	8000108866	–	–
KTB MH 765015 S4E_*	762 x 508 x 150	1195400000	1195410000	1195420000	1195430000	1195440000	Klippon® TB13
KTB MH 765020 S4E_*	762 x 508 x 200	1195450000	1195460000	1195470000	1195480000	1195490000	Klippon® TB13
KTB MH 766215 S4E_*	760 x 620 x 150	8000108867	8000108868	–	8000108869	–	–
KTB MH 766220 S4E_*	760 x 620 x 200	8000108870	8000108872	–	8000108873	–	–
KTB MH 916115 S4E_*	914 x 610 x 150	1195500000	1195510000	1195520000	1195530000	1195540000	Klippon® TB14
KTB MH 916120 S4E_*	914 x 610 x 200	1195550000	1195560000	1195570000	1195580000	1195590000	Klippon® TB14
KTB MH 917620 S4E_*	914 x 762 x 200	8000108875	8000108877	–	8000108879	–	–
KTB MH 919120 S4E_*	914 x 914 x 200	8000108880	8000108882	–	8000108884	–	–
KTB MH 987420 S4E_*	980 x 740 x 200	1195600000	1195610000	1195620000	1195630000	1195640000	–
Note		* Placeholder for the number of gland plates (0, 1, 2, 3, 4). The Klippon® TB enclosures with 2 and 4 gland plates are subject to minimum order quantities.					

Technical Overview

Technical data

Enclosure material*	Stainless steel 1.4404 (316L) 1.5 mm
Surface finish	electropolished
IP protection class	IP66 / IP67 to DIN EN 60529
NEMA protection classes	3, 4x, 12
Gland plates	1-4 (fixed with M6 hexagon head screws with 10 mm heads), optionally without a gland plate
Gland plate thickness	3 mm (other thickness are available on request)
Earthing inside	Enclosure base and lid: welded M6 stainless steel earth studs
Earthing outside	Continuous M10 brass earth stud (optionally with stainless-steel earth stud)
Installation mounting	4 or 9 mounting bolts with M6 threaded holes to attach the mounting plate or mounting rail
Enclosure attachment	4 or 6 welded mounting feet with 11-mm holes (2 slotted and 2 cross-shaped openings)
Lid opening	Lid can be fully removed without the use of tools, can be fitted on both sides, lid opening angle: 130°
Cover attachment	4 hinges and M6 hex-head screws (AF 10) with slot
Equipped for a padlock	Removable padlock fitting, for additional product security
Impact resistance	7 J to IEC 60079-0, IK 09 (10J) to DIN EN 50102
Gasket material	Silicone
Operating temperature range	-60 °C...+105 °C (IP66/IP67), -60 °C...+135 °C (IP66)
Torque – lid and gland plate screws	2.5 Nm
Note	* Painted enclosures are available on request.

Approvals for empty enclosures

ATEX certificate	IBExU14ATEX1028 U	cULus	E243298
ATEX marking	II 2G Ex eb IIC Gb II 2D Ex tb IIIC Db	DNV	TAE000013S
IECEx certificate	IECEx IBE 14.0004U	CCOE	P461058_1
IECEx marking	Ex eb IIC Gb Ex tb IIIC Db	INMETRO	LMP 21.0017
CCCEx certificate	2020322303002357	AEx	E223792
CCCEx marking	Ex e IIC Gb, Ex tD A21 IP66/67	Miscellaneous	EN 45545, DIN EN 15085-2/CL2
Note	The Klippon® TB enclosure range can be pre-fitted in our customer specific production department according to your wishes.		

Approvals for control and distribution box

ATEX certificate	IBExU14ATEX1050	KOSHA certificate	16-AV4B0-0245X
ATEX marking	Ex II 2G Ex eb IIC/IIB/IIA T6/T5/T4 Gb Ex II 1G Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex II 2G Ex eb ia IIC/IIB/IIA T6/T5/T4 Gb Ex II 2D Ex tb IIIC T80°C/T95°C/T135°C Db Ex II 1D Ex ia IIIC T80°C/T95°C/T135°C Da -60 °C ≤ Ta ≤ +40/+55/+90 °C	KOSHA marking	Ex eb IIC/IIB/IIA T6/T5/T4 Gb Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex eb ia IIC/IIB/IIA T6/T5/T4 Gb Ex tb IIIC T80°C/T95°C/T135°C Db Ex ia IIIC T80°C/T95°C/T135°C Da 60 °C...+40/+55/+90 °C
CCCEx certificate	2020322303002358	IECEx certificate	IECEx IBE 14.0013
CCCEx marking	Ex e IIC/IIB/IIA T6/T5/T4 Gb Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex e ia IIC/IIB/IIA T6/T5/T4 Gb	IECEx marking	Ex eb IIC/IIB/IIA T6/T5/T4 Gb Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex eb ia IIC/IIB/IIA T6/T5/T4 Gb Ex tb IIIC T80°C/T95°C/T135°C Db Ex ia IIIC T80°C/T95°C/T135°C Da -60 °C...+40/+55/+90 °C
INMETRO certificate	IEx 17.0021	AEx certificate	E223792
INMETRO marking	Ex eb IIC T6/T5/T4 Gb Ex ia IIC T6/T5/T4 Ga Ex eb ia IIC T6/T5/T4 Gb Ex tb IIIC 85°C/100°C/135°C Db IP66/IP67 Ex ia IIIC 85°C/100°C/135°C Da	AEx marking	Class I, Zone 1, AEx e IIC Gb T6..T4 Class I, Zone 2, AEx e IIC Gc T6..T4 Class I Div.2 Group A,B,C,D T6...T4 Class II Div.2 Group F,G Zone 21, AEx tb IIIC Db
Note	Labelling depends on the application layout. Limited to IP66 protection when used in temperatures greater than 105 °C. For details of power dissipation, please contact your Weidmüller representative. Additional approvals available on request.		

Klippon® TB – Integrate, expand, and customise:
The perfect supplement to every application

The fully structured range of system accessories for the Klippon® TB enclosure range allows you to easily adapt the enclosure to meet the specific requirements of every application.

The following options are available:

1 Document holder

Document holders for storage of important documents in the enclosure.

2 Earthing studs

Earthing studs are replaceable. Available in two versions – brass and stainless steel.

3 Gland plates

Flange plates in two thicknesses designed for easy on -replacement.

4 Mounting plates

Mounting plates with and without a drilling pattern, for horizontal and vertical mounting of rails, or components fitted directly.

5 Mounting hardware kits

Mounting hardware kits are available for quick and easy installation of label holders, mounting plates, gland plates, document holders, and rain hoods.

6 Door stay

A door stay prevents the door from being closed unintentionally, regardless of the mounting position of the enclosure.
This item is **only** available Ex-works.

7 Locking systems

Various locking systems are available for the safe and orderly securing of the enclosure. Different screw types for the Klippon® TB MH and FS and different lock inserts for the Klippon® TB QL.

8 Type label holder

A range of nameplate holders are available for the prominent display of required and additional nameplates.

9 Rain hoods

The rain hood provides an ideal, additional level of protection for the enclosure. Particularly useful against heavy rainfall or extreme levels of direct sunlight.

10 Viewing window in the enclosure cover

Viewing window in the enclosure cover for the easy monitoring of active components or operating status.

11 EMC optimisation

For the improved electromagnetic shielding of sensitive components, we offer individual EMC optimisations, e.g. special EMC gaskets.

12 Laboratory tests

Thanks to our accredited laboratory, we can carry further customised tests and approvals.

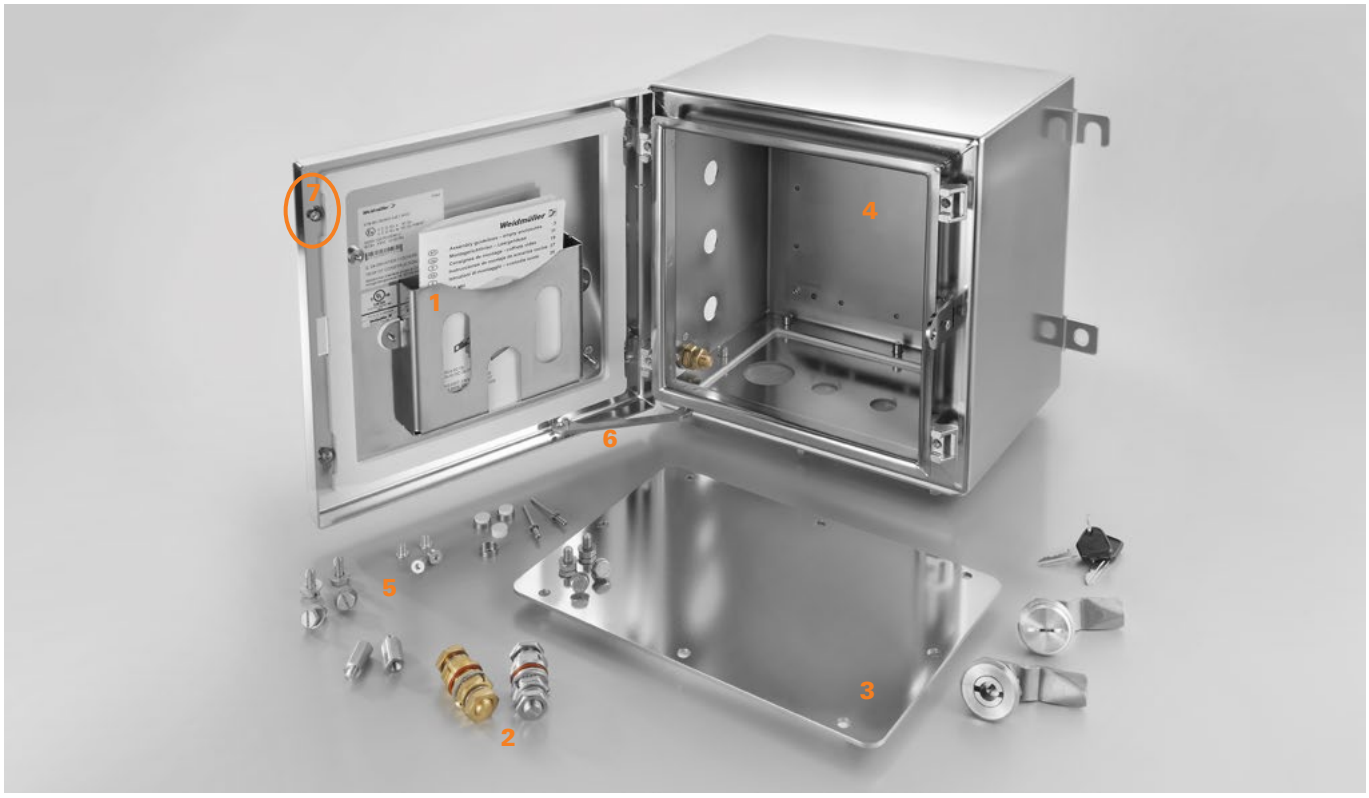
7
1
4
6
5
3
2

6

FF-001-TB-01
8
FF-0001
TB-01

9

10

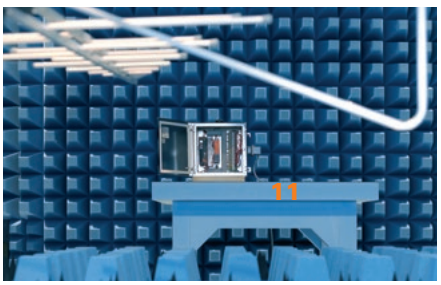
11

12

Klippon® TB MH 221513

Depth 133 mm

Height / Width / Depth	229 / 152 / 133 mm

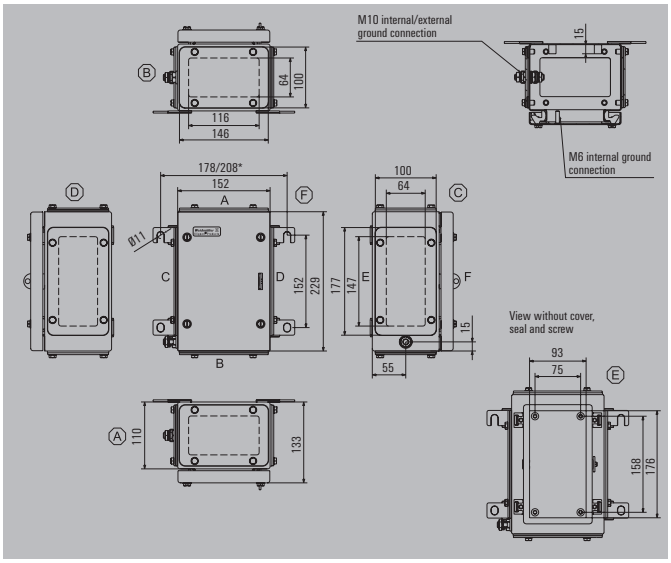

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1194550000
1 gland plate - positioned at the bottom (B)	1194560000
3 gland plates - positioned at bottom, left and right (B, C & D)	1194580000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193930000
With hole pattern, sheet steel, galvanised	2022050000
Stainless steel 1.4301 natural	1193810000
With hole pattern, natural stainless steel 1.4301	1257650000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006720
Vertical	8000006708
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2022770000
Left and right sides (C & D), electropolished stainless steel 1.4404	2022900000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256270000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256280000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281360000
Stainless steel 1.4404, electro-polished	1314090000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x26	1x10
4 mm²	1x21	1x8
6 mm²	1x16	1x6
10 mm²	1x13	1x4
16 mm²	1x10	1x3
35 mm²	1x7	1x2

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	6	8
M16	5	6
M20	2	3
M25	2	2
M32	1	2
M40	1	2
M50	0	0
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 262615

Depth 150 mm

Height / Width / Depth	260 / 260 / 150 mm

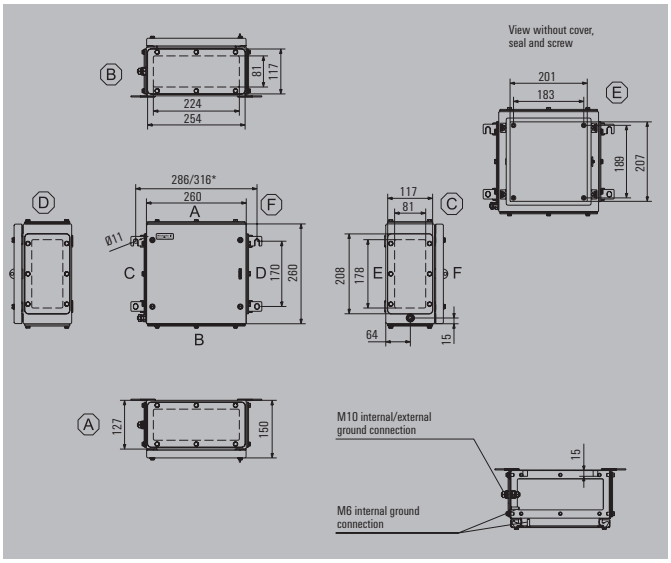

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1194600000
1 gland plate - positioned at the bottom (B)	1194610000
3 gland plates - positioned at bottom, left and right (B, C & D)	1194630000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193950000
With hole pattern, sheet steel, galvanised	2022060000
Stainless steel 1.4301 natural	1193820000
With hole pattern, natural stainless steel 1.4301	1257660000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006721
Vertical	8000006709
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2022930000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023090000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256290000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256310000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281370000
Stainless steel 1.4404, electro-polished	1314100000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	2x31	2x31
	4 mm²	1x26	1x26
	6 mm²	1x19	1x19
	10 mm²	1x15	1x15
	16 mm²	1x12	1x12
	35 mm²	1x9	1x9

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	20	15
M16	11	8
M20	9	7
M25	4	3
M32	3	2
M40	3	2
M50	2	2
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 262620

Depth 200 mm

Height / Width / Depth	260 / 260 / 200 mm

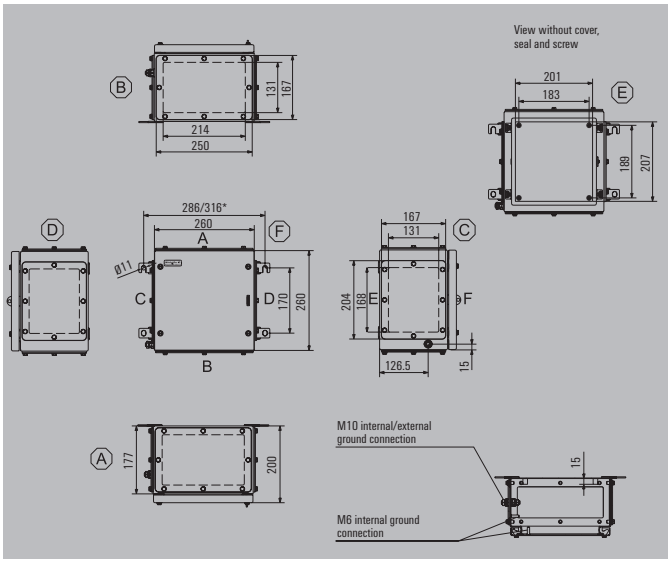

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1194650000
1 gland plate - positioned at the bottom (B)	1194660000
3 gland plates - positioned at bottom, left and right (B, C & D)	1194680000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193950000
With hole pattern, sheet steel, galvanised	2022060000
Stainless steel 1.4301 natural	1193820000
With hole pattern, natural stainless steel 1.4301	1257660000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006721
Vertical	8000006709
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023100000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023110000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256320000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256330000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281380000
Stainless steel 1.4404, electro-polished	1314110000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	2x31	2x31
	4 mm²	1x26	1x26
	6 mm²	1x19	1x19
	10 mm²	1x15	1x15
	16 mm²	1x12	1x12
	35 mm²	1x9	1x9

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	33	25
M16	22	16
M20	14	11
M25	12	9
M32	6	4
M40	5	4
M50	2	2
M63	2	1
M75	1	1

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 302015

Depth 150 mm

Height / Width / Depth	306 / 203 / 150 mm

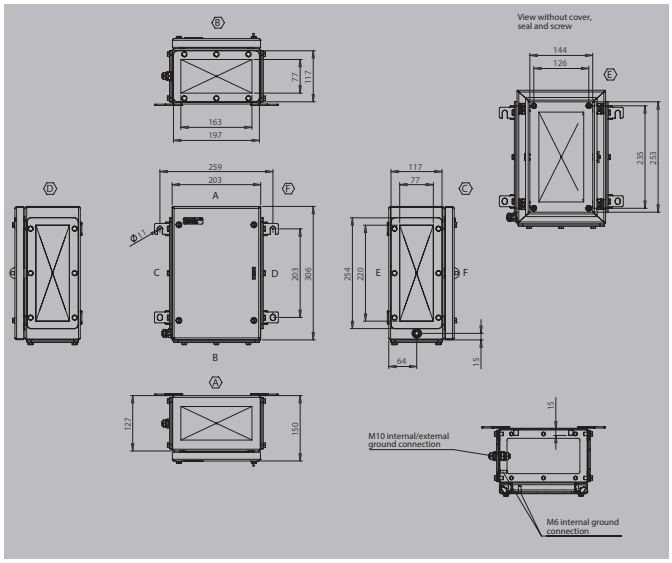

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108831
1 gland plate - positioned at the bottom (B)	8000108832
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108833
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110193
With hole pattern, sheet steel, galvanised	8000115913
Stainless steel 1.4301 natural	8000115923
With hole pattern, natural stainless steel 1.4301	8000115902
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5**	
Horizontally	8000116109
Vertical	8000116099
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114887
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114898
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114143
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114149
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	8000115041
Stainless steel 1.4404, electro-polished	8000115024
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	1x40	2x22
	4 mm²	1x33	2x18
	6 mm²	1x25	2x13
	10 mm²	1x20	1x11
	16 mm²	1x16	1x8
	35 mm²	1x12	1x6

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	32	33
M16	18	22
M20	10	14
M25	8	12
M32	3	6
M40	2	5
M50	2	2
M63	2	2
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 303015

Depth 150 mm

Height / Width / Depth	306 / 306 / 150 mm

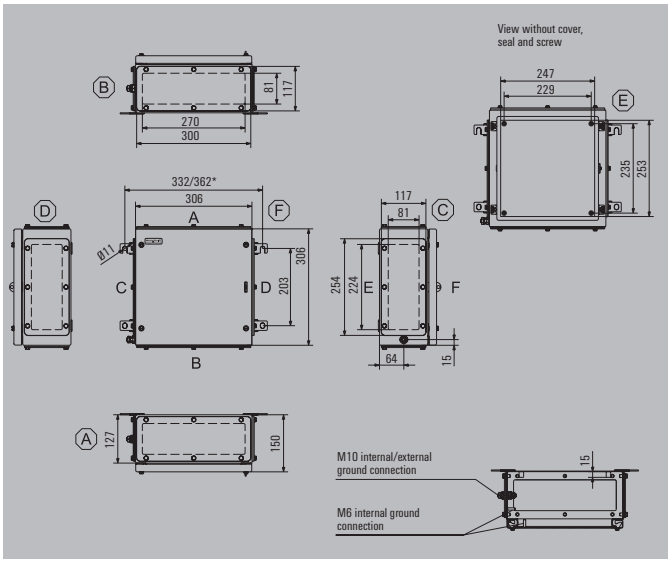

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1194700000
1 gland plate - positioned at the bottom (B)	1194710000
3 gland plates - positioned at bottom, left and right (B, C & D)	1194730000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193960000
With hole pattern, sheet steel, galvanised	2022190000
Stainless steel 1.4301 natural	1193830000
With hole pattern, natural stainless steel 1.4301	1257670000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006722
Vertical	8000006710
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023120000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023130000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256340000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256350000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281390000
Stainless steel 1.4404, electro-polished	1314120000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	2x41	2x40
4 mm²	2x34	2x33
6 mm²	2x25	2x25
10 mm²	1x20	1x20
16 mm²	1x17	1x16
35 mm²	1x12	1x12

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	24	20
M16	13	11
M20	11	9
M25	5	4
M32	4	3
M40	3	3
M50	3	2
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 303020

Depth 200 mm

Height / Width / Depth	306 / 306 / 200 mm

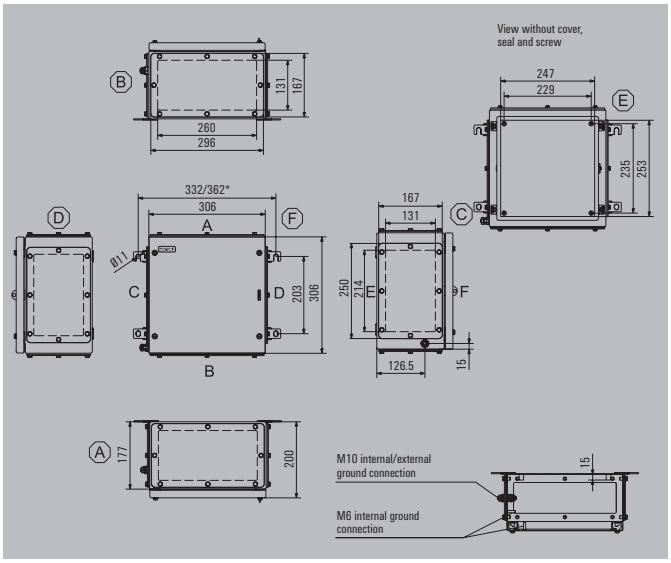

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1194750000
1 gland plate - positioned at the bottom (B)	1194760000
3 gland plates - positioned at bottom, left and right (B, C & D)	1194780000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193960000
With hole pattern, sheet steel, galvanised	2022190000
Stainless steel 1.4301 natural	1193830000
With hole pattern, natural stainless steel 1.4301	1257670000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006722
Vertical	8000006710
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023140000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023150000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256360000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256370000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281400000
Stainless steel 1.4404, electro-polished	1314130000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	2x41	2x40
	4 mm²	2x34	2x33
	6 mm²	2x25	2x25
	10 mm²	1x20	1x20
	16 mm²	1x17	1x16
	35 mm²	1x12	1x12

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	40	33
M16	26	22
M20	17	14
M25	14	12
M32	8	6
M40	6	5
M50	3	2
M63	2	2
M75	2	1

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 352615

Depth 150 mm

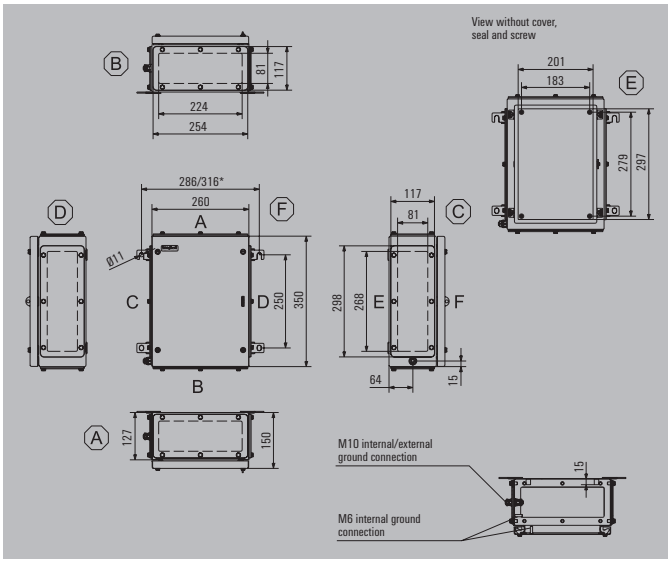

Height / Width / Depth	350 / 260 / 150 mm

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1194800000
1 gland plate - positioned at the bottom (B)	1194810000
3 gland plates - positioned at bottom, left and right (B, C & D)	1194830000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193970000
With hole pattern, sheet steel, galvanised	2022310000
Stainless steel 1.4301 natural	1193840000
With hole pattern, natural stainless steel 1.4301	1257680000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006721
Vertical	8000006711
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023160000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023210000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256380000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256390000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281410000
Stainless steel 1.4404, electro-polished	1314140000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	2x49	2x31
4 mm²	1x41	2x26
6 mm²	1x31	2x19
10 mm²	1x25	2x15
16 mm²	1x20	1x12
35 mm²	1x15	1x9

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	20	23
M16	11	13
M20	9	11
M25	4	5
M32	3	4
M40	3	3
M50	2	3
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 352620

Depth 200 mm

Height / Width / Depth 350 / 260 / 200 mm

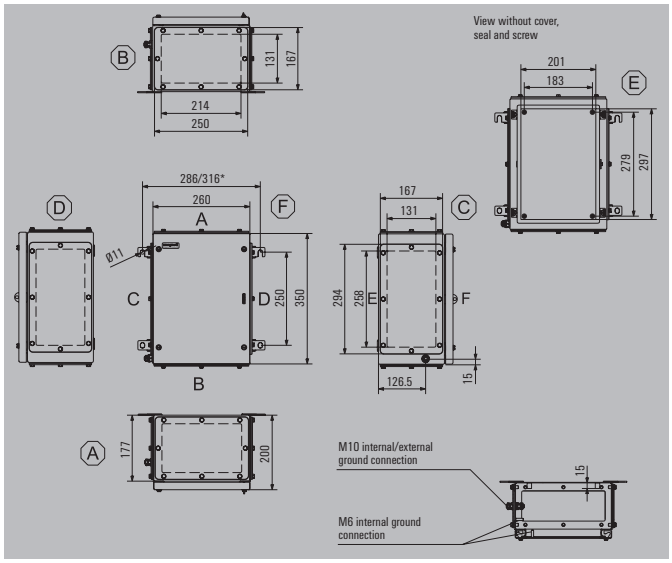

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1194850000
1 gland plate - positioned at the bottom (B)	1194860000
3 gland plates - positioned at bottom, left and right (B, C & D)	1194880000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193970000
With hole pattern, sheet steel, galvanised	2022310000
Stainless steel 1.4301 natural	1193840000
With hole pattern, natural stainless steel 1.4301	1257680000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006721
Vertical	8000006711
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023230000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023280000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256410000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256420000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281420000
Stainless steel 1.4404, electro-polished	1314150000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	2x49	2x31
	4 mm²	1x41	2x26
	6 mm²	1x31	2x19
	10 mm²	1x25	2x15
	16 mm²	1x20	1x12
	35 mm²	1x15	1x9

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	33	38
M16	22	26
M20	14	17
M25	12	14
M32	6	7
M40	5	6
M50	2	3
M63	2	2
M75	1	2

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 353515

Depth 150 mm

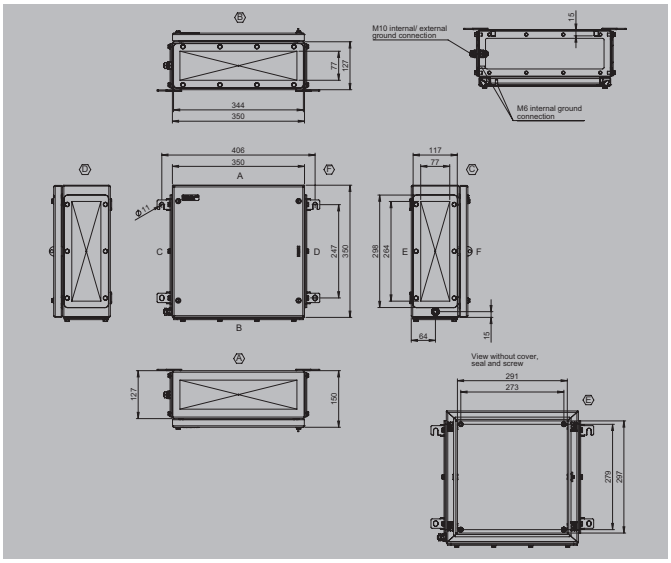

Height / Width / Depth	350 / 350 / 150 mm

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108834
1 gland plate - positioned at the bottom (B)	8000108835
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108836
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110194
With hole pattern, sheet steel, galvanised	8000115914
Stainless steel 1.4301 natural	8000115924
With hole pattern, natural stainless steel 1.4301	8000115903
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116110
Vertical	8000116100
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114900
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114901
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114154
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114155
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	8000115042
Stainless steel 1.4404, electro-polished	8000115025
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	2x49	2x49
	4 mm²	2x41	2x41
	6 mm²	2x31	2x31
	10 mm²	2x25	2x25
	16 mm²	1x20	1x20
	35 mm²	1x15	1x15

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	60	52
M16	36	30
M20	20	16
M25	16	12
M32	6	5
M40	5	4
M50	4	3
M63	3	3
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 353520

Depth 200 mm

Height / Width / Depth	350 / 350 / 200 mm

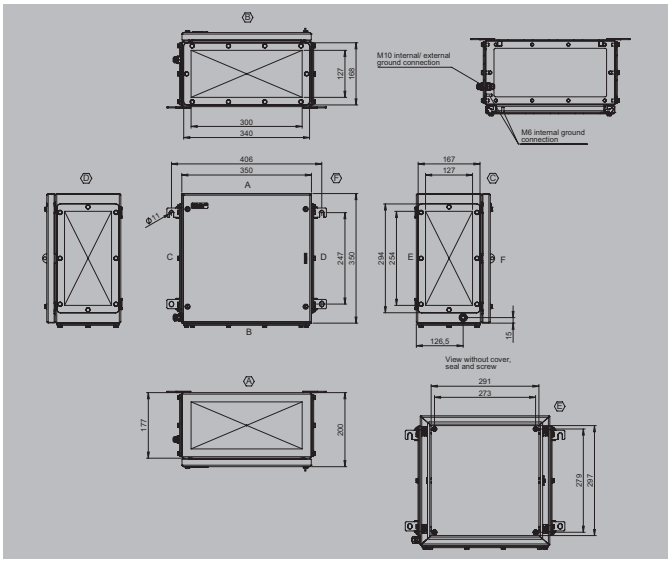

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108837
1 gland plate - positioned at the bottom (B)	8000108838
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108839
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110194
With hole pattern, sheet steel, galvanised	8000115914
Stainless steel 1.4301 natural	8000115924
With hole pattern, natural stainless steel 1.4301	8000115903
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116110
Vertical	8000116100
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114905
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114906
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114130
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114132
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	8000115043
Stainless steel 1.4404, electro-polished	8000115026
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	2x49	2x49
	4 mm²	2x41	2x41
	6 mm²	2x31	2x31
	10 mm²	2x25	2x25
	16 mm²	1x20	1x20
	35 mm²	1x15	1x15

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	60	52
M16	36	30
M20	20	16
M25	16	12
M32	6	5
M40	5	4
M50	4	3
M63	3	3
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 355520

Depth 200 mm

Height / Width / Depth	350 / 550 / 200 mm

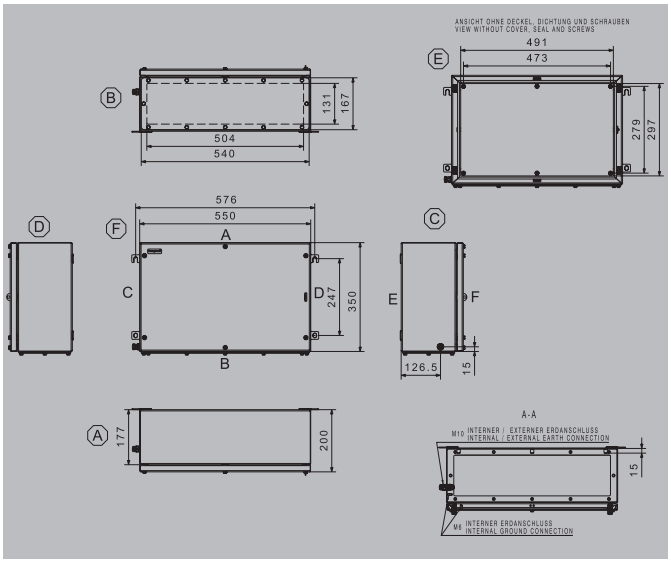

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	2698040000
1 gland plate - positioned at the bottom (B)	2698050000
Note	

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, sheet steel, galvanised	2716090000
Steel sheet, zinc plated	2715560000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000073447
Label holder	
100x25 stainless steel 1.4301	1257640000
130x50 stainless steel 1.4301	1283450000
70 x 70 angled stainless steel 1.4301	1279320000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	4x52	2x91
4 mm²	4x43	2x76
6 mm²	4x32	2x58
10 mm²	3x26	2x46
16 mm²	3x22	1x39
35 mm²	2x16	1x29

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	70	45
M16	48	30
M20	30	20
M25	26	17
M32	14	9
M40	12	7
M50	5	3
M63	4	3
M75	3	2

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 403015

Depth 150 mm

Height / Width / Depth	400 / 300 / 150 mm

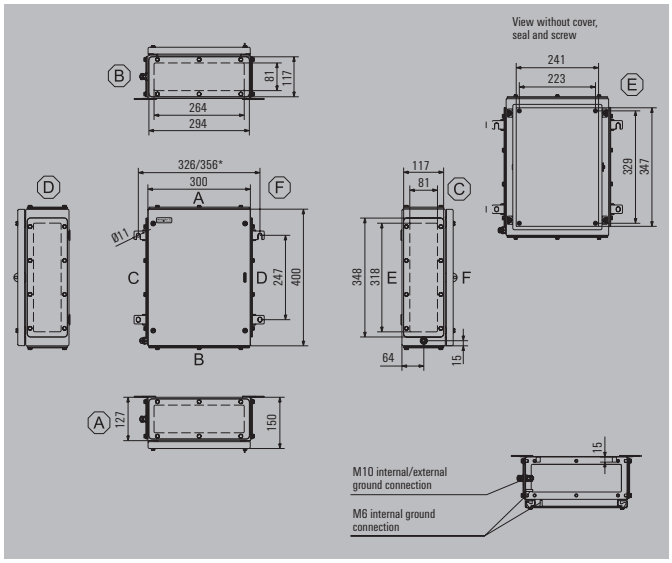

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1194900000
1 gland plate - positioned at the bottom (B)	1194910000
3 gland plates - positioned at bottom, left and right (B, C & D)	1194930000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193980000
With hole pattern, sheet steel, galvanised	2022420000
Stainless steel 1.4301 natural	1193850000
With hole pattern, natural stainless steel 1.4301	1257690000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006723
Vertical	8000006712
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023320000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023330000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256430000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256440000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281430000
Stainless steel 1.4404, electro-polished	1314170000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	2x59	3x39
4 mm²	2x49	3x32
6 mm²	1x37	2x24
10 mm²	1x30	2x19
16 mm²	1x24	2x16
35 mm²	1x18	1x11

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	23	29
M16	13	16
M20	11	13
M25	5	6
M32	4	5
M40	3	4
M50	3	3
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 403020

Depth 200 mm

Height / Width / Depth	400 / 300 / 200 mm

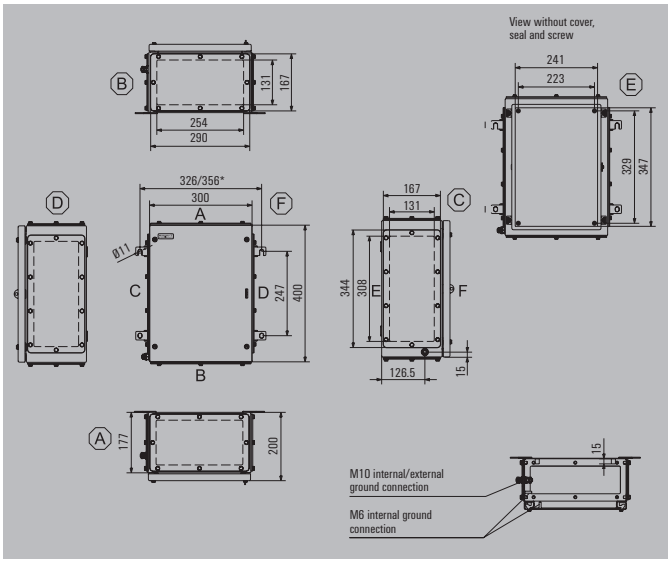

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1194950000
1 gland plate - positioned at the bottom (B)	1194960000
3 gland plates - positioned at bottom, left and right (B, C & D)	1194980000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193980000
With hole pattern, sheet steel, galvanised	2022420000
Stainless steel 1.4301 natural	1193850000
With hole pattern, natural stainless steel 1.4301	1257690000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006723
Vertical	8000006712
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023450000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023480000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256450000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256470000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281440000
Stainless steel 1.4404, electro-polished	1314180000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	2x59	3x39
4 mm²	2x49	3x32
6 mm²	1x37	2x24
10 mm²	1x30	2x19
16 mm²	1x24	2x16
35 mm²	1x18	1x11

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	38	48
M16	26	32
M20	17	20
M25	14	17
M32	7	9
M40	6	7
M50	3	3
M63	2	3
M75	2	2

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 404015

Depth 150 mm

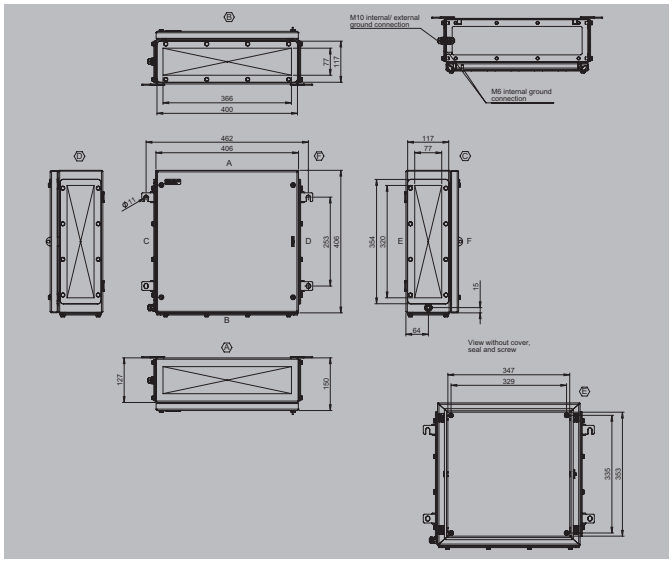

Height / Width / Depth	406 / 406 / 150 mm

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108840
1 gland plate - positioned at the bottom (B)	8000108841
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108842
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110195
With hole pattern, sheet steel, galvanised	8000115915
Stainless steel 1.4301 natural	8000115925
With hole pattern, natural stainless steel 1.4301	8000115904
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116111
Vertical	8000116101
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114907
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114909
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114135
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114136
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	8000115044
Stainless steel 1.4404, electro-polished	8000115028
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	3x59	3x59
	4 mm²	3x49	3x49
	6 mm²	3x37	3x37
	10 mm²	2x30	2x30
	16 mm²	2x24	2x24
	35 mm²	1x18	1x18

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	51	29
M16	39	16
M20	22	13
M25	18	6
M32	7	5
M40	5	4
M50	4	3
M63	3	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 404020

Depth 200 mm

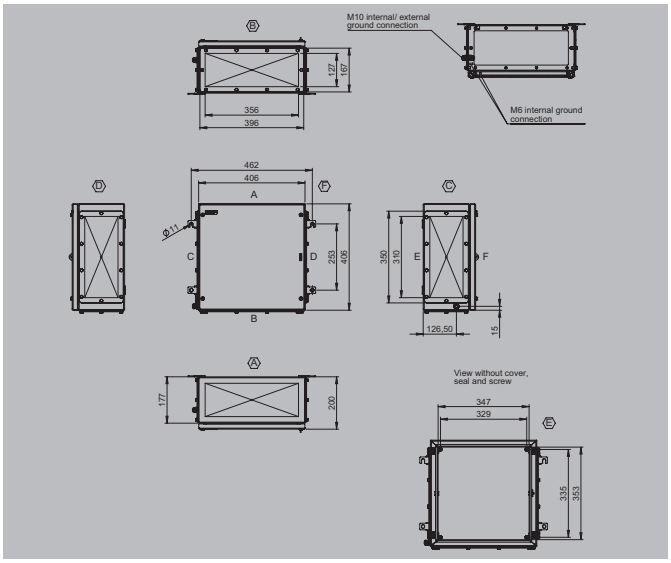

Height / Width / Depth	406 / 406 / 200 mm

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108843
1 gland plate - positioned at the bottom (B)	8000108844
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108845
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110195
With hole pattern, sheet steel, galvanised	8000115915
Stainless steel 1.4301 natural	8000115925
With hole pattern, natural stainless steel 1.4301	8000115904
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5**	
Horizontally	8000116111
Vertical	8000116101
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114910
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114888
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114137
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114138
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115029
Stainless steel 1.4301, mirror-polished	8000115045
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	3x59	3x59
	4 mm²	3x49	3x49
	6 mm²	3x37	3x37
	10 mm²	2x30	2x30
	16 mm²	2x24	2x24
	35 mm²	1x18	1x18

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	51	29
M16	39	16
M20	22	13
M25	18	6
M32	7	5
M40	5	4
M50	4	3
M63	3	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 453815

Depth 150 mm

Height / Width / Depth 458 / 382 / 150 mm

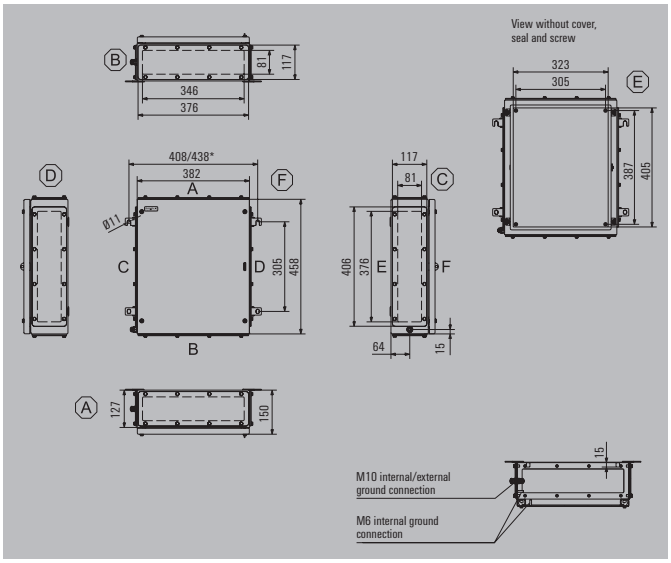

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195000000
1 gland plate - positioned at the bottom (B)	1195010000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195030000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193990000
With hole pattern, sheet steel, galvanised	2022590000
Stainless steel 1.4301 natural	1193860000
With hole pattern, natural stainless steel 1.4301	1257700000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006724
Vertical	8000006713
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023490000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023500000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256480000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256490000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281450000
Stainless steel 1.4404, electro-polished	1314190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	3x71	4x54
	4 mm²	2x59	3x46
	6 mm²	2x44	3x34
	10 mm²	2x36	2x27
	16 mm²	2x29	2x22
	35 mm²	1x22	1x17

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	30	33
M16	17	19
M20	15	16
M25	6	7
M32	5	6
M40	4	5
M50	4	4
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 453820

Depth 200 mm

Height / Width / Depth	458 / 382 / 200 mm

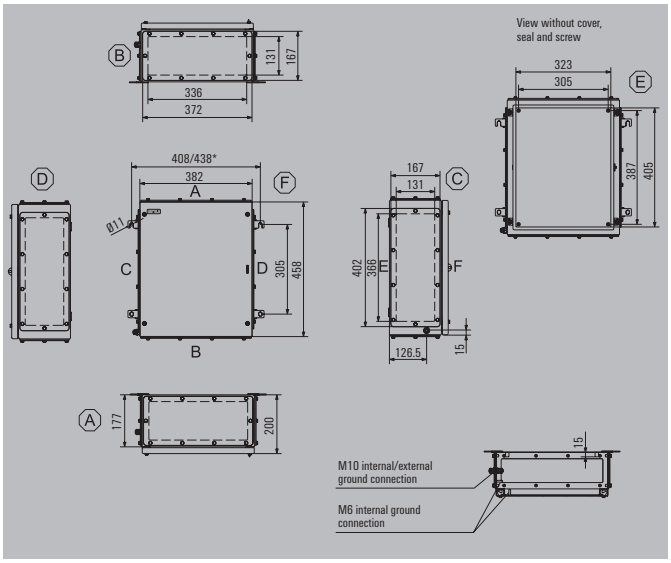

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195050000
1 gland plate - positioned at the bottom (B)	1195060000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195080000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1193990000
With hole pattern, sheet steel, galvanised	2022590000
Stainless steel 1.4301 natural	1193860000
With hole pattern, natural stainless steel 1.4301	1257700000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006724
Vertical	8000006713
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023510000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023520000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256510000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256520000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281460000
Stainless steel 1.4404, electro-polished	1314200000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x71	4x54
4 mm²	2x59	3x46
6 mm²	2x44	3x34
10 mm²	2x36	2x27
16 mm²	2x29	2x22
35 mm²	1x22	1x17

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	50	55
M16	34	38
M20	23	24
M25	18	21
M32	10	11
M40	8	9
M50	4	4
M63	3	3
M75	2	3

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 456220

Depth 200 mm

Height / Width / Depth	450 / 620 / 200 mm

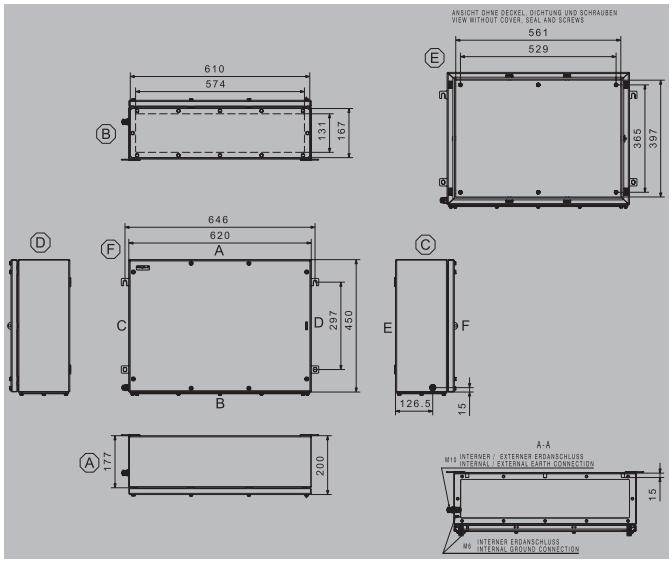

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	**2698060000**
1 gland plate - positioned at the bottom (B)	**2698070000**
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	**2716100000**
With hole pattern, sheet steel, galvanised	**2716110000**
Fastening screws for terminal rails*	**1274150000**
Label holder	
100x25 stainless steel 1.4301	**1257640000**
130x50 stainless steel 1.4301	**1283450000**
70 x 70 angled stainless steel 1.4301	**1279320000**
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	**1252190000**
Document holders	
For DIN A6 size documents	**1252780000**
For DIN A5 size documents	**1252750000**
For DIN A4 size documents	**1252730000**
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	**1285200000**
Earthing stud	
Stainless steel 1.4404, M10	**1192690000**

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)

Assembly with terminal	vertical	horizontal
2.5 mm²	5x71	3x105
4 mm²	5x59	3x88
6 mm²	4x45	3x66
10 mm²	4x36	2x53
16 mm²	3x30	2x44
35 mm²	2x22	1x33

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	80	63
M16	54	42
M20	36	27
M25	30	23
M32	17	12
M40	14	10
M50	6	4
M63	5	4
M75	4	3

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 484815

Depth 150 mm

Height / Width / Depth	480 / 480 / 150 mm

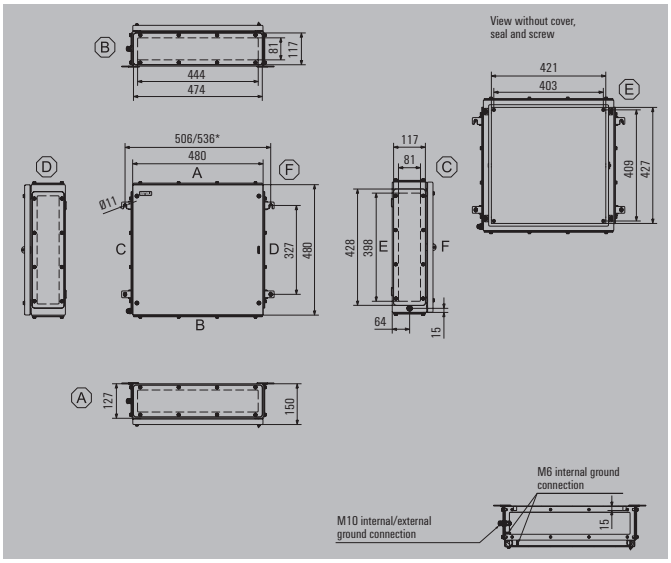

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195100000
1 gland plate - positioned at the bottom (B)	1195110000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195130000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194000000
With hole pattern, sheet steel, galvanised	2022610000
Stainless steel 1.4301 natural	1193870000
With hole pattern, natural stainless steel 1.4301	1257710000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Vertical	8000006714
Horizontally	8000006725
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023530000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023540000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256530000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256540000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281470000
Stainless steel 1.4404, electro-polished	1314220000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	4x75	4x74
	4 mm²	3x62	3x62
	6 mm²	3x47	3x46
	10 mm²	2x38	3x37
	16 mm²	2x31	2x31
	35 mm²	1x23	2x23

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	39	36
M16	22	20
M20	19	17
M25	8	7
M32	7	6
M40	6	5
M50	5	4
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 484820

Depth 200 mm

Height / Width / Depth	480 / 480 / 200 mm

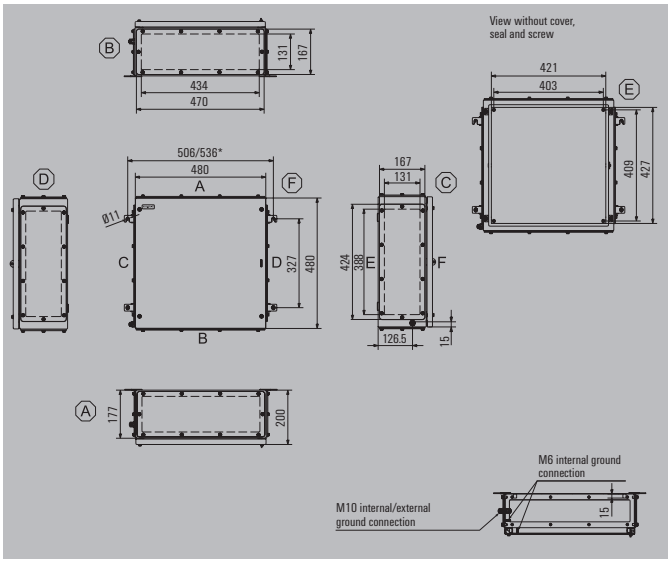

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195150000
1 gland plate - positioned at the bottom (B)	1195160000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195180000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194000000
With hole pattern, sheet steel, galvanised	2022610000
Stainless steel 1.4301 natural	1193870000
With hole pattern, natural stainless steel 1.4301	1257710000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006725
Vertical	8000006714
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023580000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023620000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256550000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256560000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281480000
Stainless steel 1.4404, electro-polished	1314230000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	4x75	4x74
	4 mm²	3x62	3x62
	6 mm²	3x47	3x46
	10 mm²	2x38	3x37
	16 mm²	2x31	2x31
	35 mm²	1x23	2x23

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	65	60
M16	44	40
M20	29	26
M25	24	21
M32	13	12
M40	11	10
M50	5	4
M63	4	4
M75	3	3

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 504015

Depth 150 mm

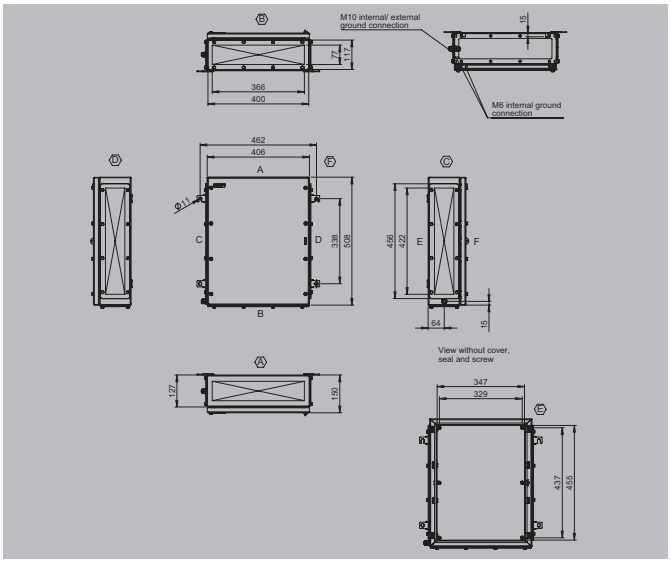

Height / Width / Depth	508 / 406 / 150 mm

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108846
1 gland plate - positioned at the bottom (B)	8000108847
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108848
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110196
With hole pattern, sheet steel, galvanised	8000115916
With hole pattern, natural stainless steel 1.4301	8000115905
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116112
Vertical	8000116102
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114907
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114889
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114135
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114139
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115028
Stainless steel 1.4301, mirror-polished	8000115044
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	3x77	4x59
	4 mm²	3x65	3x49
	6 mm²	3x48	3x37
	10 mm²	2x39	3x30
	16 mm²	2x32	2x24
	35 mm²	1x24	2x18

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	51	60
M16	39	45
M20	22	26
M25	18	20
M32	7	5
M40	5	4
M50	4	3
M63	3	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 504020

Depth 200 mm

Height / Width / Depth 508 / 406 / 200 mm

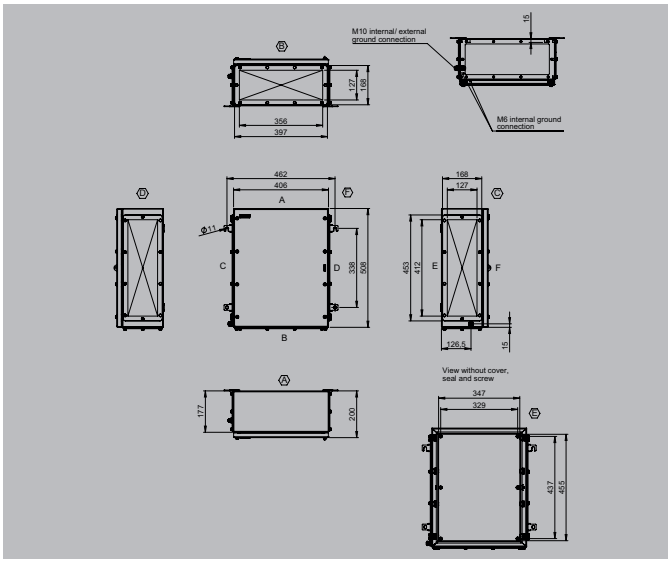

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108849
1 gland plate - positioned at the bottom (B)	8000108850
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108851
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110196
With hole pattern, sheet steel, galvanised	8000115916
With hole pattern, natural stainless steel 1.4301	8000115905
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116112
Vertical	8000116102
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114910
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114890
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114137
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114140
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115028
Stainless steel 1.4301, mirror-polished	8000115044
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x75	4x58
4 mm²	3x65	3x49
6 mm²	3x48	3x37
10 mm²	2x39	3x30
16 mm²	2x32	2x24
35 mm²	1x24	2x18

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	51	60
M16	39	45
M20	22	26
M25	18	20
M32	7	5
M40	5	4
M50	4	3
M63	3	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 507620

Depth 200 mm

Height / Width / Depth	500 / 760 / 200 mm

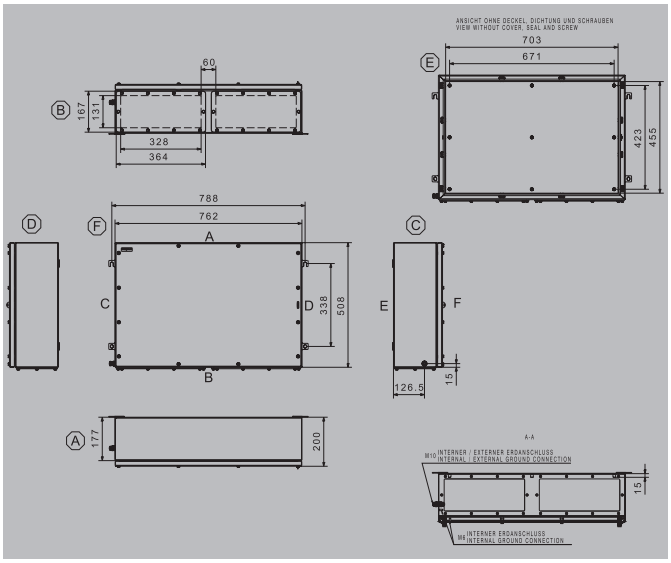

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	2698080000
1 gland plate - positioned at the bottom (B)	2698090000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	2716120000
With hole pattern, sheet steel, galvanised	2716130000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Vertical	8000073449
Label holder	
100x25 stainless steel 1.4301	1257640000
130x50 stainless steel 1.4301	1283450000
70 x 70 angled stainless steel 1.4301	1279320000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	7x82	4x132
4 mm²	6x69	4x111
6 mm²	5x52	3x83
10 mm²	5x42	3x67
16 mm²	4x35	2x56
35 mm²	3x26	2x42

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	96	70
M16	64	48
M20	40	32
M25	34	26
M32	18	14
M40	14	12
M50	6	5
M63	6	4
M75	4	3

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 553515

Depth 150 mm

Height / Width / Depth 550 / 350 / 150 mm

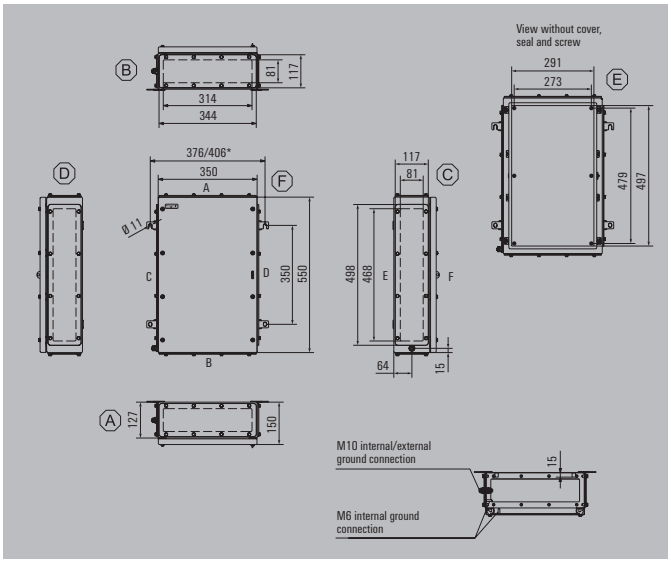

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195200000
1 gland plate - positioned at the bottom (B)	1195210000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195230000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194010000
With hole pattern, sheet steel, galvanised	2022650000
Stainless steel 1.4301 natural	1193880000
With hole pattern, natural stainless steel 1.4301	1257720000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006726
Vertical	8000006715
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023660000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023670000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256570000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256580000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281490000
Stainless steel 1.4404, electro-polished	1314240000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	2x89	4x48
	4 mm²	2x73	4x40
	6 mm²	2x55	4x30
	10 mm²	2x45	3x24
	16 mm²	1x37	3x20
	35 mm²	1x28	2x15

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	27	42
M16	15	24
M20	13	20
M25	6	9
M32	5	7
M40	4	6
M50	3	5
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 553520

Depth 200 mm

Height / Width / Depth	550 / 350 / 200 mm

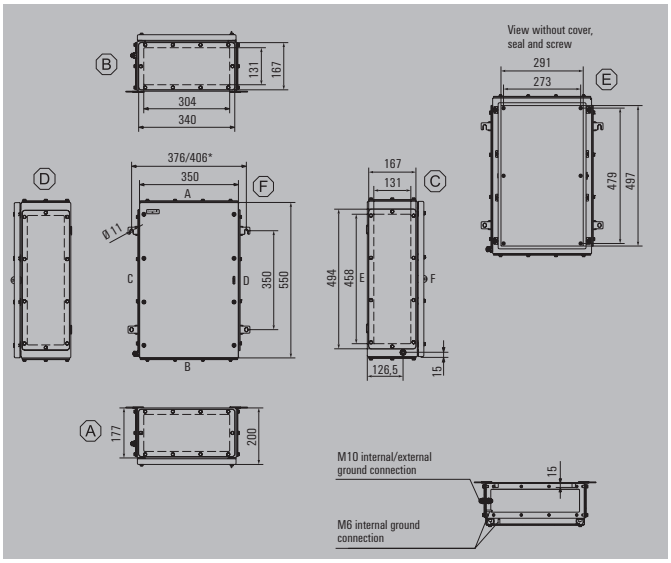

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195250000
1 gland plate - positioned at the bottom (B)	1195260000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195280000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194010000
With hole pattern, sheet steel, galvanised	2022650000
Stainless steel 1.4301 natural	1193880000
With hole pattern, natural stainless steel 1.4301	1257720000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006726
Vertical	8000006715
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023740000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023790000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256590000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256610000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281500000
Stainless steel 1.4404, electro-polished	1314250000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	2x89	4x48
4 mm²	2x73	4x40
6 mm²	2x55	4x30
10 mm²	2x45	3x24
16 mm²	1x37	3x20
35 mm²	1x28	2x15

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	45	70
M16	30	48
M20	20	30
M25	17	26
M32	9	14
M40	7	12
M50	3	5
M63	3	4
M75	2	3

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 624020

Depth 200 mm

Height / Width / Depth 620 / 406 / 200 mm

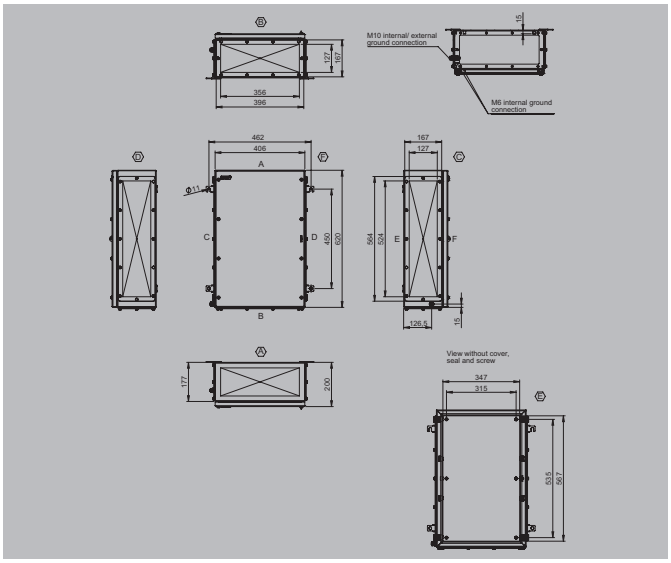

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108852
1 gland plate - positioned at the bottom (B)	8000108853
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108854
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110198
With hole pattern, sheet steel, galvanised	8000115917
With hole pattern, natural stainless steel 1.4301	8000115906
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116113
Vertical	8000116103
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114910
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114891
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114137
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114141
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115029
Stainless steel 1.4301, mirror-polished	8000115045
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x101	5x59
4 mm²	3x83	5x49
6 mm²	3x62	4x37
10 mm²	2x49	4x30
16 mm²	2x42	3x24
35 mm²	1x31	2x18

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	102	125
M16	65	68
M20	44	64
M25	27	39
M32	14	20
M40	10	16
M50	4	6
M63	3	5
M75	2	4

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 624515

Depth 150 mm

Height / Width / Depth	620 / 450 / 150 mm

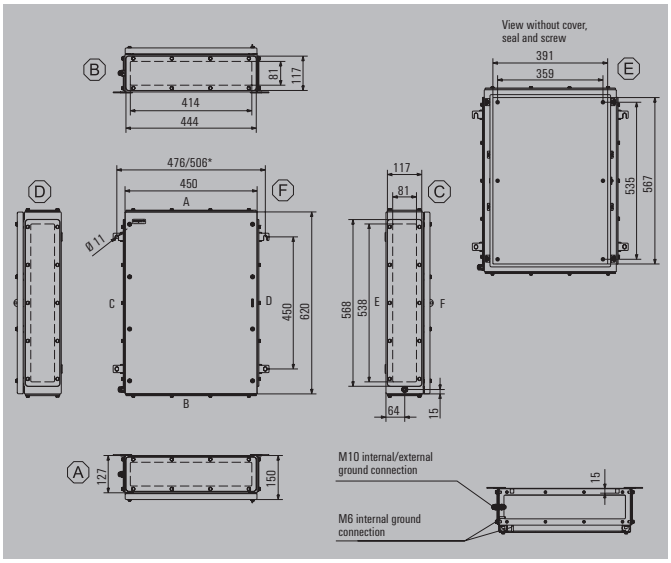

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195300000
1 gland plate - positioned at the bottom (B)	1195310000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195330000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194020000
With hole pattern, sheet steel, galvanised	2022670000
Stainless steel 1.4301 natural	1193890000
With hole pattern, natural stainless steel 1.4301	1257740000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006727
Vertical	8000006716
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023820000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023870000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256620000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256630000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281510000
Stainless steel 1.4404, electro-polished	1314270000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	3x101	5x65
	4 mm²	3x83	5x54
	6 mm²	3x62	4x41
	10 mm²	2x49	4x33
	16 mm²	2x42	3x26
	35 mm²	1x31	2x20

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	38	48
M16	21	27
M20	18	24
M25	8	10
M32	6	9
M40	5	7
M50	4	6
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 624520

Depth 200 mm

Height / Width / Depth 620 / 450 / 200 mm

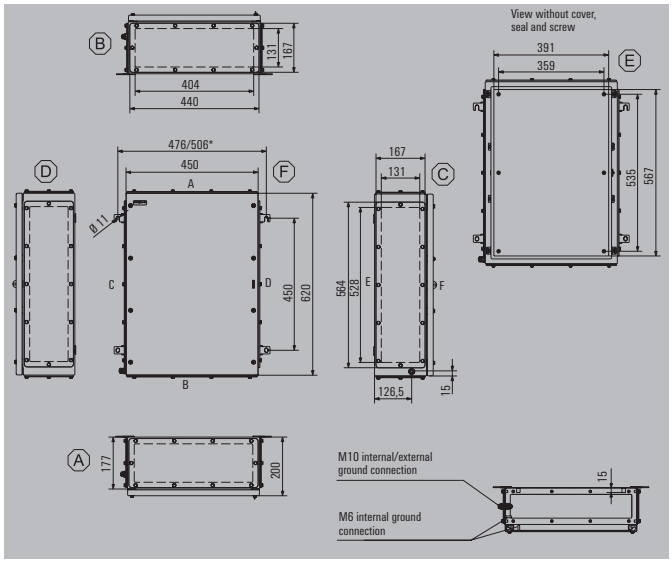

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195350000
1 gland plate - positioned at the bottom (B)	1195360000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195380000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194020000
With hole pattern, sheet steel, galvanised	2022670000
Stainless steel 1.4301 natural	1193890000
With hole pattern, natural stainless steel 1.4301	1257740000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006727
Vertical	8000006716
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2023880000
Left and right sides (C & D), electropolished stainless steel 1.4404	2023930000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256640000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256650000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281520000
Stainless steel 1.4404, electro-polished	1314280000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	3x101	5x65
	4 mm²	3x83	5x54
	6 mm²	3x62	4x41
	10 mm²	2x49	4x33
	16 mm²	2x42	3x26
	35 mm²	1x31	2x20

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	63	80
M16	42	54
M20	27	36
M25	23	30
M32	12	17
M40	10	14
M50	4	6
M63	4	5
M75	3	4

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 625015

Depth 150 mm

Height / Width / Depth	620 / 508 / 150 mm

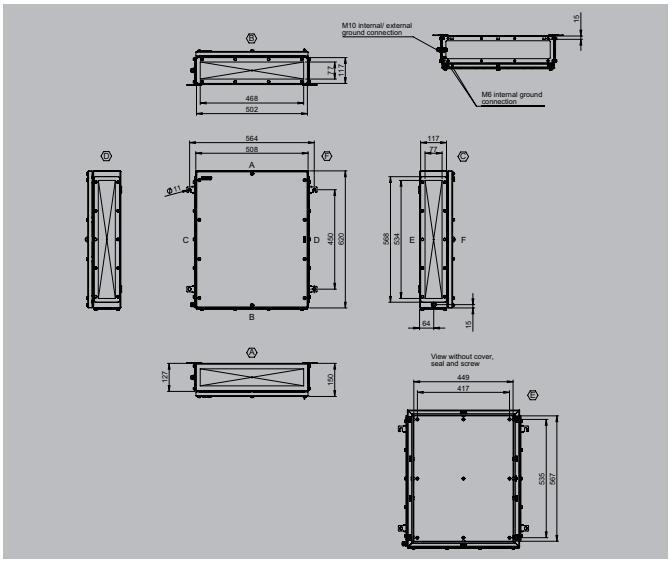

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108855
1 gland plate - positioned at the bottom (B)	8000108856
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108857
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110199
With hole pattern, sheet steel, galvanised	8000115918
With hole pattern, natural stainless steel 1.4301	8000115907
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116114
Vertical	8000116104
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114892
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114893
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114142
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114144
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115030
Stainless steel 1.4301, mirror-polished	8000115046
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	4x101	5x77
4 mm²	3x83	5x65
6 mm²	3x62	4x48
10 mm²	3x49	4x39
16 mm²	2x42	3x32
35 mm²	2x31	2x24

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	66	75
M16	30	60
M20	28	32
M25	22	26
M32	9	10
M40	7	8
M50	6	6
M63	4	5
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 625020

Depth 200 mm

Height / Width / Depth	620 / 508 / 200 mm

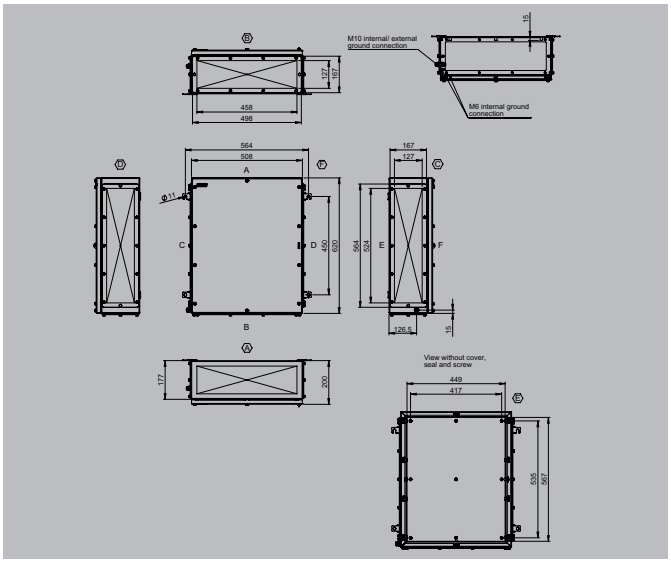

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108858
1 gland plate - positioned at the bottom (B)	8000108859
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108860
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110199
With hole pattern, sheet steel, galvanised	8000115918
With hole pattern, natural stainless steel 1.4301	8000115907
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116114
Vertical	8000116104
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114894
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114891
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114145
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114141
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115032
Stainless steel 1.4301, mirror-polished	8000115047
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	4x101	5x78
	4 mm²	3x83	5x65
	6 mm²	3x62	4x48
	10 mm²	3x49	4x38
	16 mm²	2x42	3x32
	35 mm²	2x31	2x24

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	66	75
M16	30	60
M20	28	32
M25	22	26
M32	9	10
M40	7	8
M50	6	6
M63	4	5
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 626215

Depth 150 mm

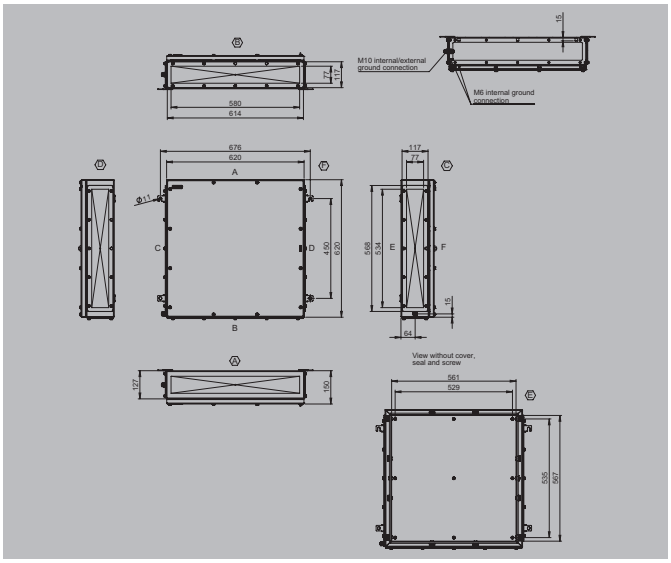

Height / Width / Depth	620 / 620 / 150 mm

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108861
1 gland plate - positioned at the bottom (B)	8000108862
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108863
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110200
With hole pattern, sheet steel, galvanised	8000115919
With hole pattern, natural stainless steel 1.4301	8000115908
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116115
Vertical	8000116105
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114895
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114893
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114146
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114144
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115033
Stainless steel 1.4301, mirror-polished	8000115048
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	5x101	5x101
	4 mm²	5x83	5x83
	6 mm²	4x62	4x62
	10 mm²	4x49	4x49
	16 mm²	3x42	3x42
	35 mm²	2x31	2x31

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	84	75
M16	63	60
M20	34	32
M25	28	26
M32	11	9
M40	9	8
M50	7	6
M63	5	5
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 626220

Depth 200 mm

Height / Width / Depth	620 / 620 / 200 mm

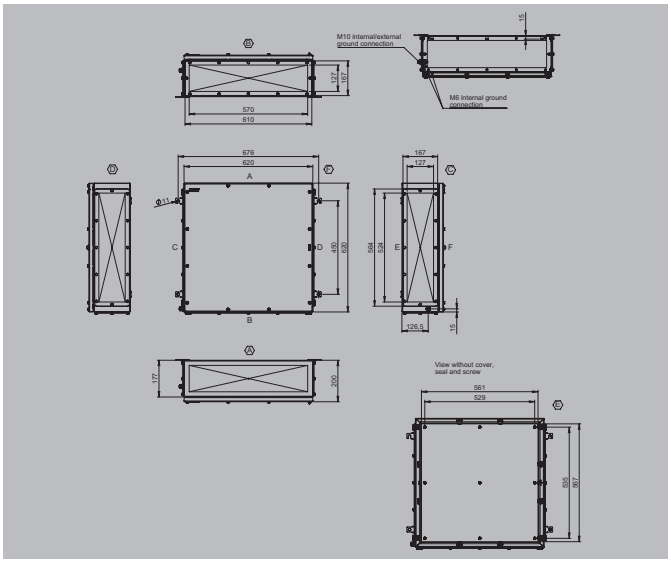

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108864
1 gland plate - positioned at the bottom (B)	8000108865
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108866
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110200
With hole pattern, sheet steel, galvanised	8000115919
With hole pattern, natural stainless steel 1.4301	8000115908
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116115
Vertical	8000116105
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114896
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114891
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114147
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114141
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115034
Stainless steel 1.4301, mirror-polished	8000115049
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note
*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	5x101	5x101
	4 mm²	5x83	5x83
	6 mm²	4x62	4x62
	10 mm²	4x49	4x49
	16 mm²	3x42	3x42
	35 mm²	2x31	2x31

Note
*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	84	75
M16	63	60
M20	34	32
M25	28	26
M32	11	9
M40	9	8
M50	7	6
M63	5	5
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 765015

Depth 150 mm

Height / Width / Depth	762 / 508 / 150 mm

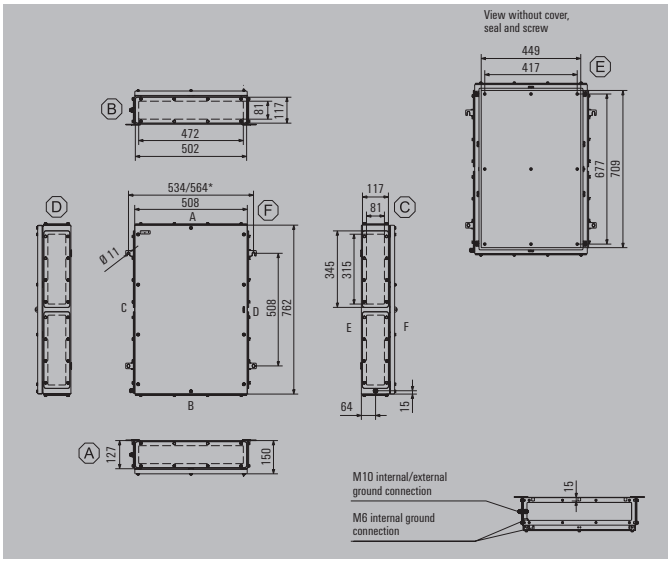

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195400000
1 gland plate - positioned at the bottom (B)	1195410000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195430000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194030000
With hole pattern, sheet steel, galvanised	2022680000
Stainless steel 1.4301 natural	1193900000
With hole pattern, natural stainless steel 1.4301	1257750000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006728
Vertical	8000006717
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2024040000
Left and right sides (C & D), electropolished stainless steel 1.4404	2024090000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256660000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256670000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281530000
Stainless steel 1.4404, electro-polished	1314290000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	4x128	7x78
	4 mm²	4x107	6x64
	6 mm²	3x80	5x48
	10 mm²	3x65	5x39
	16 mm²	2x53	4x32
	35 mm²	2x40	3x24

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	42	58
M16	24	32
M20	21	26
M25	9	12
M32	7	10
M40	6	8
M50	5	6
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 765020

Depth 200 mm

Height / Width / Depth 762 / 508 / 200 mm

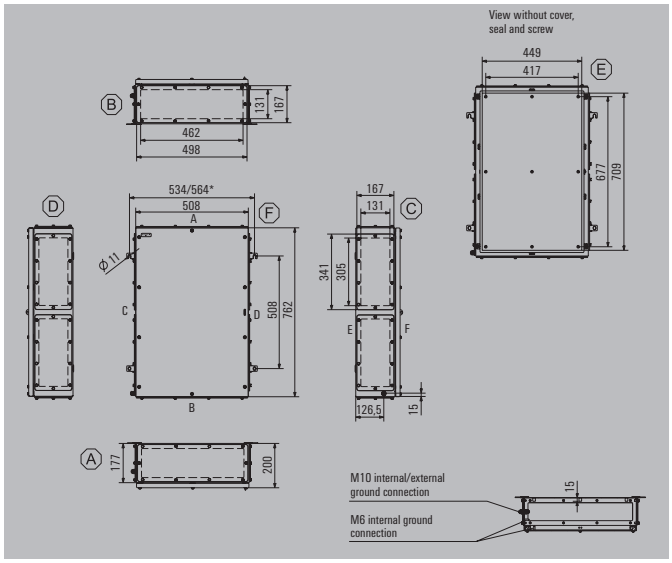

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195450000
1 gland plate - positioned at the bottom (B)	1195460000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195480000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194030000
With hole pattern, sheet steel, galvanised	2022680000
Stainless steel 1.4301 natural	1193900000
With hole pattern, natural stainless steel 1.4301	1257750000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006728
Vertical	8000006717
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2024100000
Left and right sides (C & D), electropolished stainless steel 1.4404	2024140000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256680000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256690000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281540000
Stainless steel 1.4404, electro-polished	1314300000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)

Assembly with terminal		vertical	horizontal
	2.5 mm²	4x128	7x78
	4 mm²	4x107	6x64
	6 mm²	3x80	5x48
	10 mm²	3x65	5x39
	16 mm²	2x53	4x32
	35 mm²	2x40	3x24

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	70	96
M16	48	64
M20	32	40
M25	26	34
M32	14	18
M40	12	14
M50	5	6
M63	4	6
M75	3	4

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 766215

Depth 150 mm

Height / Width / Depth	760 / 620 / 150 mm

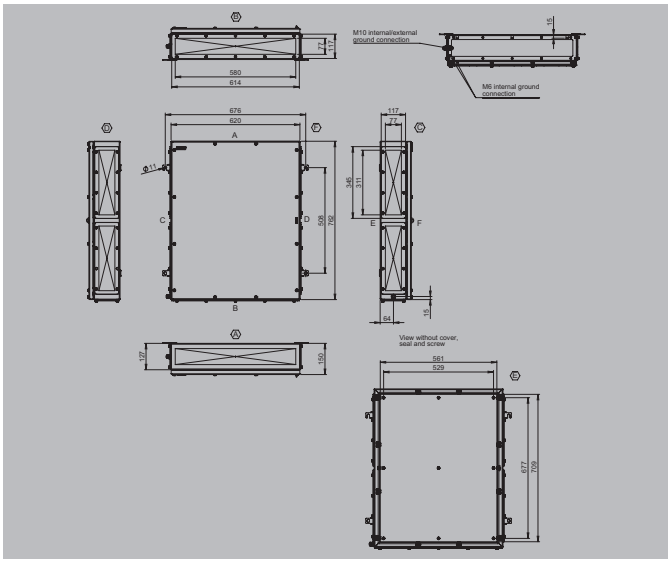

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108867
1 gland plate - positioned at the bottom (B)	8000108868
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108869
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110201
With hole pattern, sheet steel, galvanised	8000115920
With hole pattern, natural stainless steel 1.4301	8000115909
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116116
Vertical	8000116106
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114895
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114902
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114146
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114151
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115033
Stainless steel 1.4301, mirror-polished	8000115048
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note
*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	5x128	7x101
	4 mm²	5x107	6x83
	6 mm²	4x80	5x62
	10 mm²	4x64	5x49
	16 mm²	3x53	4x42
	35 mm²	2x40	3x31

Note
*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	84	90
M16	63	66
M20	34	36
M25	28	32
M32	11	12
M40	9	10
M50	7	8
M63	5	6
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 766220

Depth 200 mm

Height / Width / Depth 760 / 620 / 200 mm

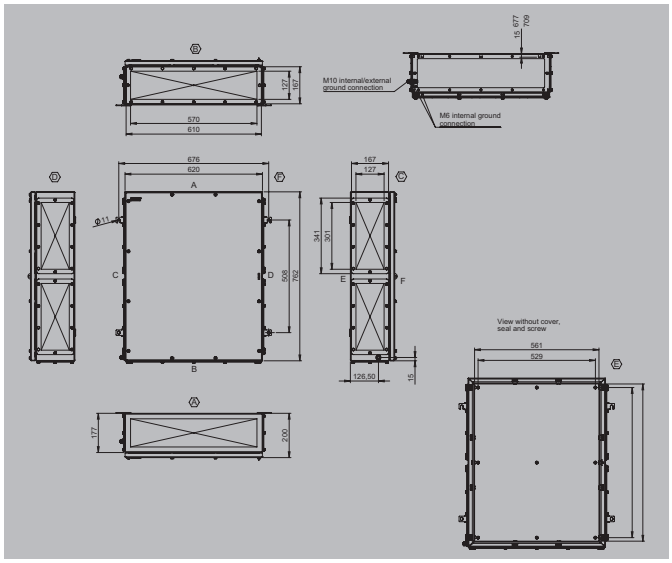

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108870
1 gland plate - positioned at the bottom (B)	8000108872
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108873
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000110201
With hole pattern, sheet steel, galvanised	8000115920
With hole pattern, natural stainless steel 1.4301	8000115909
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116116
Vertical	8000116106
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114896
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114903
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114147
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114152
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115034
Stainless steel 1.4301, mirror-polished	8000115049
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
	1192680000
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	5x128	7x101
	4 mm²	5x107	6x83
	6 mm²	4x80	5x62
	10 mm²	4x64	5x49
	16 mm²	3x53	4x42
	35 mm²	2x40	3x31

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	84	90
M16	63	66
M20	34	36
M25	28	32
M32	11	12
M40	9	10
M50	7	8
M63	5	6
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 916115

Depth 150 mm

Height / Width / Depth	914 / 610 / 150 mm

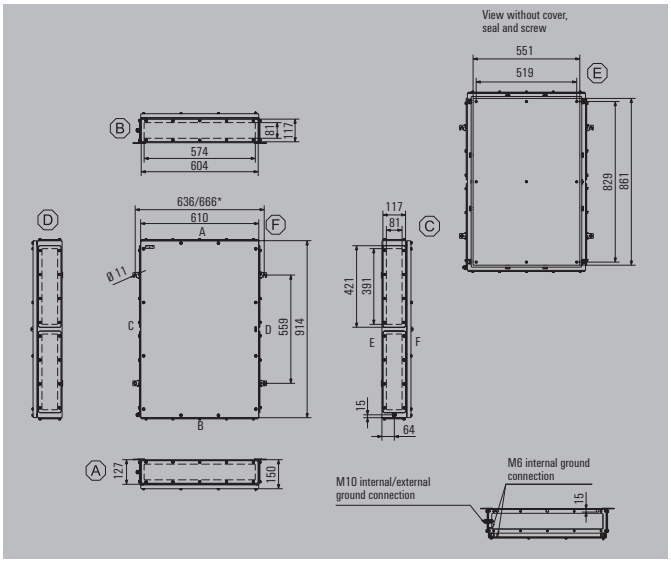

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195500000
1 gland plate - positioned at the bottom (B)	1195510000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195530000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194040000
With hole pattern, sheet steel, galvanised	2022740000
Stainless steel 1.4301 natural	1193910000
With hole pattern, natural stainless steel 1.4301	1257760000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006729
Vertical	8000006718
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2024150000
Left and right sides (C & D), electropolished stainless steel 1.4404	2024300000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256710000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256720000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281550000
Stainless steel 1.4404, electro-polished	1314320000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	5x157	8x99
4 mm²	4x132	7x80
6 mm²	4x100	7x62
10 mm²	3x85	6x50
16 mm²	3x66	5x40
35 mm²	2x49	4x30

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	53	70
M16	29	40
M20	25	34
M25	11	14
M32	9	12
M40	8	10
M50	6	8
M63	0	0
M75	0	0

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 916120

Depth 200 mm

Height / Width / Depth	914 / 610 / 200 mm

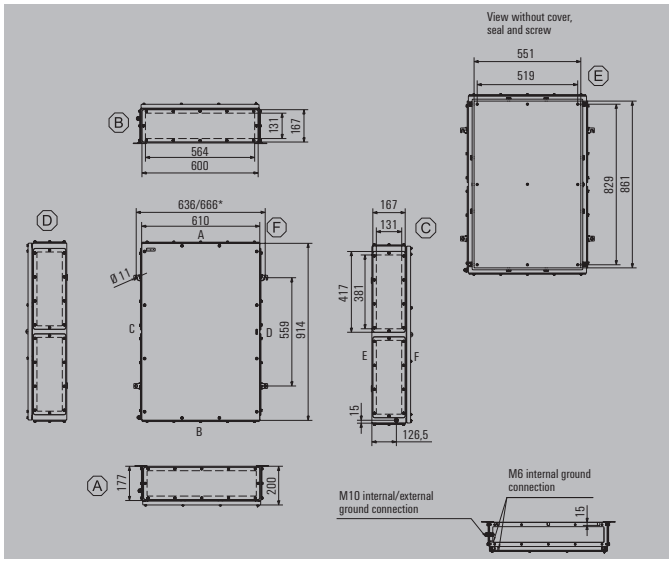

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195550000
1 gland plate - positioned at the bottom (B)	1195560000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195580000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194040000
With hole pattern, sheet steel, galvanised	2022740000
Stainless steel 1.4301 natural	1193910000
With hole pattern, natural stainless steel 1.4301	1257760000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006729
Vertical	8000006718
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2024470000
Left and right sides (C & D), electropolished stainless steel 1.4404	2024490000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256730000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256740000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281570000
Stainless steel 1.4404, electro-polished	1314330000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	5x157	8x99
4 mm²	4x132	7x80
6 mm²	4x100	7x62
10 mm²	3x85	6x50
16 mm²	3x66	5x40
35 mm²	2x49	4x30

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	88	116
M16	58	80
M20	38	52
M25	33	42
M32	18	24
M40	15	20
M50	6	8
M63	5	6
M75	4	6

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 917620

Depth 200 mm

Height / Width / Depth	914 / 762 / 200 mm

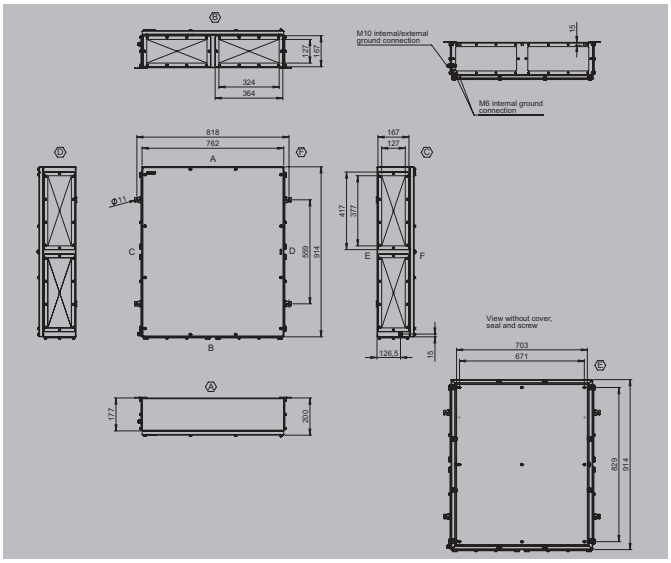

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108875
1 gland plate - positioned at the bottom (B)	8000108877
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108879
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000116040
With hole pattern, sheet steel, galvanised	8000115921
Stainless steel 1.4301 natural	8000115931
With hole pattern, natural stainless steel 1.4301	8000115910
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116117
Vertical	8000116107
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114904
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114897
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114153
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114148
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115036
Stainless steel 1.4301, mirror-polished	8000115050
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	7x157	8x128
	4 mm²	6x132	7x107
	6 mm²	5x100	7x80
	10 mm²	5x85	6x65
	16 mm²	4x66	5x53
	35 mm²	3x49	4x40

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	150	180
M16	120	112
M20	80	88
M25	48	54
M32	24	28
M40	20	24
M50	8	8
M63	6	6
M75	4	6

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 919120

Depth 200 mm

Height / Width / Depth 914 / 914 / 200 mm

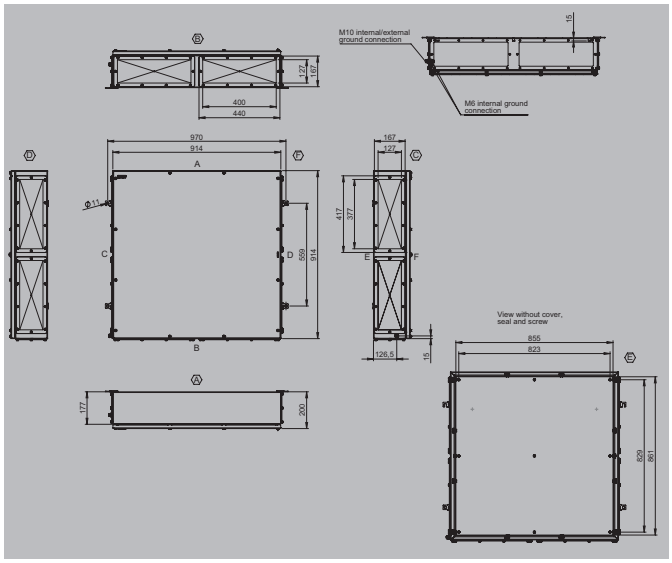

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	8000108880
1 gland plate - positioned at the bottom (B)	8000108882
3 gland plates - positioned at bottom, left and right (B, C & D)	8000108884
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000116041
With hole pattern, sheet steel, galvanised	8000115922
Stainless steel 1.4301 natural	8000115932
With hole pattern, natural stainless steel 1.4301	8000115911
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000116118
Vertical	8000116108
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114899
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114897
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	8000114150
Left and right sides (C & D), electropolished stainless steel 1.4404	8000114148
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4404, electro-polished	8000115037
Stainless steel 1.4301, mirror-polished	8000115051
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	8x157	8x157
	4 mm²	7x132	7x132
	6 mm²	7x100	7x100
	10 mm²	6x85	6x85
	16 mm²	5x66	5x66
	35 mm²	4x49	4x49

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	190	180
M16	120	112
M20	96	88
M25	60	54
M32	32	28
M40	12	24
M50	10	8
M63	8	6
M75	6	6

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB MH 987420

Depth 200 mm

980 / 740 / 200 mm

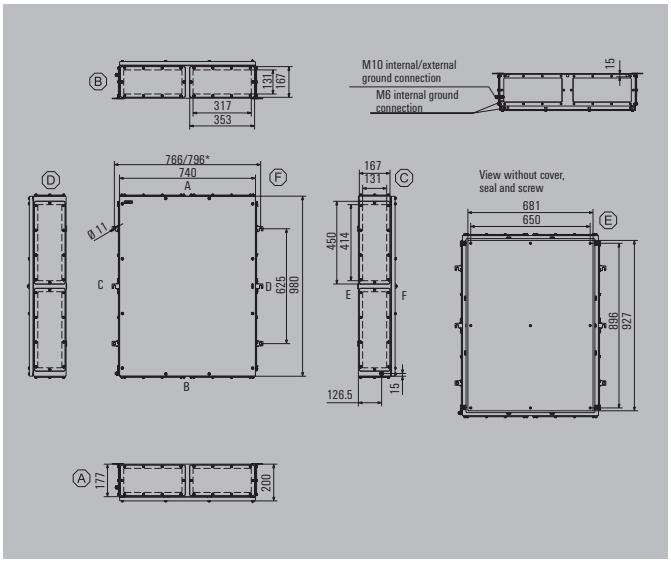

Ordering data

Stainless steel 1.4404 316L, electropolished	Order No.
0 gland plates	1195600000
1 gland plate - positioned at the bottom (B)	1195610000
3 gland plates - positioned at bottom, left and right (B, C & D)	1195630000
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	1194050000
With hole pattern, sheet steel, galvanised	2022760000
Stainless steel 1.4301 natural	1193920000
With hole pattern, natural stainless steel 1.4301	1257770000
Fastening screws for mounting plates	0642600000
Fastening screws for terminal rails*	1274150000
Mounting rails, TS35x7.5**	
Horizontally	8000006730
Vertical	8000006719
Stainless steel spacer M6 x 8, Set of 4	
10 mm length	0935110000
15 mm length	0935120000
20 mm length	0935130000
30 mm length	0935140000
Gland plates - 3 mm with M6 earth studs	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	2024560000
Left and right sides (C & D), electropolished stainless steel 1.4404	2024590000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256750000
Left and right sides (C & D), electropolished stainless steel 1.4404	1256760000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281580000
Stainless steel 1.4404, electro-polished	1314340000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
130x50 stainless steel 1.4301	1283450000
100x25 stainless steel 1.4301	1257640000
Document holders	
For DIN A6 size documents	1252780000
For DIN A5 size documents	1252750000
For DIN A4 size documents	1252730000
Set of fixings*	
For label holders, rain hoods and document holders (rivet)	1252190000
For plastic (Trafolyte), identification plate (screw)	1285200000
Earthing stud	
Stainless steel 1.4404, M10	1192690000

Note

*Packing unit (PU) = 20 pcs., sufficient for 10 fixtures
**Packing unit (PU) = 20 pcs., fixing screws 1274150000 available separately

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	6x174	9x127
4 mm²	6x146	8x99
6 mm²	5x108	7x78
10 mm²	4x85	6x63
16 mm²	4x72	5x51
35 mm²	3x54	4x38

Note

*For the enclosure versions with no, one or two gland plates, the horizontal distance of the mounting feet is reduced by 30 mm.
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	96	126
M16	64	84
M20	42	54
M25	36	48
M32	20	26
M40	16	22
M50	6	10
M63	6	8
M75	4	6

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Dimensions of mounting plate



Klippon® TB QL – Quarter Lock

Stainless steel enclosures for industrial areas and potentially explosive atmospheres

The potentially explosive atmospheres of process industry and power generation plants are subject to difficult environmental conditions and growing safety requirements. With their outstanding performance features, Klippon® TB enclosures are ideally suited to meet these challenges. The tried-and-tested and market-leading product range has now been improved in a number of ways.

We manufacture and deliver the enclosures according to your individual requirements – fully assembled with terminal blocks, electronic components and cable glands.

Features:

- Available in 22 standard sizes with 3 standard depths
- Custom sizes available on request
- Equipped with up to four flange plates
- Gasket with compression protection
- Cover quick release with slot
- Improved temperature performance
- High IP66 protection class
- Integrated earth studs in the cover and lower section
- Welded mounting feet

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klippontb

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Height x width x depth in mm	0 Gland Plates	1 Gland Plate (below)	2 Gland Plates (above + below)	3 Gland plates (below + sides)	4 Gland plates (all sides)
KTB QL 221513 S4E_*	229 x 152 x 133	1199850000	1199860000	1199870000	1199880000	1199890000
KTB QL 262615 S4E_*	260 x 260 x 150	1199900000	1199910000	1199920000	1199930000	1199940000
KTB QL 262620 S4E_*	260 x 260 x 200	1199950000	1199960000	1199970000	1199980000	1199990000
KTB QL 302015 S4E_*	306 x 203 x 150	8000109883	8000109885	-	8000109886	-
KTB QL 303015 S4E_*	306 x 306 x 150	1200010000	1200020000	1200030000	1200040000	1200050000
KTB QL 303020 S4E_*	306 x 306 x 200	1200060000	1200070000	1200080000	1200090000	1200100000
KTB QL 352615 S4E_*	350 x 260 x 150	1200110000	1200120000	1200130000	1200140000	1200150000
KTB QL 352620 S4E_*	350 x 260 x 200	1200160000	1200170000	1200180000	1200190000	1200210000
KTB QL 353515 S4E_*	350 x 350 x 150	8000109887	8000109888	-	8000109889	-
KTB QL 353520 S4E_*	350 x 350 x 200	8000109890	8000109891	-	8000109892	-
KTB QL 403015 S4E_*	400 x 300 x 150	1200220000	1200230000	1200240000	1200250000	1200260000
KTB QL 403020 S4E_*	400 x 300 x 200	1200270000	1200280000	1200290000	1200310000	1200320000
KTB QL 404015 S4E_*	406 x 406 x 150	8000109893	8000109894	-	8000109895	-
KTB QL 404020 S4E_*	406 x 406 x 200	8000109896	8000109897	-	8000109898	-
KTB QL 453815 S4E_*	458 x 382 x 150	1200330000	1200340000	1200350000	1200360000	1200370000
KTB QL 453820 S4E_*	458 x 382 x 200	1200380000	1200390000	1200410000	1200420000	1200430000
KTB QL 484815 S4E_*	480 x 480 x 150	1200440000	1200450000	1200460000	1200470000	1200480000
KTB QL 484820 S4E_*	480 x 480 x 200	1200490000	1200510000	1200520000	1200530000	1200540000
KTB QL 504015 S4E_*	508 x 406 x 150	8000109899	8000109900	-	8000109901	-
KTB QL 504020 S4E_*	508 x 406 x 200	8000109902	8000109903	-	8000109904	-
KTB QL 553515 S4E_*	550 x 350 x 150	1200550000	1200560000	1200570000	1200580000	1200590000
KTB QL 553520 S4E_*	550 x 350 x 200	1200610000	1200620000	1200630000	1200640000	1200650000
KTB QL 624020 S4E_*	620 x 406 x 200	8000109905	8000109906	-	8000109907	-
KTB QL 624515 S4E_*	620 x 450 x 150	1200660000	1200670000	1200680000	1200690000	1200710000
KTB QL 624520 S4E_*	620 x 450 x 200	1200720000	1200730000	1200740000	1200750000	1200760000
KTB QL 625015 S4E_*	620 x 508 x 150	8000109908	8000109909	-	8000109910	-
KTB QL 625020 S4E_*	620 x 508 x 200	8000109911	8000109912	-	8000109913	-
KTB QL 626215 S4E_*	620 x 620 x 150	8000109914	8000109915	-	8000109916	-
KTB QL 626220 S4E_*	620 x 620 x 200	8000109917	8000109918	-	8000109919	-
KTB QL 765015 S4E_*	762 x 508 x 150	1200770000	1200780000	1200790000	1200810000	1200820000
KTB QL 765020 S4E_*	762 x 508 x 200	1200830000	1200840000	1200850000	1200860000	1200870000
KTB QL 766215 S4E_*	760 x 620 x 150	8000109920	8000109921	-	8000109922	-
KTB QL 766220 S4E_*	760 x 620 x 200	8000109923	8000109924	-	8000109925	-
KTB QL 916115 S4E_*	914 x 610 x 150	1200940000	1200890000	1200910000	1200920000	1200930000
KTB QL 916120 S4E_*	914 x 610 x 200	1200880000	1200950000	1200960000	1200970000	1200980000
KTB QL 917620 S4E_*	914 x 762 x 200	8000109926	8000109927	-	8000109928	-
KTB QL 919120 S4E_*	914 x 914 x 200	8000109929	8000109930	-	8000109931	-
KTB QL 987420 S4E_*	980 x 740 x 200	1200990000	1201010000	1201020000	1201030000	1201040000
Note		* Placeholder for the number of gland plates (0, 1, 2, 3, 4). The Klippon® TB QL enclosures are subject to minimum order quantities.				

Technical Overview

Technical data

Enclosure material*	Stainless steel 1.4404 (316L) 1.5 mm
Surface finish	electropolished
IP protection class	IP66 to DIN EN 60529
NEMA protection classes	3, 4x, 12
Gland plates	1-4 (fixed with M6 hexagon head screws with 10 mm heads), optionally without a gland plate
Gland plate thickness	3 mm (other thickness are available on request)
Earthing inside	Enclosure base and lid: welded M6 stainless steel earth studs
Earthing outside	Continuous M10 brass earth stud (optionally with stainless-steel earth stud)
Installation mounting	4 or 9 mounting bolts with M6 threaded holes to attach the mounting plate or mounting rail
Enclosure attachment	4 or 6 welded mounting feet with 11-mm holes (2 slotted and 2 cross-shaped openings)
Lid opening	Lid can be fully removed without the use of tools, can be fitted on both sides, lid opening angle: 130°
Cover attachment	Quarter-turn lock with slotted insert (other inserts available on request)
Impact resistance	7 J to IEC 60079-0, IK 09 (10J) to DIN EN 50102
Gasket material	Silicone
Operating temperature range	-60 °C...+135 °C
Torque – lid and gland plate screws	2.5 Nm
Note	* Painted enclosures are available on request.

Approvals for empty enclosures

ATEX certificate	IBExU14ATEX1028 U	cULus	E243298
ATEX marking	II 2G Ex eb IIC Gb II 2D Ex tb IIIC Db	DNV	TAE000013S
IECEx certificate	IECEx IBE 14.0004U	CCOE	P461058_1
IECEx marking	Ex eb IIC Gb Ex tb IIIC Db	INMETRO	LMP 21.0017
CCCEx certificate	2020322303002357	AEx	E223792
CCCEx marking	Ex e IIC Gb, Ex tD A21 IP66/67	Miscellaneous	EN 45545, DIN EN 15085-2/CL2
Note	The Klippon® TB enclosure range can be pre-fitted in our customer specific production department according to your wishes.		

Approvals for control and distribution box

ATEX certificate	IBExU14ATEX1050	IECEx certificate	IECEx IBE 14.0013
ATEX marking	Ⓔx II 2G Ex eb IIC/IIB/IIA T6/T5/T4 Gb Ⓔx II 1G Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ⓔx II 2G Ex eb ia IIC/IIB/IIA T6/T5/T4 Gb Ⓔx II 2D Ex tb IIIC T80°C/T95°C/T135°C Db Ⓔx II 1D Ex ia IIIC T80°C/T95°C/T135°C Da -60 °C ≤ Ta ≤ +40/+55/+90 °C	IECEx marking	Ex eb IIC/IIB/IIA T6/T5/T4 Gb Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex eb ia IIC/IIB/IIA T6/T5/T4 Gb Ex tb IIIC T80°C/T95°C/T135°C Db Ex ia IIIC T80°C/T95°C/T135°C Da -60 °C...+40/+55/+90 °C
CCCEx certificate	2020322303002358	INMETRO certificate	IEx 17.0021
CCCEx marking	Ex e IIC/IIB/IIA T6/T5/T4 Gb Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex e ia IIC/IIB/IIA T6/T5/T4 Gb	INMETRO marking	Ex eb IIC T6/T5/T4 Gb Ex ia IIC T6/T5/T4 Ga Ex eb ia IIC T6/T5/T4 Gb Ex tb IIIC 85°C/100°C/135°C Db IP66/IP67 Ex ia IIIC 85°C/100°C/135°C Da
KOSHA certificate	16-AV4B0-0245X	AEx certificate	E223792
KOSHA marking	Ex eb IIC/IIB/IIA T6/T5/T4 Gb Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex eb ia IIC/IIB/IIA T6/T5/T4 Gb Ex tb IIIC T80°C/T95°C/T135°C Db Ex ia IIIC T80°C/T95°C/T135°C Da -60 °C...+40/+55/+90 °C	AEx marking	Class I, Zone 1, AEx e IIC Gb T6..T4 Class I, Zone 2, AEx e IIC Gc T6..T4 Class I Div.2 Group A,B,C,D T6...T4 Class II Div.2 Group F,G Zone 21, AEx tb IIIC Db
Note	Labelling depends on the application layout. For information about power loss, please contact your Weidmüller contact person. Additional approvals available on request.		

Klippon® TB FS – Fixing Screw

Stainless steel enclosures for industrial areas and potentially explosive atmospheres

Growing safety requirements and challenging environmental conditions in the potentially explosive atmospheres of process industry and power generation plants place special demands on enclosure solutions. Klippon® TB enclosures have special performance features that enable them meet these demands.

The Klippon® TB FS enclosure series complements our Klippon® TB MH and Klippon® TB QL standard enclosures. On request, we manufacture and deliver these enclosures custom-assembled with terminal blocks, electronic components and cable glands.

Features:

- Available in 12 sizes and 3 standard depths
- Equipped with up to four flange plates
- Gasket with compression protection
- Cover lock outside the sealed zone
- Improved temperature performance
- High protection classes: IP66 and IP67
- Integrated earth studs in the cover and lower section
- Welded mounting feet

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klippontb

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Height x width x depth in mm	0 Gland Plates	1 Gland Plate (below)	2 Gland Plates (above + below)	3 Gland plates (below + sides)	4 Gland plates (all sides)
KTB FS 221513 S4E_*	229 x 152 x 133	1195650000	1195660000	1195670000	1195680000	1195690000
KTB FS 262615 S4E_*	260 x 260 x 150	1195700000	1195710000	1195720000	1195730000	1195740000
KTB FS 262620 S4E_*	260 x 260 x 200	1195750000	1195760000	1195770000	1195780000	1195790000
KTB FS 303015 S4E_*	306 x 306 x 150	1195800000	1195810000	1195820000	1195830000	1195840000
KTB FS 303020 S4E_*	306 x 306 x 200	1195850000	1195860000	1195870000	1195880000	1195890000
KTB FS 352615 S4E_*	350 x 260 x 150	1195900000	1195910000	1195920000	1195930000	1195940000
KTB FS 352620 S4E_*	350 x 260 x 200	1195950000	1195960000	1195970000	1195980000	1195990000
KTB FS 403015 S4E_*	400 x 300 x 150	1196000000	1196010000	1196020000	1196030000	1196040000
KTB FS 403020 S4E_*	400 x 300 x 200	1196050000	1196060000	1196070000	1196080000	1196090000
KTB FS 453815 S4E_*	458 x 382 x 150	1196100000	1196110000	1196120000	1196130000	1196140000
KTB FS 453820 S4E_*	458 x 382 x 200	1196150000	1196160000	1196170000	1196180000	1196190000
KTB FS 484815 S4E_*	480 x 480 x 150	1196200000	1196210000	1196220000	1196230000	1196240000
KTB FS 484820 S4E_*	480 x 480 x 200	1196250000	1196260000	1196270000	1196280000	1196290000
KTB FS 553515 S4E_*	550 x 350 x 150	1196300000	1196310000	1196320000	1196330000	1196340000
KTB FS 553520 S4E_*	550 x 350 x 200	1196350000	1196360000	1196370000	1196380000	1196390000
KTB FS 624515 S4E_*	620 x 450 x 150	1196400000	1196410000	1196420000	1196430000	1196440000
KTB FS 624520 S4E_*	620 x 450 x 200	1196450000	1196460000	1196470000	1196480000	1196490000
KTB FS 765015 S4E_*	762 x 508 x 150	1196500000	1196510000	1196520000	1196530000	1196540000
KTB FS 765020 S4E_*	762 x 508 x 200	1196550000	1196560000	1196570000	1196580000	1196590000
KTB FS 916115 S4E_*	914 x 610 x 150	1196600000	1196610000	1196620000	1196630000	1196640000
KTB FS 916120 S4E_*	914 x 610 x 200	1196650000	1196660000	1196670000	1196680000	1196690000
KTB FS 987420 S4E_*	980 x 740 x 200	1196700000	1196710000	1196720000	1196730000	1196740000

Note * Placeholder for the number of gland plates (0, 1, 2, 3, 4). The Klippon® TB QL enclosures are subject to minimum order quantities.

Technical Overview

Technical data

Enclosure material*	Stainless steel 1.4404 (316L) 1.5 mm
Surface finish	electropolished
IP protection class	IP66 / IP67 to DIN EN 60529
NEMA protection classes	3, 4x, 12
Gland plates	1-4 (fixed with M6 hexagon head screws with 10 mm heads), optionally without a gland plate
Gland plate thickness	3 mm (other thickness are available on request)
Earthing inside	Enclosure base and lid: welded M6 stainless steel earth studs
Earthing outside	Continuous M10 brass earth stud (optionally with stainless-steel earth stud)
Installation mounting	4 or 9 mounting bolts with M6 threaded holes to attach the mounting plate or mounting rail
Enclosure attachment	4 or 6 welded mounting feet with 11-mm holes (2 slotted and 2 cross-shaped openings)
Lid opening	Lid can be fully removed without the use of tools
Cover attachment	M6 hexagonal slotted screws AF 10
Impact resistance	7J to IEC 60079-0, IK 09 (10J) to DIN EN 50102
Gasket material	Silicone
Operating temperature range	–60 °C...+105 °C (IP66/IP67), –60 °C...+135 °C (IP66)
Torque – lid and gland plate screws	2.5 Nm
Note	* Painted enclosures are available on request.

Approvals for empty enclosures

ATEX certificate	IBExU14ATEX1028 U	cULus	E243298
ATEX marking	II 2G Ex eb IIC Gb II 2D Ex tb IIIC Db	DNV	TAE000013S
IECEx certificate	IECEx IBE 14.0004U	CCOE	P461058_1
IECEx marking	Ex eb IIC Gb Ex tb IIIC Db	INMETRO	LMP 21.0017
CCCEx certificate	2020322303002357	AEx	E223792
CCCEx marking	Ex e IIC Gb, Ex tD A21 IP66/67	Miscellaneous	EN 45545, DIN EN 15085-2/CL2
Note	The Klippon® TB enclosure range can be pre-fitted in our customer specific production department according to your wishes.		

Approvals for control and distribution box

ATEX certificate	IBExU14ATEX1050	IECEx certificate	IECEx IBE 14.0013
ATEX marking	Ex II 2G Ex eb IIC/IIB/IIA T6/T5/T4 Gb Ex II 1G Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex II 2G Ex eb ia IIC/IIB/IIA T6/T5/T4 Gb Ex II 2D Ex tb IIIC T80°C/T95°C/T135°C Db Ex II 1D Ex ia IIIC T80°C7T95°C/T135°C Da -60 °C ≤ Ta ≤ +40/+55/+90 °C	IECEx marking	Ex eb IIC/IIB/IIA T6/T5/T4 Gb Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex eb ia IIC/IIB/IIA T6/T5/T4 Gb Ex tb IIIC T80°C/T95°C/T135°C Db Ex ia IIIC T80°C7T95°C/T135°C Da -60 °C...+40/+55/+90 °C
CCCEx certificate	2020322303002358	INMETRO certificate	IEx 17.0021
CCCEx marking	Ex e IIC/IIB/IIA T6/T5/T4 Gb Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex e ia IIC/IIB/IIA T6/T5/T4 Gb	INMETRO marking	Ex eb IIC T6/T5/T4 Gb Ex ia IIC T6/T5/T4 Ga Ex eb ia IIC T6/T5/T4 Gb Ex tb IIIC 85°C/100°C/135°C Db IP66/IP67 Ex ia IIIC 85°C/100°C/135°C Da
KOSHA certificate	16-AV4BO-0245X	AEx certificate	E223792
KOSHA marking	Ex eb IIC/IIB/IIA T6/T5/T4 Gb Ex ia IIC/IIB/IIA T6/T5/T4 Ga Ex eb ia IIC/IIB/IIA T6/T5/T4 Gb Ex tb IIIC T80°C/T95°C/T135°C Db Ex ia IIIC T80°C/T95°C/T135°C Da -60 °C...+40/+55/+90 °C	AEx marking	Class I, Zone 1, AEx e IIC Gb T6..T4 Class I, Zone 2, AEx e IIC Gc T6..T4 Class I Div.2 Group A,B,C,D T6...T4 Class II Div.2 Group F,G Zone 21, AEx tb IIIC Db
Note	Labelling depends on the application layout. For information about power loss, please contact your Weidmüller contact person. Additional approvals available on request.		

Klippon® Protect – terminal boxes
Product overview of stainless steel enclosures

Various types of terminal boxes are available for installing signal / power supplies or distributors in potentially explosive atmospheres.
The terminal boxes are explosion-protected equipment approved for use in EX areas in zones 0, 1, 2 and 20, 21, 22.

They are approved in accordance with current international standards Ex e, Ex ia and Ex tb. Customer-specific configuration means these terminal boxes are the ideal solution for all applications. Use the product overview to find the right solution for you!
Combine enclosures with or without threaded holes with a suitable mounting rail or a pre-assembled terminal strip.

We have put together a small selection for you, but we are happy to configure your own customised solution.

Features:
- Available in a wide range of designs to meet customer requirements
- Additional international approvals
- High quality thanks to the use of tried-and-tested basic products of the Klippon® brand

One Terminal Box
Ex-certified enclosures for customized solutions

Our One Terminal Boxes are equipped with one feed-through terminal (WDU 2.5 or WDU 4) as standard. You can flexibly expand the enclosure with terminals you need whereby you can count on our support at any time. The most convienient way to create Ex terminal boxes is to use our Fast Delivery Service with our Weidmüller Configurator (WMC): design your individual Ex terminal box in the WMC and receive your offer within minutes.

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/exterminalbox

Overview of enclosures

Terminal boxes based on the Klippon® TB enclosure series

Description	Height x width x depth in mm	Labelling	Approval	Order No.
KTB MH 221513 Exia	229 x 152 x 133	Ex ia IIC T4 Ga	IECEx, ATEX	8000028398
KTB MH 262615 Exia	260 x 260 x 150	Ex ia IIC T4 Ga	IECEx, ATEX	8000028399
KTB QL 484820 Exe	480 x 480 x 200	Ex eb IIC T6 Gb	IECEx, ATEX	8000028401
Note				

Technical Overview

Technical data

Enclosure	
Material	Stainless steel 1.4404 (316L) 1.5 mm
Surface finish	electropolished (Klippon® TB)
IP protection class	IP66 / IP67 to DIN EN 60529
Gasket material	Silicone
Modular terminal	
Material	Wemid
Colour	beige, blue or green/yellow
Connection technology	Screw connection
Clamped conductors (H05V/H07V)	Solid, flexible and flexible with wire-end ferrule
Note	

Approvals for Klippon® TB

ATEX certificate	IBExU14ATEX1050
IECEx certificate	IECEx IBE 14.0013
Note	Labelling depends on the application layout. For information about power loss, please contact your Weidmüller contact person.

Klippon® TB MH 221513 Ex ia terminal box

Depth 133 mm

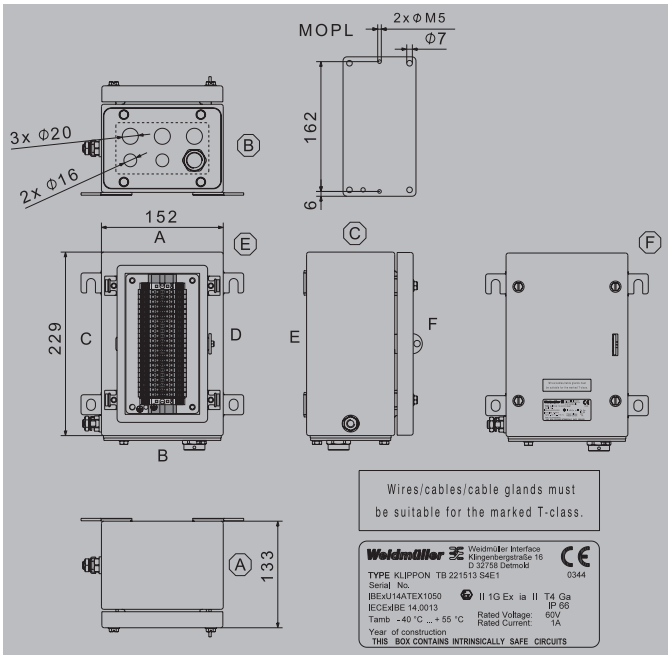

Height / Width / Depth	229 / 152 / 133 mm

Ordering data

	Order No.
KTB MH 221513 EXIA	8000028398
Note	

Technical data

Article - short description	Klippon TB (Terminal Box), Terminal Box, stainless steel enclosure, Height: 229 mm, Width: 152 mm, Depth: 133 mm, Gland plates: Bottom, Material: Stainless steel 1.4404 (316L), electropolished, silver
Identification	Ex ia IIC T4 Ga
Certificate no. Terminal Box (ATEX)	IBExU14ATEX1050
Certificate no. Terminal Box (IECEx)	IECEx IBE 14.0013
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-11, IEC 60079-31, EN 60079-0, EN 60079-7, EN 60079-11, EN 60079-31, EN/IEC 60079-26
Ambient temperature	Tamb -40°C...+55°C
Type label material	Polyester coated with aluminium
Protection class	IP66
Assembly	
Modular terminal blocks	1x22
Rated cross-section	4 mm²
Rated voltage	60 V
Rated current	1 A
Drill holes side A	none
Drill holes side B	2 x M16, 3 x M20, 1 x BDX
Technical data, enclosure	
Material	Stainless steel 1.4404 (316L)
Surface finish	electropolished
Material thickness	1.5 mm
Material thickness of flange	3 mm
Gland plates	Bottom
Seal material	Silicone
Enclosure attachment	4 welded-on mounting feet with 11 mm hole size
Mounting dimension - height / -width	152 mm / 178 mm
Lid attachment	4 hinges and M6 hex-head slotted screws SW10
Access opening: height / Access opening: width	176 mm / 93 mm
Earth, enclosure, external	Continuous M10 earth stud in body enclosure
Earth, enclosure, internal	Welded-on M6 stainless-steel earth stud in enclosure body and lid.

Note

Reference products

	Order No.
KTB MH 221513 S4E1	1194560000
WDU 4 BL	1020180000
KLIPPON BDX M20 S	2519550000
Note	

Accessories

Mounting plates and fastening screws	**Order No.**
Stainless steel 1.4301 natural	1193810000
Fastening screws for mounting plates	0642600000
Gland plate 3 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1280890000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256270000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281360000
Label holder	
70 x 70 angled stainless steel 1.4301	1279320000
Earthing stud	
Stainless steel 1.4404, M10	1192690000
Pressure compensating element with drainage function	
M20, brass	2519520000
Cable glands	
Nickel-plated brass, Ex e, M16, 3-12 mm	1460040000
Nickel-plated brass, Ex e, M20, 3-12 mm	1460050000
Blanking plugs	
Nickel-plated brass, Ex e, M16	1218940000
Nickel-plated brass, Ex e, M20	1218950000
Locknuts	
Nickel-plated brass, M16	1736990000
Nickel-plated brass, M20	1737000000

Note

Klippon® TB MH 262615 Ex ia terminal box

Depth 150 mm

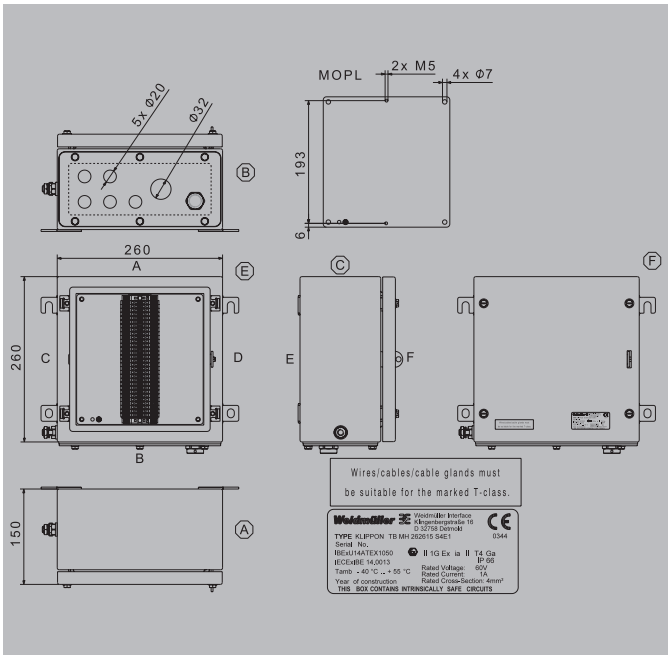

Height / Width / Depth	260 / 260 / 150 mm

Ordering data

	Order No.
KTB MH 262615 EXIA	8000028399
Note	

Technical data

Article - short description	Klippon TB (Terminal Box), Terminal Box, stainless steel enclosure, Height: 260 mm, Width: 260 mm, Depth: 150 mm, Gland plates: Bottom, Material: Stainless steel 1.4404 (316L), electropolished, silver
Identification	Ex ia IIC T4 Ga
Certificate no. Terminal Box (ATEX)	IBExU14ATEX1050
Certificate no. Terminal Box (IECEx)	IECEx IBE 14.0013
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-11, IEC 60079-31, EN 60079-0, EN 60079-7, EN 60079-11, EN 60079-31, EN/IEC 60079-26
Ambient temperature	Tamb -40°C...+55°C
Type label material	Polyester coated with aluminium
Protection class	IP66
Assembly	
Modular terminal blocks	1x30
Rated cross-section	4 mm²
Rated voltage	60 V
Rated current	1 A
Drill holes side A	none
Drill holes side B	5 x M20, 1 x M32, 1 x BDX
Technical data, enclosure	
Material	Stainless steel 1.4404 (316L)
Surface finish	electropolished
Material thickness	1.5 mm
Material thickness of flange	3 mm
Gland plates	Bottom
Seal material	Silicone
Enclosure attachment	4 welded-on mounting feet with 11 mm hole size
Mounting dimension - height / -width	170 mm / 286 mm
Lid attachment	4 hinges and M6 hex-head slotted screws SW10
Access opening: height / Access opening: width	207 mm / 201 mm
Earth, enclosure, external	Continuous M10 earth stud in body enclosure
Earth, enclosure, internal	Welded-on M6 stainless-steel earth stud in enclosure body and lid.

Note

Reference products

	Order No.
KTB MH 262615 S4E1	1194610000
WDU 4 BL	1020180000
KLIPPON BDX M20 S	2519550000
Note	

Accessories

Mounting plates and fastening screws	**Order No.**
Stainless steel 1.4301 natural	1193820000
Fastening screws for mounting plates	0642600000
Gland plate 3 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1280910000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256290000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281370000
Label holder	
100x25 stainless steel 1.4301	1257640000
130x50 stainless steel 1.4301	1283450000
70 x 70 angled stainless steel 1.4301	1279320000
Earthing stud	
Stainless steel 1.4404, M10	1192690000
Document holders	
For DIN A6 size documents	1252780000
Pressure compensating element with drainage function	
M20, brass	2519520000
Cable glands	
Nickel-plated brass, Ex e, M20, 3-12 mm	1460050000
Nickel-plated brass, Ex e, M32, 14-24 mm	1460080000
Blanking plugs	
Nickel-plated brass, Ex e, M20	1218950000
Nickel-plated brass, Ex e, M32	1218970000
Locknuts	
Nickel-plated brass, M20	1737000000
Nickel-plated brass, M32	1737020000

Note

Klippon® TB QL 484820 Ex e terminal box

Depth 200 mm

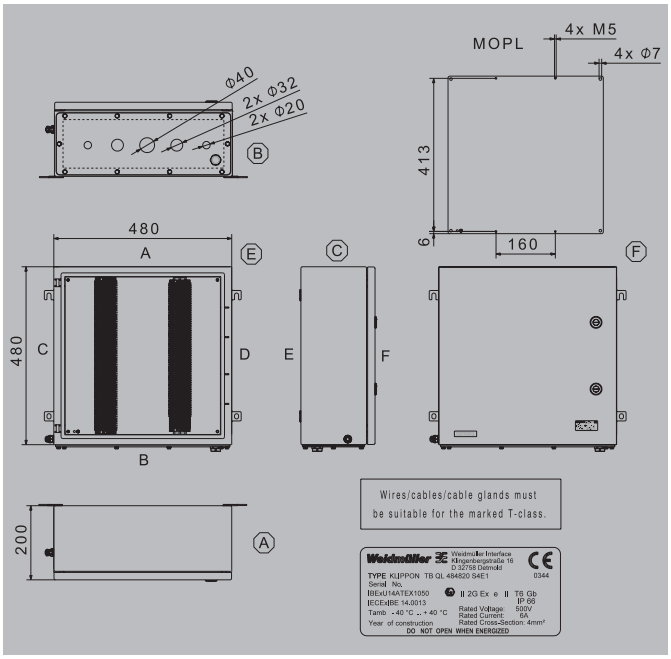

Height / Width / Depth	480 / 480 / 200 mm

Ordering data

	Order No.
KTB QL 484820 EXE	8000028401
Note	

Reference products

	Order No.
KTB QL 484820 S4E1	1200510000
WDU 4	1020100000
WPE 4	1010100000
KLIPPON BDX M20 S	2519550000
Note	

Technical data

Article - short description	Klippon TB (Terminal Box), Terminal Box, stainless steel enclosure, Height: 480 mm, Width: 480 mm, Depth: 200 mm, Gland plates: Bottom, Material: Stainless steel 1.4404 (316L), electropolished, silver
Identification	Ex eb IIC T6 Gb
Certificate no. Terminal Box (ATEX)	IBExU14ATEX1050
Certificate no. Terminal Box (IECEx)	IECEx IBE 14.0013
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-31, EN 60079-0, EN 60079-7, EN 60079-31
Ambient temperature	Tamb -40°C...+40°C
Type label material	Polyester coated with aluminium
Protection class	IP66
Assembly	
Modular terminal blocks	1x66, 1x59, 5 x PE
Rated cross-section	4 mm²
Rated voltage	550 V
Rated current	6 A
Drill holes side A	none
Drill holes side B	2 x M20, 2 x M25, 1 x M40, 1 x BDX
Technical data, enclosure	
Material	Stainless steel 1.4404 (316L)
Surface finish	electropolished
Material thickness	1.5 mm
Material thickness of flange	3 mm
Gland plates	Bottom
Seal material	Silicone
Enclosure attachment	4 welded-on mounting feet with 11 mm hole size
Mounting dimension - height / -width	327 mm / 506 mm
Lid attachment	Quarter-turn fastener with slotted insert
Access opening: height / Access opening: width	427 mm / 421 mm
Earth, enclosure, external	Continuous M10 earth stud in body enclosure
Earth, enclosure, internal	Welded-on M6 stainless-steel earth stud in enclosure body and lid.

Note

Accessories

Mounting plates and fastening screws	Order No.
Stainless steel 1.4301 natural	1193870000
Fastening screws for mounting plates	0642600000
Gland plate 3 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1281130000
Gland plates and screws - 6 mm	
Top and bottom sides (A & B), electropolished stainless steel 1.4404	1256550000
Mounting screw, stainless steel 1.4404	1253230000
Rain hoods	
Stainless steel 1.4301, mirror-polished	1281480000
Label holder	
100x25 stainless steel 1.4301	1257640000
130x50 stainless steel 1.4301	1283450000
70 x 70 angled stainless steel 1.4301	1279320000
Document holders	
For DIN A6 size documents	1252780000
For DIN A4 size documents	1252730000
Earthing stud	
Stainless steel 1.4404, M10	1192690000
Pressure compensating element with drainage function	
M20, brass	2519520000
Cable glands	
Nickel-plated brass, Ex e, M20, 3-12 mm	1460050000
Nickel-plated brass, Ex e, M25, 10-18 mm	1460070000
Nickel-plated brass, Ex e, M40, 22-32 mm	1460090000
Blanking plugs	
Nickel-plated brass, Ex e, M20	1218950000
Nickel-plated brass, Ex e, M25	1218960000
Nickel-plated brass, Ex e, M40	1218980000
Locknuts	
Nickel-plated brass, M20	1737000000
Nickel-plated brass, M25	1737010000
Nickel-plated brass, M40	1737030000

Note

Klippon® TB Railway for the railway technology of the future

Customised enclosure solutions for tunnels, trains and tracks

The mobility needs of our society are growing. At the same time, the demands placed on safety, speed, comfort and efficiency are also increasing. Whether for rail vehicles, stationary systems or signalling equipment: As a leading supplier of connection solutions, we provide you with an extensive range of innovative products for the safe and reliable connection of signals, data or energy for the diverse systems and components required in the railway sector. We enhance the competitive edge of our customers with simple, optimised interfaces and connection solutions.

The experts in our assembly team will work together with you to develop exactly the industry-specific solutions you need for your railway application. Our new certified Klippon® TB Railway portfolio provides the perfect basis for this. This series was specially developed for applications on tracks, in trains and in tunnel systems. The extensive range enables our international experts to realise customer-specific projects quickly and efficiently. We can provide you with a complete range of services on request – from consulting and development to production and certification. With us, you get fast, uncomplicated and professional services from a single, competent source.

Your special advantage:

- Application-specific consulting by a competent sales team
- Global network for development and certification
- Efficient, solution-oriented development on the basis of our existing portfolio
- Profound project maturity and extensive documentation aids
- International IRIS-certified project management
- Type and qualification testing services by an accredited laboratory

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klipponrailway

Overview of enclosures

Description	Design	Additional assembly options (on request)	Order No.
Boxes for rolling stock			
KTB FS 262615 S2N2 TRAINBOX SMALL	Enclosures	HV 4000, vertical, up to 3-pole	**8000080478**
KTB FS 352615 S2P2 TRAINBOX HV	Terminal boxes, fitted with HV 4000, 4-pin	-	**8000080479**
KTB FS 453815 S2N2 TRAINBOX BIG	Enclosures	HV 4000, vertical, up to 5-pole	**8000080863**
KTB FS 302915 S2N2 ANGLEDBOX EDGE HV	Terminal boxes, fitted with HV 2700	-	**8000092462**
Boxes for trackside			
KTB FS 262615 S2B1 TRACKBOX SMALL	Enclosures	Vertical with feed-through terminal blocks (A-Series or W-Series)	**8000080480**
KTB FS 553518 S2B1 TRACKBOX EQP	Terminal boxes, fitted with A2C and OVP	-	**8000080481**
KTB FS 624515 S2B1 TRACKBOX BIG	Enclosures	Vertical with feed-through terminal blocks (A-Series or W-Series)	**8000080482**
Boxes for tunnel installation			
KTB FS 221513 S2B2 TUBEBOX	Enclosures	Vertical with ceramic feed-through terminal blocks	**8000080476**
KTB FS 262615 S2B2 TUBEBOX SAKK 10	Terminal boxes, fitted with SAKK 10	-	**8000080477**
Note			

Enclosure solutions for use in tunnels

Application focus 1: Connection boxes for modern train protection systems, antennas and further trackside equipment in tunnels

Your special advantages:
- Durable protection of the electrical installation in demanding tunnel environments
- No compromises to visibility thanks to non-reflective surfaces
- Resistant to vibrations and falling rocks in the vicinity of the track

Application focus 2: Connection boxes for the fail-safe supply of power to emergency systems in tunnels

Your special advantages:
- Certified fireproof uninterruptible emergency power supply (acc. to EN 455455 HL3)

Enclosure solutions for on-vehicle use

Application focus 1: Motor connection boxes for DC, three-phase and AC drives

Your special advantages:
- Space-saving design, flexible use of installation space
- Current load tolerance for lower heat and higher resistance

Application focus 2: Gangway connection box for distributing supply voltage in train sets

Your special advantages:
- Robust and secure protection for the power supply of trains
- Space-saving design, flexible use of installation space

Enclosure solutions for trackside use

Application focus: Small, medium and large connection terminals for antennas, axle counters, point machines and other components along the track

Your special advantages:
- Protection of electrical installations in the harsh environment of railway tracks
- Secure EMC protection
- High level of resistance, even with intensive solar radiation

Klippon® TB Railway – Stainless steel enclosure

the basis of our enclosure solutions for the mobility of the future

Technical Overview

Technical data

Enclosure material	Stainless steel 1.4404 (316L) 1.5 mm
Surface finish outside	brushed, natural or painted, depending on the variant
Surface finish inside	Natural
IP protection class	IP66 / IP67 to DIN EN 60529
NEMA protection classes	3, 4x, 12
Gland plates	0 / 2 (top/bottom) or 0 / 1 (bottom), depending on the variant
Gland plate thickness	3 mm
Earthing outside	M10 stainless steel bolt, extended
Mounting plate	optional
Installation mounting	4 or 9 mounting bolts with M6 threaded holes to attach the mounting plate or mounting rail
Enclosure attachment	4 or 6 welded mounting feet with 11-mm holes (2 slotted and 2 cross-shaped openings)
Lid opening	Lid can be fully removed without the use of tools
Cover attachment	M6 hexagonal slotted screws AF 10
Impact resistance	10J to DIN EN 50102
Gasket material	Silicone
Operating temperature range	-60 °C...+105 °C (IP66/IP67), -60 °C...+135 °C (IP66)
Torque – lid and gland plate screws	2.5 Nm
Fire protection class acc. to	EN 45545 HL3
Vibration resistance acc. to	EN 61373 1b for vehicle applications or EN 60068 (< 1m) for tunnel and trackside applications
Welding standard	EN 15085 CL2 for vehicle applications or ISO DIN EN 3834-3 for tunnel and trackside applications
Note	

KTB FS 221513 S2B2 TUBEBOX

Depth **133 mm**

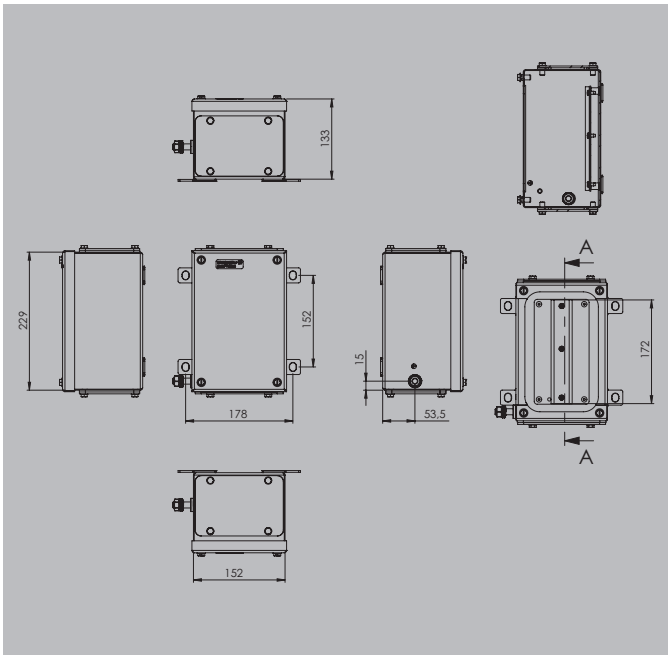

Height / Width / Depth	229 / 152 / 133 mm

Ordering data

	Order No.
KTB FS 221513 S2B2 TUBEBOX	**8000080476**
Note	

Technical data

Article - short description	Klippon TB FS (Terminal Box - Fixing Screw), Enclosures, Height: 229 mm, Width: 152 mm, Depth: 133 mm, Gland plates: Bottom, top, Material: Stainless steel 1.4301 (304), Brushed, silver
Ambient temperature	-60 °C...135 °C
Protection class	IP66, IP67
Standards	EN 60068 ≤1m from the track
Impact resistance	10 J version standard
Assembly	
Fuse holder available	No
Drill holes side A	none
Drill holes side B	none
Technical data, enclosure	
Material	Stainless steel 1.4301 (304)
Surface finish	Brushed
Seal material	Silicone
Lid attachment	M6 hex-head slotted screws SW10
Flange plate	Yes

Note

KTB FS 262615 S2B2 TUBEBOX SAKK 10

Depth **150 mm**

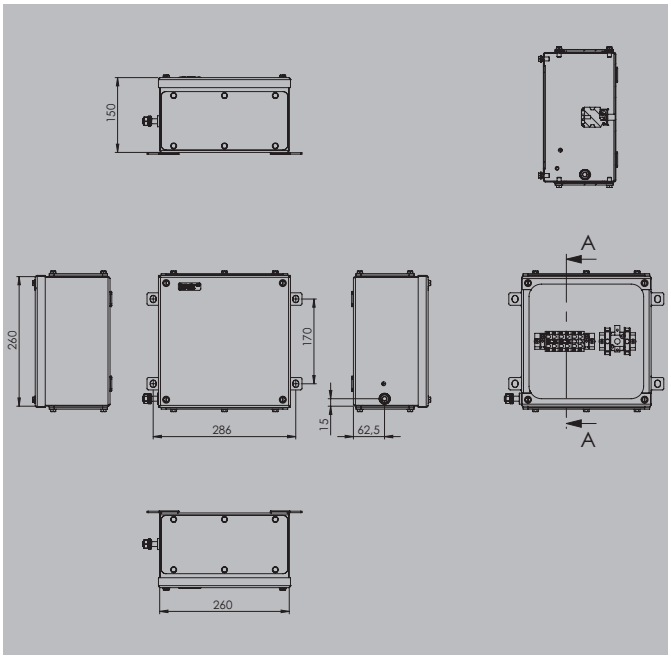

Height / Width / Depth	260 / 260 / 150 mm

Ordering data

	Order No.
KTB FS 262615 S2B2 TUBEBOX SAKK 10	**8000080477**
Note	

Technical data

Article - short description	Klippon TB FS (Terminal Box - Fixing Screw), Enclosures, Height: 260 mm, Width: 260 mm, Depth: 150 mm, Gland plates: Bottom, top, Material: Stainless steel 1.4301 (304), Brushed, silver
Ambient temperature	-60 °C...135 °C
Protection class	IP66, IP67
Standards	EN 60068 ≤1m from the track
Impact resistance	10 J version standard
Assembly	
Fuse holder available	Yes
SAKK 10	1x6
Drill holes side A	none
Drill holes side B	none
Technical data, enclosure	
Material	Stainless steel 1.4301 (304)
Surface finish	Brushed
Seal material	Silicone
Lid attachment	M6 hex-head slotted screws SW10
Flange plate	Yes

Note

KTB FS 262615 S2N2 TRAINBOX SMALL

Depth 150 mm

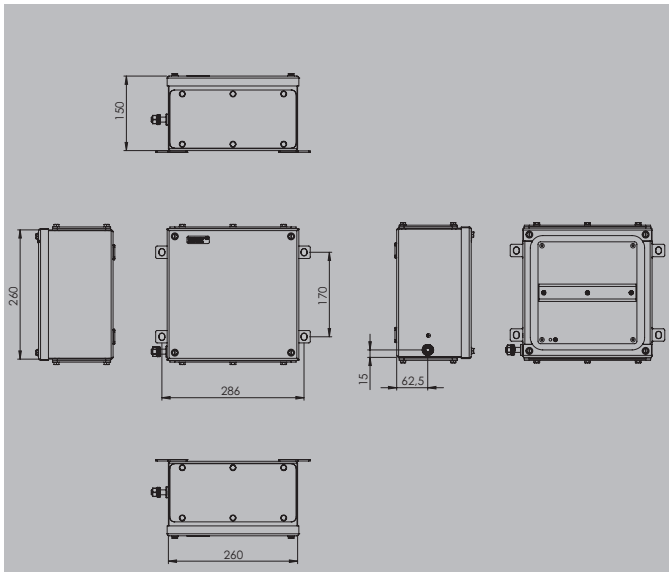

Height / Width / Depth	260 / 260 / 150 mm

Ordering data

	Order No.
KTB FS 262615 S2N2 TRAINBOX SMALL	8000080478

Note

Technical data

Article - short description	Klippon TB FS (Terminal Box - Fixing Screw), Enclosures, Height: 260 mm, Width: 260 mm, Depth: 150 mm, Gland plates: Bottom, top, Material: Stainless steel 1.4301 (304), untreated, silver
Ambient temperature	-60 °C...135 °C
Protection class	IP66, IP67
Standards	EN 61373 1b, EN 45545 HL3, EN 15085 CL2
Impact resistance	10 J version standard
Assembly	
Fuse holder available	No
Drill holes side A	none
Drill holes side B	none
Technical data, enclosure	
Material	Stainless steel 1.4301 (304)
Surface finish	untreated
Seal material	Silicone
Lid attachment	M6 hex-head slotted screws SW10
Flange plate	Yes

Note

KTB FS 352615 S2P2 TRAINBOX HV

Depth 150 mm

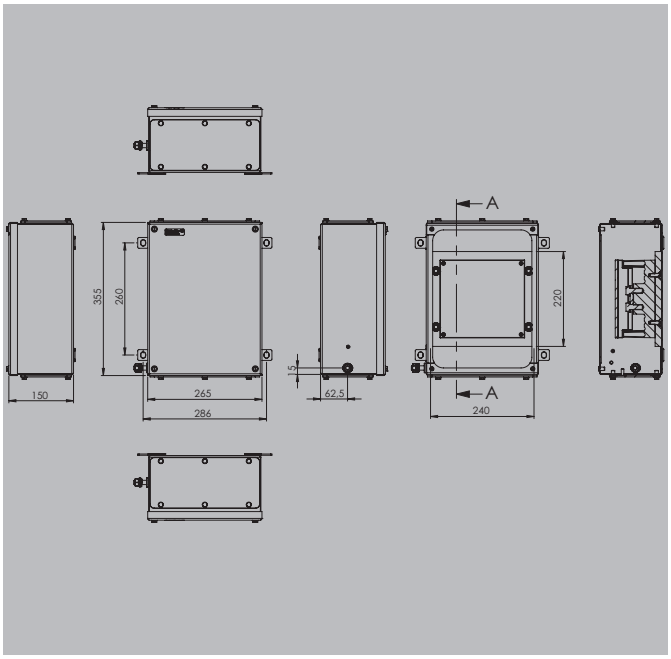

Height / Width / Depth	350 / 260 / 150 mm

Ordering data

	Order No.
KTB FS 352615 S2P2 TRAINBOX HV	**8000080479**
Note	

Technical data

Article - short description	Klippon TB FS (Terminal Box - Fixing Screw), Enclosures, Height: 350 mm, Width: 260 mm, Depth: 150 mm, Gland plates: Bottom, top, Material: Stainless steel 1.4301 (304), lacquered, silver
Ambient temperature	-60 °C...135 °C
Protection class	IP66, IP67
Standards	EN 61373 1b, EN 45545 HL3, EN 15085 CL2
Impact resistance	10 J version standard
Assembly	
Fuse holder available	No
HV 4000	1x3
Drill holes side A	none
Drill holes side B	none
Technical data, enclosure	
Material	Stainless steel 1.4301 (304)
Surface finish	lacquered
Seal material	Silicone
Lid attachment	M6 hex-head slotted screws SW10
Flange plate	Yes

Note

KTB FS 453815 S2N2 TRAINBOX BIG

Depth 150 mm

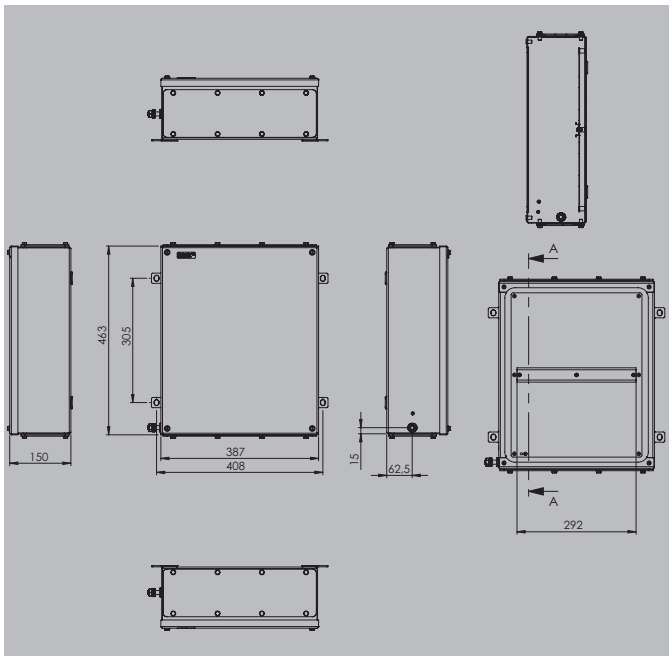

Height / Width / Depth	458 / 382 / 150 mm

Ordering data

	Order No.
KTB FS 453815 S2N2 TRAINBOX BIG	**8000080863**

Note

Technical data

Article - short description	Klippon TB FS (Terminal Box - Fixing Screw), Enclosures, Height: 458 mm, Width: 382 mm, Depth: 150 mm, Gland plates: Bottom, top, Material: Stainless steel 1.4301 (304), untreated, silver
Ambient temperature	-60 °C...135 °C
Protection class	IP66, IP67
Standards	EN 61373 1b, EN 45545 HL3, EN 15085 CL2
Impact resistance	10 J version standard
Assembly	
Fuse holder available	No
Drill holes side A	none
Drill holes side B	none
Technical data, enclosure	
Material	Stainless steel 1.4301 (304)
Surface finish	untreated
Seal material	Silicone
Lid attachment	M6 hex-head slotted screws SW10
Flange plate	Yes

Note

KTB FS 262615 S2B1 TRACKBOX SMALL

Depth **150 mm**

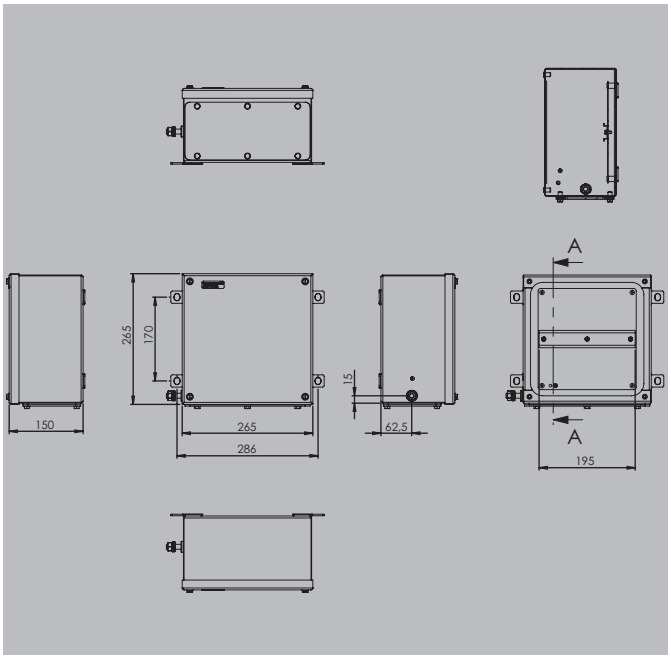

Height / Width / Depth	260 / 260 / 150 mm

Ordering data

	Order No.
KTB FS 262615 S2B1 TRACKBOX SMALL	**8000080480**
Note	

Technical data

Article - short description	Klippon TB FS (Terminal Box - Fixing Screw), Enclosures, Height: 260 mm, Width: 260 mm, Depth: 150 mm, Gland plates: Bottom, Material: Stainless steel 1.4301 (304), Brushed, silver
Ambient temperature	-60 °C...135 °C
Protection class	IP66, IP67
Standards	EN 60068 ≤1m from the track, EN 45545 HL3
Impact resistance	10 J version standard
Assembly	
Fuse holder available	No
Drill holes side A	none
Drill holes side B	none
Technical data, enclosure	
Material	Stainless steel 1.4301 (304)
Surface finish	Brushed
Seal material	Silicone
Lid attachment	M6 hex-head slotted screws SW10
Flange plate	Yes

Note

KTB FS 553518 S2B1 TRACKBOX EQP

Depth 180 mm

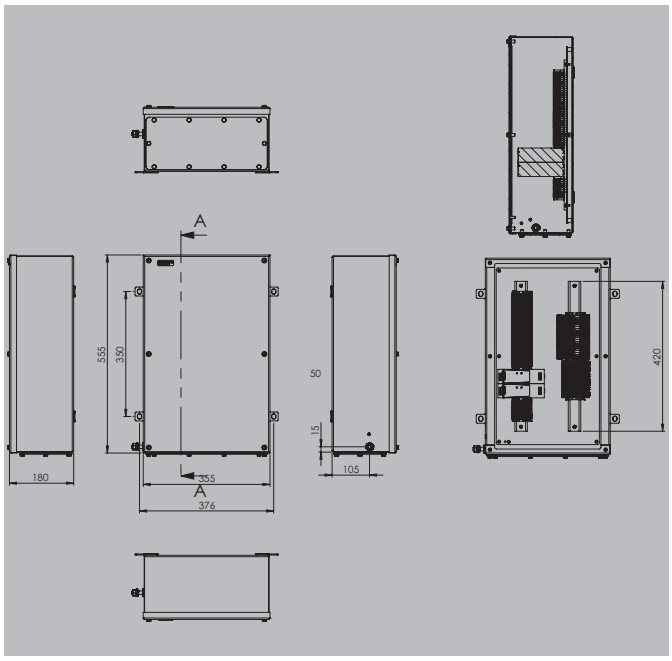

Height / Width / Depth	550 / 350 / 180 mm

Ordering data

	Order No.
KTB FS 553518 S2B1 TRACKBOX EQP	**8000080481**
Note	

Technical data

Article - short description	Klippon TB FS (Terminal Box - Fixing Screw), Enclosures, Height: 550 mm, Width: 350 mm, Depth: 180 mm, Gland plates: Bottom, Material: Stainless steel 1.4301 (304), Brushed, silver
Ambient temperature	-60 °C...135 °C
Protection class	IP66, IP67
Standards	EN 60068 ≤1m from the track, EN 45545 HL3
Impact resistance	10 J version standard
Assembly	
Fuse holder available	No
Electronic components	
Drill holes side A	none
Drill holes side B	none
Technical data, enclosure	
Material	Stainless steel 1.4301 (304)
Surface finish	Brushed
Seal material	Silicone
Lid attachment	M6 hex-head slotted screws SW10
Flange plate	Yes

Note

KTB FS 624515 S2B1 TRACKBOX BIG

Depth **150 mm**

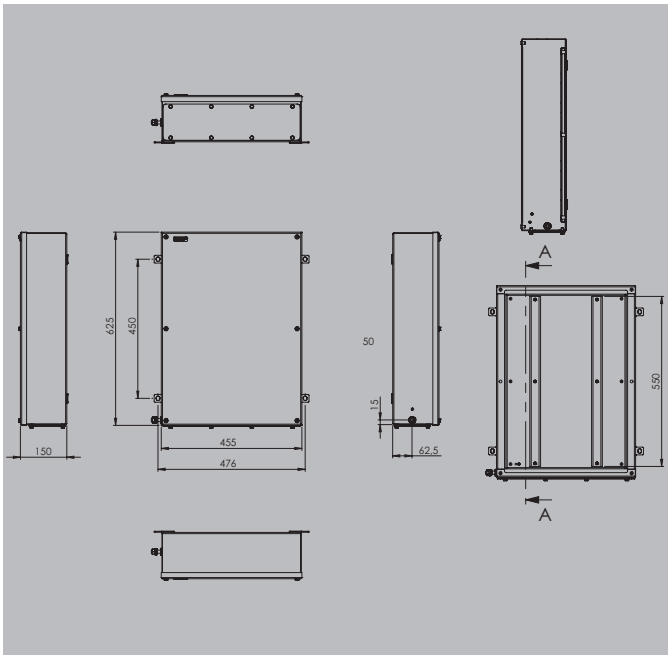

Height / Width / Depth	620 / 450 / 150 mm

Ordering data

	Order No.
KTB FS 624515 S2B1 TRACKBOX BIG	**8000080482**
Note	

Technical data

Article - short description	Klippon TB FS (Terminal Box - Fixing Screw), Enclosures, Height: 620 mm, Width: 450 mm, Depth: 150 mm, Gland plates: Bottom, Material: Stainless steel 1.4301 (304), Brushed, silver
Ambient temperature	-60 °C...135 °C
Protection class	IP66, IP67
Standards	EN 60068 ≤1m from the track, EN 45545 HL3
Impact resistance	10 J version standard
Assembly	
Fuse holder available	No
Drill holes side A	none
Drill holes side B	none
Technical data, enclosure	
Material	Stainless steel 1.4301 (304)
Surface finish	Brushed
Seal material	Silicone
Lid attachment	M6 hex-head slotted screws SW10
Flange plate	Yes

Note

KTB FS 302915 S2N2 ANGLEDBOX HV

Depth 157.5 mm

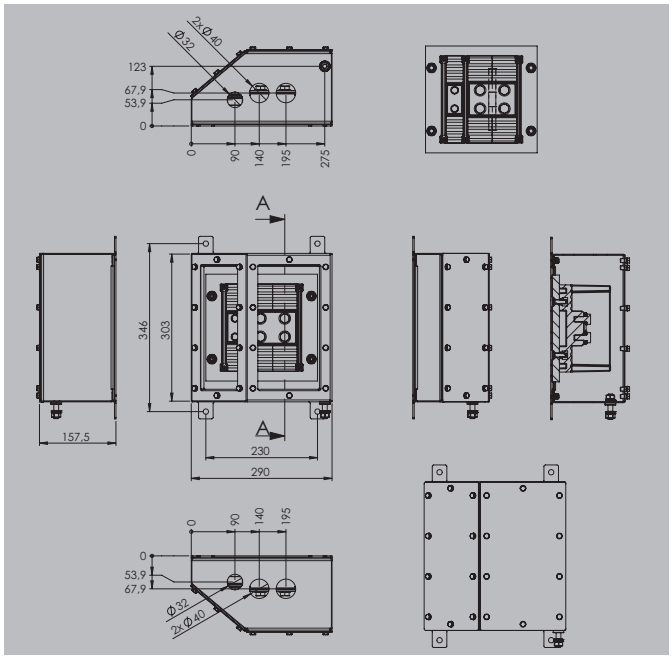

Height / Width / Depth	303 / 290 / 157.5 mm

Ordering data

	Order No.
KTB FS 302915 S2N2 ANGLEDBOX EDGE HV	**8000092462**
Note	

Technical data

Article - short description	Enclosures, Height: 303 mm, Width: 290 mm, Depth: 157.5 mm, Gland plates: Bottom, top, Material: Stainless steel 1.4301 (304), untreated, silver
Ambient temperature	-60 °C...135 °C
Protection class	IP66, IP67
Standards	EN 61373 1b, EN 45545 HL3, EN 15085 CL2
Impact resistance	10 J version standard
Assembly	
Fuse holder available	No
HV 4000	1x4
Drill holes side A	none
Drill holes side B	none
Technical data, enclosure	
Material	Stainless steel 1.4301 (304)
Surface finish	untreated
Seal material	Silicone
Lid attachment	M6 hex-head slotted screws SW10
Flange plate	Yes

Note

Klippon® TB Large

Certified control enclosure for industrial and Ex applications

Whether indoors or outdoors: To ensure installation components function reliably over the long term in harsh environments, they must be optimally protected from environmental influences. Our high-size enclosures meet the most stringent requirements and are well-thought-out down to the last detail.

We offer you DCS (Decentralised Control Station) enclosures and terminal boxes for potentially explosive atmospheres or safety-relevant areas in mechanical engineering and the process industry. All products are manufactured from high-quality stainless steel and are available in three standard sizes. They comply with protection classes IP66 and type 4x, are temperature-resistant from -50 °C to +135 °C and meet the global standards ATEX, IECEx and cULus.

Features:

- Manufactured from corrosion-resistant stainless steel 316L
- In accordance with international standards such as IEC 62208, IECEx, ATEX and cULus
- Extremely temperature-resistant silicone seals
- Stainless steel compression locks with IP66 for soft and secure closing
- Custom manufacture of intermediate sizes possible
- Optional benefits and services, e.g. installation, wiring, testing and certification

Use our online catalogue to find additional product details, technical information and additional services:

www.weidmueller.com/klipponlarge

Overview of enclosures

Ordering data

Description	Height x width x depth in mm	Order No.
KTBLQL1005030S4B1 LL1	1000 x 500 x 300	**2698400000**
KTBLQL1258040S4B1 LL1	1250 x 800 x 400	**2698420000**
KTBLQL15010050S4B1 LL1	1500 x 1000 x 500	**2698430000**
Note		

Doorstop - To prevent the door from being blown closed while performing maintenance work

Support wheel - For easy door closing

Document holder - Size A4 and made of stainless steel 1.4404 (316L)

Technical Overview

Technical data

Enclosure material*	Stainless steel 1.4404 (316L) 1.5 mm
Surface finish	brushed (K240)
IP protection class	IP66 to DIN EN 60529
NEMA protection classes	3, 4x, 12
Gland plates	1 (fixed with M6 hexagonal screws with 10 mm spanner size), optionally without flange plates
Gland plate thickness	3 mm (other thickness are available on request)
Earthing inside	Enclosure base and lid: welded M6 stainless steel earth studs
Earthing outside	Continuous M10 brass earth stud (optionally with stainless-steel earth stud)
Installation mounting	4 or 9 mounting bolts with M8 threaded holes to attach the mounting plate or mounting rail
Enclosure attachment	4 or 6 welded mounting feet with 14 mm holes
Lid opening	Cover opening angle 110°
Cover attachment	Double quarter lock (180° turn lock) with spring loading (180° rotation), compression lock
Impact resistance	7J to IEC 60079-0, IK 09 (10J) to DIN EN 50102
Gasket material	Silicone
Operating temperature range	-50 °C to +135 °C
Torque – lid and gland plate screws	2.5 Nm
Note	* Painted enclosures are available on request. additional properties: doorstop, auxiliary wheel for easy door closing, rain hood , document holder, pad eyes, QL key, door handle, auxiliary frame in the door, seal compression protection

Approvals for empty enclosures

ATEX certificate	CML 20ATEX3029U	CCCEx certificate	2020322303002357
ATEX marking	II 2G Ex eb IIC Gb Ts = -50°C to +135°C	CCCEx marking	Ex e IIC Gb, Ex tD A21 IP66/67
IECEx certificate	IECEx NEP 20.0005U	cULus	E508186
IECEx marking	Ex eb Ex eb IIC Gb IP66 Tservice: -50°C~+135°C	INMETRO	LMP 23.0529X
Note	The Klippon® TBL enclosure range can be pre-fitted in our customer specific production department according to your wishes.		

KTBLQL1005030S4B1 LL1 — Depth 300 mm

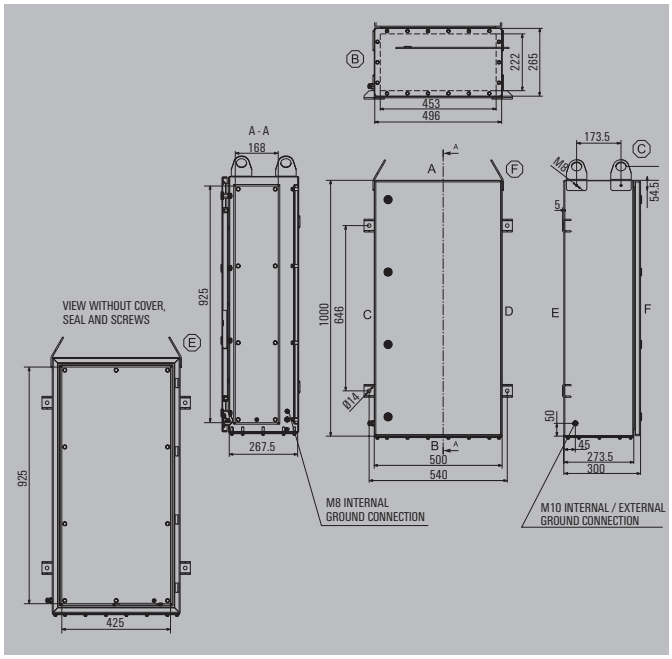

Height / Width / Depth	1000 / 500 / 300 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	2698400000

Note

Guide value for max. number of cable entries

Cable entries	A / B
M12	220
M16	149
M20	116
M25	84
M32	50
M40	36
M50	28
M63	18
M75	10

Note

Accessories

Rain hoods	Order No.
Stainless steel 1.4404 316L brushed	2698520000

Note

KTBLQL1258040S4B1 LL1 — Depth 400 mm

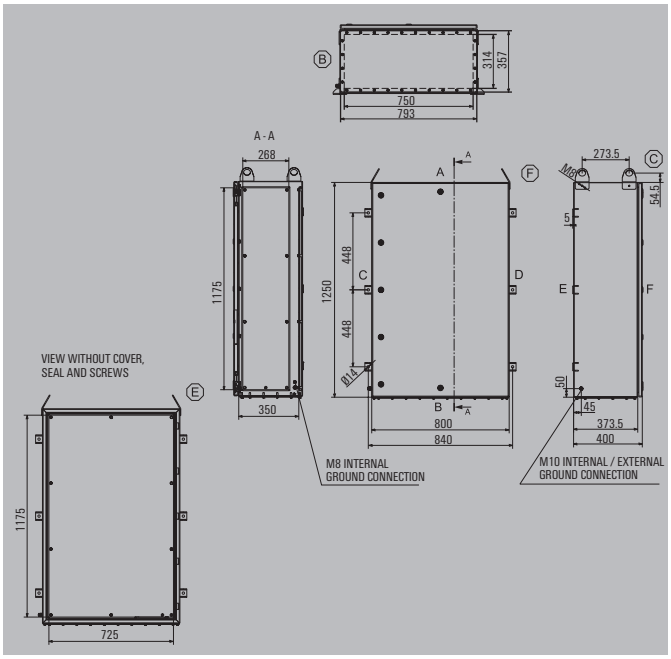

Height / Width / Depth	1250 / 800 / 400 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	2698420000

Note

Guide value for max. number of cable entries

Cable entries	A / B
M12	536
M16	364
M20	270
M25	205
M32	136
M40	102
M50	60
M63	40
M75	32

Note

Accessories

Rain hoods	Order No.
Stainless steel 1.4404 316L brushed	2698530000

Note

KTBLQL15010050S4B1 LL1 — Depth 500 mm

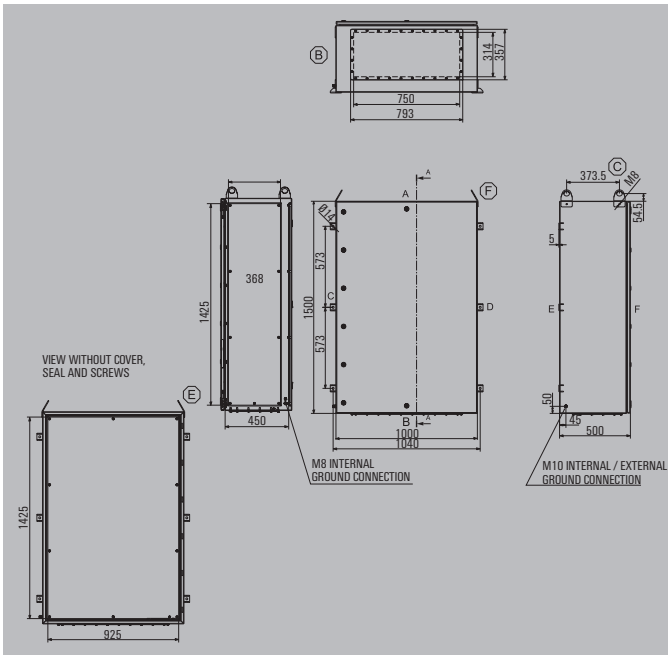

1500 / 1000 / 500 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	**2698430000**

Note

Guide value for max. number of cable entries

Cable entries	A / B
M12	536
M16	364
M20	270
M25	205
M32	136
M40	102
M50	60
M63	40
M75	32

Note

Accessories

Rain hoods	Order No.
Stainless steel 1.4404 316L brushed	**2698540000**

Note

Implementing high safety requirements economically

Klippon® EB stainless steel enclosures for industrial and hazardous applications

The new Klippon® EB enclosure series has been specially designed for use in challenging environments. It reliably meets all requirements for use in harsh environments and is characterised by attractive performance features. The cost-effective stainless steel enclosures allow a very economical calculation and are also suitable for projects with a limited budget. In addition to Klippon® EBi for industrial applications, there is Klippon® EBx for hazardous areas. Enclosures with cULus approvals are available on request.

In addition to our Klippon® EB- series, our premium Klippon® TB enclosure series is the perfect choice for applications with the highest requirements.

Your special advantage

- High impact resistance
- The robust seals are additionally protected by a pressure control system
- Water ingress is prevented by a guided water drainage system
- High protection class (IP66)
- Robust enclosure cover with hinge screws (HS) or quarter lock (QL) system
- Easy adaptation of the standard enclosure for customer projects possible

Use our online catalogue to find additional product details, technical information and additional services:

www.weidmueller.com/klipponeb

Seal with compression protection
Integrated compression protection reduces stress on the seal, prevents leakage and increases service life.

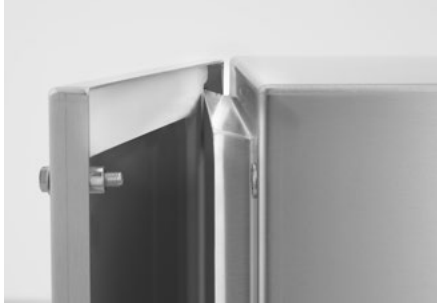

Rain gutter
A guided drainage system reliably prevents the ingress of water.

Customization in the Weidmüller Configurator WMC
The Weidmüller Configurator supports you step-by-step as you select and configure your assembled enclosure including accessories.

Perfect protection for your components

Klippon® EBi stainless steel enclosures for industrial applications

Industrial environments place high demands on the enclosures. Even moderate environmental conditions require sophisticated measures for protecting the internal components from dust and moisture to ensure trouble-free operation.

Klippon® EBi stainless steel enclosures provide perfect protection for instrumentation, distribution, and control applications. All versions are dust- and water ingress-proof to IP66 or NEMA 4X and impact-resistant to IK09. They are made of durable 1.4301 stainless steel and comply with the latest international standards. The Klippon® EBi enclosures are available with or without a bottom gland plate. Lid fixing options include either a quarter lock (QL) as standard or a fixing screw (FS) version which is available on a request basis.

Your special advantages:

- Protection class IP66 / NEMA 4X
- Impact resistance according to IK09
- International conformity according to EN 62208, DNV and UL
- Operating temperatures from -40 °C to +85 °C
- PUR cover gasket for protection and safety
- Flexible wall assembly thanks to rear mounting holes or mounting feet (optional)
- Individual configuration supported by the Weidmüller Configurator (WMC)

Use our online catalogue to find additional product details, technical information and additional services:

www.weidmueller.com/klipponebi

Quarter Lock Insert
Hinged door with a quarter lock facility ensures safe and easy accessibility. If required, hinges can be placed on either side of the enclosure to support side by side placement.

Gland plate with TRX screws
TRX screws (M5/T20) are used for gland plate mounting to facilitate compliance with the required torque.

Flexible mounting
A dedicated mounting profile facilitates the flexible, simple and secure installation of mounting rails or mounting plates for component installation within the enclosure.

Klippon® EBx – Integrate, expand, and customise:
The perfect supplement to every application

The fully structured range of system accessories for the Klippon® EBx enclosure range allows you to easily adapt the enclosure to meet the specific requirements of every application.

The following options are available:

1 Document holder

Document holders for storage of important documents in the enclosure.

2 Earthing studs

Earthing studs are replaceable. Available in two versions – brass and stainless steel.

3 Gland plates

Flange plates in two thicknesses designed for easy on -replacement.

4 Mounting plates

Mounting plates with and without a drilling pattern, for horizontal and vertical mounting of rails, or components fitted directly.

5 Mounting hardware kits

Mounting hardware kits are available for quick and easy installation of label holders, mounting plates, gland plates, document holders, and rain hoods.

6 Type label holder

A range of nameplate holders are available for the prominent display of required and additional nameplates.

7 Rain hoods

The rain hood provides an ideal, additional level of protection for the enclosure. Particularly useful against heavy rainfall or extreme levels of direct sunlight.

8 Viewing window in the enclosure cover

Viewing window in the enclosure cover for the easy monitoring of active components or operating status.

9 Laboratory tests

Thanks to our accredited laboratory, we can carry further customised tests and approvals.

Similar to illustration

Klippon® EBx – Hinged Screws

The practical box for potentially explosive atmospheres

Profitability also plays a major role in potentially explosive atmospheres in the process industry. For this reason, we have added the Klippon® EBx series to our portfolio of stainless steel enclosures for the process industry. Compared to our premium Klippon® TB series, we have simplified the design and concentrated on the essentials. Optimising development and production processes has allowed us to reduce the complexity and number of variants of this enclosure series, thereby achieving significantly accelerated throughput times.

The Klippon® EBx is the perfect choice for all projects where high efficiency is required. We can produce these enclosures efficiently in large batch sizes, which enables us to lower the price to a particularly attractive level. In addition, we supplement our products in this series with competent project management and technical support.

Features:

- Available in 11 HS variants with hinged screws
- Seal compression protection
- Integrated dust and moisture channel
- High temperature resistance
- Impermeability according to IP66
- International approvals

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klipponebx

Overview of enclosures Klippon® EBx

Ordering data – HS variants

Description	Height x width x depth in mm	1 Gland Plate (below)
KEBxHS202015S4B1 AK	200 x 200 x 150	8000071017
KEBxHS303015S4B1 AK	300 x 300 x 150	8000071018
KEBxHS303020S4B1 AK	300 x 300 x 200	8000071019
KEBxHS403020S4B1 AK	400 x 300 x 200	8000071020
KEBxHS404020S4B1 AK	400 x 400 x 200	8000071021
KEBxHS406020S4B1 AK	400 x 600 x 200	8000071022
KEBxHS504020S4B1 AK	500 x 400 x 200	8000071023
KEBxHS505020S4B1 AK	500 x 500 x 200	8000071024
KEBxHS506020S4B1 AK	500 x 600 x 200	8000071026
KEBxHS604020S4B1 AK	600 x 400 x 200	8000071029
KEBxHS806020S4B1 AK	800 x 600 x 200	8000071030

Note: Variants without gland plate on request

Technical Overview

Technical data

Enclosure material	Stainless steel 1.4404 (316L) 1.5 mm
Surface finish	brushed (K240)
Gasket material	Silicone
Gland plates	1 (fixed with M6 hexagonal screws with 10 mm spanner size), optionally without flange plates
Gland plate thickness	3 mm
Earthing inside	welded M6 stainless steel earth stud in enclosure base and cover
Earthing outside	External earthing position - suitable for M6 screw (as accessory: M10 earth stud)
Installation mounting	4 or 9 mounting bolts with M6 threaded holes to attach the mounting plate or mounting rail
Enclosure attachment	4 additional external mounting lugs
Lid opening	Hinge with screw plug (HS - hinged screws)
Cover attachment	M6 hexagonal screws (AF 10) with slot
Impact resistance	7 J to IEC 60079-0, IK 09 (10J) to DIN EN 50102
IP protection class	IP66
Operating temperature range	-55 °C to +135 °C
Torque – lid and gland plate screws	2.5 Nm
Note	

Approvals for empty enclosures

ATEX certificate	IBExU 21ATEX1016 U	cULus	On request*
ATEX marking	II 2G Ex eb IIC Gb II 2D Ex tb IIIC Db	INMETRO	LMP 21.0601U
IECEx certificate	IECEx IBE 21.0006U		
IECEx marking	Ex eb IIC Gb Ex tb IIIC Db		
Note	*All articles with M6 threaded rivet as standard; UL variants with M10 earth bolt on request		

Approvals for control and distribution box

ATEX certificate	IBExU 21ATEX1017 X	IECEx certificate	IECEx IBE 21.0012X
ATEX marking	II 2G Ex eb IIC or IIB or IIA T6...T4 Gb II 2(1)G Ex eb ia IIC or IIB or IIA T6...T4 Gb II 1G Ex ia IIC or IIB or IIA T6...T Ga II 1D Ex ia IIIC T80°C...T135°C Da II 2D Ex tb IIIC T80°C...T135°C Db -55°C ≤ Tamb ≤ +40°C...+90°C	IECEx marking	Ex eb IIC or IIB or IIA T6...T4 Gb Ex ia IIC or IIB or IIA T6...T4 Ga Ex eb ia IIC or IIB or IIA T6...T4 Gb Ex ia IIIC T80°C...T135°C Da Ex tb IIIC T80°C...T135°C Db
INMETRO certificate	LMP 21.0602X		
INMETRO marking	Ex eb IIC ou IIB ou IIA T6...T4 Gb Ex ia IIC ou IIB ou IIA T6...T4 Ga Ex eb ia IIC ou IIB ou IIA T6...T4 Gb Ex ia IIIC T80 °C...T135 °C Da Ex tb IIIC T80 °C...T135 °C Db		
Note			

KEBXHS202015S4B1 AK

Depth 150 mm

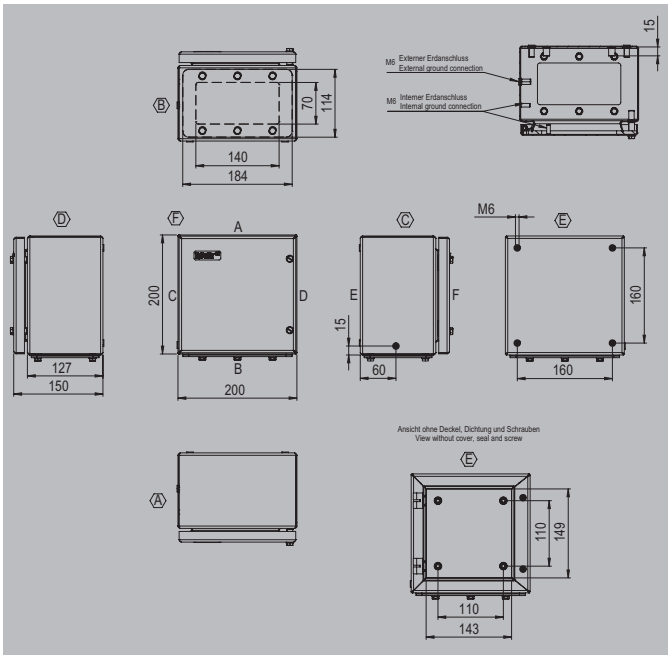

Height / Width / Depth	200 / 200 / 150 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	**8000071017**

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	**8000074117**
With hole pattern, natural stainless steel 1.4301	**8000074314**
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	**3896100000**
20 mm length	**3896200000**
30 mm length	**3896300000**
Label holder	
100x25 stainless steel 1.4301	**8000075818**
130x50 stainless steel 1.4301	**8000075816**
Mounting plates and fastening screws	
Fastening screws for terminal rails*	**1274150000**
Fastening screws for mounting plates	**2704960000**
Screwdriver	
Standard	**2749640000**

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x22	1x22
4 mm²	1x18	1x18
6 mm²	1x13	1x13
10 mm²	1x10	1x10
16 mm²	1x8	1x8
35 mm²	1x6	1x6

Note

When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	30	40
M16	17	24
M20	8	14
M25	3	7
M32	3	5
M40	2	2
M50		2
M63		
M75		

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXHS303015S4B1 AK

Depth 150 mm

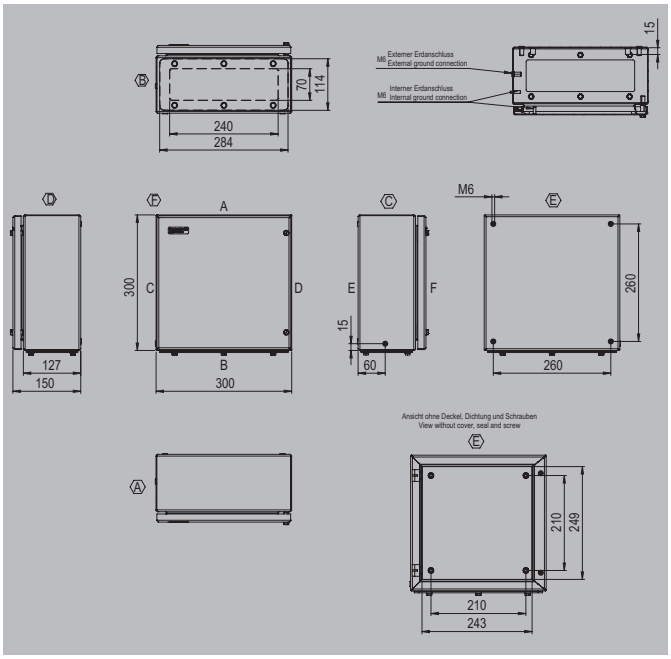

Height / Width / Depth	300 / 300 / 150 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071018

Note

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	8000074316
Steel sheet, zinc plated	8000074171
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x41	3x41
4 mm²	3x34	3x34
6 mm²	3x25	3x25
10 mm²	3x20	3x20
16 mm²	3x17	3x17
35 mm²	3x12	3x12

Note

When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	54	70
M16	30	42
M20	15	24
M25	6	13
M32	5	10
M40	4	4
M50		3
M63		
M75		

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXHS303020S4B1 AK

Depth 200 mm

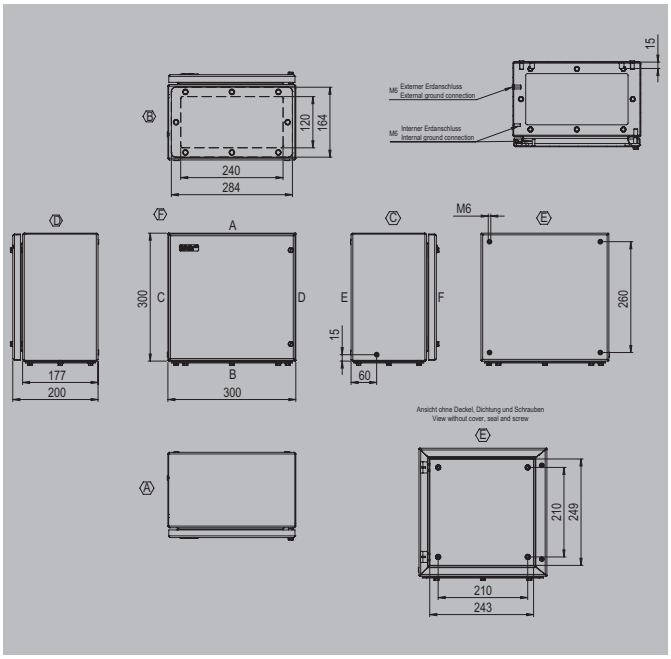

Height / Width / Depth	300 / 300 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071019

Note

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	8000074316
Steel sheet, zinc plated	8000074171
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x41	3x41
4 mm²	3x34	3x34
6 mm²	3x25	3x25
10 mm²	3x20	3x20
16 mm²	3x17	3x17
35 mm²	3x12	3x12

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	95	126
M16	50	63
M20	30	40
M25	18	26
M32	9	15
M40	7	7
M50	3	6
M63	2	2
M75	2	2

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXHS403020S4B1 AK

Depth 200 mm

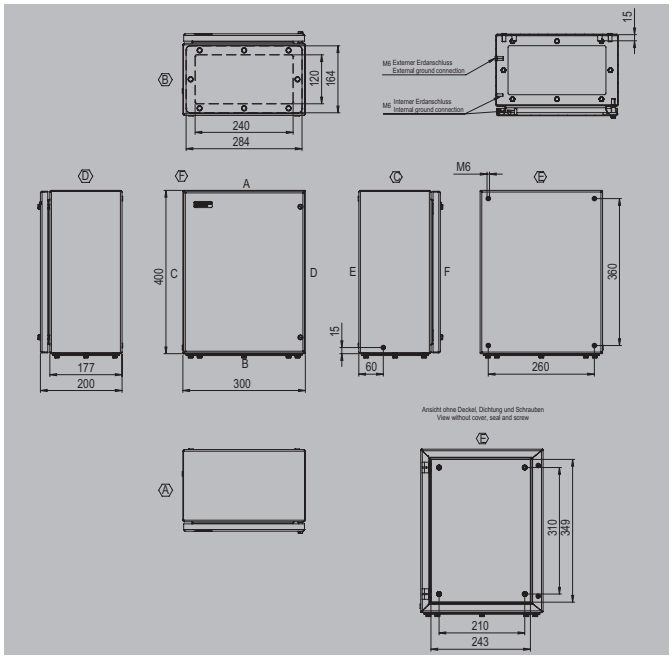

Height / Width / Depth	400 / 300 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071020

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074172
With hole pattern, natural stainless steel 1.4301	8000074318
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x61	4x41
4 mm²	3x51	4x34
6 mm²	3x38	4x25
10 mm²	3x30	4x20
16 mm²	3x25	4x17
35 mm²	3x18	4x12

Note

When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	95	180
M16	50	87
M20	30	58
M25	18	36
M32	9	21
M40	7	11
M50	3	8
M63	2	3
M75	2	3

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXHS404020S4B1 AK

Depth 200 mm

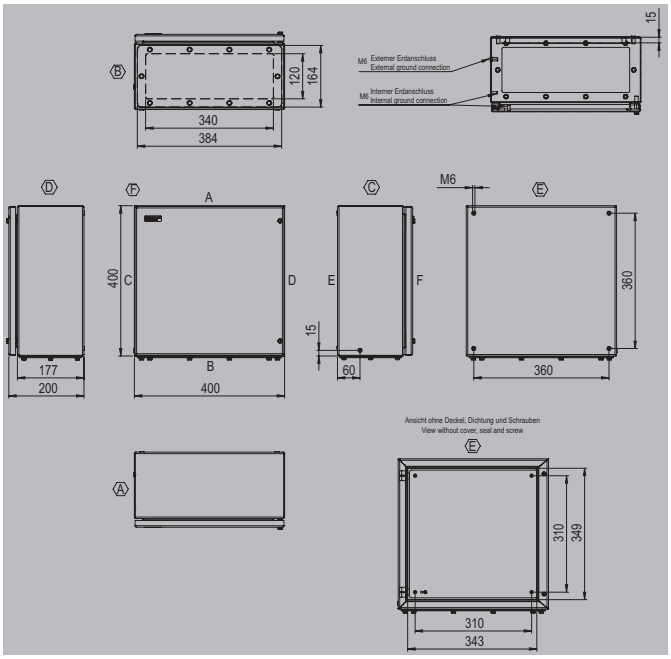

Height / Width / Depth	400 / 400 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071021

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074173
With hole pattern, natural stainless steel 1.4301	8000074319
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	4x61	4x61
4 mm²	4x51	4x51
6 mm²	4x38	4x38
10 mm²	4x30	4x30
16 mm²	4x25	4x25
35 mm²	4x18	4x18

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	137	140
M16	73	87
M20	46	58
M25	27	36
M32	14	21
M40	11	11
M50	4	8
M63	3	3
M75	3	3

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXHS406020S4B1 AK

Depth 200 mm

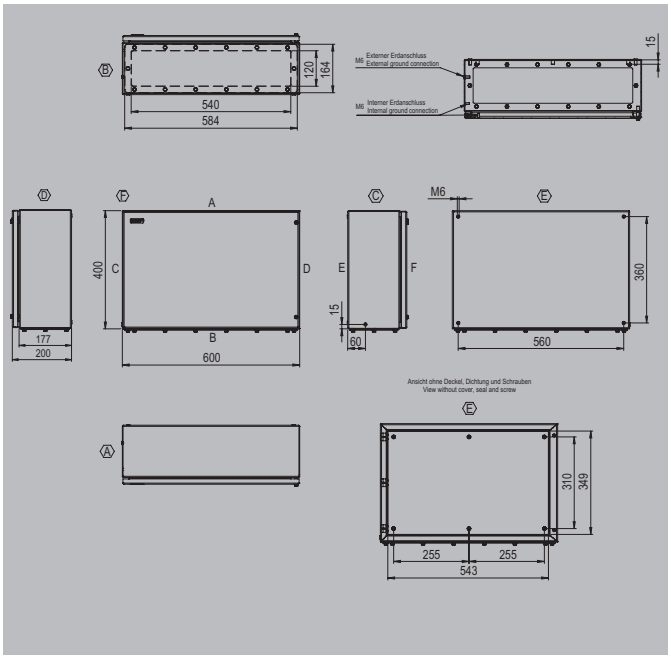

Height / Width / Depth	400 / 600 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071022

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074174
With hole pattern, natural stainless steel 1.4301	8000074320
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	6x61	4x98
4 mm²	6x51	4x82
6 mm²	6x38	4x61
10 mm²	6x30	4x49
16 mm²	6x25	4x41
35 mm²	6x18	4x30

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	217	180
M16	115	87
M20	74	58
M25	45	36
M32	22	21
M40	18	11
M50	7	8
M63	6	3
M75	5	3

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXHS504020S4B1 AK

Depth 200 mm

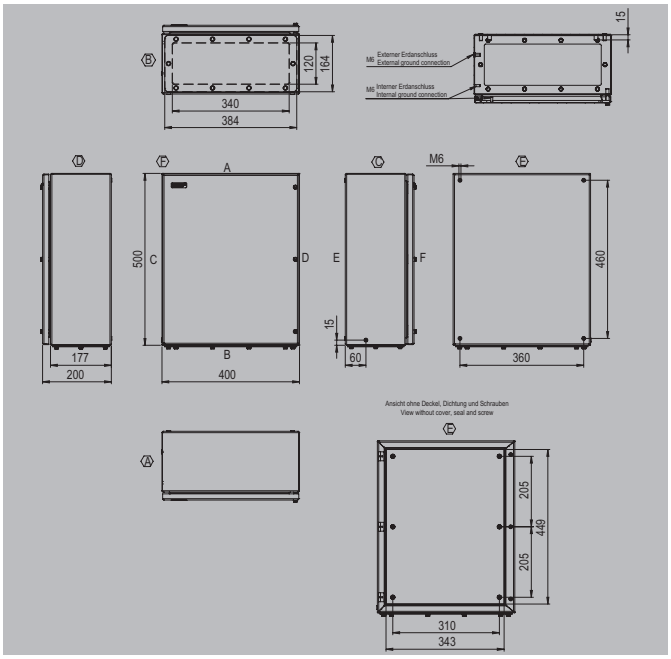

Height / Width / Depth	500 / 400 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	**8000071023**

Note

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	**8000074321**
Steel sheet, zinc plated	**8000074175**
Document holders	
For DIN A4 size documents	**8000075809**
For DIN A5 size documents	**8000075808**
For DIN A6 size documents	**8000075807**
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	**3896100000**
20 mm length	**3896200000**
30 mm length	**3896300000**
Label holder	
100x25 stainless steel 1.4301	**8000075818**
130x50 stainless steel 1.4301	**8000075816**
Mounting plates and fastening screws	
Fastening screws for terminal rails*	**1274150000**
Fastening screws for mounting plates	**2704960000**
Screwdriver	
Standard	**2749640000**

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	4x80	6x61
4 mm²	4x67	6x51
6 mm²	4x50	6x38
10 mm²	4x40	6x30
16 mm²	4x33	6x25
35 mm²	4x25	6x18

Note

When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	137	234
M16	73	114
M20	46	75
M25	27	48
M32	14	27
M40	11	14
M50	4	11
M63	3	5
M75	3	4

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXHS505020S4B1 AK

Depth 200 mm

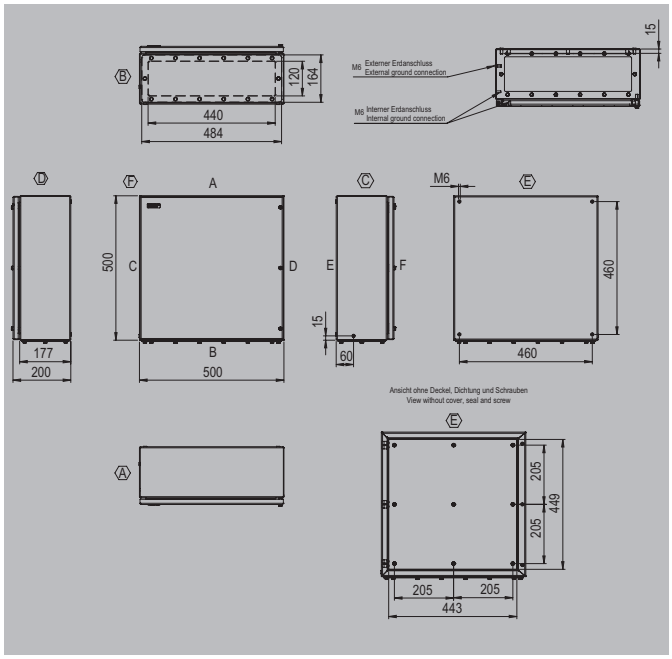

Height / Width / Depth	500 / 500 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071024

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074176
With hole pattern, natural stainless steel 1.4301	8000074322
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	4x80	4x80
4 mm²	4x67	4x67
6 mm²	4x50	4x50
10 mm²	4x40	4x40
16 mm²	4x33	4x33
35 mm²	4x25	4x25

Note

When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	175	234
M16	93	114
M20	60	75
M25	35	48
M32	18	27
M40	14	14
M50	6	11
M63	4	5
M75	4	4

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXHS506020S4B1 AK

Depth 200 mm

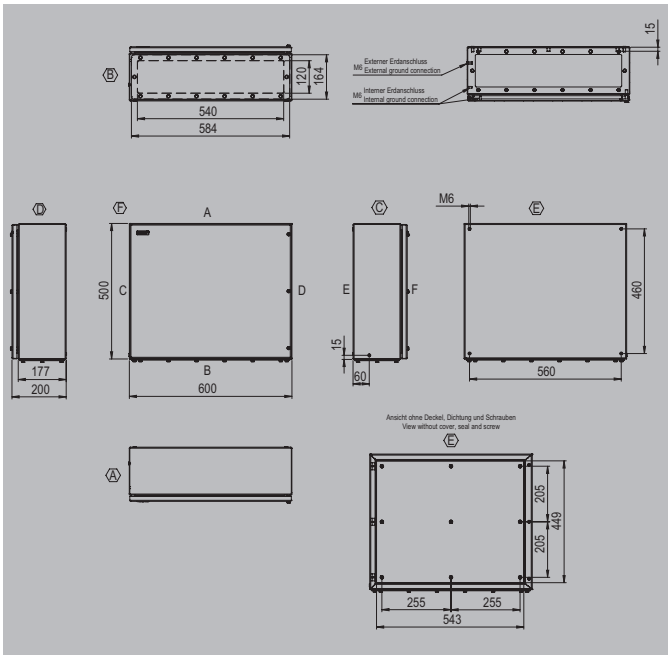

Height / Width / Depth	500 / 600 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071026

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074177
With hole pattern, natural stainless steel 1.4301	8000074323
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	6x80	6x98
4 mm²	6x67	6x82
6 mm²	6x50	6x61
10 mm²	6x40	6x49
16 mm²	6x33	6x41
35 mm²	6x25	6x30

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	217	234
M16	115	114
M20	74	75
M25	45	48
M32	22	27
M40	18	14
M50	7	11
M63	6	5
M75	5	4

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXHS604020S4B1 AK

Depth 200 mm

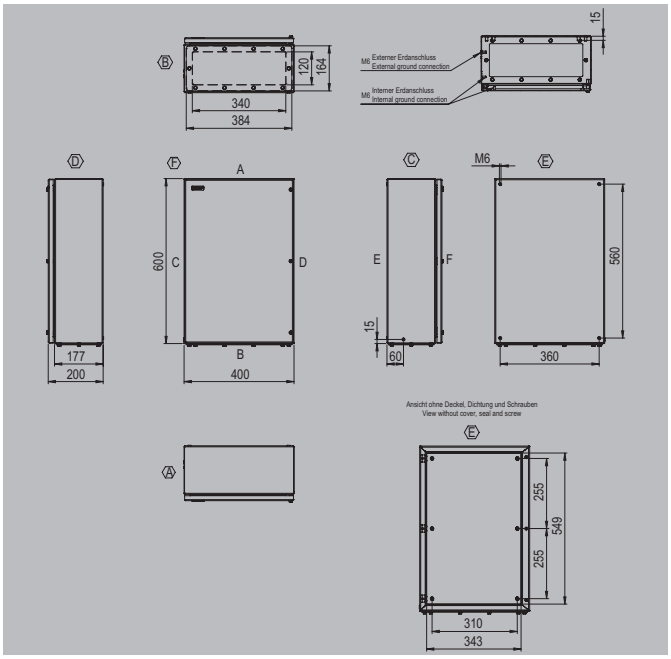

Height / Width / Depth	600 / 400 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071029

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074178
With hole pattern, natural stainless steel 1.4301	8000074324
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	5x98	8x61
4 mm²	5x82	8x51
6 mm²	5x61	8x38
10 mm²	5x49	8x30
16 mm²	5x41	8x25
35 mm²	5x30	8x18

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	137	180
M16	73	87
M20	46	58
M25	27	36
M32	14	21
M40	11	11
M50	4	8
M63	3	3
M75	3	3

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXHS806020S4B1 AK

Depth 200 mm

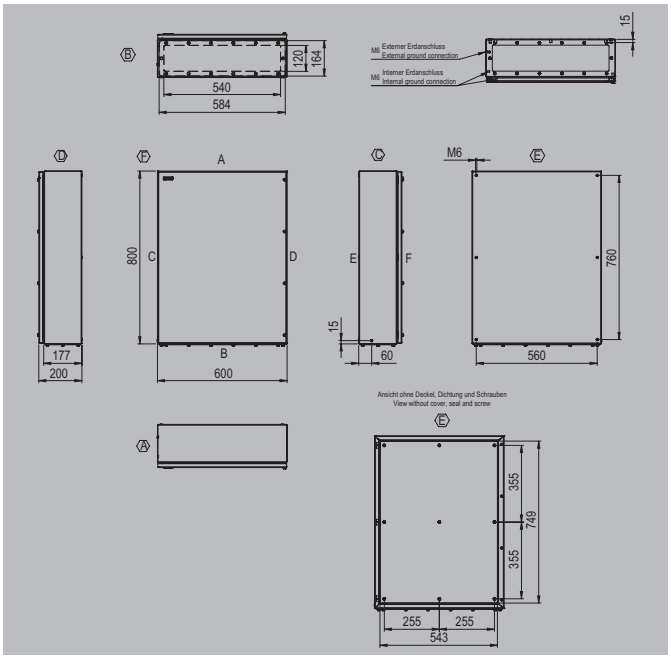

800 / 600 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071030

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074179
With hole pattern, natural stainless steel 1.4301	8000074325
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	6x138	8x98
4 mm²	6x115	8x82
6 mm²	6x86	8x61
10 mm²	6x69	8x49
16 mm²	6x58	8x41
35 mm²	6x43	8x30

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	217	392
M16	115	195
M20	74	130
M25	44	82
M32	22	48
M40	18	25
M50	7	20
M63	6	8
M75	5	7

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Klippon® EBx – Quarter Lock

The practical box for potentially explosive atmospheres

Profitability also plays a major role in potentially explosive atmospheres in the process industry. For this reason, we have added the Klippon® EBx series to our portfolio of stainless steel enclosures for the process industry. Compared to our premium Klippon® TB series, we have simplified the design and concentrated on the essentials. Optimising development and production processes has allowed us to reduce the complexity and number of variants of this enclosure series, thereby achieving significantly accelerated throughput times.

The Klippon® EBx is the perfect choice for all projects where high efficiency is required. We can produce these enclosures efficiently in large batch sizes, which enables us to lower the price to a particularly attractive level. In addition, we supplement our products in this series with competent project management and technical support.

Features:

- Available in 10 QL variants with quarter lock
- Integrated dust and moisture channel
- High temperature resistance
- Impermeability according to IP66
- International approvals

Use our online catalogue to find additional product details, technical information and additional services:

www.weidmueller.com/klipponebx

Overview of enclosures Klippon® EBx

Ordering data – QL variants

Description	Height x width x depth in mm	1 Gland Plate (below)
KEBxQL202020S4B1 AK	200 x 200 x 200	**8000071033**
KEBxQL303020S4B1 AK	300 x 300 x 200	**8000071034**
KEBxQL403030S4B1 AK	400 x 300 x 300	**8000071035**
KEBxQL404030S4B1 AK	400 x 400 x 300	**8000071036**
KEBxQL406030S4B1 AK	400 x 600 x 300	**8000071037**
KEBxQL504030S4B1 AK	500 x 400 x 300	**8000071038**
KEBxQL505030S4B1 AK	500 x 500 x 300	**8000071039**
KEBxQL506030S4B1 AK	500 x 600 x 300	**8000071040**
KEBxQL604030S4B1 AK	600 x 400 x 300	**8000071042**
KEBxQL806030S4B1 AK	800 x 600 x 300	**8000071043**

Note: Variants without gland plate on request

Technical Overview

Technical data

Enclosure material	Stainless steel 1.4404 (316L) 1.5 mm
Surface finish	brushed (K240)
Gasket material	Silicone
Gland plates	1 (fixed with M6 hexagonal screws with 10 mm spanner size), optionally without flange plates
Gland plate thickness	3 mm
Earthing inside	welded M6 stainless steel earth stud in enclosure base and cover
Earthing outside	External earthing position - suitable for M6 screw (as accessory: M10 earth stud)
Installation mounting	4 or 9 mounting bolts with M6 threaded holes to attach the mounting plate or mounting rail
Enclosure attachment	4 additional external mounting lugs
Lid opening	Quarter lock (QL) with double bit (DB3)
Cover attachment	M6 hexagonal screws (AF 10) with slot
Impact resistance	7 J to IEC 60079-0, IK 09 (10J) to DIN EN 50102
IP protection class	IP66
Operating temperature range	-55°C to +135°C
Torque – lid and gland plate screws	2.5 Nm
Note	

Approvals for empty enclosures

ATEX certificate	IBExU 21ATEX1016 U	cULus	On request*
ATEX marking	II 2G Ex eb IIC Gb II 2D Ex tb IIIC Db	INMETRO	LMP 21.0601U
IECEx certificate	IECEx IBE 21.0006U		
IECEx marking	Ex eb IIC Gb Ex tb IIIC Db		
Note	*All articles with M6 threaded rivet as standard; UL variants with M10 earth bolt on request		

Approvals for control and distribution box

ATEX certificate	IBExU 21ATEX1017 X	IECEx certificate	IECEx IBE 21.0012X
ATEX marking	II 2G Ex eb IIC or IIB or IIA T6...T4 Gb II 2(1)G Ex eb ia IIC or IIB or IIA T6...T4 Gb II 1G Ex ia IIC or IIB or IIA T6...T Ga II 1D Ex ia IIIC T80°C...T135°C Da II 2D Ex tb IIIC T80°C...T135°C Db -55°C ≤ Tamb ≤ +40°C...+90°C	IECEx marking	Ex eb IIC or IIB or IIA T6...T4 Gb Ex ia IIC or IIB or IIA T6...T4 Ga Ex eb ia IIC or IIB or IIA T6...T4 Gb Ex ia IIIC T80°C...T135°C Da Ex tb IIIC T80°C...T135°C Db
INMETRO certificate	LMP 21.0602X		
INMETRO marking	Ex eb IIC ou IIB ou IIA T6...T4 Gb Ex ia IIC ou IIB ou IIA T6...T4 Ga Ex eb ia IIC ou IIB ou IIA T6...T4 Gb Ex ia IIIC T80 °C...T135 °C Da Ex tb IIIC T80 °C...T135 °C Db		
Note			

KEBXQL202020S4B1 AK

Depth 200 mm

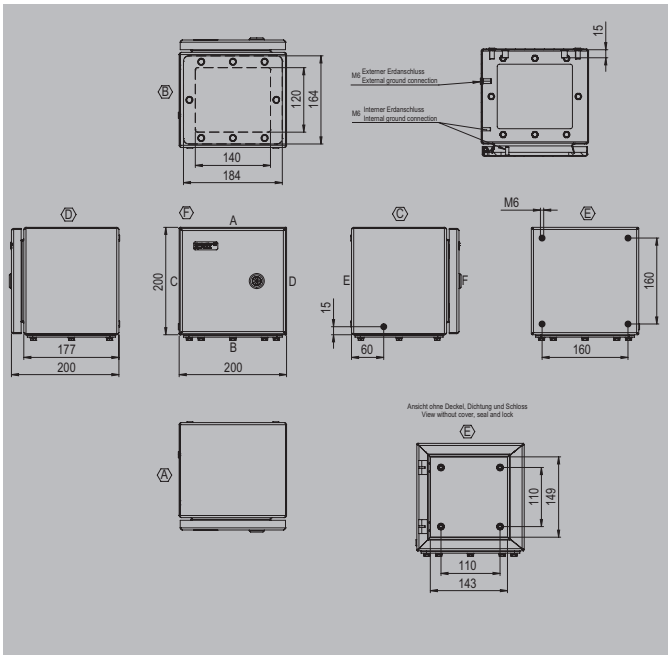

Height / Width / Depth	200 / 200 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071033

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074117
With hole pattern, natural stainless steel 1.4301	8000074314
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x22	1x22
4 mm²	1x18	1x18
6 mm²	1x13	1x13
10 mm²	1x10	1x10
16 mm²	1x8	1x8
35 mm²	1x6	1x6

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	53	72
M16	28	36
M20	16	23
M25	9	14
M32	5	8
M40	3	4
M50	1	5
M63	1	1
M75	1	1

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXQL303020S4B1 AK

Depth 200 mm

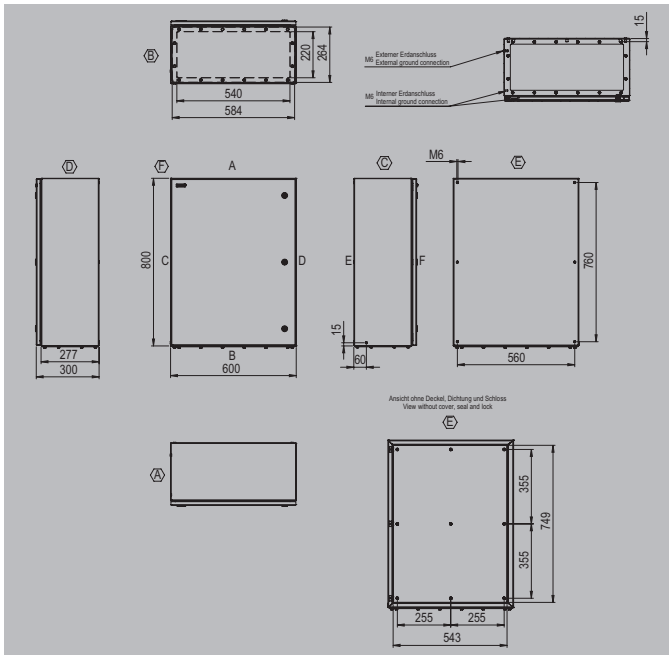

Height / Width / Depth	300 / 300 / 200 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071034

Note

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	8000074316
Steel sheet, zinc plated	8000074171
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x41	3x41
4 mm²	3x34	3x34
6 mm²	3x25	3x25
10 mm²	3x20	3x20
16 mm²	3x17	3x17
35 mm²	3x12	3x12

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	95	126
M16	50	63
M20	30	40
M25	18	26
M32	9	15
M40	7	7
M50	3	9
M63	2	2
M75	2	2

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXQL403030S4B1 AK

Depth 300 mm

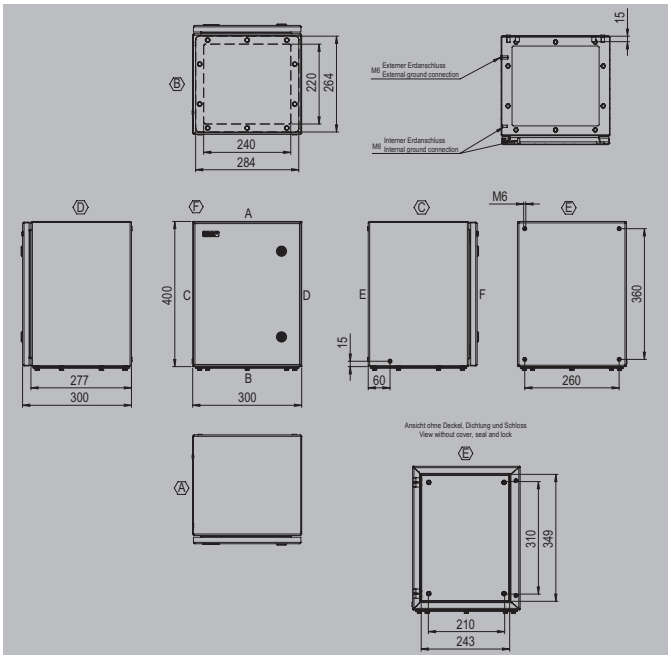

Height / Width / Depth	400 / 300 / 300 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071035

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074172
With hole pattern, natural stainless steel 1.4301	8000074318
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x61	4x41
4 mm²	3x51	4x34
6 mm²	3x38	4x25
10 mm²	3x30	4x20
16 mm²	3x25	4x17
35 mm²	3x18	4x12

Note

When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	189	300
M16	100	160
M20	60	104
M25	36	63
M32	23	35
M40	14	22
M50	8	12
M63	4	6
M75	3	5

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXQL404030S4B1 AK

Depth 300 mm

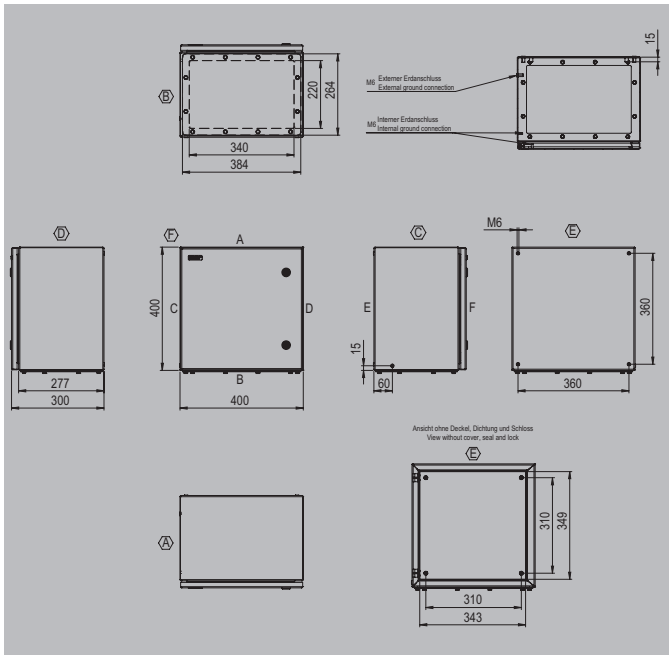

Height / Width / Depth	400 / 400 / 300 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071036

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074173
With hole pattern, natural stainless steel 1.4301	8000074319
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	4x61	4x61
4 mm²	4x51	4x51
6 mm²	4x38	4x38
10 mm²	4x30	4x30
16 mm²	4x25	4x25
35 mm²	4x18	4x18

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	273	300
M16	145	160
M20	92	104
M25	48	63
M32	35	35
M40	22	22
M50	12	12
M63	6	6
M75	5	5

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXQL406030S4B1 AK

Depth 300 mm

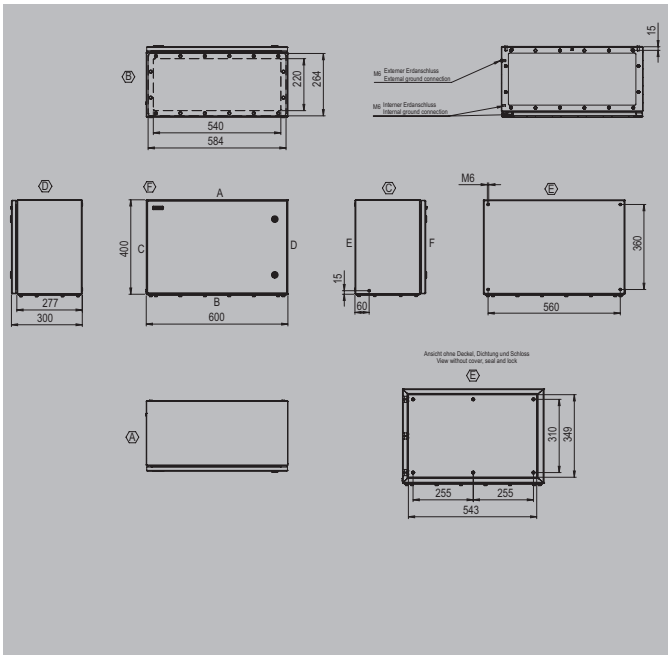

Height / Width / Depth	400 / 600 / 300 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071037

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074174
With hole pattern, natural stainless steel 1.4301	8000074320
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	6x61	4x98
4 mm²	6x51	4x82
6 mm²	6x38	4x61
10 mm²	6x30	4x49
16 mm²	6x25	4x41
35 mm²	6x18	4x30

Note

When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	434	300
M16	230	160
M20	148	104
M25	87	63
M32	55	35
M40	36	22
M50	21	12
M63	11	6
M75	9	5

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXQL504030S4B1 AK

Depth 300 mm

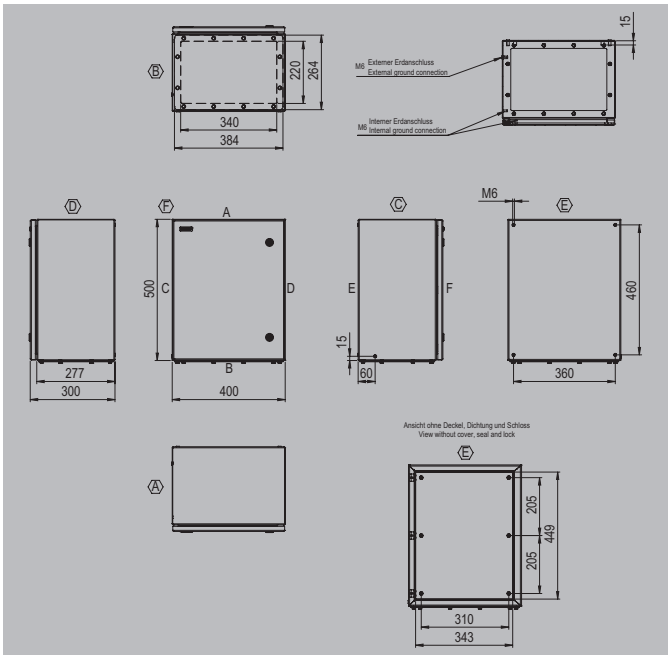

Height / Width / Depth	500 / 400 / 300 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071038

Note

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	8000074321
Steel sheet, zinc plated	8000074175
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	4x80	6x61
4 mm²	4x67	6x51
6 mm²	4x50	6x38
10 mm²	4x40	6x30
16 mm²	4x33	6x25
35 mm²	4x25	6x18

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	273	390
M16	145	209
M20	92	135
M25	48	84
M32	35	45
M40	22	30
M50	12	17
M63	6	9
M75	5	7

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXQL505030S4B1 AK

Depth 300 mm

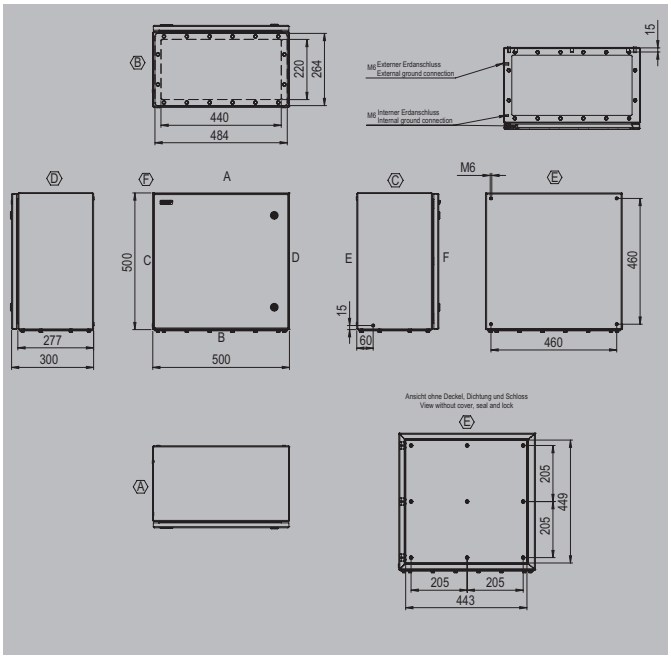

Height / Width / Depth	500 / 500 / 300 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071039

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074176
With hole pattern, natural stainless steel 1.4301	8000074322
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	4x80	4x80
4 mm²	4x67	4x67
6 mm²	4x50	4x50
10 mm²	4x40	4x40
16 mm²	4x33	4x33
35 mm²	4x25	4x25

Note

When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	350	390
M16	185	209
M20	120	135
M25	69	84
M32	45	45
M40	28	30
M50	17	17
M63	8	9
M75	7	7

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXQL506030S4B1 AK

Depth 300 mm

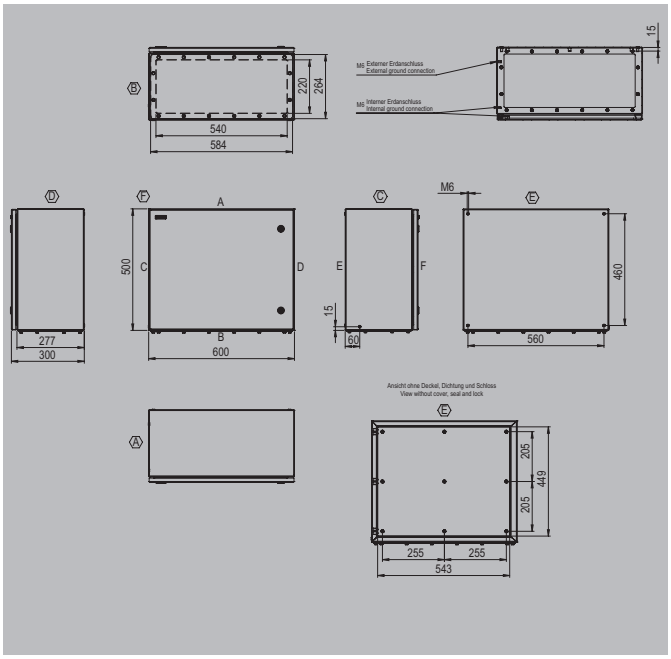

Height / Width / Depth	500 / 600 / 300 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071040

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074177
With hole pattern, natural stainless steel 1.4301	8000074323
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	6x80	6x98
4 mm²	6x67	6x82
6 mm²	6x50	6x61
10 mm²	6x40	6x49
16 mm²	6x33	6x41
35 mm²	6x25	6x30

Note

When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	434	390
M16	230	209
M20	148	135
M25	87	84
M32	55	45
M40	36	30
M50	21	17
M63	11	9
M75	9	7

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXQL604030S4B1 AK

Depth 300 mm

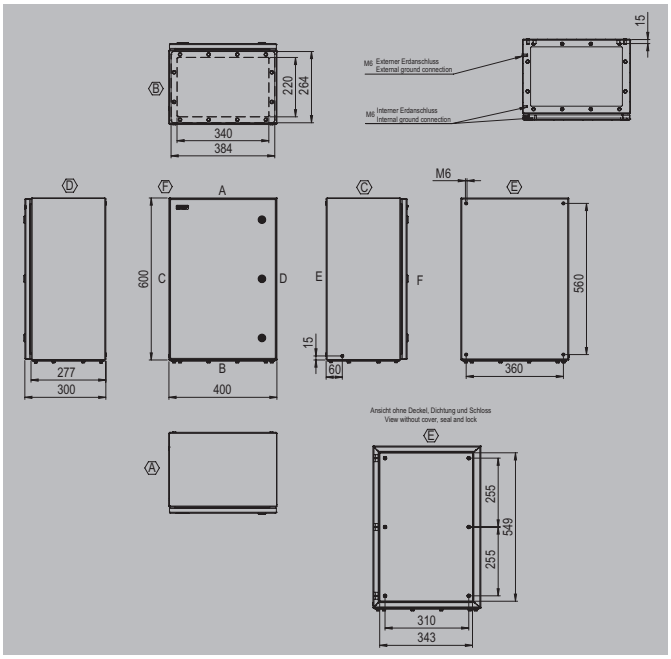

Height / Width / Depth	600 / 400 / 300 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	**8000071042**

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	**8000074178**
With hole pattern, natural stainless steel 1.4301	**8000074324**
Document holders	
For DIN A4 size documents	**8000075809**
For DIN A5 size documents	**8000075808**
For DIN A6 size documents	**8000075807**
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	**3896100000**
20 mm length	**3896200000**
30 mm length	**3896300000**
Label holder	
100x25 stainless steel 1.4301	**8000075818**
130x50 stainless steel 1.4301	**8000075816**
Mounting plates and fastening screws	
Fastening screws for terminal rails*	**1274150000**
Fastening screws for mounting plates	**2704960000**
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	5x98	8x61
4 mm²	5x82	8x51
6 mm²	5x61	8x38
10 mm²	5x49	8x30
16 mm²	5x41	8x25
35 mm²	5x30	8x18

Note

When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	273	480
M16	145	259
M20	92	171
M25	48	105
M32	35	58
M40	22	36
M50	12	21
M63	6	11
M75	5	9

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

KEBXQL806030S4B1 AK

Depth 300 mm

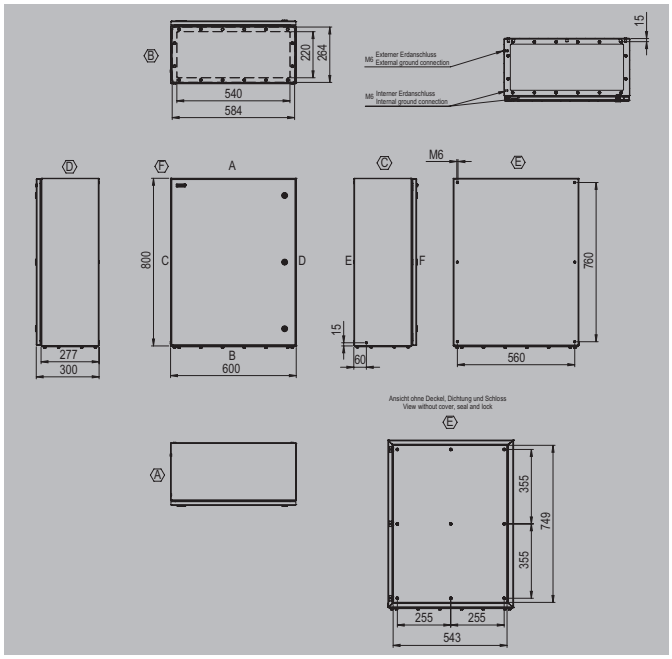

Height / Width / Depth	800 / 600 / 300 mm

Ordering data

Stainless steel 1.4404 316L, brushed	Order No.
1 gland plate - positioned at the bottom (B)	8000071043

Note

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074179
With hole pattern, natural stainless steel 1.4301	8000074325
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	6x138	8x98
4 mm²	6x115	8x82
6 mm²	6x86	8x61
10 mm²	6x69	8x49
16 mm²	6x58	8x41
35 mm²	6x43	8x30

Note
When mounting modular terminals please leave a distance of 10 mm to the ends of the DIN rail.
Ordering recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	434	653
M16	230	358
M20	148	234
M25	87	144
M32	55	80
M40	36	50
M50	21	30
M63	11	24
M75	9	13

Note Our IP 68 brass cable glands serve as a reference for these recommended values.

Klippon® EBi QL – Quarter Lock

Stainless steel enclosures
for use within harsh industrial environments

Even under moderate environmental conditions, there is an increasing need for complex, individual automated solutions. A harsh industrial environment places additional, heavy demands on applications and determines the design of the industrial enclosures to meet these demands. With complete protection and excellent durability, our Klippon® EBi stainless steel enclosures offer the best protection for the components inside them.

- Available in 6 sizes and 2 depths
- Impact resistance IK09 (10J) in accordance with DIN EN 50102 for industrial applications
- Dedicated internal mounting support bracket for fixing terminal rail or mounting plates with self forming screws
- Concealed hinges
- Supplied in 0 or 1 gland plate version
- Direct enclosure mounting is provided via the fixing positions placed into the rear of the enclosure
- Mounting feet in stainless steel are optionally available and can be rotated 90°
- Dust and moisture channel
- Double-bit locking system

Our assembly service can supply these enclosure preassembled with terminals, electronics and cable glands.

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klipponebi

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Height x width x depth in mm	0 Gland Plate	1 Gland Plate (below)
KEBi QL 202015 S2N_*	200 x 200 x 150	8000090356	8000090362
KEBi QL 303015 S2N_*	300 x 300 x 150	8000090357	8000090363
KEBi QL 303020 S2N_*	300 x 300 x 200	8000090358	8000090364
KEBi QL 403020 S2N_*	400 x 300 x 200	8000090359	8000090365
KEBi QL 404020 S2N_*	400 x 400 x 200	8000090360	8000090366
KEBi QL 504020 S2N_*	500 x 400 x 200	8000090361	8000090367
Note	*Placeholder for the number of gland plates (0 or 1)		

Technical Overview

Features

• Available in 6 sizes and 2 standard depths
• Welded mounting bracket for securing the mounting plate or mounting rail by means of self-tapping screws
• External earth - M6 earth rivet
• Concealed hinges
• M6 earthing bolt welded in the cover and base of the enclosure
• Available with 0 or 1 gland plates
• Optimised laser welding, high quality standard
• Direct mounting of the enclosure with rear mounting holes
• Mounting feet in stainless steel are optionally available, and can be rotated by 90°
• Moisture and dust channel
• Double-bit locking system
• Permanent labelling of items
• Key included for sash lock
• Packaging optimally designed for enclosure
Note

Technical data

Material	Stainless steel 1.4301 (304) 1.5 mm
Surface	untreated
IP protection class	IP 66 to DIN EN 60529
Gland plates	Stainless steel 1.4301 (304) 3 mm, fitted with M5 TRX T20 screws
Earthing inside	Welded-on M6 stainless-steel earth stud in enclosure lid and base
Earthing outside	External earth position – suitable for M6 threaded screw
Installation mounting	Welded mounting bracket for flexible mounting of the mounting plate, rails or TAS 20 rails. They contain 4.51 mm drill holes for accommodating the mounting plate or TS/TAS by means of self-tapping screws (1274150000)
Enclosure attachment	Direct mounting (9 mm mounting holes on rear wall) or via mounting feet (optionally available), adjustable by 90°
Lid opening	125°
Lid fixing	Quarter lock with double bit
Impact resistance	IK09 (10J) to DIN EN 50102
Gasket material	Chloroprene
Operating temperature range	-40 °C ... +85 °C
Tightening torque of gland plates screws*	2.5 Nm
Note	*SD T20 Screwdriver (2749520000) optionally available

Approvals for empty enclosures

Empty enclosure standard	DIN EN 62208
Note	For details of power dissipation, please contact your Weidmüller representative.

Klippon® EBi QL 202015

Depth 150 mm

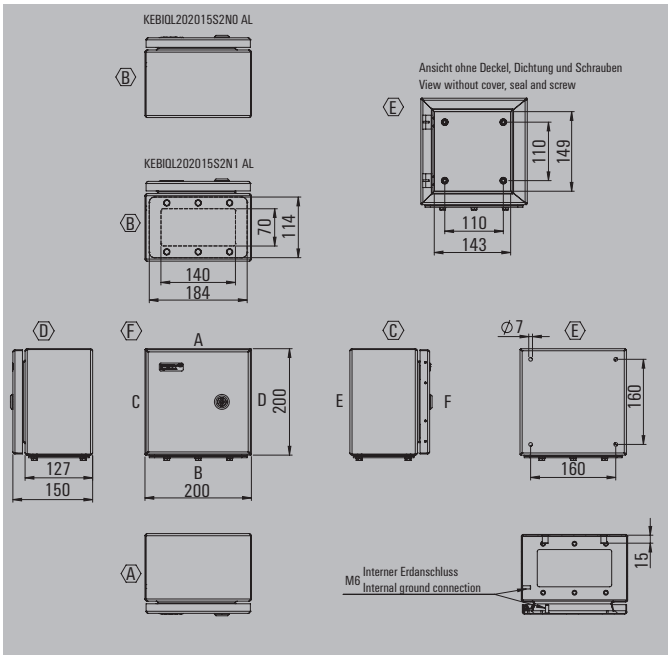

Height / Width / Depth	200 / 200 / 150 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090356
1 gland plate - positioned at the bottom (B)	8000090362
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074117
With hole pattern, natural stainless steel 1.4301	8000074314
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x22	1x22
4 mm²	1x18	1x18
6 mm²	1x13	1x13
10 mm²	1x10	1x10
16 mm²	1x8	1x8
35 mm²	1x6	1x6

Note

The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	18	28
M16	10	15
M20	8	8
M25	3	6
M32	2	6
M40	2	2
M50		
M63		
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi QL 303015

Depth 150 mm

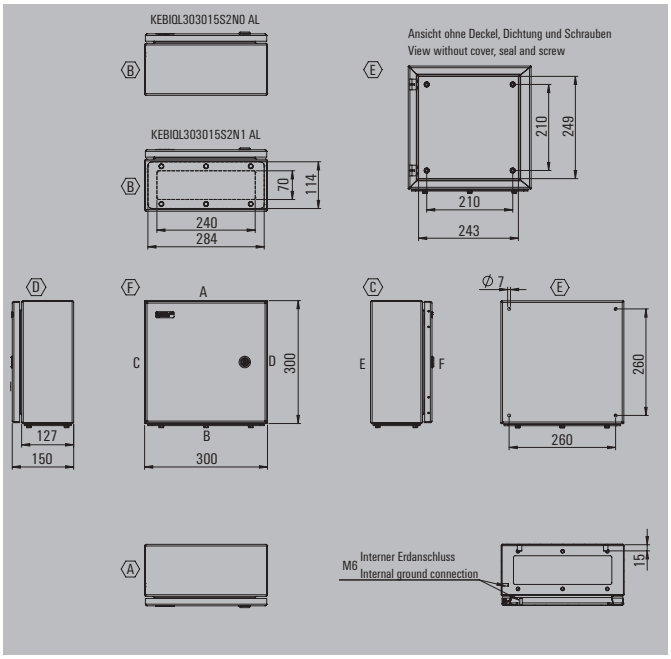

Height / Width / Depth	300 / 300 / 150 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090357
1 gland plate - positioned at the bottom (B)	8000090363
Note	

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	8000074316
Steel sheet, zinc plated	8000074171
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	2x40	2x40
4 mm²	2x33	2x33
6 mm²	2x25	2x25
10 mm²	1x20	1x20
16 mm²	1x15	1x16
35 mm²	1x12	1x12

Note

The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	33	48
M16	18	27
M20	14	14
M25	6	12
M32	4	10
M40	3	4
M50		
M63		
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi QL 303020

Depth 200 mm

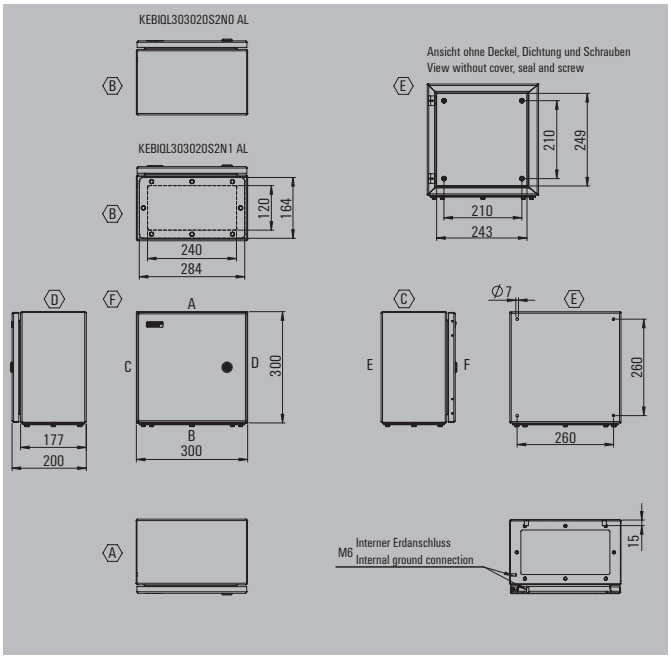

Height / Width / Depth	300 / 300 / 200 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090358
1 gland plate - positioned at the bottom (B)	8000090364
Note	

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	8000074316
Steel sheet, zinc plated	8000074171
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	2x40	2x40
4 mm²	2x33	2x33
6 mm²	2x25	2x25
10 mm²	1x20	1x20
16 mm²	1x15	1x16
35 mm²	1x12	1x12

Note The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	55	72
M16	36	45
M20	21	28
M25	18	18
M32	8	15
M40	6	8
M50		
M63		
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi QL 403020

Depth 200 mm

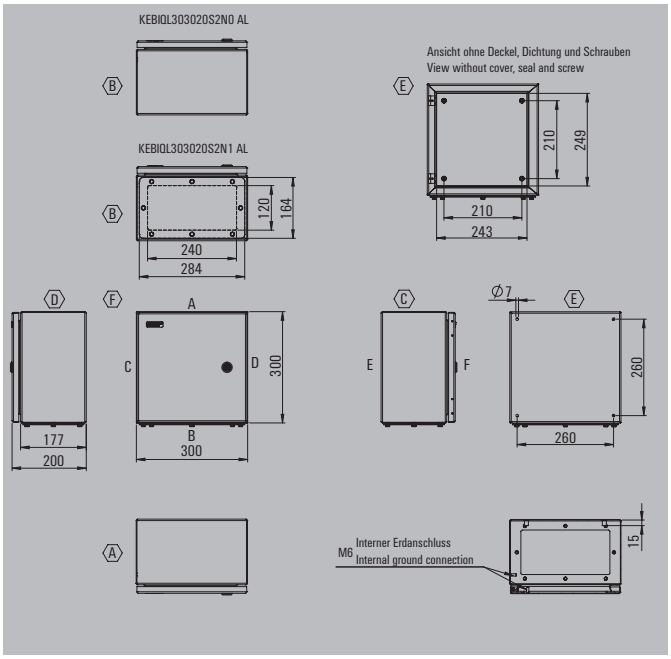

Height / Width / Depth	400 / 300 / 200 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090359
1 gland plate - positioned at the bottom (B)	8000090365
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074172
With hole pattern, natural stainless steel 1.4301	8000074318
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	2x59	3x40
4 mm²	2x49	3x33
6 mm²	1x37	2x25
10 mm²	1x30	2x20
16 mm²	1x24	2x16
35 mm²	1x18	1x12

Note

The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	55	96
M16	36	65
M20	21	40
M25	18	24
M32	8	21
M40	6	10
M50		
M63		
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi QL 404020

Depth 200 mm

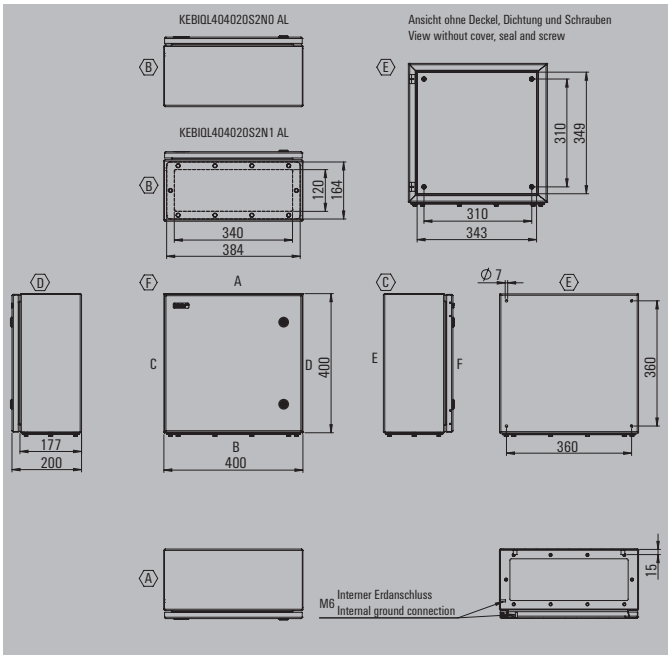

Height / Width / Depth	400 / 400 / 200 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090360
1 gland plate - positioned at the bottom (B)	8000090366
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074173
With hole pattern, natural stainless steel 1.4301	8000074319
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	3x59	3x59
	4 mm²	3x49	3x49
	6 mm²	2x37	2x37
	10 mm²	2x30	2x30
	16 mm²	2x24	2x24
	35 mm²	1x18	1x18

Note

The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	80	96
M16	48	65
M20	30	40
M25	24	24
M32	12	21
M40	10	10
M50	4	4
M63	3	3
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi QL 504020

Depth 200 mm

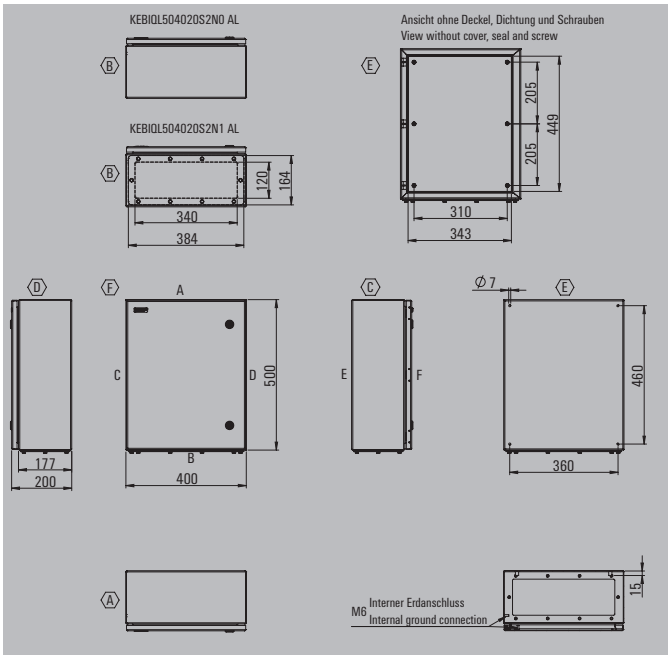

Height / Width / Depth	500 / 400 / 200 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	**8000090361**
1 gland plate - positioned at the bottom (B)	**8000090367**
Note	

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	**8000074321**
Steel sheet, zinc plated	**8000074175**
Document holders	
For DIN A4 size documents	**8000075809**
For DIN A5 size documents	**8000075808**
For DIN A6 size documents	**8000075807**
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	**3896100000**
20 mm length	**3896200000**
30 mm length	**3896300000**
Label holder	
100x25 stainless steel 1.4301	**8000075818**
130x50 stainless steel 1.4301	**8000075816**
Mounting plates and fastening screws	
Fastening screws for terminal rails*	**1274150000**
Fastening screws for mounting plates	**2704960000**
Double-bit key	
	2473930000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x80	4x59
4 mm²	3x66	4x49
6 mm²	2x51	3x37
10 mm²	2x40	3x30
16 mm²	2x33	3x24
35 mm²	1x24	2x18

Note The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	80	126
M16	48	80
M20	30	52
M25	24	33
M32	12	27
M40	10	14
M50	4	5
M63	3	4
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi HS – Hinged Screws

Stainless steel enclosures
for use within harsh industrial environments

Even under moderate environmental conditions, there is an increasing need for complex, individual automated solutions. A harsh industrial environment places additional, heavy demands on applications and determines the design of the industrial enclosures to meet these demands. With complete protection and excellent durability, our Klippon® EBi stainless steel enclosures offer the best protection for the components inside them.

- Available in 6 sizes and 2 depths
- Impact resistance IK09 (10J) in accordance with DIN EN 50102 for industrial applications
- Dedicated internal mounting support bracket for fixing terminal rail or mounting plates with self forming screws
- Concealed hinges
- Supplied in 0 or 1 gland plate version
- Direct enclosure mounting is provided via the fixing positions placed into the rear of the enclosure
- Mounting feet in stainless steel are optionally available and can be rotated 90°
- Dust and moisture channel
- Double-bit locking system

Our assembly service can supply these enclosure preassembled with terminals, electronics and cable glands.

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klipponebi

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Height x width x depth in mm	0 Gland Plate	1 Gland Plate (below)
KEBi HS 202015 S2N_*	200 x 200 x 150	8000090342	8000090348
KEBi HS 303015 S2N_*	300 x 300 x 150	8000090343	8000090349
KEBi HS 303020 S2N_*	300 x 300 x 200	8000090344	8000090351
KEBi HS 403020 S2N_*	400 x 300 x 200	8000090345	8000090352
KEBi HS 404020 S2N_*	400 x 400 x 200	8000090346	8000090354
KEBi HS 504020 S2N_*	500 x 400 x 200	8000090347	8000090355
Note	Note *Placeholder for the number of gland plates (0 or 1)		

Technical Overview

Features

• Available in 6 sizes and 2 standard depths
• Welded mounting bracket for securing the mounting plate or mounting rail by means of self-tapping screws
• External earth - M6 earth rivet
• Concealed hinges
• M6 earthing bolt welded in the cover and base of the enclosure
• Available with 0 or 1 gland plates
• Optimised laser welding, high quality standard
• Direct mounting of the enclosure with rear mounting holes
• Mounting feet in stainless steel are optionally available, and can be rotated by 90°
• Moisture and dust channel
• Hinged Screw locking system
• Permanent labelling of items
• Key included for sash lock
• Packaging optimally designed for enclosure
Note

Technical data

Material	Stainless steel 1.4301 (304) 1.5 mm
Surface	untreated
IP protection class	IP 66 to DIN EN 60529
Gland plates	Stainless steel 1.4301 (304) 3 mm, fitted with M5 TRX T20 screws
Earthing inside	Welded-on M6 stainless-steel earth stud in enclosure lid and base
Earthing outside	External earth position – suitable for M6 threaded screw
Installation mounting	Welded mounting bracket for flexible mounting of the mounting plate, rails or TAS 20 rails. They contain 4.51 mm drill holes for accommodating the mounting plate or TS/TAS by means of self-tapping screws (1274150000)
Enclosure attachment	Direct mounting (9 mm mounting holes on rear wall) or via mounting feet (optionally available), adjustable by 90°
Lid opening	125°
Lid fixing	M5 hexagonal screw with slot and 10mm distance across flats + hinge
Impact resistance	IK09 (10J) to DIN EN 50102
Gasket material	Chloroprene
Operating temperature range	-40 °C ... +85 °C
Tightening torque of gland plates screws*	2.5 Nm
Note	*SD T20 Screwdriver (2749520000) optionally available

Approvals for empty enclosures

Empty enclosure standard	DIN EN 62208
Note	For details of power dissipation, please contact your Weidmüller representative.

Klippon® EBi HS 202015

Depth 150 mm

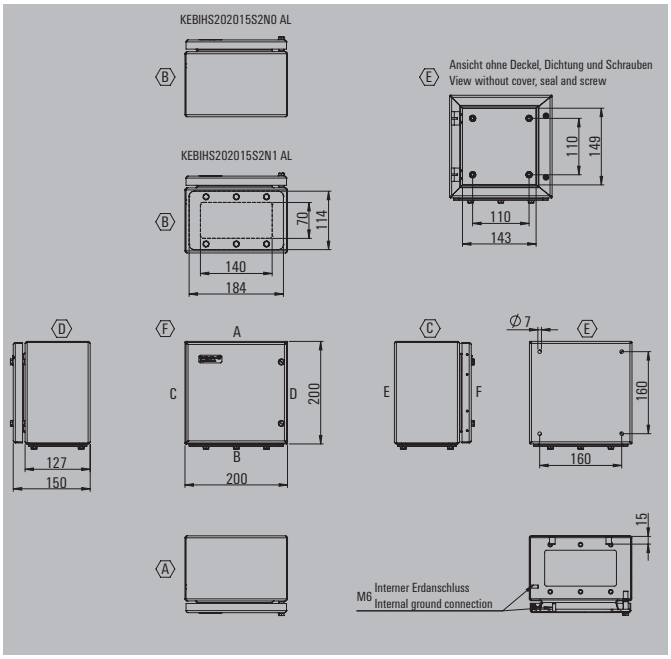

Height / Width / Depth	200 / 200 / 150 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090342
1 gland plate - positioned at the bottom (B)	8000090348
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074117
With hole pattern, natural stainless steel 1.4301	8000074314
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x26	1x10
4 mm²	1x21	1x8
6 mm²	1x16	1x6
10 mm²	1x13	1x4
16 mm²	1x10	1x3
35 mm²	1x7	1x2

Note The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	18	28
M16	10	15
M20	8	8
M25	3	6
M32	2	6
M40	2	2
M50		
M63		
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi HS 303015

Depth 150 mm

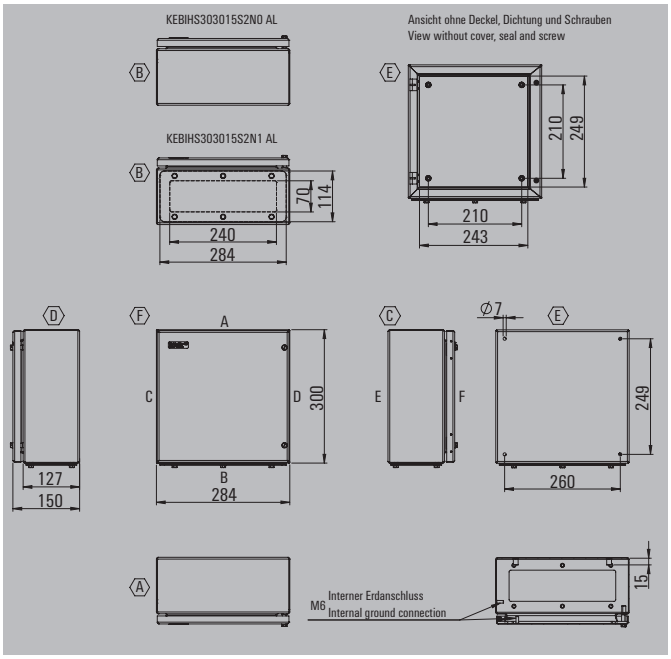

Height / Width / Depth	300 / 300 / 150 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090343
1 gland plate - positioned at the bottom (B)	8000090349
Note	

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	8000074316
Steel sheet, zinc plated	8000074171
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x41	2x40
4 mm²	1x34	2x33
6 mm²	1x25	2x25
10 mm²	1x20	1x20
16 mm²	1x17	1x16
35 mm²	1x12	1x12

Note The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	33	48
M16	18	27
M20	14	14
M25	6	12
M32	4	10
M40	3	4
M50		
M63		
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi HS 303020

Depth 200 mm

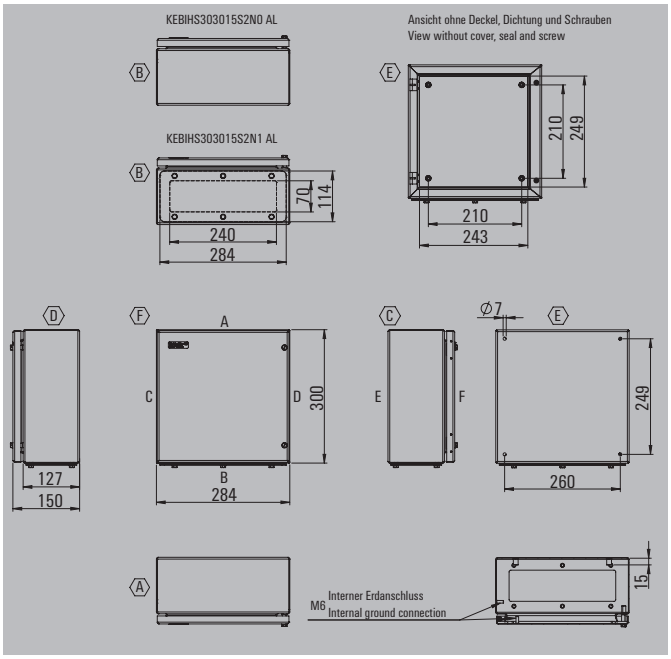

Height / Width / Depth	300 / 300 / 200 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090344
1 gland plate - positioned at the bottom (B)	8000090351
Note	

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	8000074316
Steel sheet, zinc plated	8000074171
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x41	2x40
4 mm²	1x34	2x33
6 mm²	1x25	2x25
10 mm²	1x20	1x20
16 mm²	1x17	1x16
35 mm²	1x12	1x12

Note The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	55	72
M16	36	45
M20	21	28
M25	18	18
M32	8	15
M40	6	8
M50		
M63		
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi HS 403020

Depth 200 mm

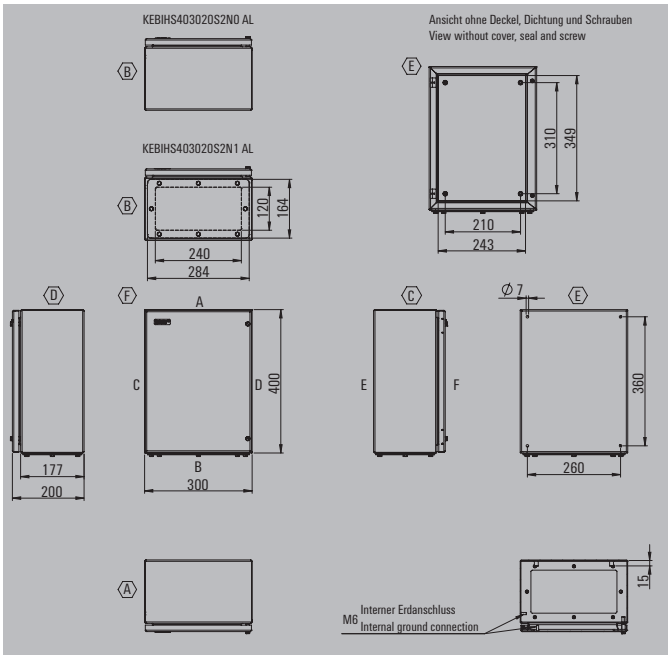

Height / Width / Depth	400 / 300 / 200 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090345
1 gland plate - positioned at the bottom (B)	8000090352
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074172
With hole pattern, natural stainless steel 1.4301	8000074318
Mounting foot	
	2660200318
Document holders	
For DIN A6 size documents	8000075807
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	2x59	3x39
4 mm²	2x49	3x32
6 mm²	1x37	2x24
10 mm²	1x30	2x19
16 mm²	1x24	2x16
35 mm²	1x18	1x11

Note

The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	55	96
M16	36	65
M20	21	40
M25	18	24
M32	8	21
M40	6	10
M50		
M63		
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi HS 404020

Depth 200 mm

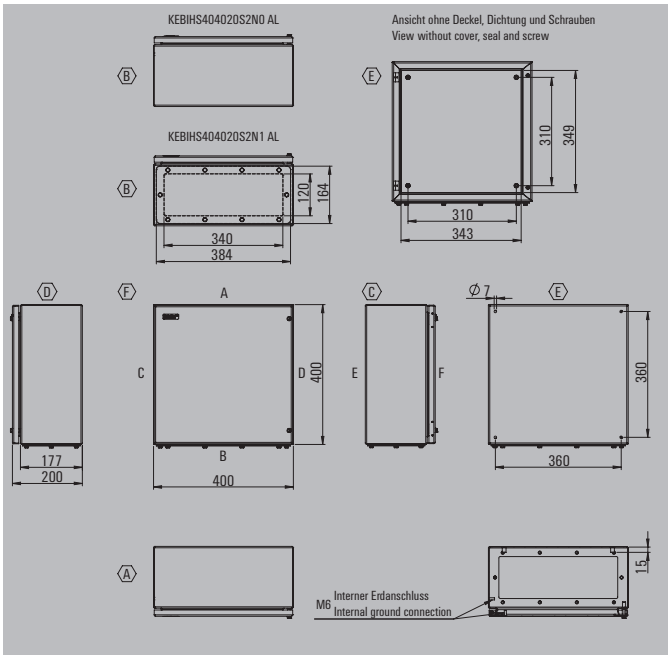

Height / Width / Depth	400 / 400 / 200 mm

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090346
1 gland plate - positioned at the bottom (B)	8000090354
Note	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	8000074173
With hole pattern, natural stainless steel 1.4301	8000074319
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	3x59	3x59
	4 mm²	3x49	3x49
	6 mm²	2x37	2x37
	10 mm²	2x30	2x30
	16 mm²	2x24	2x24
	35 mm²	1x18	1x11

Note

The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	80	96
M16	48	65
M20	30	40
M25	24	24
M32	12	21
M40	10	10
M50	4	4
M63	3	3
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® EBi HS 504020

Depth 200 mm

500 / 400 / 200 mm

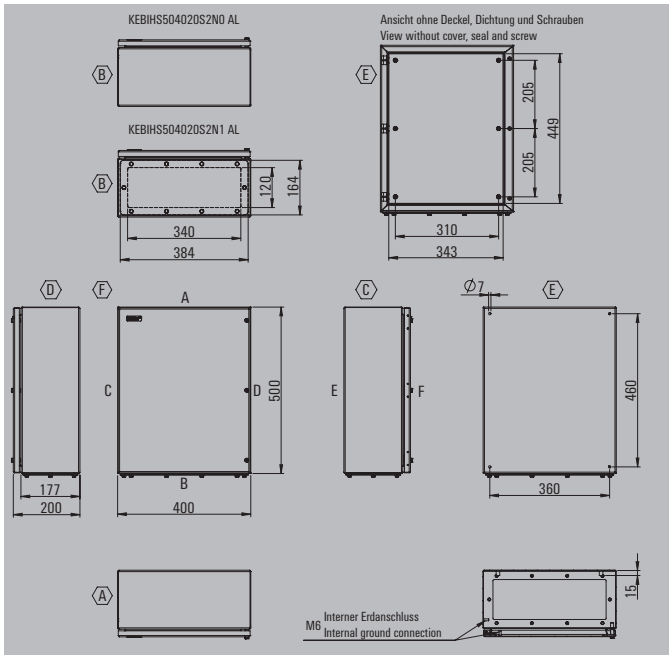

Ordering data

Stainless steel 1.4301 (304), untreated	Order No.
0 gland plates	8000090347
1 gland plate - positioned at the bottom (B)	8000090355
Note	

Accessories

Mounting plates and fastening screws	Order No.
With hole pattern, natural stainless steel 1.4301	8000074321
Steel sheet, zinc plated	8000074175
Document holders	
For DIN A4 size documents	8000075809
For DIN A5 size documents	8000075808
For DIN A6 size documents	8000075807
Mounting foot	
	2660200318
Mild steel nickel plated Spacer M6 x 8, set of 2	
15 mm length	3896100000
20 mm length	3896200000
30 mm length	3896300000
Label holder	
100x25 stainless steel 1.4301	8000075818
130x50 stainless steel 1.4301	8000075816
Mounting plates and fastening screws	
Fastening screws for terminal rails*	1274150000
Fastening screws for mounting plates	2704960000
Screwdriver	
Standard	2749640000

Note *Packing unit (PU) = 20 pcs.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x80	4x59
4 mm²	3x66	4x49
6 mm²	2x51	3x37
10 mm²	2x40	3x30
16 mm²	2x33	3x24
35 mm²	2x24	2x18

Note
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.Order recommendations:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	80	126
M16	48	80
M20	30	52
M25	24	33
M32	12	27
M40	10	14
M50	4	5
M63	3	4
M75		

Note Our IP 68 brass cable glands are used as the reference for these guideline values.

Klippon® STB stainless and sheet steel enclosures

Protection for industrial standard applications and potentially explosive atmospheres

The Klippon® STB range manufactured from either sheet or stainless steel is the perfectly designed Small Terminal Box. It provides the ideal connection point for either industrial or harsh environment applications.

The name Klippon® has long been synonymous for competence and quality in the supply of enclosures and customer solutions. This philosophy continues with our Klippon® STB range of enclosures.

Flexible, internal mounting options
Terminal rails can be installed on the industry standard mounting rails using the provided fixing set with welded C-profile (TAS 20). A maximum possible internal working area is provided while ensuring a stable and flexible area for the rail assembly.

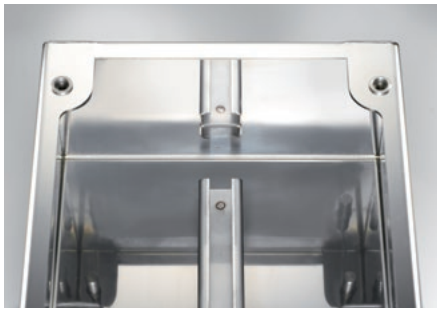

Internal / external earthing screw
The enclosures are supplied with a pre-welded internal and external M6 stainless steel earth stud.

Approvals
Klippon® STB enclosures have the latest international approvals.

Enhanced sealing performance
The new silicon seal has impressive thermal properties and can withstand temperatures from -60 °C to +100 °C (+120 °C). Compression protection ensures the complete functionality of the seal.

Industries
Klippon® STB enclosures can be used in a variety of applications. For example, they are ideal for use in standard applications such as machine construction or transportation. They can also be used in explosive risk zones in the process and petrochemical industry.

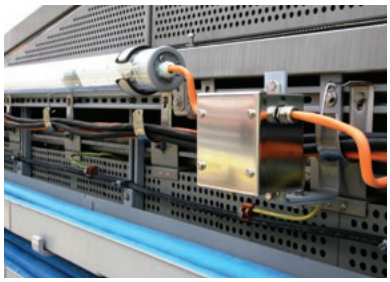

Mounting lugs
Mounting lugs are pre-fitted as standard. They are vibration and shock resistant and designed to be secure in operation.

Customised solutions
Weidmüller delivers enclosures in the Klippon® STB series connection ready. With Klippon Services, Weidmüller offers extensive consultation, engineering and installation services for modified enclosures. Depending on the customer- and industry-specific application, the enclosures can be modified and, subject to international specifications and regulations, sent worldwide together with a wide range of accessories.

Klippon® STB – Small Terminal Box

Steel enclosures

Ideally suited for the energy and process industry and transportation, the Klippon® STB range is the perfect complement to our existing Klippon® enclosure product line. Enclosures of this range comply with international standards.

Some of the many advantages of these cases are:
- Available in stainless steel or in steel sheet
- Higher temperature resistant seals than the standard
- Flexible options when mounting the internal rail
- The gasket is protected against compression; this ensures that a permanent and secure seal is maintained.
- Earth studs in the lid and in the enclosure base
- Lasered welding seams offer improved quality
- Delivered with welded mounting feet to ensure an sturdy enclosure installation

Weidmüller can manufacture and supply this enclosure to match customer specifications and fitted with all necessary terminals and cable glands.

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klipponstb

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Height x width x depth in mm	Mirror-polish	Electropolished	Powder-coated (RAL7032)
Klippon® STB 1	120 x 120 x 80	1002690000	1058810000	1024970000
Klippon® STB 1.1	150 x 120 x 80	1002750000	1058820000	1024980000
Klippon® STB 2	150 x 150 x 90	1002740000	1058830000	1024990000
Klippon® STB 2.1	190 x 150 x 90	1002730000	1058840000	1025010000
Klippon® STB 3	190 x 190 x 100	1002720000	1058850000	1025020000
Klippon® STB 4	250 x 250 x 120	1002710000	1058860000	1025030000
Klippon® STB 5	160 x 380 x 120	1002700000	1058880000	1025040000
Klippon® STB 6	250 x 400 x 130	1002760000	1058870000	1025050000
Note				

Technical Overview

Features

- Mirror-polished or electropolished stainless steel 1.4404 (316L) or powder coated steel sheet 1.0330
- Fitted with a welded, internal C-profile rail (TAS 20) and mounting feet
- Laser cut weld seams
- Approved according to the latest international standards

Note We deliver enclosures through our assembly service which are ready to be connected and suitable for every application

Technical data

	Stainless steel	Sheet steel
Enclosure material	Stainless steel 1.4404 (316L) in1.50 mm	Steel sheet 1.0330 in1.50 mm
Surface finish	Mirror-polished, electropolished	Powder-coated RAL 7032
IP protection class	IP 66	IP 66
NEMA Rating	4, 4x	
Earthing	Enclosure base part: internal / external M6 stainless steel Lid: M6 x 10 stainless steel	Enclosure base part: internal / external M6 stainless steel Lid: M6 x 10 stainless steel
Installation mounting	Welded C-profile rail	Welded C-profile rail
Enclosure attachment	2 external mounting feet with 8 mm holes	2 external mounting feet with 8 mm holes
Lid opening	Completely removable lid with 4 x M5 screws	Completely removable lid with 4 x M5 screws
Impact resistance	7J in accordance with IEC 60079-0	10J industrial version in accordance with DIN EN 50102
Gasket material	Silicone -60 °C...+100 °C *	Silicone -60 °C...+120 °C
Lid screws, torque	2.5 Nm	2.5 Nm
Note	* +120 °C only for industrial applications	

Approvals for empty enclosures

	Stainless steel	Sheet steel
ATEX certificate	IBExU07ATEX1147 U	
ATEX marking	Ex II 2G Ex eb IIC Gb , Ex II 1G Ex ia IIC Ga, Ex II 2D Ex tb IIIC Db	
IECEx certificate	IECEx IBE 09.0018U	
IECEx marking	Ex eb IIC Gb, Ex ia IIC Ga, Ex tb IIIC Db	
AEx	E223792	
cULus	E197061 and E256877	
Lloyds Register	08/20032	08/20032
INMETRO	In preparation	
Note	This enclosure range is component certified. If other electrical components are inserted into the case, additional certification is required.	

Approvals for control and distribution box

	Stainless steel		
ATEX certificate	IBExU07ATEX1148	INMETRO certificte	LMP 21.0018
ATEX marking	Ex II 2G Ex eb IIC T6/T5/T4 Gb Ex II 2(1)G Ex eb ia [Ga] IIC T6/T5/T4 Gb Ex II 1G Ex ia IIC T6/T5/T4 Ga Ex II 2D Ex tb IIIC T80°C/T95°C/T100°C Db -60°C ≤ Ta ≤ +40/+55/+60 °C	INMETRO marking	Ex eb IIC T6/T5/T4 Gb Ex e [ia Ga] IIC T6/T5/T4 Gb Ex ia IIC T6/T5/T4 Ga Ex tb IIIC T80°C/95°C/120°C Db IP66
IECEx certificate	IECEx IBE 09.0019	AEx certificate	E223792
IECEx marking	Ex eb IIC T6/T5/T4 Gb Ex eb ia [Ga] IIC T6/T5/T4 Gb Ex ia IIC T6/T5/T4 Ga Ex tb IIIC T80°C/T95°C/T100°C Db -60°C ≤ Ta ≤ +40/+55/+60 °C	AEx marking	Class I, Zone 1, AEx e IIC Gb T6..T4 Class I, Zone 2, AEx e IIC Gc T6..T4 Class I Div.2 Group A,B,C,D T6...T4 Class II Div.2 Group F,G Zone 21, AEx tb IIIC Db
KOSHA certificate	16-AV4BO-247X		
KOSHA marking	Ex eb IIC T6/T5/T4 Gb Ex eb ia [Ga] IIC T6/T5/T4 Gb Ex ia IIC T6/T5/T4 Ga Ex tb IIIC T80°C/T95°C/T100°C Db -60°C ≤ Ta ≤ +40/+55/+60 °C		
Note	If you have specific requirements for equipment operating in explosive hazard areas, please contact us at Weidmüller to receive a full copy of the certification. For details of power dissipation, please contact your Weidmüller representative.		

Klippon® STB 1

Depth 80 mm

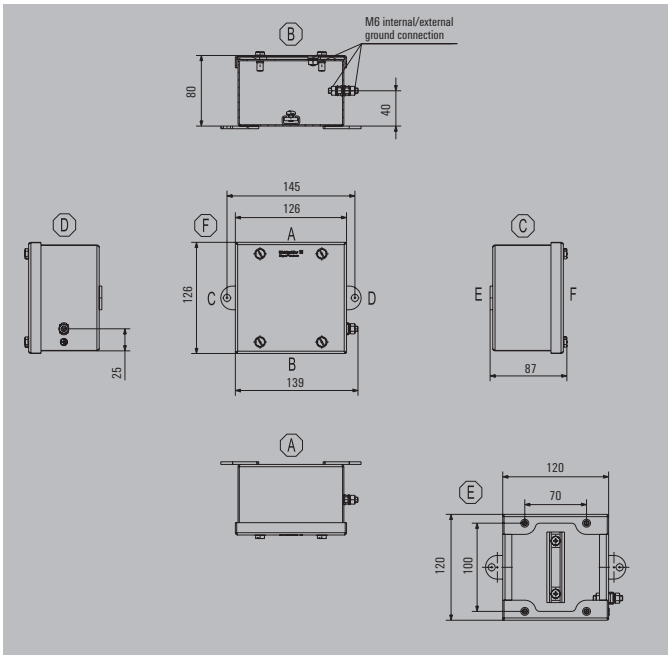

Height / Width / Depth	120 / 120 / 80 mm

Ordering data

Stainless steel 1.4404 (316L)	Order No.
mirror-polished	1002690000
electro-polished	1058810000
Sheet steel, powder-coated (RAL 7032)	
powder-coated	1024970000

Note The colours of painted enclosures may vary under certain circumstances.

Accessories

Mounting rails, TS35x7.5	Order No.
Vertical	8683740000
Sliding fixing nut with screw	
M5	0433500000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Pressure compensating element with drainage function	
M20, stainless steel 1.4404 (316L)	2519550000

Note The enclosure is supplied with a set of sliding fixing nuts, washer, screws M5, to fix the mounting rail TS 35 or TS 32 into the C-Profile.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x17	
4 mm²	1x14	
6 mm²	1x11	
10 mm²	1x8	
16 mm²	1x7	

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Recommended order:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	10	8
M16	6	4
M20	6	4
M25	3	2
M32	2	1
M40	2	1
M50		
M63		

Note

Klippon® STB 1.1

Depth 80 mm

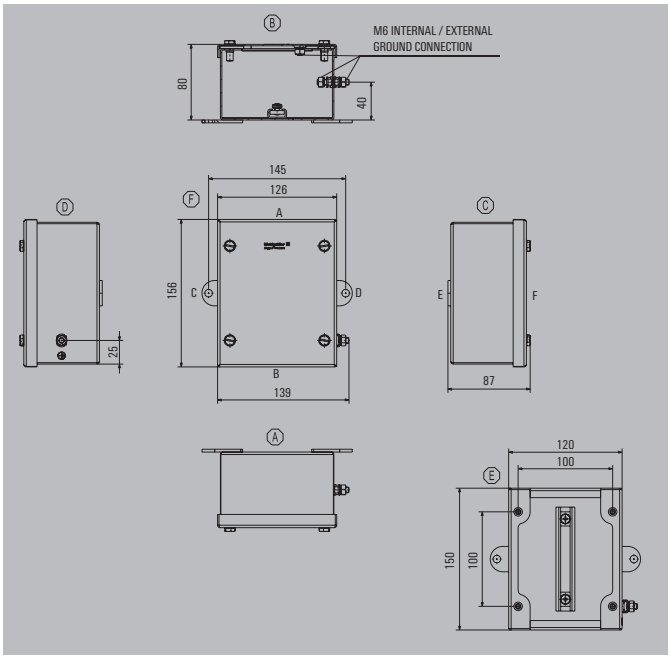

Height / Width / Depth	150 / 120 / 80 mm

Ordering data

Stainless steel 1.4404 (316L)	Order No.
mirror-polished	1002750000
electro-polished	1058820000
Sheet steel, powder-coated (RAL 7032)	
powder-coated	1024980000

Note The colours of painted enclosures may vary under certain circumstances.

Accessories

Mounting rails, TS35x7.5	Order No.
Vertical	8683740000
Sliding fixing nut with screw	
M5	0433500000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Pressure compensating element with drainage function	
M20, stainless steel 1.4404 (316L)	2519550000

Note The enclosure is supplied with a set of sliding fixing nuts, washer, screws M5, to fix the mounting rail TS 35 or TS 32 into the C-Profile.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x23	
4 mm²	1x19	
6 mm²	1x14	
10 mm²	1x11	
16 mm²	1x9	

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Recommended order:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	10	10
M16	6	6
M20	6	6
M25	3	2
M32	2	2
M40	2	1
M50		
M63		

Note

Klippon® STB 2

Depth 90 mm

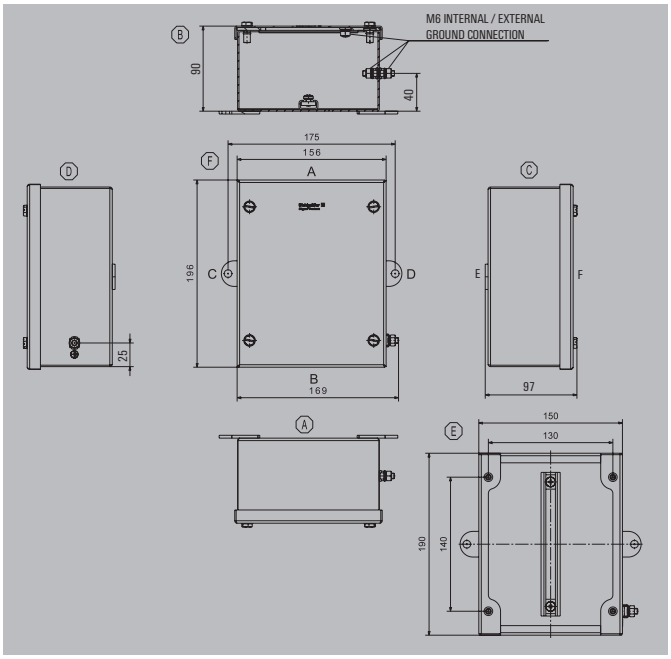

Height / Width / Depth	150 / 150 / 90 mm

Ordering data

Stainless steel 1.4404 (316L)	Order No.
mirror-polished	1002740000
electro-polished	1058830000
Sheet steel, powder-coated (RAL 7032)	
powder-coated	1024990000

Note The colours of painted enclosures may vary under certain circumstances.

Accessories

Mounting rails, TS35x7.5	Order No.
Vertical	8683740000
Sliding fixing nut with screw	
M5	0433500000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Pressure compensating element with drainage function	
M20, stainless steel 1.4404 (316L)	2519550000

Note The enclosure is supplied with a set of sliding fixing nuts, washer, screws M5, to fix the mounting rail TS 35 or TS 32 into the C-Profile.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x23	
4 mm²	1x19	
6 mm²	1x14	
10 mm²	1x11	
16 mm²	1x9	

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Recommended order:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	15	15
M16	10	8
M20	8	6
M25	3	2
M32	3	2
M40	2	2
M50	1	1
M63		

Note

Klippon® STB 2.1

Depth 90 mm

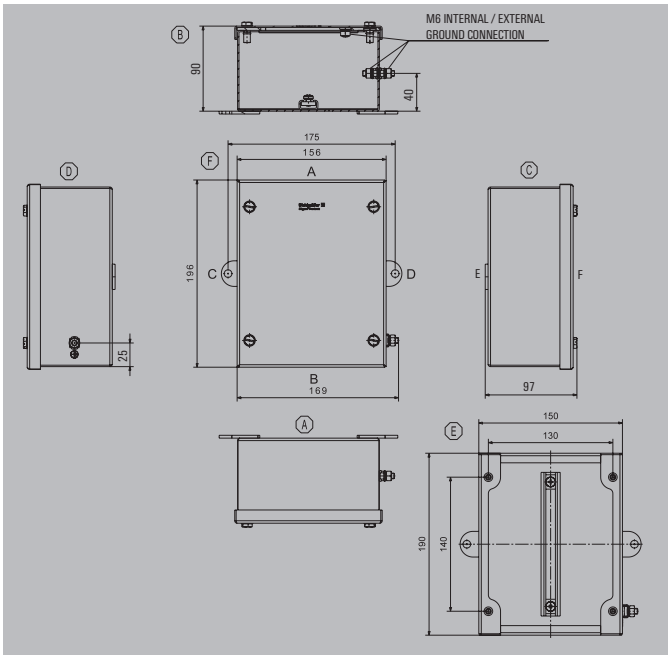

Height / Width / Depth	190 / 150 / 90 mm

Ordering data

Stainless steel 1.4404 (316L)	Order No.
mirror-polished	1002730000
electro-polished	1058840000
Sheet steel, powder-coated (RAL 7032)	
powder-coated	1025010000

Note The colours of painted enclosures may vary under certain circumstances.

Accessories

Mounting rails, TS35x7.5	Order No.
Vertical	1567660000
Sliding fixing nut with screw	
M5	0433500000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Pressure compensating element with drainage function	
M20, stainless steel 1.4404 (316L)	2519550000

Note The enclosure is supplied with a set of sliding fixing nuts, washer, screws M5, to fix the mounting rail TS 35 or TS 32 into the C-Profile.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x30	
4 mm²	1x25	
6 mm²	1x20	
10 mm²	1x15	
16 mm²	1x13	

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Recommended order:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	15	18
M16	10	10
M20	8	10
M25	3	3
M32	3	3
M40	2	2
M50	1	1
M63		

Note

Klippon® STB 3

Depth 100 mm

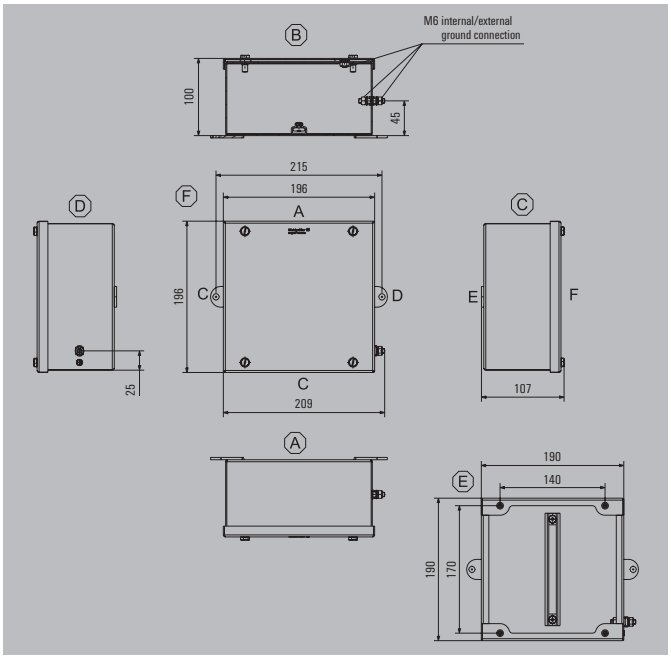

Height / Width / Depth	190 / 190 / 100 mm

Ordering data

Stainless steel 1.4404 (316L)	Order No.
mirror-polished	1002720000
electro-polished	1058850000
Sheet steel, powder-coated (RAL 7032)	
powder-coated	1025020000

Note The colours of painted enclosures may vary under certain circumstances.

Accessories

Mounting rails, TS35x7.5	Order No.
Vertical	1567660000
Sliding fixing nut with screw	
M5	0433500000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Pressure compensating element with drainage function	
M20, stainless steel 1.4404 (316L)	2519550000

Note The enclosure is supplied with a set of sliding fixing nuts, washer, screws M5, to fix the mounting rail TS 35 or TS 32 into the C-Profile.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x30	
4 mm²	1x25	
6 mm²	1x20	
10 mm²	1x15	
16 mm²	1x13	

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Recommended order:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	21	21
M16	15	15
M20	10	8
M25	8	6
M32	3	3
M40	3	2
M50	2	1
M63	1	

Note

Klippon® STB 4

Depth 120 mm

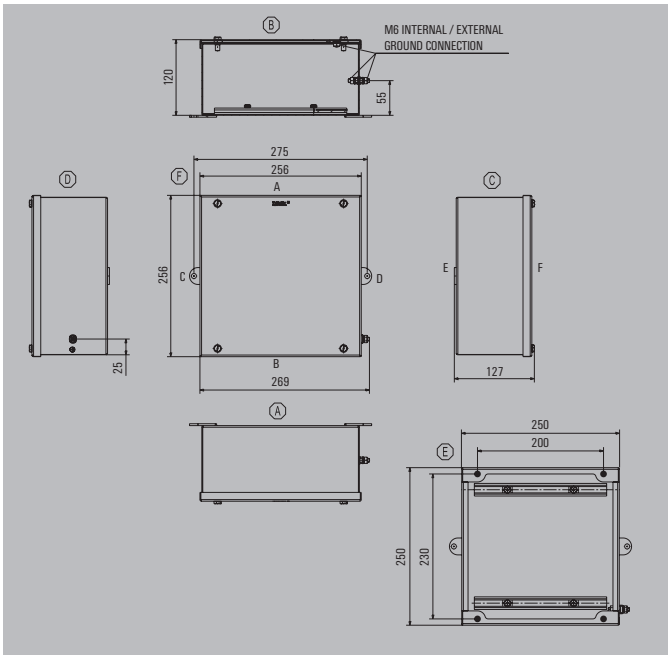

Height / Width / Depth	250 / 250 / 120 mm

Ordering data

Stainless steel 1.4404 (316L)	Order No.
mirror-polished	1002710000
electro-polished	1058860000
Sheet steel, powder-coated (RAL 7032)	
powder-coated	1025030000

Note The colours of painted enclosures may vary under certain circumstances.

Accessories

Mounting rails, TS35x7.5	Order No.
Horizontally	8563410000
Vertical	8803610000
Sliding fixing nut with screw	
M5	0433500000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Pressure compensating element with drainage function	
M20, stainless steel 1.4404 (316L)	2519550000

Note The enclosure is supplied with a set of sliding fixing nuts, washer, screws M5, to fix the mounting rail TS 35 or TS 32 into the C-Profile.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	2x42	2x42
4 mm²	2x35	2x35
6 mm²	2x27	2x27
10 mm²	2x22	2x22
16 mm²	2x18	2x18

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Recommended order:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	24	24
M16	21	21
M20	12	12
M25	10	10
M32	8	8
M40	3	3
M50	3	2
M63	2	1

Note

Klippon® STB 5

Depth 120 mm

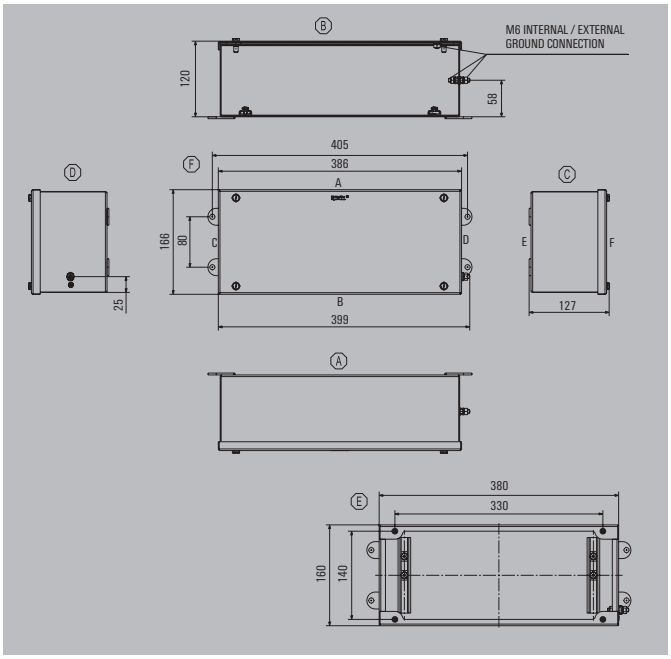

Height / Width / Depth	160 / 380 / 120 mm

Ordering data

Stainless steel 1.4404 (316L)	Order No.
mirror-polished	1002700000
electro-polished	1058880000
Sheet steel, powder-coated (RAL 7032)	
powder-coated	1025040000

Note The colours of painted enclosures may vary under certain circumstances.

Accessories

Mounting rails, TS35x7.5	Order No.
Horizontally	8563410000
Vertical	8803610000
Sliding fixing nut with screw	
M5	0433500000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Pressure compensating element with drainage function	
M20, stainless steel 1.4404 (316L)	2519550000

Note The enclosure is supplied with a set of sliding fixing nuts, washer, screws M5, to fix the mounting rail TS 35 or TS 32 into the C-Profile.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x25	1x68
4 mm²	3x21	1x57
6 mm²	3x16	1x44
10 mm²	3x12	1x35
16 mm²	3x10	1x29

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Recommended order:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	64	20
M16	33	12
M20	30	12
M25	16	6
M32	10	4
M40	6	2
M50	4	1
M63	2	1

Note

Klippon® STB 6

Depth 130 mm

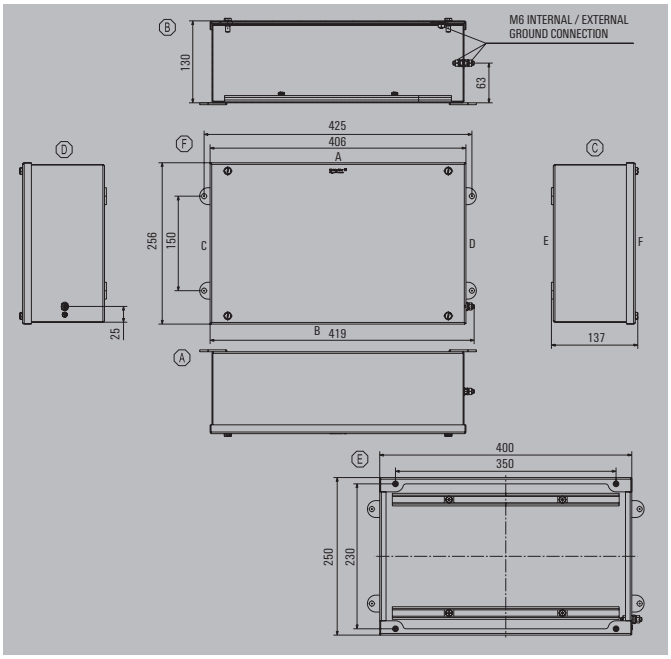

Height / Width / Depth	250 / 400 / 130 mm

Ordering data

Stainless steel 1.4404 (316L)	Order No.
mirror-polished	1002760000
electro-polished	1058870000
Sheet steel, powder-coated (RAL 7032)	
powder-coated	1025050000

Note The colours of painted enclosures may vary under certain circumstances.

Accessories

Mounting rails, TS35x7.5	Order No.
Vertical	8803610000
Horizontally	8563410000
Sliding fixing nut with screw	
M5	0433500000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Pressure compensating element with drainage function	
M20, stainless steel 1.4404 (316L)	2519550000

Note The enclosure is supplied with a set of sliding fixing nuts, washer, screws M5, to fix the mounting rail TS 35 or TS 32 into the C-Profile.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	3x42	2x72
4 mm²	3x35	2x60
6 mm²	3x27	2x46
10 mm²	3x22	2x37
16 mm²	3x18	2x30

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Recommended order:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for terminal blocks, please refer to online catalogue

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	64	36
M16	33	21
M20	30	18
M25	16	10
M32	10	8
M40	6	3
M50	4	2
M63	2	2

Note

Klippon® Protect – Terminal Boxes
Product overview Steel enclosures

Various types of terminal boxes are available for installing signal / power supplies or distributors in explosive risk zones.
The terminal boxes are explosion-protected equipment approved for use in Ex areas in zones 0, 1, 2 and 20, 21, 22.

They are certified in accordance with the latest international standards Ex e, Ex ia and Ex tb. Customer-specific configuration means these terminal boxes are the optimum solution for all applications. Use the product overview to find the right solution for you!
Combine the enclosure, with or without threaded holes, a suitable mounting rail or pre-fitted strip terminals.

We have put together a small selection for you,
but we are happy to configure a bespoke solution for you.

Features:
- Available in a wide range of versions to meet customer requirements
- Additional international approvals
- Increased quality thanks to the use of established basic products in the Klippon® brand

One Terminal Box
Ex-certified enclosures for customized solutions

Our One Terminal Boxes are equipped with one feed-through terminal (WDU 2.5 or WDU 4) as standard. You can flexibly expand the enclosure with terminals you need whereby you can count on our support at any time. The most convenient way to create Ex terminal boxes is to use our Fast Delivery Service with our Weidmüller Configurator (WMC): design your individual Ex terminal box in the WMC and receive your offer within minutes.

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/exterminalbox

Overview of enclosures

Terminal boxes based on the Klippon® STB range of enclosures

Description	Height x width x depth in mm	Marking	Approval	Order No.
STB 2 Exe	150 x 150 x 90	Ex eb IIC T6 Gb	IECEx, ATEX	8000028395
STB 3 Exe	190 x 190 x 100	Ex eb IIC T6 Gb	IECEx, ATEX	8000028396
STB 4 Exe	250 x 250 x 120	Ex eb IIC T6 Gb	IECEx, ATEX	8000028397
Note				

Technical Overview

Technical data

Enclosures	
Material	Stainless steel 1.4404 (316L) 1.5 mm
Surface finish	Mirror-polished (Klippon® STB)
IP protection class	IP66 to DIN EN 60529
Gasket material	Silicone
Terminal block	
Material	Wemid
Colour	beige, blue or green/yellow
Connection system	screw connection
Clampable wires (H05V/H07V)	solid, flexible and flexible with ferrule
Note	

Approvals for Klippon® STB

ATEX certificate	IBExU07ATEX1148
IECEx certificate	IECEx IBE 09.0019
Note	Labelling depends on the application layout. For details of power dissipation, please contact your Weidmüller representative.

Klippon® STB 2 Ex e terminal box

Depth 90 mm

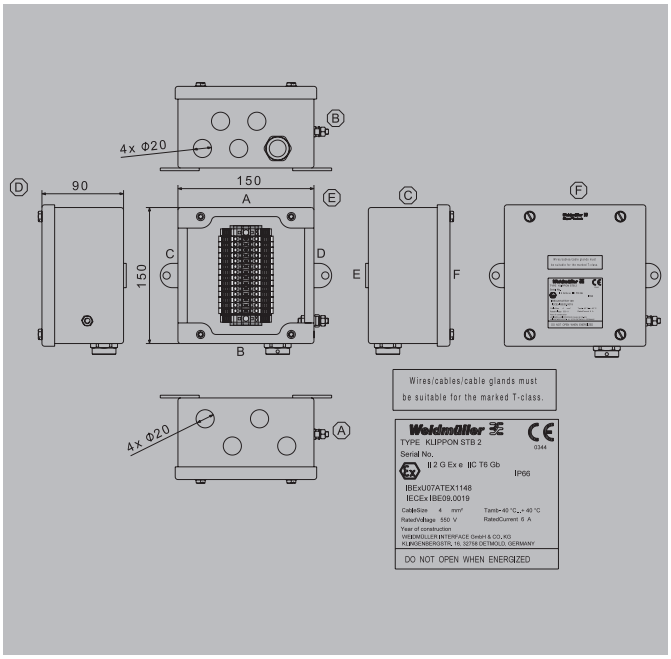

Height / Width / Depth	150 / 150 / 90 mm

Ordering data

	Order No.
STB 2 EXE	8000028395
Note	

Technical data

Article - short description	Klippon STB (Small Terminal Box), Terminal Box, stainless steel enclosure, Height: 150 mm, Width: 150 mm, Depth: 90 mm, Material: Stainless steel 1.4404 (316L), Mirror polished, silver
Identification	Ex eb IIC T6 Gb
Certificate no. Terminal Box (ATEX)	IBExU 07ATEX1148
Certificate no. Terminal Box (IECEx)	IECEx IBE09.0019
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-11, IEC 60079-31, EN 60079-0, EN 60079-7, EN 60079-11, EN 60079-31
Ambient temperature	Tamb -40°C...+40°C
Type label material	Polyester coated with aluminium
Protection class	IP66
Assembly	
Modular terminal blocks	1x14
Rated cross-section	4 mm²
Rated voltage	550 V
Rated current	6 A
Drill holes side A	4 x M20
Drill holes side B	4 x M20, 1 x BDX
Technical data, enclosure	
Material	Stainless steel 1.4404 (316L)
Surface finish	Mirror polished
Material thickness	1.5 mm
Seal material	Silicone
Enclosure attachment	Welded-on mounting foot with 8-mm holes
Mounting dimension - height / -width	75 mm / 175 mm
Lid attachment	M5 hex-head slotted screws SW10
Access opening: width / Access opening: height	130 mm / 130 mm
Earth, enclosure, external	Welded-on M6 x 16 stainless-steel bolts
Earth, enclosure, internal	Welded-on M6 x 16 stainless-steel bolts

Reference products

	Order No.
KLIPPON STB 2 SS	1002740000
WDU 4	1020100000
KLIPPON BDX M20 S	2519550000
Note	

Accessories

Pressure compensating element with drainage function	**Order No.**
M20, brass	2519520000
Cable glands	
Nickel-plated brass, Ex e, M20, 3-12 mm	1460050000
Blanking plugs	
Nickel-plated brass, Ex e, M20	1218950000
Locknuts	
Nickel-plated brass, M20	1737000000

Note

Note

Klippon® STB 3 Ex e terminal box

Depth 100 mm

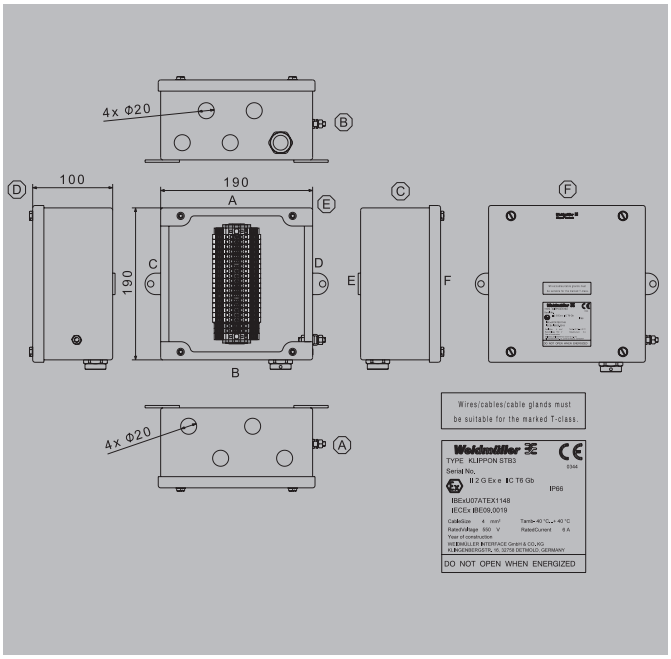

Height / Width / Depth	190 / 190 / 100 mm

Ordering data

	Order No.
STB 3 EXE	8000028396
Note	

Reference products

	Order No.
KLIPPON STB 3 SS	1002720000
WDU 4	1020100000
WPE 4	1010100000
KLIPPON BDX M20 S	2519550000
Note	

Technical data

Article - short description	Klippon STB (Small Terminal Box), Terminal Box, stainless steel enclosure, Height: 190 mm, Width: 190 mm, Depth: 100 mm, Material: Stainless steel 1.4404 (316L), Mirror polished, silver
Identification	Ex eb IIC T6 Gb
Certificate no. Terminal Box (ATEX)	IBExU 07ATEX1148
Certificate no. Terminal Box (IECEx)	IECEx IBE09.0019
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-11, IEC 60079-31, EN 60079-0, EN 60079-7, EN 60079-11, EN 60079-31
Ambient temperature	Tamb -40°C...+40°C
Type label material	Polyester coated with aluminium
Protection class	IP66
Assembly	
Modular terminal blocks	1x18, 2 x PE
Rated cross-section	4 mm²
Rated voltage	550 V
Rated current	6 A
Drill holes side A	4 x M20
Drill holes side B	4 x M20, 1 x BDX
Technical data, enclosure	
Material	Stainless steel 1.4404 (316L)
Surface finish	Mirror polished
Material thickness	1.5 mm
Seal material	Silicone
Enclosure attachment	Welded-on mounting foot with 8-mm holes
Mounting dimension - height / -width	95 mm / 215 mm
Lid attachment	M5 hex-head slotted screws SW10
Access opening: width / Access opening: height	170 mm / 170 mm
Earth, enclosure, external	Welded-on M6 x 16 stainless-steel bolts
Earth, enclosure, internal	Welded-on M6 x 16 stainless-steel bolts

Accessories

Pressure compensating element with drainage function	Order No.
M20, brass	2519520000
Cable glands	
Nickel-plated brass, Ex e, M20, 3-12 mm	1460050000
Blanking plugs	
Nickel-plated brass, Ex e, M20	1218950000
Locknuts	
Nickel-plated brass, M20	1737000000

Note

Note

Klippon® STB 4 Ex e terminal box

Depth 120 mm

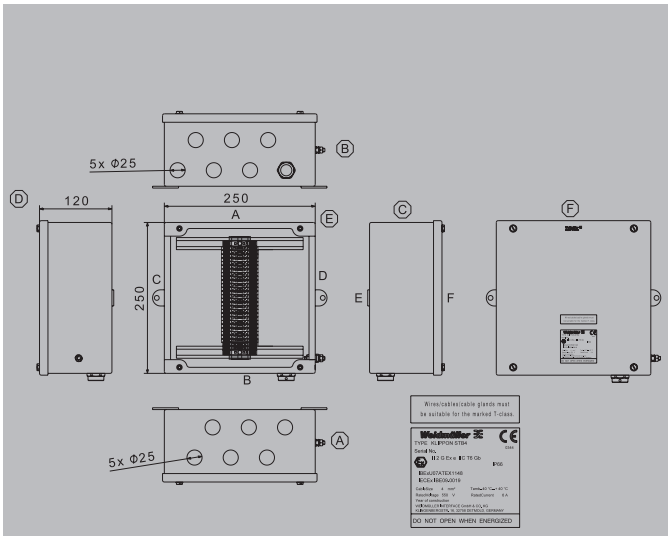

250 / 250 / 120 mm

Ordering data

	Order No.
STB 4 EXE	8000028397

Note

Technical data

Article - short description	Klippon STB (Small Terminal Box), Terminal Box, stainless steel enclosure, Height: 250 mm, Width: 250 mm, Depth: 120 mm, Material: Stainless steel 1.4404 (316L), Mirror polished, silver
Identification	Ex eb IIC T6 Gb
Certificate no. Terminal Box (ATEX)	IBExU 07ATEX1148
Certificate no. Terminal Box (IECEx)	IECEx IBE09.0019
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-11, IEC 60079-31, EN 60079-0, EN 60079-7, EN 60079-11, EN 60079-31
Ambient temperature	Tamb -40°C...+40°C
Type label material	Polyester coated with aluminium
Protection class	IP66
Assembly	
Modular terminal blocks	1x26, 2 x PE
Rated cross-section	4 mm²
Rated voltage	550 V
Rated current	6 A
Drill holes side A	6 x M25
Drill holes side B	6 x M25, 1 x BDX
Technical data, enclosure	
Material	Stainless steel 1.4404 (316L)
Surface finish	Mirror polished
Material thickness	1.5 mm
Seal material	Silicone
Enclosure attachment	Welded-on mounting foot with 8-mm holes
Mounting dimension - height / -width	125 mm / 275 mm
Lid attachment	M5 hex-head slotted screws SW10
Access opening: width / Access opening: height	230 mm / 230 mm
Earth, enclosure, external	Welded-on M6 x 16 stainless-steel bolts
Earth, enclosure, internal	Welded-on M6 x 16 stainless-steel bolts

Reference products

	Order No.
KLIPPON STB 4 SS	1002710000
WDU 4	1020100000
WPE 4	1010100000
KLIPPON BDX M20 S	2519550000

Note

Accessories

Pressure compensating element with drainage function	Order No.
M20, brass	2519520000
Cable glands	
Nickel-plated brass, Ex e, M25, 10-18 mm	1460070000
Blanking plugs	
Nickel-plated brass, Ex e, M25	1218960000
Locknuts	
Nickel-plated brass, M25	1737010000

Note

Note

Safely control work processes in hazardous areas on site

With certified enclosure solutions with control and display elements

Harsh industrial environments and hazardous areas, such as in the oil and gas industry, place extreme demands on the safety, the robustness and quality of products and devices.

We meet these challenges with the Klippon® Control Station, the addition to our range of customised enclosure solutions. More than 50 years of expertise have made us market leader in this area with global competence centres. The basis of our enclosure solutions is provided by the usual Weidmüller quality and comprehensive approvals for explosion hazard areas. Based on this, our sturdy "on-site control station" is available in two standard sizes and with up to four control and display elements and provides a flexible solution to meet your specific needs.

Order your distributor enclosure as well as control and signaling units from a single source and from one enclosure design – for reliable security and reduced storage costs for maintenance and repair operations.

Your special advantages:
Ideal for urgent service calls
We have prepared moduls of the proven Klippon® enclosure series STB available for you for further processing. This means we manufacture a control solution suitable for your application at short notice.

Predestined for emergency shutdown applications: Klippon® Control Stations score when it comes to the safe shutdown of plant sections, such as in the process industry

Project solutions from a single source
Obtain command/signaling units and distribution and control boxes as a complete solution – tailored to the individual requirements of your projects in hazardous areas.

Customised assembly
In addition to standard types from stock, you can obtain enclosure solutions from us that are completely assembled and equipped according to customer requirements.

A variety of sizes and materials
Enclosures in stainless steel, aluminium or polyester are available for different environmental conditions. Depending on the size of the enclosure, it provides space for the integration of up to four control and display elements.

International certificates
The Klippon® Control Station is tested and certified among others according to ATEX and IECEx.

Durability for maximum requirements

Klippon® Protect sets the highest standards with stainless steel enclosures

The enclosure ranges Klippon® TB and Klippon® STB are offered in stainless steel and boost market leading performance characteristics, which even allow them to meet the demanding requirements for use with the harshest environments. The enclosures are certified and comply with the latest international standards – including ATEX and IECEx.

Additional features:

- Standard silicone seals for use in extreme temperature environments
- High Ingress Performace - IP66
- Welded-on mounting feet for wall mounting

Technical data	Stainless steel
Material	Stainless steel 1.4404 (316L) 1.50 mm
Surface finish	Mirror-polished
Colour	Natural
IP protection class	IP 54; IP 66
Ambient temperature	-55 °C to 55 °C
Seal material of enclosure	Silicone
Seal material of command and signalling units	EPDM
Flammability rating	-
Impact resistance IK	7 joules in acc. with IEC60079-0 4 joules in acc. with IEC60079-0 with integrated illuminated pushbutton or light module
Cable gland material	Nickel-plated brass
Cable gland clamping area min. – max. in mm	
M20	3–12 mm
M25	10–18 mm
Max. rated cross-section	2.5 mm²
Max. operating voltage	400 V
with integrated illuminated pushbutton or light module	250 V
Maximum operating current at 40 °C ambient temperature	
1.5 mm² – T6	10 A
1.5 mm² – T5	16 A
2.5 mm² – T6	16 A
Maximum operating current at 55 °C ambient temperature	
1.5 mm² – T4	16 A
1.5 mm² – T5	10 A
2.5 mm² – T5	16 A
Temperature class	T4, T5, T6
Type of mounting	Wall mounting
Earthing inside	M6x10 earthing studs integrated in the cover, stainless steel
Lid attachment	Hexagonal slothead screws SW10
Lid screw torque	2.5 Nm
Earthing torque	7.5 Nm
Earthing outside	M6 earthing studs, stainless steel
Approvals	IECEXITA14.0013X TUEV14ATEX7606X LMP 21.0019X
Marking	2G Ex e d IIC T* Gb 2G Ex ib d [ia] IIC T* Gb 2D Ex tb IIIC T80/100 °C Db
Mounting feet	2 welded-on mounting feet with 8 mm holes

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klipponcontrolstation

Number of built-in components				Emergency stop pushbutton	Key switch	Pushbutton		Illuminated push button		Light module		Dimensions with built-in components HxWxD in mm	Designation	Cable gland	Order number
	●	●●	●●●	red	I – 0 – II	red	green	red	green	red	green				
Stainless steel	●			1								150x120x119	KLIPPON CS STB 1-1	VG M20	**1537200000**
	●						1					150x120x95	KLIPPON CS STB 1-1	VG M20	**1537210000**
	●				1							150x120x109	KLIPPON CS STB 1-1	VG M20	**1537220000**
	●								1			150x120x96	KLIPPON CS STB 1-1	VG M20	**1537230000**
	●			1								153x120x119	KLIPPON CS STB 1-2	VG M25	**1537240000**
	●						1					153x120x95	KLIPPON CS STB 1-2	VG M25	**1537250000**
	●				1							153x120x109	KLIPPON CS STB 1-2	VG M25	**1537280000**
	●								1			153x120x96	KLIPPON CS STB 1-2	VG M25	**1537290000**
		●				1	1					223x150x95	KLIPPON CS STB 2.1-2	VG M25	**1537300000**
		●					1				1	223x150x103	KLIPPON CS STB 2.1-2	VG M25	**1537310000**
		●		1						1		223x150x119	KLIPPON CS STB 2.1-2	VG M25	**1537320000**
			●			1	2					223x150x95	KLIPPON CS STB 2.1-6	VG M25	**1537330000**
			●			1	1		1			223x150x103	KLIPPON CS STB 2.1-7	VG M25	**1537340000**
			●	1		1	1					220x150x119	KLIPPON CS STB 2.1-7	VG M20	**1537370000**

Technical data

	Klippon® CS STB 1-1	Klippon® CS STB 1-1
Enclosure		
Dimensions with installation (HxBxD)	150 / 120 / 119 mm	150 / 120 / 95 mm
Material	Stainless steel 1.4404 (316L)	Stainless steel 1.4404 (316L)
General characteristics		
Surface finish / Colour	Mirror polished / Natural	Mirror polished / Natural
Protection class	IP54, IP66	IP54, IP66
Ambient temperature	-55 °C...+55 °C	-55 °C...+55 °C
Impact resistance	7 joules in acc. with IEC60079-0	7 joules in acc. with IEC60079-0
Enclosure seal material	Silicone (VMQ)	Silicone (VMQ)
Seal material of operating and display elements	EPDM	EPDM
Type of mounting	Wall mounting	Wall mounting
Internal earth	M6 x 10 earthing studs integrated in the lid, stainless steel	M6 x 10 earthing studs integrated in the lid, stainless steel
External earth	M6 earthing studs, stainless steel	M6 earthing studs, stainless steel
Lid attachment	M5 hexagonal screw with slot and 10mm distance across flats	M5 hexagonal screw with slot and 10mm distance across flats
Torque for lid screws	2.5 Nm	2.5 Nm
Earth stud torque	7.5 Nm	7.5 Nm
Electrical properties*		
Wire connection cross section, finely stranded, max.	2.5 mm²	2.5 mm²
Operating voltage, max.	400 V	400 V
Temperature class	T4, T5, T6	T4, T5, T6
Enclosure assembly		
1 Position in enclosure	EMERGENCY-STOP pushbutton with yellow, contrasting label	Pushbutton - green
2 Position in enclosure		
3 Position in enclosure		
4 Position in enclosure		
Contact design	2 NC contact, positive opening contacts	1 NC contact, 1 NO contacts
Actuators	EMERGENCY STOP pushbutton	Pushbutton
Actuator colour	red	green
Illumination module colour		
Illuminated button actuator colour		
Cable entries		
Drill holes side B	1 x M20	1 x M20
Cable gland	1460050000 - VG M20 EXE MS	1460050000 - VG M20 EXE MS
Clamping range min. / max.	3 mm / 12 mm	3 mm / 12 mm
Approval and Marking		
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-31	IEC 60079-0, IEC 60079-7, IEC 60079-31
Certificate No. (IECEX)	IECEXITA14.0013X	IECEXITA14.0013X
Certificate No. (ATEX)	TUEV14ATEX7606X	TUEV14ATEX7606X
Certificate no. Terminal Box (INMETRO)	LMP 21.0019X	LMP 21.0019X
Marking	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Note

Ordering data

Type	Qty.	Order No.
KLIPPON CS STB 1-1	1	1537200000

Type	Qty.	Order No.
KLIPPON CS STB 1-1	1	1537210000

Note

*Other temperature classes and connection values on request, or see "Notice to Installer".

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS STB 1-1

150 / 120 / 109 mm
Stainless steel 1.4404 (316L)
Mirror polished / Natural
IP54, IP66
-55 °C...+55 °C
7 joules in acc. with IEC60079-0
Silicone (VMQ)
EPDM
Wall mounting
M6 x 10 earthing studs integrated in the lid, stainless steel
M6 earthing studs, stainless steel
M5 hexagonal screw with slot and 10mm distance across flats
2.5 Nm
7.5 Nm
2.5 mm²
400 V
T4, T5, T6
Key-operated switch
1 NC contact, 1 NO contacts
Key-operated switch, 3 switching positions, I - 0 - II, (I + II), latching, Key retractable
1 x M20
1460050000 - VG M20 EXE MS
3 mm / 12 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Type	Qty.	Order No.
KLIPPON CS STB 1-1	1	1537220000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS STB 1-1

150 / 120 / 96 mm
Stainless steel 1.4404 (316L)
Mirror polished / Natural
IP54, IP66
-55 °C...+55 °C
4 joules in acc. with IEC60079-0
Silicone (VMQ)
EPDM
Wall mounting
M6 x 10 earthing studs integrated in the lid, stainless steel
M6 earthing studs, stainless steel
M5 hexagonal screw with slot and 10mm distance across flats
2.5 Nm
7.5 Nm
2.5 mm²
250 V
T4, T5, T6
Illuminated pushbutton - green
2 NO contacts
Pushbutton
green
green
1 x M20
1460050000 - VG M20 EXE MS
3 mm / 12 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Type	Qty.	Order No.
KLIPPON CS STB 1-1	1	1537230000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS STB 1-2

153 / 120 / 119 mm
Stainless steel 1.4404 (316L)
Mirror polished / Natural
IP54, IP66
-55 °C...+55 °C
7 joules in acc. with IEC60079-0
Silicone (VMQ)
EPDM
Wall mounting
M6 x 10 earthing studs integrated in the lid, stainless steel
M6 earthing studs, stainless steel
M5 hexagonal screw with slot and 10mm distance across flats
2.5 Nm
7.5 Nm
2.5 mm²
400 V
T4, T5, T6
EMERGENCY-STOP pushbutton with yellow, contrasting label
2 NC contact, positive opening contacts
EMERGENCY STOP pushbutton
red
1 x M25
1460070000 - VG M25 EXE MS
10 mm / 18 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Type	Qty.	Order No.
KLIPPON CS STB 1-2	1	1537240000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Technical data

	Klippon® CS STB 1-2	Klippon® CS STB 1-2
Enclosure		
Dimensions with installation (HxBxD)	153 / 120 / 95 mm	153 / 120 / 109 mm
Material	Stainless steel 1.4404 (316L)	Stainless steel 1.4404 (316L)
General characteristics		
Surface finish / Colour	Mirror polished / Natural	Mirror polished / Natural
Protection class	IP54, IP66	IP54, IP66
Ambient temperature	-55 °C...+55 °C	-55 °C...+55 °C
Impact resistance	7 joules in acc. with IEC60079-0	7 joules in acc. with IEC60079-0
Enclosure seal material	Silicone (VMQ)	Silicone (VMQ)
Seal material of operating and display elements	EPDM	EPDM
Type of mounting	Wall mounting	Wall mounting
Internal earth	M6 x 10 earthing studs integrated in the lid, stainless steel	M6 x 10 earthing studs integrated in the lid, stainless steel
External earth	M6 earthing studs, stainless steel	M6 earthing studs, stainless steel
Lid attachment	M5 hexagonal screw with slot and 10mm distance across flats	M5 hexagonal screw with slot and 10mm distance across flats
Torque for lid screws	2.5 Nm	2.5 Nm
Earth stud torque	7.5 Nm	7.5 Nm
Electrical properties*		
Wire connection cross section, finely stranded, max.	2.5 mm²	2.5 mm²
Operating voltage, max.	400 V	400 V
Temperature class	T4, T5, T6	T4, T5, T6
Enclosure assembly		
1 Position in enclosure	Pushbutton - green	Key-operated switch
2 Position in enclosure		
3 Position in enclosure		
4 Position in enclosure		
Contact design	1 NC contact, 1 NO contacts	1 NC contact, 1 NO contacts
Actuators	Pushbutton	Key-operated switch, 3 switching positions, I - 0 - II, (I + II), latching, Key retractable
Actuator colour	green	
Illumination module colour		
Illuminated button actuator colour		
Cable entries		
Drill holes side B	1 x M25	1 x M25
Cable gland	1460070000 - VG M25 EXE MS	1460070000 - VG M25 EXE MS
Clamping range min. / max.	10 mm / 18 mm	10 mm / 18 mm
Approval and Marking		
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-31	IEC 60079-0, IEC 60079-7, IEC 60079-31
Certificate No. (IECEX)	IECEXITA14.0013X	IECEXITA14.0013X
Certificate No. (ATEX)	TUEV14ATEX7606X	TUEV14ATEX7606X
Certificate no. Terminal Box (INMETRO)	LMP 21.0019X	LMP 21.0019X
Marking	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Note

Ordering data

Type	Qty.	Order No.
KLIPPON CS STB 1-2	1	1537250000

Type	Qty.	Order No.
KLIPPON CS STB 1-2	1	1537280000

Note

*Other temperature classes and connection values on request, or see "Notice to Installer".

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS STB 1-2

153 / 120 / 96 mm
Stainless steel 1.4404 (316L)
Mirror polished / Natural
IP54, IP66
-55 °C...+55 °C
4 joules in acc. with IEC60079-0
Silicone (VMQ)
EPDM
Wall mounting
M6 x 10 earthing studs integrated in the lid, stainless steel
M6 earthing studs, stainless steel
M5 hexagonal screw with slot and 10mm distance across flats
2.5 Nm
7.5 Nm
2.5 mm²
250 V
T4, T5, T6
Illuminated pushbutton - green
2 NO contacts
Pushbutton
green
green
1 x M25
1460070000 - VG M25 EXE MS
3 mm / 12 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Type	Qty.	Order No.
KLIPPON CS STB 1-2	1	1537290000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS STB 2.1-2

223 / 150 / 95 mm
Stainless steel 1.4404 (316L)
Mirror polished / Natural
IP54, IP66
-55 °C...+55 °C
7 joules in acc. with IEC60079-0
Silicone (VMQ)
EPDM
Wall mounting
M6 x 10 earthing studs integrated in the lid, stainless steel
M6 earthing studs, stainless steel
M5 hexagonal screw with slot and 10mm distance across flats
2.5 Nm
7.5 Nm
2.5 mm²
400 V
T4, T5, T6
Pushbutton - red
Pushbutton - green
2 NC contact, 2 NO contacts
Pushbutton
red, green
green
1 x M25
1460070000 - VG M25 EXE MS
10 mm / 18 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Type	Qty.	Order No.
KLIPPON CS STB 2.1-2	1	1537300000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS STB 2.1-2

223 / 150 / 103 mm
Stainless steel 1.4404 (316L)
Mirror polished / Natural
IP54, IP66
-55 °C...+55 °C
4 joules in acc. with IEC60079-0
Silicone (VMQ)
EPDM
Wall mounting
M6 x 10 earthing studs integrated in the lid, stainless steel
M6 earthing studs, stainless steel
M5 hexagonal screw with slot and 10mm distance across flats
2.5 Nm
7.5 Nm
2.5 mm²
250 V
T4, T5, T6
Light module - green
Pushbutton - green
1 NC contact, 1 NO contacts
Pushbutton
green
green
1 x M25
1460070000 - VG M25 EXE MS
10 mm / 18 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Type	Qty.	Order No.
KLIPPON CS STB 2.1-2	1	1537310000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS STB 2.1-2

Klippon® CS STB 2.1-6

Technical data

	Klippon® CS STB 2.1-2	Klippon® CS STB 2.1-6
Enclosure		
Dimensions with installation (HxBxD)	223 / 150 / 119 mm	223 / 150 / 95 mm
Material	Stainless steel 1.4404 (316L)	Stainless steel 1.4404 (316L)
General characteristics		
Surface finish / Colour	Mirror polished / Natural	Mirror polished / Natural
Protection class	IP54, IP66	IP54, IP66
Ambient temperature	-55 °C...+55 °C	-55 °C...+55 °C
Impact resistance	4 joules in acc. with IEC60079-0	7 joules in acc. with IEC60079-0
Enclosure seal material	Silicone (VMQ)	Silicone (VMQ)
Seal material of operating and display elements	EPDM	EPDM
Type of mounting	Wall mounting	Wall mounting
Internal earth	M6 x 10 earthing studs integrated in the lid, stainless steel	M6 x 10 earthing studs integrated in the lid, stainless steel
External earth	M6 earthing studs, stainless steel	M6 earthing studs, stainless steel
Lid attachment	M5 hexagonal screw with slot and 10mm distance across flats	M5 hexagonal screw with slot and 10mm distance across flats
Torque for lid screws	2.5 Nm	2.5 Nm
Earth stud torque	7.5 Nm	7.5 Nm
Electrical properties*		
Wire connection cross section, finely stranded, max.	2.5 mm²	2.5 mm²
Operating voltage, max.	250 V	400 V
Temperature class	T4, T5, T6	T4, T5, T6
Enclosure assembly		
1 Position in enclosure	Light module - red	Pushbutton - green
2 Position in enclosure	EMERGENCY-STOP pushbutton with yellow, contrasting label	Pushbutton - red
3 Position in enclosure		Pushbutton - green
4 Position in enclosure		
Contact design	2 NC contact, positive opening contacts	3 NC contact, 3 NO contacts
Actuators	EMERGENCY STOP pushbutton	Pushbutton
Actuator colour	red	green, red
Illumination module colour		
Illuminated button actuator colour		
Cable entries		
Drill holes side B	1 x M25	1 x M25
Cable gland	1460070000 - VG M25 EXE MS	1460070000 - VG M25 EXE MS
Clamping range min. / max.	10 mm / 18 mm	10 mm / 18 mm
Approval and Marking		
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-31	IEC 60079-0, IEC 60079-7, IEC 60079-31
Certificate No. (IECEX)	IECEXITA14.0013X	IECEXITA14.0013X
Certificate No. (ATEX)	TUEV14ATEX7606X	TUEV14ATEX7606X
Certificate no. Terminal Box (INMETRO)	LMP 21.0019X	LMP 21.0019X
Marking	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Note

Ordering data

Type	Qty.	Order No.
KLIPPON CS STB 2.1-2	1	1537320000

Type	Qty.	Order No.
KLIPPON CS STB 2.1-6	1	1537330000

Note

*Other temperature classes and connection values on request, or see "Notice to Installer".

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS STB 2.1-7

223 / 150 / 103 mm
Stainless steel 1.4404 (316L)
Mirror polished / Natural
IP54, IP66
-55 °C...+55 °C
4 joules in acc. with IEC60079-0
Silicone (VMQ)
EPDM
Wall mounting
M6 x 10 earthing studs integrated in the lid, stainless steel
M6 earthing studs, stainless steel
M5 hexagonal screw with slot and 10mm distance across flats
2.5 Nm
7.5 Nm
2.5 mm²
250 V
T4, T5, T6
Pushbutton - red
Light module - green
Pushbutton - green
2 NC contact, 2 NO contacts
Pushbutton
red, green
green
1 x M25
1460070000 - VG M25 EXE MS
10 mm / 18 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Type	Qty.	Order No.
KLIPPON CS STB 2.1-7	1	1537340000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS STB 2.1-7

220 / 150 / 119 mm
Stainless steel 1.4404 (316L)
Mirror polished / Natural
IP54, IP66
-55 °C...+55 °C
7 joules in acc. with IEC60079-0
Silicone (VMQ)
EPDM
Wall mounting
M6 x 10 earthing studs integrated in the lid, stainless steel
M6 earthing studs, stainless steel
M5 hexagonal screw with slot and 10mm distance across flats
2.5 Nm
7.5 Nm
2.5 mm²
400 V
T4, T5, T6
Pushbutton - green
Pushbutton - red
EMERGENCY-STOP pushbutton with yellow, contrasting label
2 NO contacts, 2 NC contact, positive opening contacts
Pushbutton, EMERGENCY STOP pushbutton
green, red
2 x M20
1460050000 - VG M20 EXE MS
3 mm / 12 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db

Type	Qty.	Order No.
KLIPPON CS STB 2.1-7	1	1537370000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® Fire Rated Box

High functional integrity thanks to robust industrial enclosures

Fire protection enclosures are often used in tunnel systems. There they ensure that important electrical installations function reliably, even in the event of a fire. This is especially the case when it comes to emergency systems for lighting and ventilation. Fire protection enclosures in the Klippon® Fire Rated Box range are designed to maintain electrical connections for defined periods of 30, 60 or 90 minutes at high temperatures of up to 1,000 °C. The products are configured according to requirements and comply with the most common international standard DIN 4102-12 (E30, E60 and E90). Testing for compliance with additional specific standards can be carried out on request. Fire resistance certificates are valid for specific configurations. Other configurations must be certified separately.

The Klippon® Fire Rated Box is available in variants made of glass fibre-reinforced plastic (Klippon® POK) or sheet steel (Klippon® STB). Both variants are extremely robust, durable and resistant to the extremely harsh environmental conditions of tunnel systems. They are highly corrosion-resistant, protected according to IP66 and impact-resistant up to 10 joules. They are fitted with high-quality ceramic terminals from the Weidmüller portfolio.

Your special advantages:

- Particularly robust and durable industrial enclosures
- Reliable protection of electrical functions in harsh environments
- Permanently available complete solution with high-quality components from the Weidmüller range
- Standard enclosures tested according to the most common standard DIN 4102-12 (E30, E60, E90)
- Available in four individually adaptable variants made of glass fibre-reinforced plastic or sheet steel, with or without fuse inserts
- Additional variations and customised assemblies available on request
- Ceramic terminals available with optional fuse holder

Use our online catalogue to find additional product details, technical information and additional services:

www.weidmueller.com/klipponfireratedbox

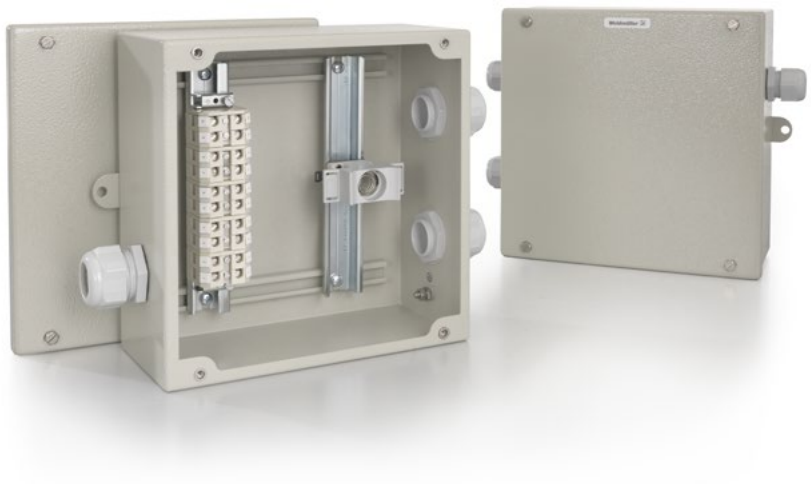

Technical Overview

Technical data

STB	
Enclosure material	Stainless steel 1.4404 (316L) 1.5 mm
Surface finish	powder-coated, pebble grey RAL 7032
IP protection class	IP 66 to DIN EN 60529
Installation mounting	Welded C-profile rail
Enclosure attachment	2 external mounting feet with 8 mm holes
Impact resistance	10J industrial version in accordance with DIN EN 50102
Gasket material	Silicone -60 °C ...+120 °C
Torque screws for cover	2.5 Nm
Temperature range	-20 °C ... +80 °C
Connection	SAKK Series ceramic terminals
Fuse carrier	optional
Switching integrity DIN 4102	max. E90
Conductor cross-section	1.5 - 10 mm²
Note	

Overview of enclosures

Ordering data

Description	Height x width x depth in mm (without cable glands)	functional integrity class* (DIN 4102)	Order No.
KLIPPON STB 4 MS M25 E90	250 x 255 x 120	E90	**8000052519**
KLIPPON STB 4 MS FH M25 E90	250 x 255 x 120	E90	**8000052592**
KLIPPON STB 4 MS M32 E90	250 x 255 x 120	E90	**8000054772**
KLIPPON STB 4 MS FH M32 E90	250 x 255 x 120	E90	**8000054773**

Note: *The enclosures were tested with the cable variants „Dätwyler E 90 5 x 1.5 mm²“ and „EUPEN Eurocase E90 5x10 mm²“.
The cabling was tested horizontally and vertically on the wall and also under the ceiling.
E30-certified for all tested variants
E60-certified for both cable variants
E90-certified for all tested variants without fuse holder; with fuse holder only for cable variant Dätwyler 5 x 1.5

KLIPPON STB 4 MS FH M25 E90

Depth 120 mm

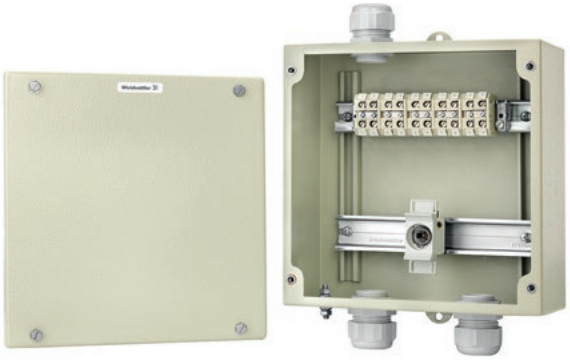

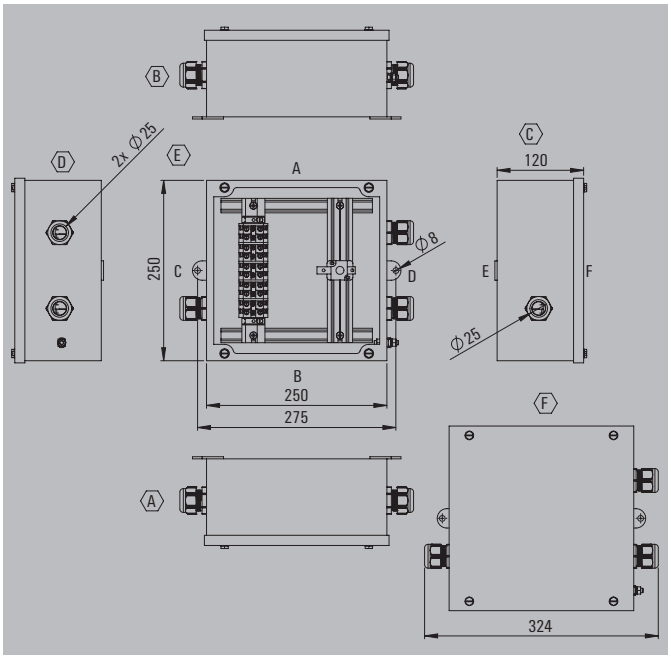

Height / Width / Depth	250 / 250 / 120 mm

Ordering data

	Order No.
KLIPPON STB 4 MS FH M25 E90	8000052592
Note	

Technical data

Article - short description	Klippon STB (Small Terminal Box), Enclosures, Height: 250 mm, Width: 250 mm, Depth: 120 mm, Material: Sheet steel, Powder-coated, Pebble grey
Ambient temperature	-20...80 °C
Protection class	IP66
Fire resistance class according to DIN 4102-12	E90
Standards	DIN 4102-04, DIN 4102-12
Impact resistance	10 J version standard
Assembly	
Fuse holder available	Yes
SAKK 10	10
Drill holes side C	1 x M25
Drill holes side D	2 x M25
Technical data, enclosure	
Material	Sheet steel
Surface finish	Powder-coated
Seal material	Silicone
Lid attachment	M5 hexagonal screw with slot and 10mm distance across flats

Reference products

	Order No.
KLIPPON STB 4 MS HT	1025030000
SFNS5 VKMU M5 SW15	0433500000
TS 32X15 2M/ST/ZN	0122800000
TS 35X15 2M/ST/ZN	0236400000
SAKK 10	9502610000
QL 2 SAKK10	9502650000
KISC M3X20.5/10 EK4	0303000000
AP SAKK4/10 KER/WS	9502630000
VH 12.5 SAKK10	9509510000
MEW 1/32	0445600000
WS 8/8 MM WS	2007170000
VG M25-K67	1909710000
GWDR M25-NP	1736250000
SKMU M25 - K GR	1772470000
Note	

Note

KLIPPON STB 4 MS FH M32 E90

Depth 120 mm

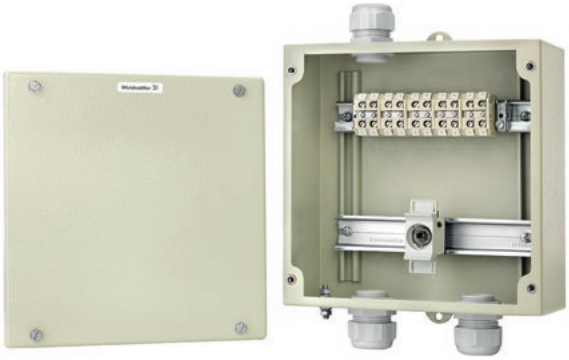

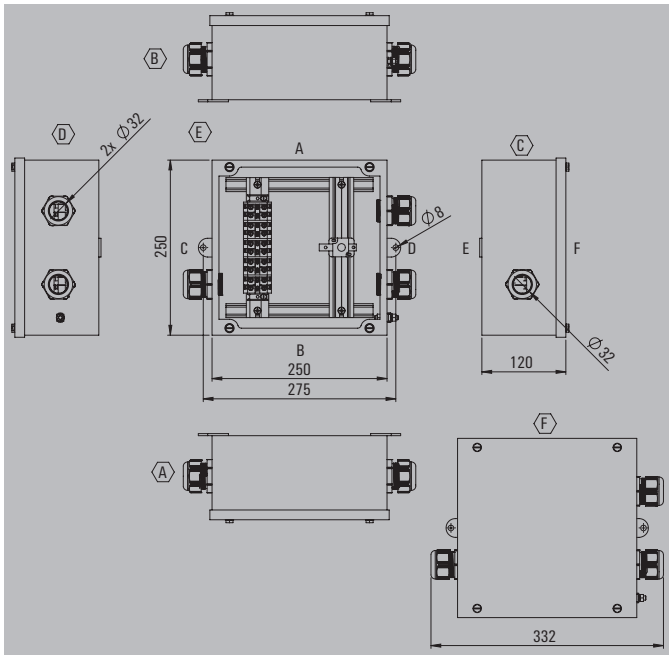

Height / Width / Depth	250 / 250 / 120 mm

Ordering data

		Order No.
	KLIPPON STB 4 MS FH M32 E90	**8000054773**
Note		

Technical data

Article - short description	Klippon STB (Small Terminal Box), Enclosures, Height: 250 mm, Width: 250 mm, Depth: 120 mm, Material: Sheet steel, Powder-coated, Pebble grey
Ambient temperature	-20...80 °C
Protection class	IP66
Fire resistance class according to DIN 4102-12	E90
Standards	DIN 4102-04, DIN 4102-12
Impact resistance	10 J version standard
Assembly	
Fuse holder available	Yes
SAKK 10	10
Drill holes side C	1 x M32
Drill holes side D	2 x M32
Technical data, enclosure	
Material	Sheet steel
Surface finish	Powder-coated
Seal material	Silicone
Lid attachment	M5 hexagonal screw with slot and 10mm distance across flats

Reference products

	Order No.
KLIPPON STB 4 MS HT	**1025030000**
SFNS5 VKMU M5 SW15	**0433500000**
TS 32X15 2M/ST/ZN	**0122800000**
TS 35X15 2M/ST/ZN	**0236400000**
SAKK 10	**9502610000**
QL 2 SAKK10	**9502650000**
KISC M3X20.5/10 EK4	**0303000000**
AP SAKK4/10 KER/WS	**9502630000**
VH 12.5 SAKK10	**9509510000**
MEW 1/32	**0445600000**
WS 8/8 MM WS	**2007170000**
VG M32-K67	**1909720000**
GWDR M32-NP	**1736260000**
SKMU M32 - K GR	**1772480000**
Note	

Note

KLIPPON STB 4 MS M25 E90

Depth 120 mm

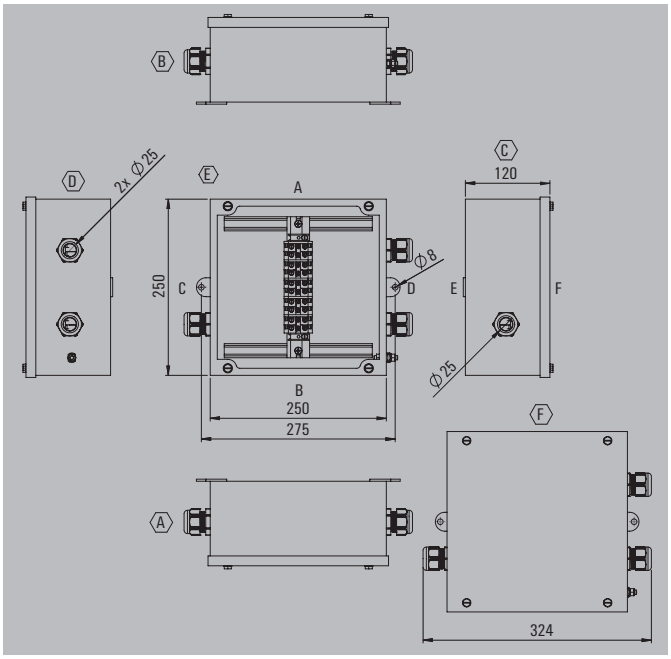

Height / Width / Depth	250 / 250 / 120 mm

Ordering data

	Order No.
KLIPPON STB 4 MS M25 E90	**8000052519**
Note	

Technical data

Article - short description	Klippon STB (Small Terminal Box), Enclosures, Height: 250 mm, Width: 250 mm, Depth: 120 mm, Material: Sheet steel, Powder-coated, Pebble grey
Ambient temperature	-20...80 °C
Protection class	IP66
Fire resistance class according to DIN 4102-12	E90
Standards	DIN 4102-04, DIN 4102-12
Impact resistance	10 J version standard
Assembly	
Fuse holder available	No
SAKK 10	10
Drill holes side C	1 x M25
Drill holes side D	2 x M25
Technical data, enclosure	
Material	Sheet steel
Surface finish	Powder-coated
Seal material	Silicone
Lid attachment	M5 hexagonal screw with slot and 10mm distance across flats

Reference products

	Order No.
KLIPPON STB 4 MS HT	**1025030000**
TS 32X15 2M/ST/ZN	**0122800000**
SAKK 10	**9502610000**
QL 2 SAKK10	**9502650000**
KISC M3X20.5/10 EK4	**0303000000**
AP SAKK4/10 KER/WS	**9502630000**
VH 12.5 SAKK10	**9509510000**
MEW 1/32	**0445600000**
WS 8/8 MM WS	**2007170000**
VG M25-K67	**1909710000**
GWDR M25-NP	**1736250000**
SKMU M25 - K GR	**1772470000**
Note	

Note

KLIPPON STB 4 MS M32 E90

Depth 120 mm

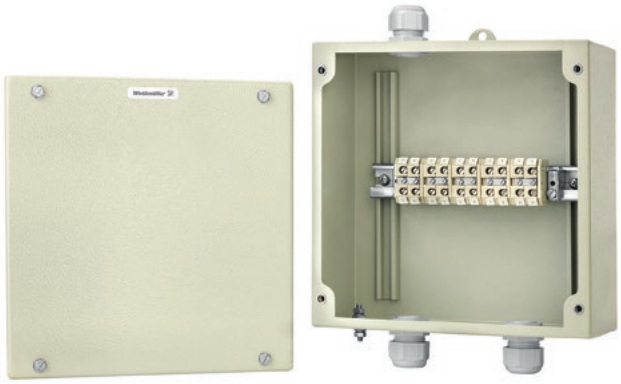

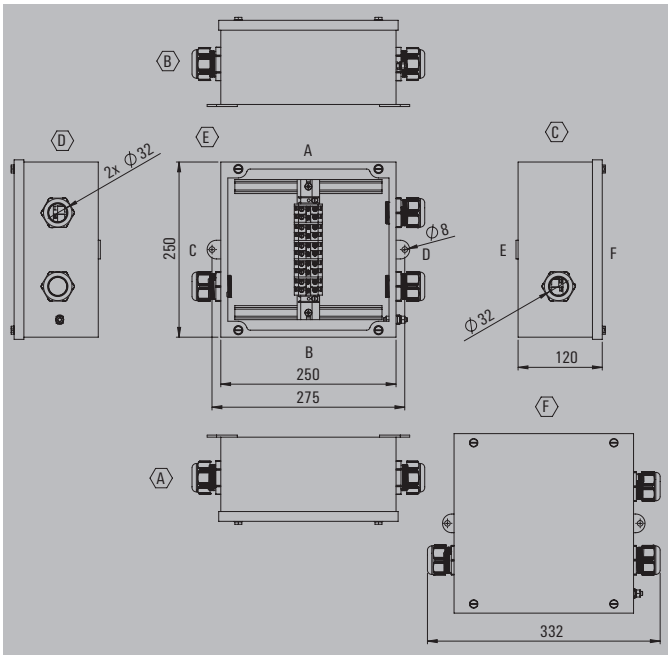

250 / 250 / 120 mm

Ordering data

	Order No.
KLIPPON STB 4 MS M32 E90	**8000054772**

Note

Technical data

Article - short description	Klippon STB (Small Terminal Box), Enclosures, Height: 250 mm, Width: 250 mm, Depth: 120 mm, Material: Sheet steel, Powder-coated, Pebble grey
Ambient temperature	-20...80 °C
Protection class	IP66
Fire resistance class according to DIN 4102-12	E90
Standards	DIN 4102-04, DIN 4102-12
Impact resistance	10 J version standard
Assembly	
Fuse holder available	No
SAKK 10	10
Drill holes side C	1 x M32
Drill holes side D	2 x M32
Technical data, enclosure	
Material	Sheet steel
Surface finish	Powder-coated
Seal material	Silicone
Lid attachment	M5 hexagonal screw with slot and 10mm distance across flats

Reference products

	Order No.
KLIPPON STB 4 MS HT	**1025030000**
TS 32X15 2M/ST/ZN	**0122800000**
SAKK 10	**9502610000**
QL 2 SAKK10	**9502650000**
KISC M3X20.5/10 EK4	**0303000000**
AP SAKK4/10 KER/WS	**9502630000**
VH 12.5 SAKK10	**9509510000**
MEW 1/32	**0445600000**
WS 8/8 MM WS	**2007170000**
VG M32-K67	**1909720000**
GWDR M32-NP	**1736260000**
SKMU M32 - K GR	**1772480000**

Note

Note

Klippon® K – aluminium enclosure

Robust enclosure for industrial applications

The aluminium Klippon® K enclosures are suitable for use in an extremely wide range of different areas. Various components can be installed inside the enclosures, and will benefit in particular from the high temperature resistance, the excellent IP protection and the good impact resistance.

Standardised closure system
The cover is attached using captive TRX slotted screws. The highly functional screw connection with coated stainless steel screws allows for use even in corrosive atmospheres. Working with the enclosures requires just one single tool, as only TRX slotted screws are used.

Earth studs
M6 brass earth studs and M10 stainless steel earth studs are available as accessories. Klippon® K Ex enclosures are fitted with an M4 earth stud as standard, and are available on request.

High IP protection
There are no glued areas on the moulded seal of the enclosure, which helps ensure optimal leak-tightness. The seal guarantees an IP protection of IP66 to IP68 (depending on the use).

Mounting options
The matching terminal rails or mounting plates are available as accessories and can be used to install a wide range of different components inside the enclosure.

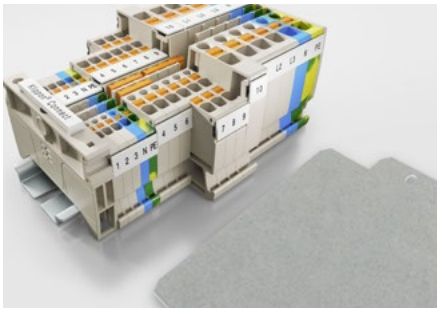

Versatile attachment options
The enclosure can be attached directly using the designated attachment holes. Alternatively, it can be attached from the outside using the assembly feet that are available as accessories.

Ex applications
Klippon® K enclosures with explosion protection for use in explosive risk zones are optionally available.

Customer-specific assembly
Enjoy more flexibility in your project business with Klippon® Services. We combine reliable planning, professional engineering and production in the perfect quality to create your customised product.

Klippon® K – Aluminium enclosures

Klippon® K-Series aluminium enclosures can be used in a variety of applications, e.g. for the assembly of modular terminal blocks, switches, power supplies, operational and display elements or electronic modules.

The extensive Klippon® K enclosure range has the following advantages:
- More flexibility – 19 different sizes
- Available in two surface finishes – powder-coated and natural
- Mounting holes not within the sealed area
- Fastening thread to attach mounting rails and plates
- Closed moulded gasket (no glue seam)

Weidmüller manufactures and supplies the enclosures to match customer specifications – fully fitted with terminals, electronics and cable glands.

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klipponk

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Height x width x depth in mm	Powder-coated (RAL 7001)*			Unpainted		
		Standard		Ex enclosure**	Standard		Ex enclosure**
		CR moulded seal	Silicone moulded seal**	Silicone moulded seal	CR moulded seal	Silicone moulded seal**	Silicone moulded seal
Klippon® K 0	45 x 50 x 30	9529090000	1937920000		0573200000	1939760000	
Klippon® K 01	64 x 58 x 34	9529100000	1937850000		1565240000	1939540000	
Klippon® K 02	64 x 98 x 34	9529110000	1937840000		1565250000	1939550000	
Klippon® K 1	70 x 70 x 45	9529120000	1937630000	1329630000	0342000000	1939560000	9526840000
Klippon® K 11	80 x 75 x 57	9529130000	1937910000	1329640000	0573300000	1939570000	9526850000
Klippon® K 2	70 x 100 x 45	9529140000	1937930000	1329650000	0342100000	1939580000	9526860000
Klippon® K 21	80 x 125 x 57	9529150000	1937830000	1328120000	0573400000	1939590000	9526870000
Klippon® K 3	70 x 165 x 45	9529160000	1937900000	1329670000	0342200000	1939600000	9526880000
Klippon® K 31	80 x 175 x 57	9529170000	1937820000	1329680000	0573500000	1939610000	9526890000
Klippon® K 32	80 x 250 x 55	9529180000	1937810000	1329690000	1565260000	1939620000	9526900000
Klippon® K 4	82 x 130 x 72	9529190000	1937890000	1329700000	0342300000	1939630000	9526910000
Klippon® K 41	120 x 122 x 81	9529200000	1937800000	1329710000	1565270000	1939640000	9526920000
Klippon® K 5	130 x 170 x 90	9529210000	1937860000	1329720000	0342400000	1939650000	9526930000
Klippon® K 51	120 x 220 x 81	9529220000	1937750000	1328130000	1565280000	1939660000	9526940000
Klippon® K 52	160 x 160 x 91	9529230000	1937740000	1329730000	1565290000	1939670000	9526950000
Klippon® K 6	160 x 200 x 100	9529240000	1937870000	1329740000	0342500000	1939690000	9526960000
Klippon® K 61	160 x 260 x 91	9529250000	1937730000	1328140000	0573600000	1939700000	9526970000
Klippon® K 7	160 x 350 x 100	9529260000	1937880000	1329750000	0342600000	1939710000	9526980000
Klippon® K 71	230 x 280 x 111	9529270000	1937720000	1329770000	0573700000	1939730000	9526990000
Note	*Colour variations may occur under certain circumstances, **Delivery time on request, Ex enclosures available on request						

Technical Overview

Features

• Two surfaces: natural and powder-coated
• High IP protection up to IP68
• Moulded silicone gasket for applications with high temperatures
• A uniform TRX-slotted screw head is used for over 19 different enclosure sizes.
• Alloy is resistant to salt water
• Approved according to the latest international standards
Note We deliver enclosures through our assembly service which are ready to be connected and suitable for every application

Technical data

	Ex	Standard
Enclosure material	High quality aluminium alloy (Al-Si12)	High quality aluminium alloy (Al-Si12)
Surface, untreated	Smooth	Smooth
Surface, painted	Silver grey, textured, similar to RAL 7001	Silver grey, textured, similar to RAL 7001
Painting	50-90 µm paint thickness	50-90 µm paint thickness
IP protection class	IP66, IP67 to DIN EN 60529	IP66, IP67 and IP68* to DIN EN 60529
NEMA		4, 4x
Earthing outside	Earthing studs, M4	
Installation mounting	Flexible DIN rail mounting	Flexible DIN rail mounting
Enclosure mounting	Direct mounting with optional mounting brackets (from a size of 120 x 122 x 81 Klippon® K 41)	Direct mounting with optional mounting brackets (from a size of 120 x 122 x 81 Klippon® K 41)
Lid fixing	Captive stainless steel TRX 20 or slotted screws.	Captive stainless steel TRX 20 or slotted screws.
Impact resistance	7J to IEC 60079-0	IK 09 (10J) to DIN EN 50102
Gasket material	Silicone (VMQ)	Chloroprene / Silicone (VMQ)
Temperature range	-60 °C...+135 °C	-40 °C...+80 °C with chloroprene gasket / -60 °C...+135 °C with silicone gasket
Lid screws, torque**	2.5 Nm	2.5 Nm
Note	* (t=72h; h=1m) ** To secure the lid we recommend the use of our TRX T20 Screwdriver (2749520000) Depending on the screw head size, our slotted screwdriver may also be used as an alternative, Ex enclosures available on request	

Approvals for empty enclosures

	Ex	Standard
ATEX certificate	IBExU12ATEX1144 U	
ATEX marking	II 2G Ex e IIC Gb or II 2G Ex eb IIC II 2D Ex t IIIC Db or II 2D Ex tb IIIC	
IECEx certificate	IECEx IBE 13.0001U	
IECEx marking	Ex e IIC Gb or Ex eb IIC Ex tb IIIC Db or Ex tb IIIC	
cULus	cULus E197061 (Ord. Loc.)	E197061
INMETRO	LMP 23.0526U	
DNV	TAE00002SM	TAE00002SM
Installation	The Klippon® K enclosure range can be pre-fitted in our customer specific production department according to your wishes.	
Note	This enclosure range is component certified. If other electrical components are inserted into the case, additional certification is required.	

Approvals for control and distribution box

	Ex		
ATEX certificate	IBExU12ATEX1145 X	INMETRO certificate	LMP 23.0527X
ATEX marking	II 2G Ex e IIC T6...T4 Gb or II 2G Ex eb IIC T6...T4 II 2G Ex ia IIC T6...T4 Gb or II 2 Ex ia IIC T6...T4 II 2(1)G Ex e ia IIC T6...T4 Gb or II 2(1)G Ex eb ia IIC T6...T4 II 2D Ex t IIIC T85°C...135°C Db or II 2 D Ex tb IIIC T85°C...135°C	INMETRO marking	Ex eb IIC T6...T4 Gb IP66 Ex ia IIC T6...T4 Gb IP66 Ex eb ia IIC T6...T4 Gb IP66 Ex tb IIIC T85 °C...T135 °C Db IP66
IECEx certificate	IECEx IBE 13.0002X	CCCx certificate	2020322303000040
IECEx marking	Ex e IIC T6...T4 Gb or Ex eb IIC T6...T4 Ex ia IIC T6...T4 Gb Ex e ia IIC T6...T4 Gb Ex tb IIIC T85°C...135°C Db or Ex tb IIIC T85°C...135°C	CCCx marking	Ex e IIC T4/T5/T6 Gb Ex ia IIC T4/T5/T6 Ga Ex e ia IIC T4/T5/T6 Gb Ex tD A21 IP66 T80°C/T95°C/T130°C
Note	If you have specific requirements for equipment operating in explosive hazard areas, please contact us at Weidmüller to receive a full copy of the certification. For details of power dissipation, please contact your Weidmüller representative.		

Klippon® K 0

Depth 30 mm

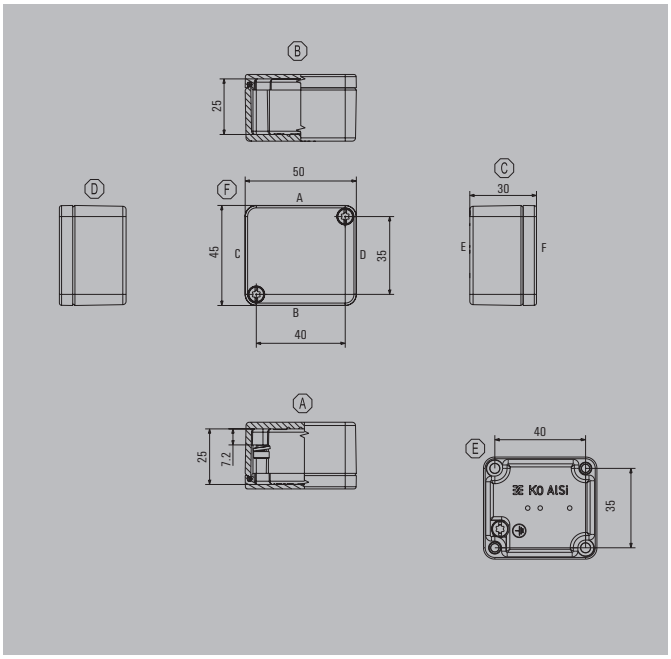

Height / Width / Depth	45 / 50 / 30 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	**9529090000**
Standard (silicone seal)*	**1937920000**
unpainted	
Standard (CR seal)	**0573200000**
Standard (silicone seal)*	**1939760000**

Note The colours of painted enclosures may vary under certain circumstances. *Delivery time on request

Accessories

TRX screw driver	Order No.
not insulated, TRX T20	**2749520000**
Pressure compensation elements	
Polyamide 6, M12	**1868570000**
Stainless steel 1.4305, M12	**1868550000**

Note Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x1*	1x1*
4 mm²	1x1*	1x1*
6 mm²		
10 mm²		
16 mm²		

Note *Please refer to the Terminal Block catalogue or the SAK Series for more information about assembling the enclosures with terminal blocks. There are no prescribed possible attachment points in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	1	1
M16	1	1
M20		
M25		
M32		
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Klippon® K 01

Depth 34 mm

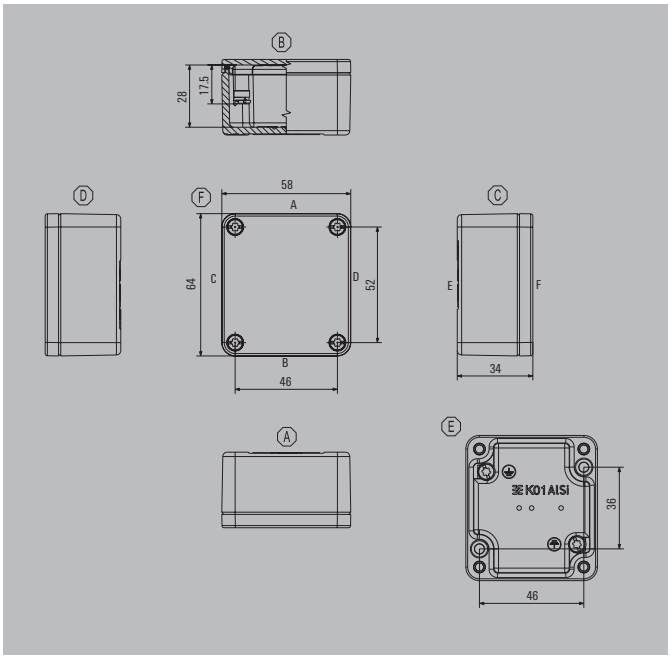

Height / Width / Depth	64 / 58 / 34 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	**9529100000**
Standard (silicone seal)*	**1937850000**
unpainted	
Standard (CR seal)	**1565240000**
Standard (silicone seal)*	**1939540000**

Note The colours of painted enclosures may vary under certain circumstances. *Delivery time on request

Accessories

TRX screw driver	Order No.
not insulated, TRX T20	**2749520000**
Pressure compensation elements	
Polyamide 6, M12	**1868570000**
Stainless steel 1.4305, M12	**1868550000**

Note Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x1*	1x1*
4 mm²	1x1*	1x1*
6 mm²		
10 mm²		
16 mm²		

Note *Please refer to the Terminal Block catalogue or the SAK Series for more information about assembling the enclosures with terminal blocks. There are no prescribed possible attachment points in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	1	1
M16	1	1
M20		
M25		
M32		
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Klippon® K 02

Depth 34 mm

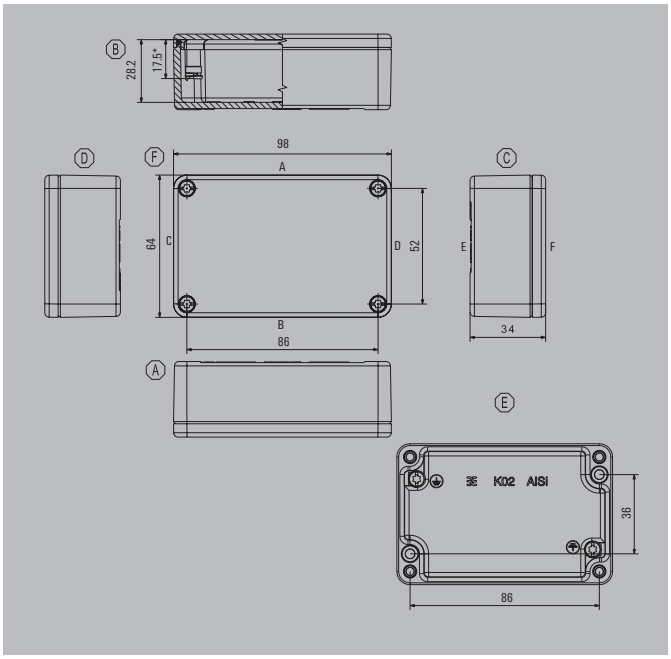

Height / Width / Depth	64 / 98 / 34 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	**9529110000**
Standard (silicone seal)*	**1937840000**
unpainted	
Standard (CR seal)	**1565250000**
Standard (silicone seal)*	**1939550000**

Note The colours of painted enclosures may vary under certain circumstances. *Delivery time on request

Accessories

TRX screw driver	Order No.
not insulated, TRX T20	**2749520000**
Pressure compensation elements	
Polyamide 6, M12	**1868570000**
Stainless steel 1.4305, M12	**1868550000**

Note Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	1x1*	1x1*
	4 mm²	1x1*	1x1*
	6 mm²		
	10 mm²		
	16 mm²		

Note *Please refer to the Terminal Block catalogue or the SAK Series for more information about assembling the enclosures with terminal blocks. There are no prescribed possible attachment points in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	3	1
M16	3	1
M20	2	
M25		
M32		
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Klippon® K 1

Depth 45 mm

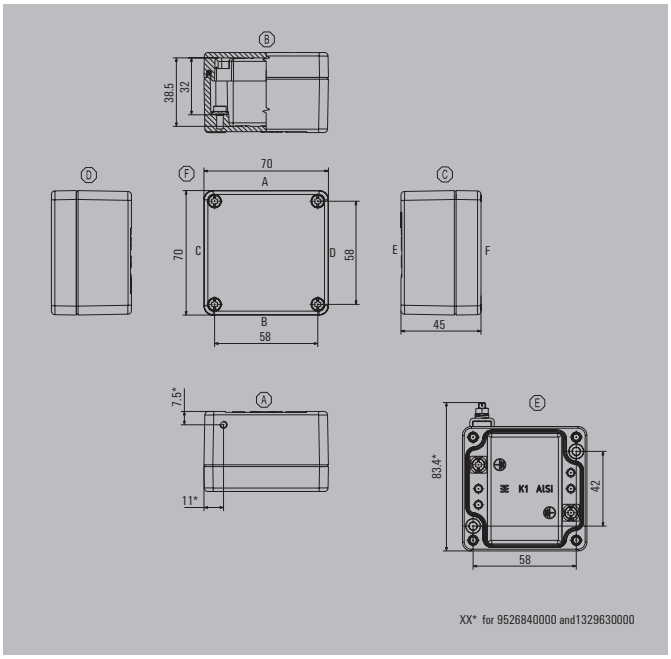

XX* for 9526840000 and1329630000

Height / Width / Depth	70 / 70 / 45 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	**9529120000**
Standard (silicone seal)*	**1937630000**
unpainted	
Standard (CR seal)	**0342000000**
Standard (silicone seal)*	**1939560000**

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Mounting plate	
Steel sheet, zinc plated	**1905280000**
TRX screw driver	
not insulated, TRX T20	**2749520000**
Earthing stud	
Brass, M6	**1277250000**
Stainless steel 1.4404, M6	**1283430000**
Pressure compensation elements	
Polyamide 6, M12	**1868570000**
Stainless steel 1.4305, M12	**1868550000**

Note The accessory sets contain the necessary mounting materials. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x1*	1x5
4 mm²	1x1*	1x1*
6 mm²		
10 mm²		
16 mm²		

Note *Please refer to the Terminal Block Catalogue or the SAK Series for more information about populating the enclosures with terminal blocks. For vertical installations, we recommend using not more than one BK 4 or BK 4 CRN (0625120000). For horizontal installations with 2.5mm² 1x5 AKZ terminal blocks (only possible on a TS 15) for 4mm², use not more than one BK 4. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	2	1
M16	2	1
M20	1	
M25		
M32		
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

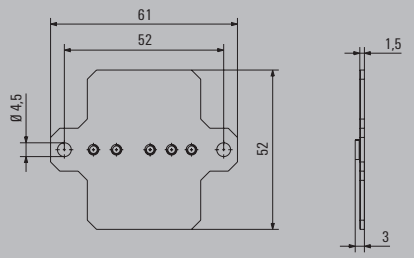

Klippon® K 11

Depth 57 mm

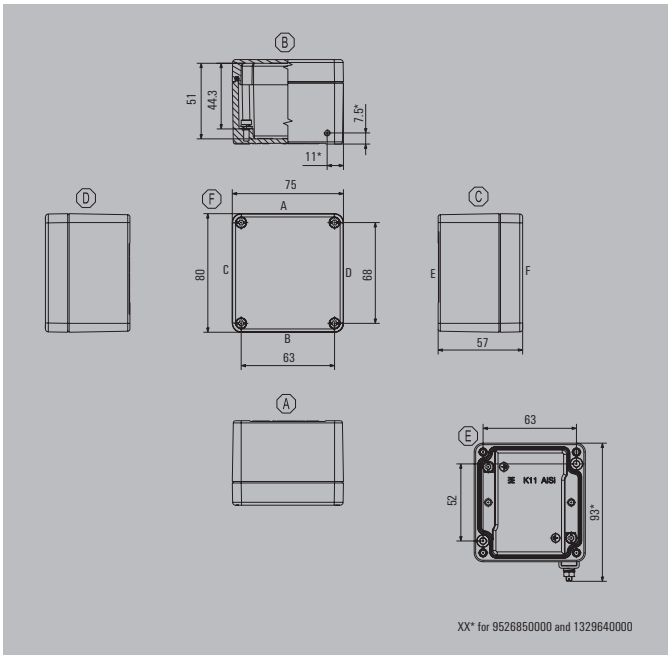

Height / Width / Depth	80 / 75 / 57 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	**9529130000**
Standard (silicone seal)*	**1937910000**
unpainted	
Standard (CR seal)	**0573300000**
Standard (silicone seal)*	**1939570000**

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
15 mm width	**1909990000**
Mounting plate	
Steel sheet, zinc plated	**3073000000**
Hinge, diecast zinc, Set	
	1580360000
TRX screw driver	
not insulated, TRX T20	**2749520000**
Earthing stud	
Brass, M6	**1277250000**
Stainless steel 1.4404, M6	**1283430000**
Pressure compensation elements	
Polyamide 6, M12	**1868570000**
Stainless steel 1.4305, M12	**1868550000**

Note The accessory sets contain the necessary mounting materials. Necessary on use of 1 hinge per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x1*	1x5
4 mm²	1x1*	1x4
6 mm²		
10 mm²		
16 mm²		

Note *Please refer to the Terminal Block Catalogue or the SAK Series for more information about populating the enclosures with terminal blocks. We recommend at most one BK 6 or BK 6 CRN (0625220000) in vertical installations. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	2	2
M16	2	2
M20	1	1
M25	1	
M32		
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate



Klippon® K 2

Depth 45 mm

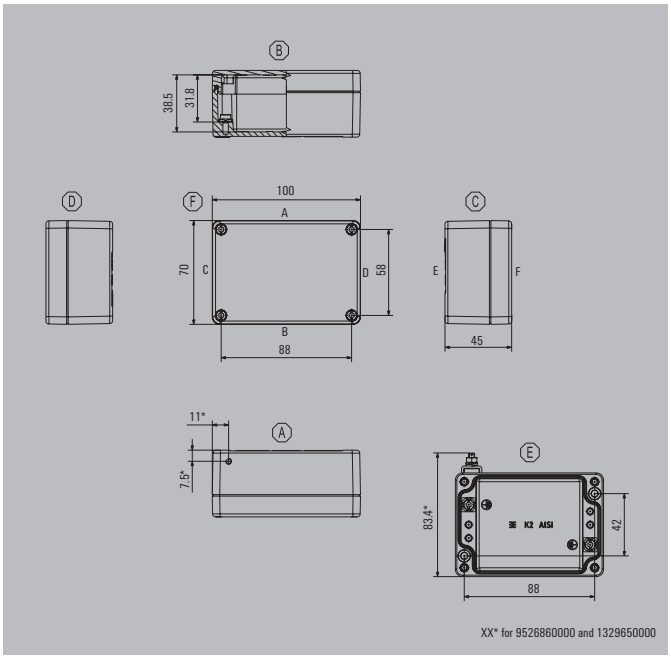

XX* for 9526860000 and 1329650000

Height / Width / Depth	70 / 100 / 45 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	9529140000
Standard (silicone seal)*	1937930000
unpainted	
Standard (CR seal)	0342100000
Standard (silicone seal)*	1939580000

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
15 mm width	1910010000
Mounting plate	
Steel sheet, zinc plated	1905270000
TRX screw driver	
not insulated, TRX T20	2749520000
Earthing stud	
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000

Note The accessory sets contain the necessary mounting materials. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x10
4 mm²	*	
6 mm²		
10 mm²		
16 mm²		

Note *Please refer to the Terminal Block Catalogue or the SAK Series for more information about populating the enclosures with terminal blocks. We recommend at most one BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	3	1
M16	3	1
M20	2	
M25		
M32		
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

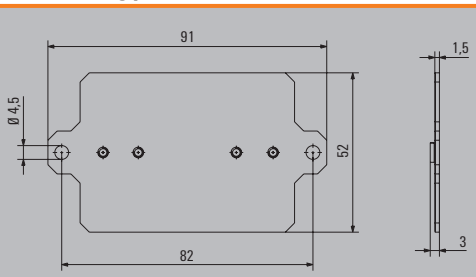

Klippon® K 21

Depth 57 mm

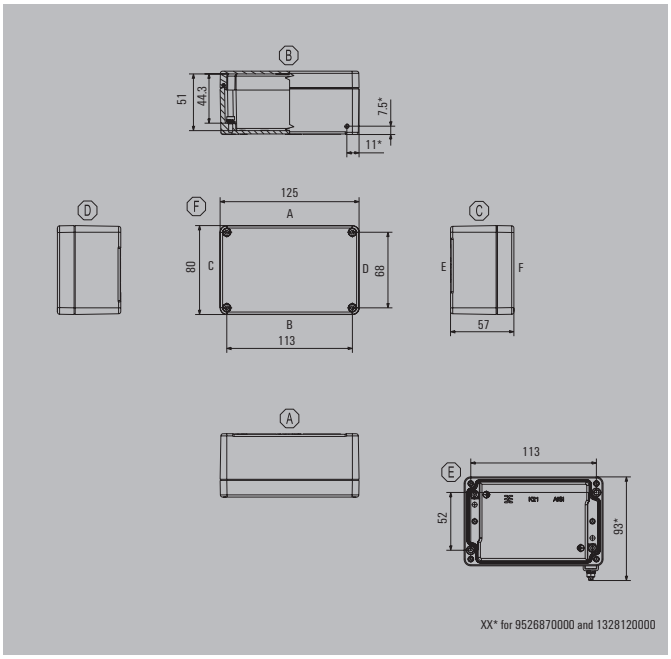

Height / Width / Depth	80 / 125 / 57 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	9529150000
Standard (silicone seal)*	1937830000
unpainted	
Standard (CR seal)	0573400000
Standard (silicone seal)*	1939590000

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
15 mm width	1910020000
Mounting plate	
Steel sheet, zinc plated	3073020000
Hinge, diecast zinc, Set	
	1580360000
TRX screw driver	
not insulated, TRX T20	2749520000
Earthing stud	
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Stainless steel 1.4305, M12	1868550000
Polyamide 6, M12	1868570000

Note The accessory sets contain the necessary mounting materials. Necessary on use of 1 hinge per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x15
4 mm²	*	1x12
6 mm²		
10 mm²		
16 mm²		

Note *Please refer to the Terminal Block Catalogue or the SAK Series for more information about populating the enclosures with terminal blocks. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	6	2
M16	4	2
M20	3	1
M25	2	
M32		
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

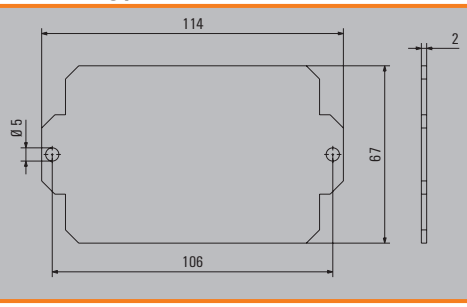

Klippon® K 3

Depth 45 mm

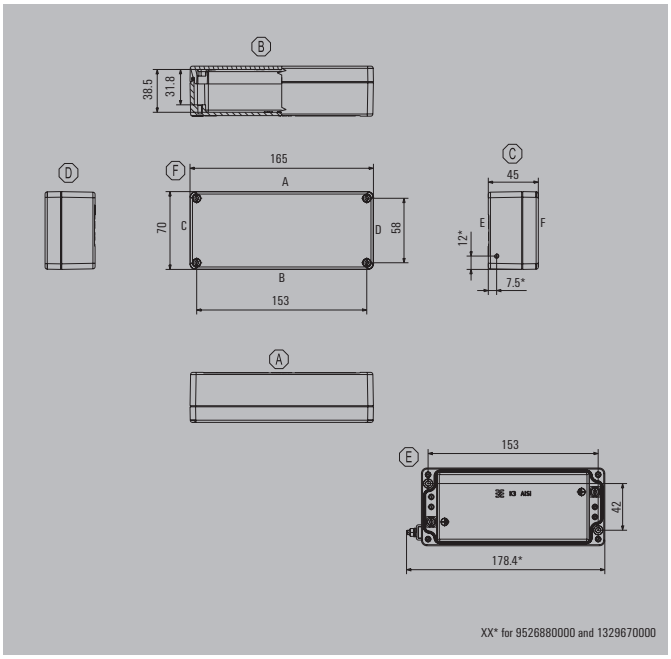

XX* for 9526880000 and 1329670000

Height / Width / Depth	70 / 165 / 45 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	**9529160000**
Standard (silicone seal)*	**1937900000**
unpainted	
Standard (CR seal)	**0342200000**
Standard (silicone seal)*	**1939600000**

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
15 mm width	**1910030000**
Mounting plate	
Steel sheet, zinc plated	**1898210000**
TRX screw driver	
not insulated, TRX T20	**2749520000**
Earthing stud	
Brass, M6	**1277250000**
Stainless steel 1.4404, M6	**1283430000**
Pressure compensation elements	
Stainless steel 1.4305, M12	**1868550000**
Polyamide 6, M12	**1868570000**

Note The accessory sets contain the necessary mounting materials. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x22
4 mm²	*	
6 mm²		
10 mm²		
16 mm²		

Note *Please refer to the Terminal Block Catalogue or the SAK Series for more information about populating the enclosures with terminal blocks. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	6	1
M16	5	1
M20	4	
M25		
M32		
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

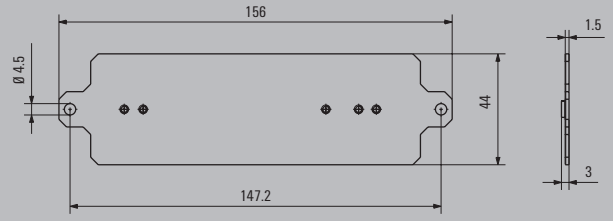

Klippon® K 31

Depth 57 mm

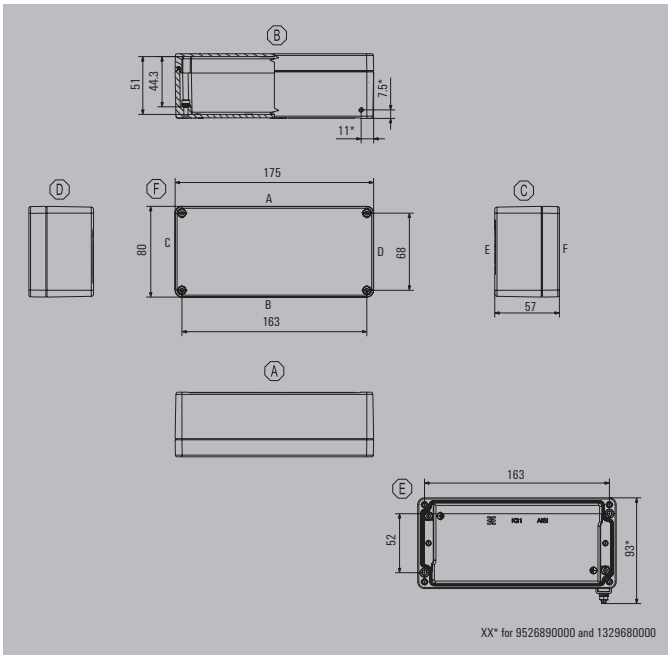

Height / Width / Depth	80 / 175 / 57 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	**9529170000**
Standard (silicone seal)*	**1937820000**
unpainted	
Standard (CR seal)	**0573500000**
Standard (silicone seal)*	**1939610000**

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
15 mm width	**1910040000**
Mounting plate	
Steel sheet, zinc plated	**3073040000**
Hinge, diecast zinc, Set	
	1580360000
TRX screw driver	
not insulated, TRX T20	**2749520000**
Earthing stud	
Brass, M6	**1277250000**
Stainless steel 1.4404, M6	**1283430000**
Pressure compensation elements	
Stainless steel 1.4305, M12	**1868550000**
Polyamide 6, M12	**1868570000**

Note The accessory sets contain the necessary mounting materials. Necessary on use of 1 hinge per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)

Assembly with terminal		vertical	horizontal
	2.5 mm²	*	1x23
	4 mm²	*	1x19
	6 mm²		
	10 mm²		
	16 mm²		

Note *Please refer to the Terminal Block Catalogue or the SAK Series for more information about populating the enclosures with terminal blocks. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries		A / B	C / D
	M12	9	2
	M16	6	2
	M20	4	1
	M25	3	
	M32		
	M40		
	M50		
	M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

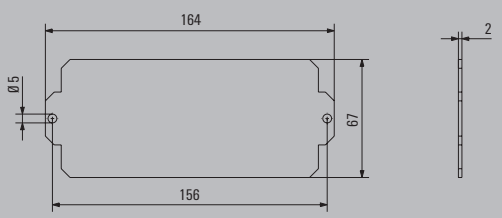

Klippon® K 32

Depth 55 mm

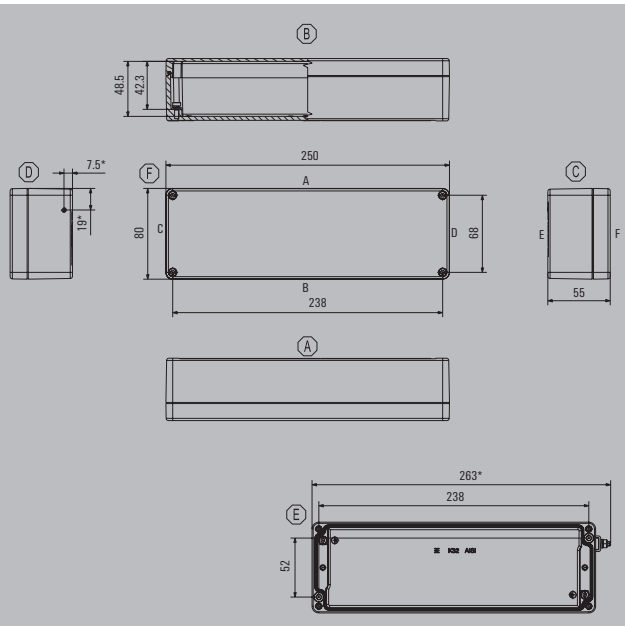

Height / Width / Depth	80 / 250 / 55 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	9529180000
Standard (silicone seal)*	1937810000
unpainted	
Standard (CR seal)	1565260000
Standard (silicone seal)*	1939620000

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Mounting plate	Order No.
Steel sheet, zinc plated	3073050000
TRX screw driver	
not insulated, TRX T20	2749520000
Earthing stud	
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Stainless steel 1.4305, M12	1868550000
Polyamide 6, M12	1868570000

Note The accessory sets contain the necessary mounting materials. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	*	1x38
	4 mm²	*	1x32
	6 mm²		
	10 mm²		
	16 mm²		

Note *Please refer to the Terminal Block Catalogue or the SAK Series for more information about populating the enclosures with terminal blocks. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	15	2
M16	9	2
M20	7	1
M25	6	
M32		
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

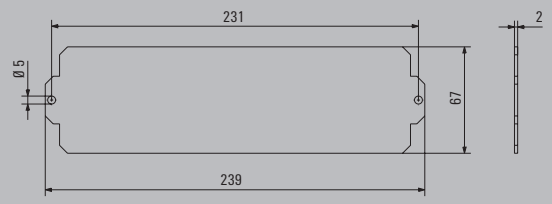

Klippon® K 4

Depth 72 mm

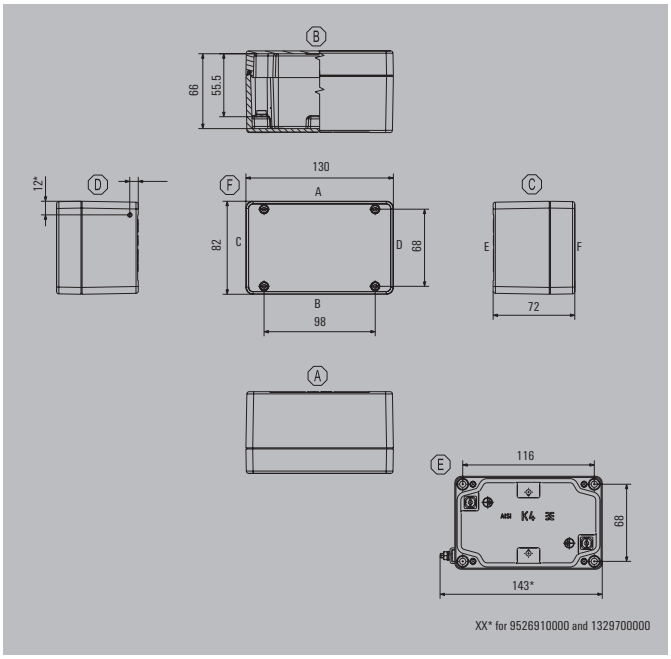

Height / Width / Depth	82 / 130 / 72 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	9529190000
Standard (silicone seal)*	1937890000
unpainted	
Standard (CR seal)	0342300000
Standard (silicone seal)*	1939630000

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
35 mm width	1910060000
Mounting plate	
Steel sheet, zinc plated	3073060000
Hinge, diecast zinc, Set	
	1580360000
TRX screw driver	
not insulated, TRX T20	2749520000
Earthing stud	
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Pressure compensation elements	
Stainless steel 1.4305, M12	1868550000
Polyamide 6, M12	1868570000

Note Sets also contain the mounting material, if necessary. 1 hinge per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x5	*
4 mm²	1x4	*
6 mm²	1x3	
10 mm²	1x2	
16 mm²		

Note The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Ordering recommendations:
TS 35 mounting rail (screw-type terminals) WDU 2.5 1020000000 / (tension clamp terminals) ZDU 2.5 1608510000
*For fitting the enclosures with terminal blocks, please refer to the Terminal block catalogue or the SAK series. We recommend BK 6 or BK 6 CRN (0625220000) for horizontal installations. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a horizontal position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	5	2
M16	3	2
M20	2	1
M25	2	1
M32		1
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

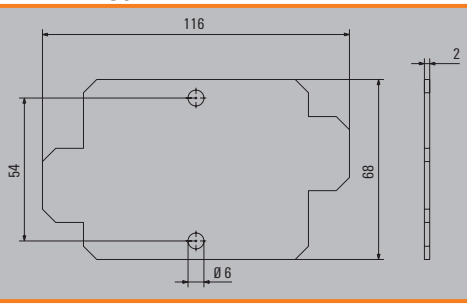

Klippon® K 41

Depth 81 mm

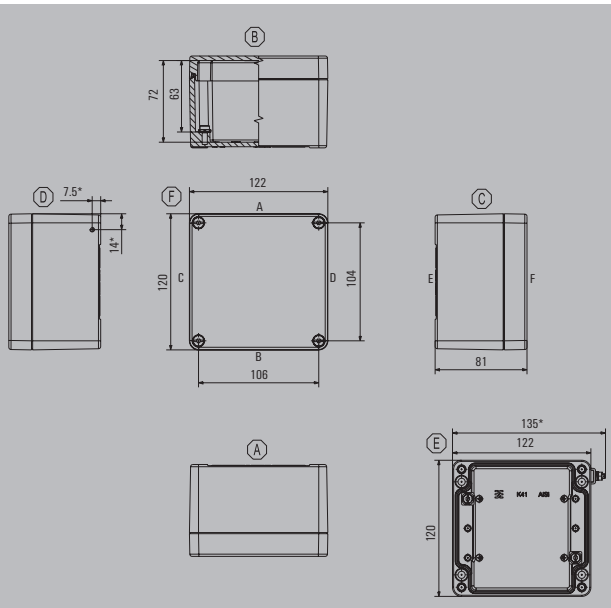

Height / Width / Depth	120 / 122 / 81 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	9529200000
Standard (silicone seal)*	1937800000
unpainted	
Standard (CR seal)	1565270000
Standard (silicone seal)*	1939640000

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
35 mm width	1910070000
Mounting plate	
Steel sheet, zinc plated	3073070000
Hinge, diecast zinc, Set	
	1580360000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9527590000
TRX screw driver	
not insulated, TRX T20	2749520000
Earthing stud	
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Pressure compensation elements	
Stainless steel 1.4305, M12	1868550000
Polyamide 6, M12	1868570000

Note The accessory sets contain the necessary mounting materials. Necessary on use of 1 hinge per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x13
4 mm²	*	1x11
6 mm²		1x8
10 mm²		1x6
16 mm²		

Note *Please refer to the Terminal Block Catalogue or the SAK Series for more information about populating the enclosures with terminal blocks. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no specified mounting options available for mounting the enclosure in a vertical position. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	6	4
M16	6	4
M20	3	2
M25	2	1
M32	1	1
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

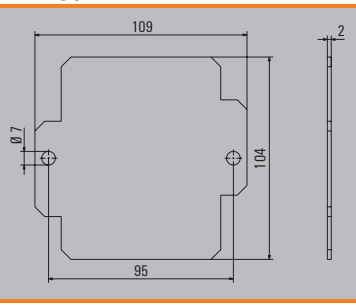

Klippon® K 5

Depth 90 mm

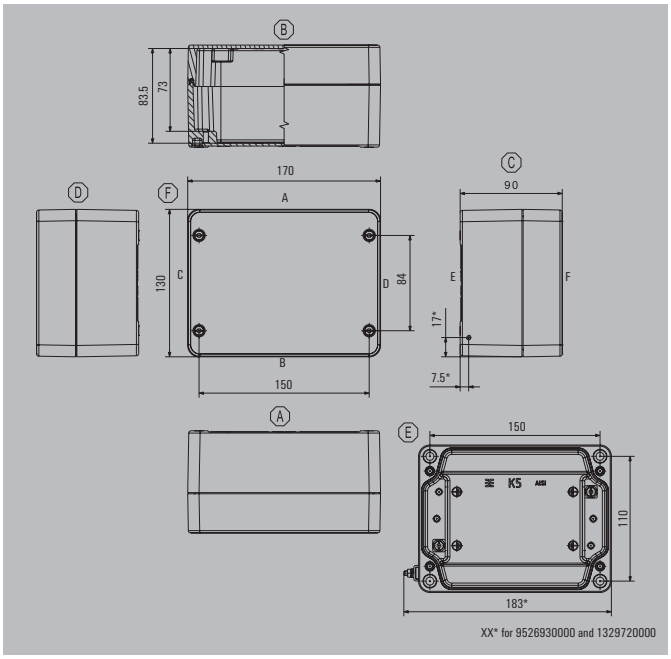

Height / Width / Depth	130 / 170 / 90 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	**9529210000**
Standard (silicone seal)*	**1937860000**
unpainted	
Standard (CR seal)	**0342400000**
Standard (silicone seal)*	**1939650000**

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
35 mm width	**1910080000**
Mounting plate	
Steel sheet, zinc plated	**3073080000**
Hinge, diecast zinc, Set	
	1580360000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	**9529080000**
TRX screw driver	
not insulated, TRX T20	**2749520000**
Earthing stud	
Brass, M6	**1277250000**
Stainless steel 1.4404, M6	**1283430000**
Brass, M10	**1277220000**
Stainless steel 1.4404, M10	**1283440000**
Pressure compensation elements	
Stainless steel 1.4305, M12	**1868550000**
Polyamide 6, M12	**1868570000**

Note The accessory sets contain the necessary mounting materials. Necessary on use of 1 hinge per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x20
4 mm²	*	1x17
6 mm²		1x12
10 mm²		1x10
16 mm²		1x8

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
Ordering information for the terminal blocks, please refer to the online catalogue.
*For fitting the enclosures with terminal blocks, please refer to the Terminal block catalogue or the SAK series. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no specified mounting options available for mounting the enclosure in a vertical position. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	11	4
M16	8	2
M20	4	1
M25	3	1
M32	2	1
M40		
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

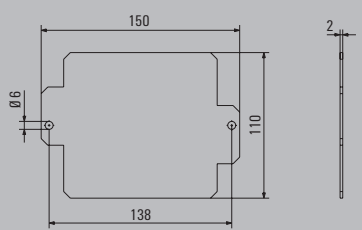

Klippon® K 51

Depth 81 mm

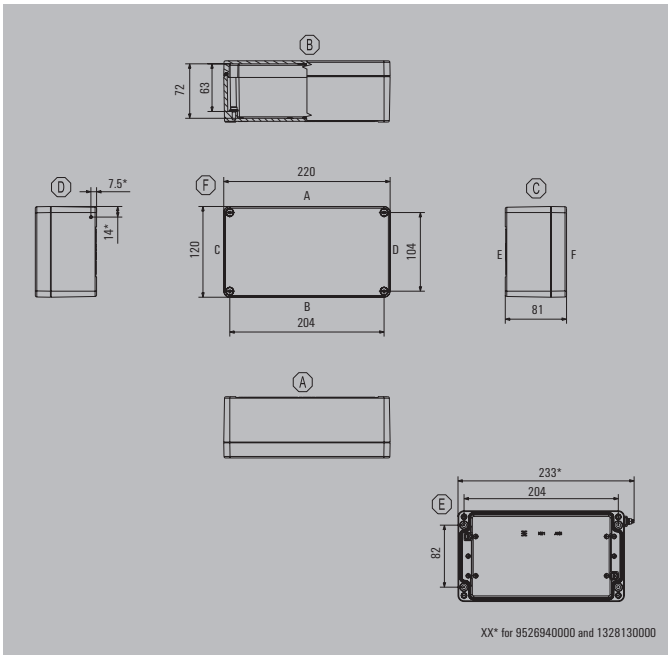

Height / Width / Depth	120 / 220 / 81 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	9529220000
Standard (silicone seal)*	1937750000
unpainted	
Standard (CR seal)	1565280000
Standard (silicone seal)*	1939660000

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
35 mm width	1910090000
Mounting plate	
Steel sheet, zinc plated	3073090000
Hinge, diecast zinc, Set	
	1580360000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9527590000
TRX screw driver	
not insulated, TRX T20	2749520000
Earthing stud	
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Pressure compensation elements	
Stainless steel 1.4305, M12	1868550000
Polyamide 6, M12	1868570000

Note The accessory sets contain the necessary mounting materials. Necessary on use of 2 hinges per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x31
4 mm²	*	1x26
6 mm²		1x19
10 mm²		1x16
16 mm²		

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
Ordering information for the terminal blocks, please refer to the online catalogue.
*For fitting the enclosures with terminal blocks, please refer to the Terminal block catalogue or the SAK series. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no specified mounting options available for mounting the enclosure in a vertical position. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	23	6
M16	14	3
M20	8	2
M25	5	1
M32	3	1
M40	3	
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

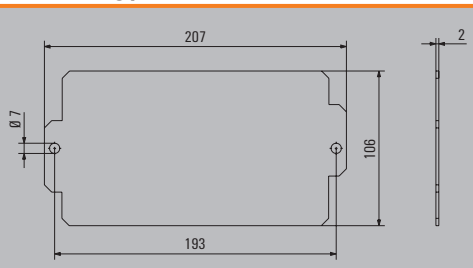

Klippon® K 52

Depth 91 mm

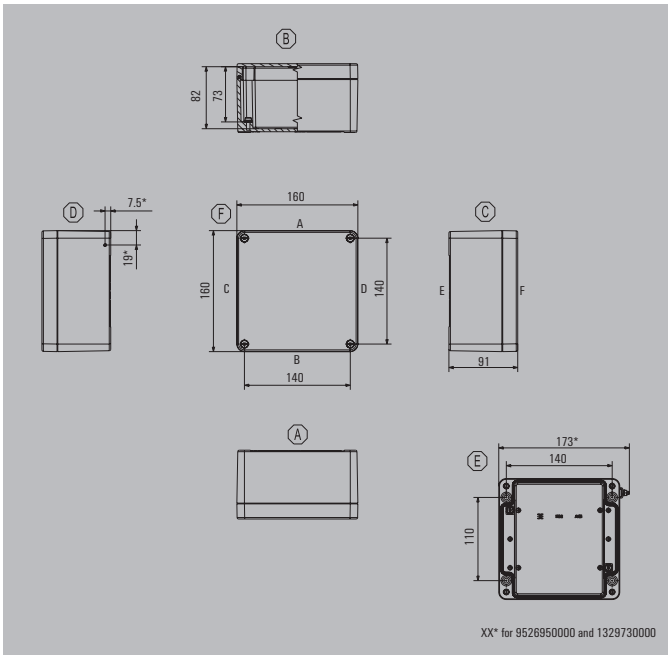

Height / Width / Depth	160 / 160 / 91 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	**9529230000**
Standard (silicone seal)*	**1937740000**
unpainted	
Standard (CR seal)	**1565290000**
Standard (silicone seal)*	**1939670000**

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
35 mm width	**1910100000**
Mounting plate	
Steel sheet, zinc plated	**3073100000**
Hinge, diecast zinc, Set	
	1580360000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	**9527590000**
TRX screw driver	
not insulated, TRX T20	**2749520000**
Earthing stud	
Brass, M6	**1277250000**
Stainless steel 1.4404, M6	**1283430000**
Brass, M10	**1277220000**
Stainless steel 1.4404, M10	**1283440000**
Pressure compensation elements	
Stainless steel 1.4305, M12	**1868550000**
Polyamide 6, M12	**1868570000**

Note The accessory sets contain the necessary mounting materials. Necessary on use of 1 hinge per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x16
4 mm²	*	1x13
6 mm²		1x10
10 mm²		1x8
16 mm²		1x6

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
Ordering information for the terminal blocks, please refer to the online catalogue.
*For fitting the enclosures with terminal blocks, please refer to the Terminal block catalogue or the SAK series. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no specified mounting options available for mounting the enclosure in a vertical position. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	14	8
M16	8	5
M20	5	3
M25	3	2
M32	2	1
M40	1	
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

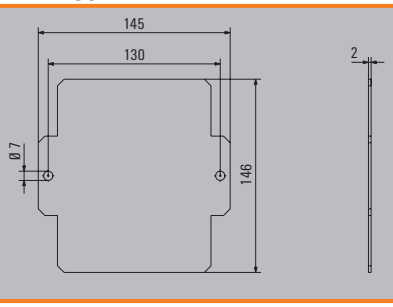

Klippon® K 6

Depth 100 mm

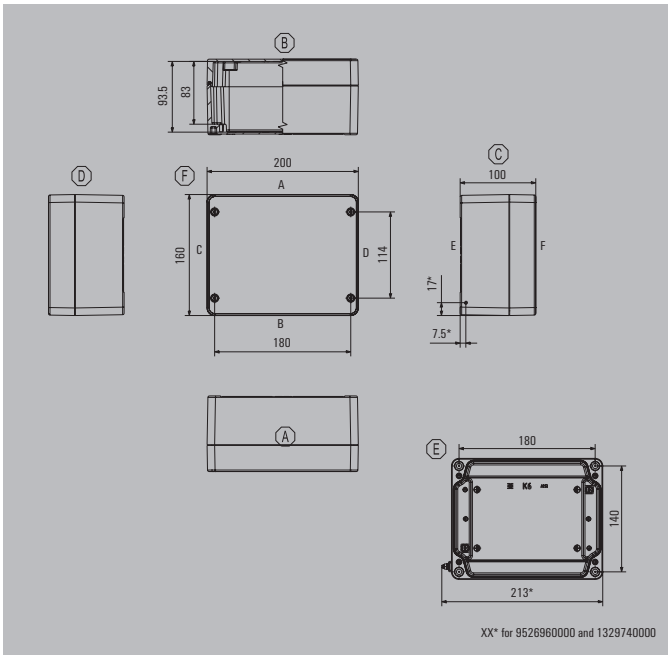

XX* for 9526960000 and 1329740000

Height / Width / Depth	160 / 200 / 100 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	9529240000
Standard (silicone seal)*	1937870000
unpainted	
Standard (CR seal)	0342500000
Standard (silicone seal)*	1939690000

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
35 mm width	1910110000
Mounting plate	
Steel sheet, zinc plated	3073110000
Hinge, diecast zinc, Set	
	1580360000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9529080000
TRX screw driver	
not insulated, TRX T20	2749520000
Earthing stud	
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Pressure compensation elements	
Stainless steel 1.4305, M12	1868550000
Polyamide 6, M12	1868570000

Note The accessory sets contain the necessary mounting materials. Necessary on use of 2 hinges per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	*	1x25
	4 mm²	*	1x21
	6 mm²		1x16
	10 mm²		1x12
	16 mm²		1x10

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
Ordering information for the terminal blocks, please refer to the online catalogue.
*For fitting the enclosures with terminal blocks, please refer to the Terminal block catalogue or the SAK series. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no specified mounting options available for mounting the enclosure in a vertical position. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	17	6
M16	12	6
M20	7	3
M25	4	2
M32	3	2
M40	2	1
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

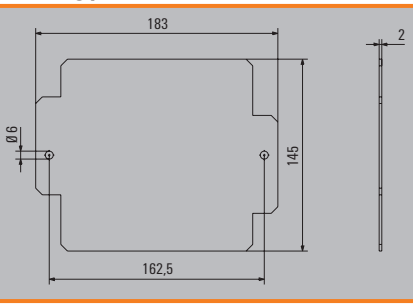

Klippon® K 61

Depth 91 mm

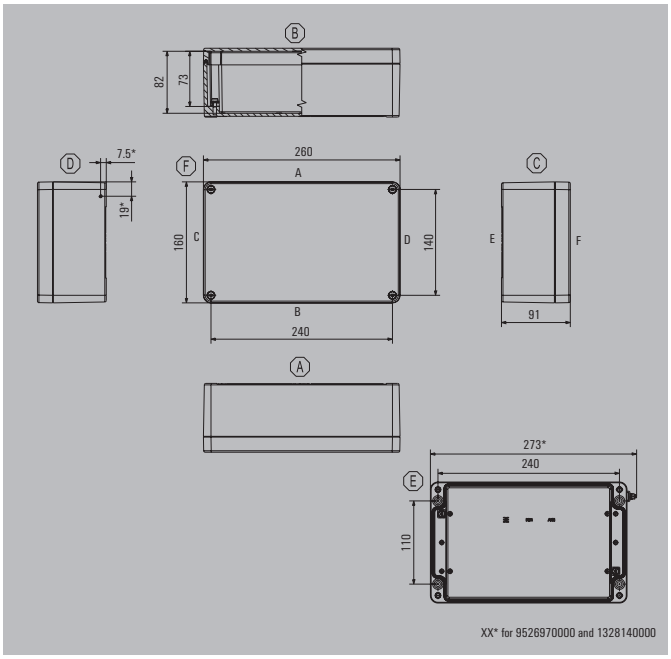

Height / Width / Depth	160 / 260 / 91 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	9529250000
Standard (silicone seal)*	1937730000
unpainted	
Standard (CR seal)	0573600000
Standard (silicone seal)*	1939700000

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
35 mm width	1910120000
Mounting plate	
Steel sheet, zinc plated	3073120000
Hinge, diecast zinc, Set	
	1580360000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9527590000
TRX screw driver	
not insulated, TRX T20	2749520000
Earthing stud	
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Pressure compensation elements	
Stainless steel 1.4305, M12	1868550000
Polyamide 6, M12	1868570000

Note The accessory sets contain the necessary mounting materials. Necessary on use of 2 hinges per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	*	1x39
	4 mm²	*	1x33
	6 mm²		1x24
	10 mm²		1x20
	16 mm²		1x16

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
Ordering information for the terminal blocks, please refer to the online catalogue.
*For fitting the enclosures with terminal blocks, please refer to the Terminal block catalogue or the SAK series. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no specified mounting options available for mounting the enclosure in a vertical position. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	27	8
M16	23	6
M20	13	3
M25	8	2
M32	4	1
M40	3	1
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

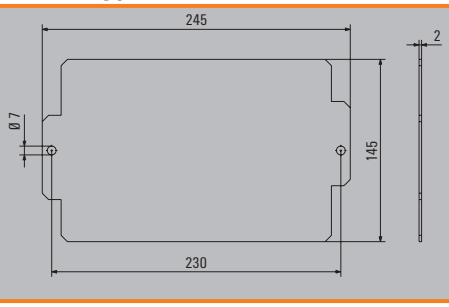

Klippon® K 7

Depth 100 mm

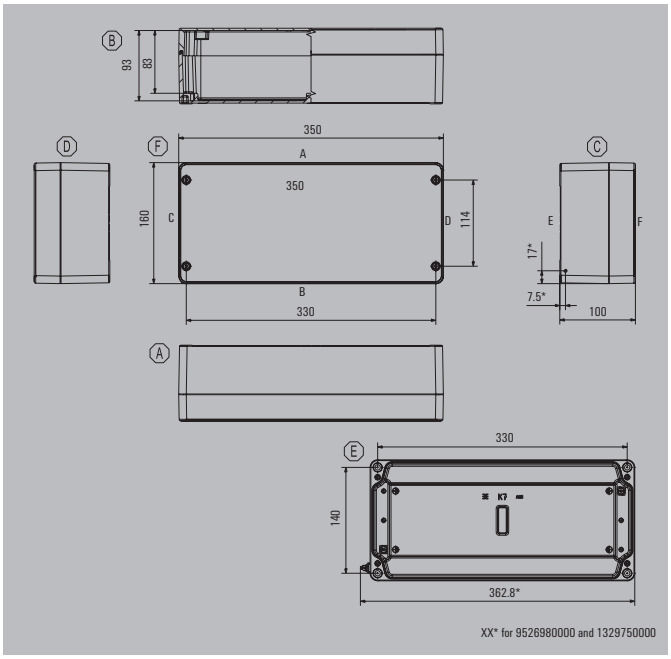

Height / Width / Depth	160 / 350 / 100 mm

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	9529260000
Standard (silicone seal)*	1937880000
unpainted	
Standard (CR seal)	0342600000
Standard (silicone seal)*	1939710000

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
35 mm width	1910130000
Mounting plate	
Steel sheet, zinc plated	3073130000
Hinge, diecast zinc, Set	
	1580360000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9529080000
TRX screw driver	
not insulated, TRX T20	2749520000
Earthing stud	
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Pressure compensation elements	
Stainless steel 1.4305, M12	1868550000
Polyamide 6, M12	1868570000

Note The accessory sets contain the necessary mounting materials. Necessary on use of 2 hinges per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	*	1x55
	4 mm²	*	1x46
	6 mm²		1x34
	10 mm²		1x28
	16 mm²		1x23

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
Ordering information for the terminal blocks, please refer to the online catalogue.
*For fitting the enclosures with terminal blocks, please refer to the Terminal block catalogue or the SAK series. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no specified mounting options available for mounting the enclosure in a vertical position. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	42	8
M16	26	6
M20	17	3
M25	10	2
M32	6	2
M40	5	1
M50		
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

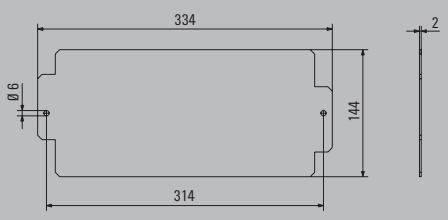

Klippon® K 71

Depth 111 mm

230 / 280 / 111 mm

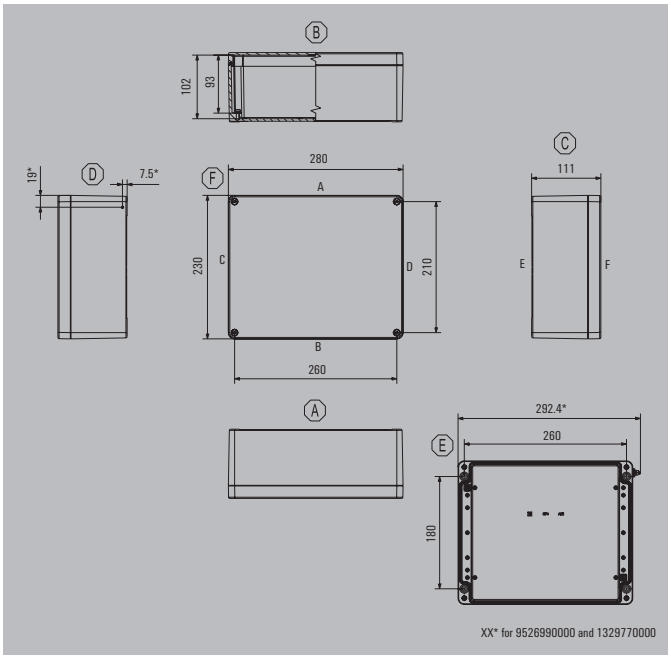

Ordering data

powder-coated (RAL 7001)	Order No.
Standard (CR seal)	9529270000
Standard (silicone seal)*	1937720000
unpainted	
Standard (CR seal)	0573700000
Standard (silicone seal)*	1939730000

Note The colours of painted enclosures may vary under certain circumstances. Ex-enclosures are available on request. *Delivery time on request

Accessories

Terminal rail, Set	Order No.
35 mm width	1910140000
Mounting plate	
Steel sheet, zinc plated	3073140000
Hinge, diecast zinc, Set	
	1580360000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9527590000
TRX screw driver	
not insulated, TRX T20	2749520000
Earthing stud	
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Pressure compensation elements	
Stainless steel 1.4305, M12	1868550000
Polyamide 6, M12	1868570000

Note The accessory sets contain the necessary mounting materials. Necessary on use of 2 hinges per longitudinal side. Helicoil for outdoor applications, available ex-works.

Guide value for max. number of terminals (industry)



Assembly with terminal		vertical	horizontal
	2.5 mm²	*	2x43
	4 mm²	*	2x36
	6 mm²		2x26
	10 mm²		2x21
	16 mm²		2x17

Note
The mounting rails are designed to be installed directly.
Assembly with terminals provides for 10 mm clearance to the ends of the mounting rail.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
Ordering information for the terminal blocks, please refer to the online catalogue.
*For fitting the enclosures with terminal blocks, please refer to the Terminal block catalogue or the SAK series. We recommend BK 6 or BK 6 CRN (0625220000) for vertical installations. There are no specified mounting options available for mounting the enclosure in a vertical position. There are no pre-defined mounting points set within this enclosure for installing internal equipment in a vertical position.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	42	28
M16	30	18
M20	21	10
M25	12	8
M32	10	3
M40	4	2
M50	3	2
M63		

Note Our IP68 brass cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

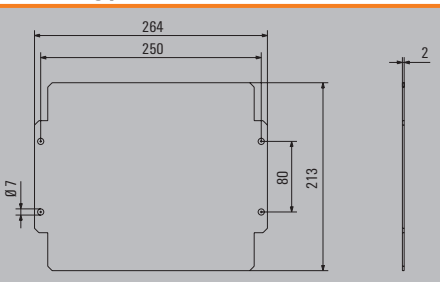

Klippon® Protect – Terminal Boxes
Product overview: Aluminium enclosure

Use the product overview to find the right solution for you! Combine your own industrial version consisting of an enclosure, with or without threaded holes, a suitable mounting rail or pre-fitted terminal strips. The compatible components are always shown in a row.

Klippon Protect enclosures with explosion protection for use in explosive risk zones are available on request.

Aluminium enclosure, uncoated

Empty enclosure without threaded holes



Mounting rail (TS)
Mounting plate (MOPL)

Dimensions of the enclosure height x width x depth in mm	Enclosure type	Order No.	Qty.	Type	Length in mm	Rail mounting slot dimensions in mm	Order No.	Qty.
Aluminium, uncoated								
64 x 58 x 34	Klippon® K01	**1565240000**	10	-	-	-	–	-
70 x 70 x 45	Klippon® K1	**0342000000**	10					
80 x 75 x 57	Klippon® K11	**0573300000**	10	TS15	64	4.5 x 20	**1909990000**	1
70 x 100 x 45	Klippon® K2	**0342100000**	10	TS15	90	4.5 x 20	**1910010000**	1
80 x 125 x 57	Klippon® K21	**0573400000**	5	TS15	114	4.5 x 20	**1910020000**	1
70 x 165 x 45	Klippon® K3	**0342200000**	5	TS15 MOPL	155 154	4.5 x 20 4.2 x 14	**1910030000**	1 1
80 x 175 x 57	Klippon® K31	**0573500000**	5	TS15	164	4.5 x 20	**1910040000**	1
82 x 130 x 72	Klippon® K4	**0342300000**	1	TS35	64	5.5 x 20	**1910060000**	1
120 x 122 x 81	Klippon® K41	**1565270000**	1	TS35	105	6.3 x 20	**1910070000**	1
130 x 170 x 90	Klippon® K5	**0342400000**	1	TS35	148	5.5 x 20	**1910080000**	1
160 x 160 x 91	Klippon® K52	**1565290000**	1	TS35	140	6.3 x 20	**1910100000**	1
		protection class IP 66		suitable for the enclosures of the respective line				

[1] Multi-pole terminal strip (terminal block BK 4, BK 6 or BK 12), mounted on mounting plate
[2] Space for further threaded holes up to M40

One Terminal Box
Ex-certified enclosures for customized solutions

Our One Terminal Boxes are equipped with one feed-through terminal (WDU 2.5 or WDU 4) as standard. You can flexibly expand the enclosure with terminals you need whereby you can count on our support at any time. The most convienient way to create Ex terminal boxes is to use our Fast Delivery Service with our Weidmüller Configurator (WMC): design your individual Ex terminal box in the WMC and receive your offer within minutes.

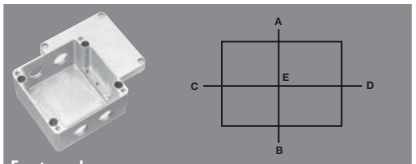

Empty enclosure with threaded holes



Terminal strip

Ex protected Terminal Boxes

Threaded hole Side A	Threaded hole Side B	Order No.	Qty.	Connection technology	Cross-section mm²	Number of DU*	Number of PE*	Order No.	Qty.	Order No.
1x M16	1x M16	**8000004184**	1	Screw connection	4	4	0	**7906080000**	100	–
1x M16	2x M16	**8000004147**	1	Screw connection	4	4	0	**8000004129**[1)]	1	**8000004202**
1x M20	1x M20	**8000004148**	1							**8000004203**
2x M16	2x M16	**8000004149**	1							**8000004207**
2x M20	2x M20	**8000004150**	1	Tension clamp connection	2.5	5	1	**8000004130**	1	**8000004208**
2x M16	2x M16			Tension clamp connection	2.5	5	1			**8000004204**
2x M20	2x M20			Screw connection	4	5	2			**8000004209**
2x M20	2x M20	**8000004151**	1	Screw connection	4	6	0	**8000004132**[1)]	1	**8000004210**
3x M16	3x M16	**8000004152**	1	Screw connection	4	13	2	**8000004134**	1	**8000004212**
3x M16	3x M16			Tension clamp connection	2.5	14	2	**8000004133**	1	**8000004211**
4x M20	4x M20	**8000004153**	1	Screw connection	4	12	0	**8000004135**[1)]	1	
4x M20	4x M20	**8000004154**	1	Screw connection	4	21	2		1	
4x M20	4x M20			Tension clamp connection	2.5	24	2	**8000004136**	1	**8000004214**
2x M20	2x M20	**8000004155**	1	Screw connection	4	5	2		1	
2x M20	2x M20			Tension clamp connection	4	4	1	**8000004139**	1	
2x M25	2x M25	**8000003446**	1						1	**8000003589**
3x M20	3x M20	**8000003447**	1							
2x M25	2x M25									
3x M20	3x M20									**8000003591**
4x M20	4x M20	**8000004158**	1	Screw connection	4	17	2		1	**8000004218**
4x M20	4x M20			Tension clamp connection	4	15	2		1	**8000004219**
4x M20	4x M20		1	Screw connection	4	16	2	**8000004142**	1	**8000004220**
4x M20	4x M20			Tension clamp connection	2.5	19	2	**8000004143**	1	**8000004221**

suitable for the enclosure of the respective line
*DU = feed-through terminals, PE = PE terminals

Ex-enclosure with threaded holes and terminal strip according to the respective line

Safely control work processes in harsh environments on site

With certified enclosure solutions with control and display elements

Harsh industrial environments, such as those in the water treatment industry, place extreme demands on the safety, robustness and quality of products and devices.

We meet these challenges with the Klippon® Control Station, the addition to our range of customised enclosure solutions. More than 50 years of expertise have made us market leader in this area with global competence centres. The basis of our enclosure solutions is provided by the usual Weidmüller quality and comprehensive approvals for explosion hazard areas. Based on this, our sturdy "on-site control station" is available in two standard sizes and with up to four control and display elements and provides a flexible solution to meet your specific needs.

Order your distributor enclosure as well as control and signaling units from a single source and from one enclosure design – for reliable security and reduced storage costs for maintenance and repair operations.

Your special advantages:
Ideal for urgent service calls
We have prepared modules of the proven Klippon® enclosure series K available for you for further processing. This means we manufacture a control solution suitable for your application at short notice.

Predestined for emergency shutdown applications: Klippon® Control Stations score when it comes to the safe shutdown of plant sections, such as in the process industry

Project solutions from a single source
Obtain command/signaling units and distribution and control boxes as a complete solution – tailored to the individual requirements of your projects in hazardous areas.

Customised assembly
In addition to standard types from stock, you can obtain enclosure solutions from us that are completely assembled and equipped according to customer requirements.

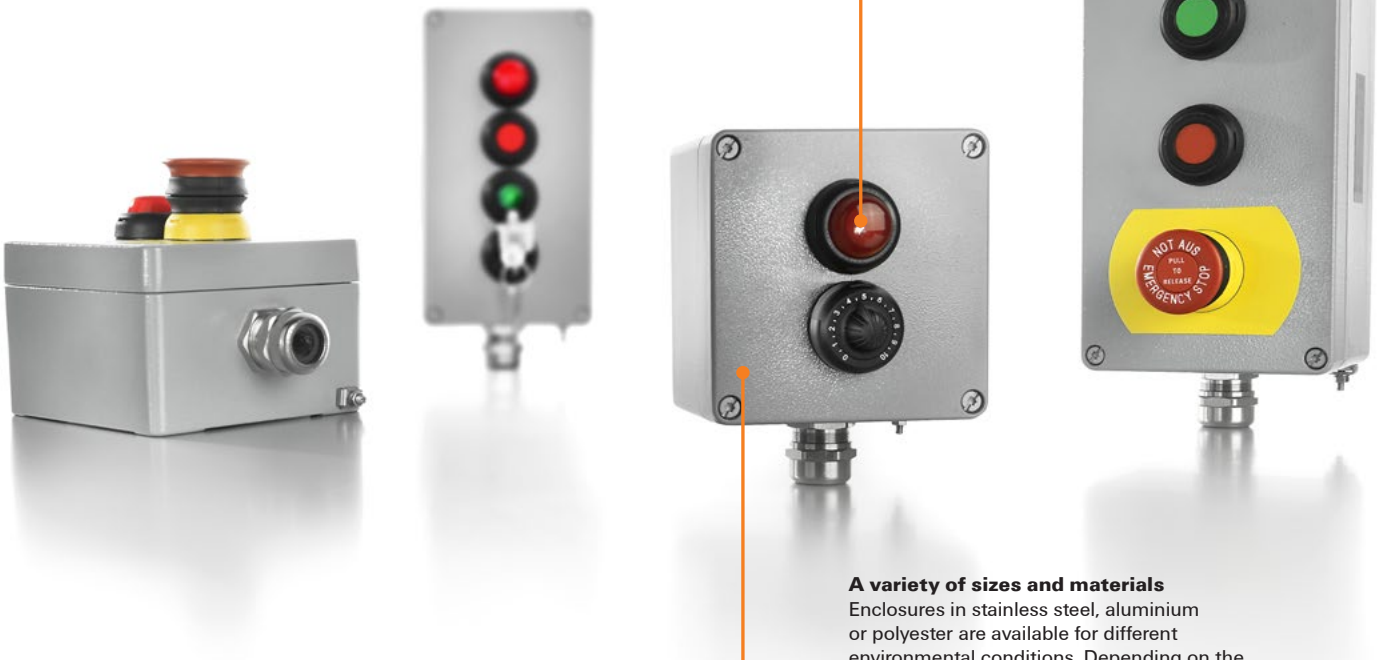

A variety of sizes and materials
Enclosures in stainless steel, aluminium or polyester are available for different environmental conditions. Depending on the size of the enclosure, it provides space for the integration of up to four control and display elements.

International certificates
The Klippon® Control Station is tested and certified among others according to ATEX and IECEx.

Reliable stability for all applications

Klippon® Protect – convincing with impact-resistant aluminium enclosures

Aluminium enclosures (Klippon® K) can be used with a wide range of applications and are ideally suited for the assembly of terminal blocks, switches, power supplies, operating and display elements or electronic modules. Available in aluminium alloy and powder coated RAL 7001. The mounting holes are located outside the sealing area, while a corresponding thread enables mounting rails and mounting plates to be affixed.

Additional features:

- Standardised enclosure with integrated threaded holes
- Cover attachment with corrosion-resistant TRX slothead screws
- Fastening by means of mounting feet or internal mounting holes
- Splice-free seals for optimum ingress protection up to IP 66

Technical data	Aluminium
Material	Aluminium alloy (AL-Si12)
Surface finish	Powder-coated
Colour	RAL 7001
IP protection class	IP 54; IP 66
Ambient temperature	-55 °C to 55 °C
Seal material of enclosure	Silicone (VMQ)
Seal material of command and signalling units	EPDM
Flammability rating	-
Impact resistance IK	7 joules in acc. with IEC60079-0 4 joules in acc. with IEC60079-0 with integrated illuminated pushbutton or light module
Cable gland material	Nickel-plated brass
Cable gland clamping area min. – max. in mm	
M20	3–12 mm
M25	10–18 mm
Max. rated cross-section	2.5 mm²
Max. operating voltage	400 V
with integrated illuminated pushbutton or light module	250 V
Maximum operating current at 40 °C ambient temperature	
1.5 mm² – T6	10 A
1.5 mm² – T5	16 A
2.5 mm² – T6	16 A
Maximum operating current at 55 °C ambient temperature	
1.5 mm² – T4	16 A
1.5 mm² – T5	10 A
2.5 mm² – T5	16 A
Temperature class	T4, T5, T6
Type of mounting	Wall mounting
Earthing inside	Earth terminal
Lid attachment	TRX 20 slothead screws
Lid screw torque	2.5 Nm
Earthing torque	2.5 Nm
Earthing outside	M4 earthing studs, stainless steel
Approvals	IECEXITA14.0013X TUEV14ATEX7606X LMP 21.0019X
Marking	2G Ex e d IIC T* Gb 2G Ex ib d [ia] IIC T* Gb 2D Ex tb IIIC T80/100 °C Db
Mounting feet	9527590000

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klipponcontrolstation

	Number of built-in components				Emergency stop pushbutton	Key switch	Pushbutton		Illuminated pushbutton		Light module		Dimensions with built-in components HxWxD in mm	Designation	Cable gland	Order number	
	●	● ●	● ● ●	● ● ● ●	red	I – 0 – II	red	green	red	green	red	green					
Aluminium	●				1								149x120x119	KLIPPON CS K41-1	VG M20	**1537470000**	
	●						1						149x120x94	KLIPPON CS K41-1	VG M20	**1537480000**	
	●					1							149x120x108	KLIPPON CS K41-1	VG M20	**1537490000**	
	●									1			149x120x96	KLIPPON CS K41-1	VG M20	**1537500000**	
		●					1	1					152x120x119	KLIPPON CS K41-4	VG M25	**1537510000**	
		●						1				1	152x120x103	KLIPPON CS K41-4	VG M25	**1537520000**	
		●			1						1		152x120x119	KLIPPON CS K41-4	VG M25	**1537530000**	
			●				1	1			1		250x120x103	KLIPPON CS K51-2	VG M25	**1537540000**	
			●				1	2					250x120x94	KLIPPON CS K51-2	VG M25	**1537550000**	
			●		1		1	1					250x120x119	KLIPPON CS K51-2	VG M25	**1537570000**	
				●			1	1			1	1	250x120x103	KLIPPON CS K51-4	VG M25	**1537580000**	

Technical data

	Klippon® CS K41-1	Klippon® CS K41-1
Enclosure		
Dimensions with installation (HxBxD)	149 / 120 / 119 mm	149 / 120 / 94 mm
Material	Aluminium AlSi12	Aluminium AlSi12
General characteristics		
Surface finish / Colour	Powder-coated / Silver grey	Powder-coated / Silver grey
Protection class	IP54, IP66	IP54, IP66
Ambient temperature	-55 °C...+55 °C	-55 °C...+55 °C
Impact resistance	7 joules in acc. with IEC60079-0	7 joules in acc. with IEC60079-0
Enclosure seal material	Silicone (VMQ)	Silicone (VMQ)
Seal material of operating and display elements	EPDM	EPDM
Type of mounting	Wall mounting	Wall mounting
Internal earth	Earth terminal	Earth terminal
External earth	M4 earthing studs, stainless steel	M4 earthing studs, stainless steel
Lid attachment	TRX-20 slothead screws	TRX-20 slothead screws
Torque for lid screws	2.5 Nm	2.5 Nm
Earth stud torque	2.5 Nm	2.5 Nm
Electrical properties*		
Wire connection cross section, finely stranded, max.	2.5 mm²	2.5 mm²
Operating voltage, max.	400 V	400 V
Temperature class	T4, T5, T6	T4, T5, T6
Enclosure assembly		
1 Position in enclosure	EMERGENCY-STOP pushbutton with yellow, contrasting label	Pushbutton - green
2 Position in enclosure		
3 Position in enclosure		
4 Position in enclosure		
Contact design	2 NC contact, positive opening contacts	1 NC contact, 1 NO contacts
Actuators	EMERGENCY STOP pushbutton	Pushbutton
Actuator colour	red	green
Illumination module colour		
Illuminated button actuator colour		
Cable entries		
Drill holes side B	1 x M20	1 x M20
Cable gland	1460050000 - VG M20 EXE MS	1460050000 - VG M20 EXE MS
Clamping range min. / max.	3 mm / 12 mm	3 mm / 12 mm
Approval and Marking		
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-31	IEC 60079-0, IEC 60079-7, IEC 60079-31
Certificate No. (IECEX)	IECEXITA14.0013X	IECEXITA14.0013X
Certificate No. (ATEX)	TUEV14ATEX7606X	TUEV14ATEX7606X
Certificate no. Terminal Box (INMETRO)	LMP 21.0019X	LMP 21.0019X
Marking	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
Accessories		
Mounting feet	9527590000 - KLIPPON K MF KIT 25	9527590000 - KLIPPON K MF KIT 25

Note

Ordering data

Type	Qty.	Order No.
KLIPPON CS K41-1	1	**1537470000**

Type	Qty.	Order No.
KLIPPON CS K41-1	1	**1537480000**

Note

*Other temperature classes and connection values on request, or see "Notice to Installer".

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS K41-1

149 / 120 / 108 mm	
Aluminium AlSi12	
Powder-coated / Silver grey	
IP54, IP66	
-55 °C...+55 °C	
7 joules in acc. with IEC60079-0	
Silicone (VMQ)	
EPDM	
Wall mounting	
Earth terminal	
M4 earthing studs, stainless steel	
TRX-20 slothead screws	
2.5 Nm	
2.5 Nm	
2.5 mm²	
400 V	
T4, T5, T6	
Key-operated switch	
1 NC contact, 1 NO contacts	
Key-operated switch, 3 switching positions, I - 0 - II, (I + II), latching, Key retractable	
1 x M20	
1460050000 - VG M20 EXE MS	
3 mm / 12 mm	
IEC 60079-0, IEC 60079-7, IEC 60079-31	
IECEXITA14.0013X	
TUEV14ATEX7606X	
LMP 21.0019X	
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	
9527590000 - KLIPPON K MF KIT 25	

Type	Qty.	Order No.
KLIPPON CS K41-1	1	1537490000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS K41-1

149 / 120 / 96 mm	
Aluminium AlSi12	
Powder-coated / Silver grey	
IP54, IP66	
-55 °C...+55 °C	
4 joules in acc. with IEC60079-0	
Silicone (VMQ)	
EPDM	
Wall mounting	
Earth terminal	
M4 earthing studs, stainless steel	
TRX-20 slothead screws	
2.5 Nm	
2.5 Nm	
2.5 mm²	
250 V	
T4, T5, T6	
Illuminated pushbutton - green	
2 NO contacts	
Pushbutton	
green	
green	
1 x M20	
1460050000 - VG M20 EXE MS	
3 mm / 12 mm	
IEC 60079-0, IEC 60079-7, IEC 60079-31	
IECEXITA14.0013X	
TUEV14ATEX7606X	
LMP 21.0019X	
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	
9527590000 - KLIPPON K MF KIT 25	

Type	Qty.	Order No.
KLIPPON CS K41-1	1	1537500000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS K41-4

152 / 120 / 119 mm	
Aluminium AlSi12	
Powder-coated / Silver grey	
IP54, IP66	
-55 °C...+55 °C	
7 joules in acc. with IEC60079-0	
Silicone (VMQ)	
EPDM	
Wall mounting	
Earth terminal	
M4 earthing studs, stainless steel	
TRX-20 slothead screws	
2.5 Nm	
2.5 Nm	
2.5 mm²	
400 V	
T4, T5, T6	
Pushbutton - red	
Pushbutton - green	
2 NC contact, 2 NO contacts	
Pushbutton	
red, green	
1 x M25	
1460070000 - VG M25 EXE MS	
10 mm / 18 mm	
IEC 60079-0, IEC 60079-7, IEC 60079-31	
IECEXITA14.0013X	
TUEV14ATEX7606X	
LMP 21.0019X	
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	
9527590000 - KLIPPON K MF KIT 25	

Type	Qty.	Order No.
KLIPPON CS K41-4	1	1537510000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Technical data

	Klippon® CS K41-4	Klippon® CS K41-4
Enclosure		
Dimensions with installation (HxBxD)	152 / 120 / 103 mm	152 / 120 / 119 mm
Material	Aluminium AlSi12	Aluminium AlSi12
General characteristics		
Surface finish / Colour	Powder-coated / Silver grey	Powder-coated / Silver grey
Protection class	IP54, IP66	IP54, IP66
Ambient temperature	-55 °C...+55 °C	-55 °C...+55 °C
Impact resistance	4 joules in acc. with IEC60079-0	4 joules in acc. with IEC60079-0
Enclosure seal material	Silicone (VMQ)	Silicone (VMQ)
Seal material of operating and display elements	EPDM	EPDM
Type of mounting	Wall mounting	Wall mounting
Internal earth	Earth terminal	Earth terminal
External earth	M4 earthing studs, stainless steel	M4 earthing studs, stainless steel
Lid attachment	TRX-20 slothead screws	TRX-20 slothead screws
Torque for lid screws	2.5 Nm	2.5 Nm
Earth stud torque	2.5 Nm	2.5 Nm
Electrical properties*		
Wire connection cross section, finely stranded, max.	2.5 mm²	2.5 mm²
Operating voltage, max.	250 V	250 V
Temperature class	T4, T5, T6	T4, T5, T6
Enclosure assembly		
1 Position in enclosure	Light module - green	Light module - red
2 Position in enclosure	Pushbutton - green	EMERGENCY-STOP pushbutton with yellow, contrasting label
3 Position in enclosure		
4 Position in enclosure		
Contact design	1 NC contact, 1 NO contacts	2 NC contact, positive opening contacts
Actuators	Pushbutton	EMERGENCY STOP pushbutton
Actuator colour	green	red
Illumination module colour	green	
Illuminated button actuator colour		
Cable entries		
Drill holes side B	1 x M25	1 x M25
Cable gland	1460070000 - VG M25 EXE MS	1460070000 - VG M25 EXE MS
Clamping range min. / max.	10 mm / 18 mm	10 mm / 18 mm
Approval and Marking		
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-31	IEC 60079-0, IEC 60079-7, IEC 60079-31
Certificate No. (IECEX)	IECEXITA14.0013X	IECEXITA14.0013X
Certificate No. (ATEX)	TUEV14ATEX7606X	TUEV14ATEX7606X
Certificate no. Terminal Box (INMETRO)	LMP 21.0019X	LMP 21.0019X
Marking	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
Accessories		
Mounting feet	9527590000 - KLIPPON K MF KIT 25	9527590000 - KLIPPON K MF KIT 25
Note		

Ordering data

Type	Qty.	Order No.
KLIPPON CS K41-4	1	1537520000

Type	Qty.	Order No.
KLIPPON CS K41-4	1	1537530000

Note		
	*Other temperature classes and connection values on request, or see "Notice to Installer".	*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS K51-2

250 / 120 / 103 mm	
Aluminium AlSi12	
Powder-coated / Silver grey	
IP54, IP66	
-55 °C...+55 °C	
4 joules in acc. with IEC60079-0	
Silicone (VMQ)	
EPDM	
Wall mounting	
Earth terminal	
M4 earthing studs, stainless steel	
TRX-20 slothead screws	
2.5 Nm	
2.5 Nm	
2.5 mm²	
250 V	
T4, T5, T6	
Pushbutton - red	
Light module - green	
Pushbutton - green	
2 NC contact, 2 NO contacts	
Pushbutton	
red, green	
green	
1 x M25	
1460070000 - VG M25 EXE MS	
10 mm / 18 mm	
IEC 60079-0, IEC 60079-7, IEC 60079-31	
IECEXITA14.0013X	
TUEV14ATEX7606X	
LMP 21.0019X	
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	
9527590000 - KLIPPON K MF KIT 25	

Type	Qty.	Order No.
KLIPPON CS K51-2	1	1537540000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS K51-2

250 / 120 / 94 mm	
Aluminium AlSi12	
Powder-coated / Silver grey	
IP54, IP66	
-55 °C...+55 °C	
7 joules in acc. with IEC60079-0	
Silicone (VMQ)	
EPDM	
Wall mounting	
Earth terminal	
M4 earthing studs, stainless steel	
TRX-20 slothead screws	
2.5 Nm	
2.5 Nm	
2.5 mm²	
400 V	
T4, T5, T6	
Pushbutton - green	
Pushbutton - red	
Pushbutton - green	
3 NC contact, 3 NO contacts	
Pushbutton	
green, red	
1 x M25	
1460070000 - VG M25 EXE MS	
10 mm / 18 mm	
IEC 60079-0, IEC 60079-7, IEC 60079-31	
IECEXITA14.0013X	
TUEV14ATEX7606X	
LMP 21.0019X	
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	
9527590000 - KLIPPON K MF KIT 25	

Type	Qty.	Order No.
KLIPPON CS K51-2	1	1537550000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS K51-2

250 / 120 / 119 mm	
Aluminium AlSi12	
Powder-coated / Silver grey	
IP54, IP66	
-55 °C...+55 °C	
7 joules in acc. with IEC60079-0	
Silicone (VMQ)	
EPDM	
Wall mounting	
Earth terminal	
M4 earthing studs, stainless steel	
TRX-20 slothead screws	
2.5 Nm	
2.5 Nm	
2.5 mm²	
400 V	
T4, T5, T6	
Pushbutton - green	
Pushbutton - red	
EMERGENCY-STOP pushbutton with yellow, contrasting label	
2 NO contacts, 2 NC contact, positive opening contacts	
Pushbutton, EMERGENCY STOP pushbutton	
green, red	
1 x M25	
1460070000 - VG M25 EXE MS	
10 mm / 18 mm	
IEC 60079-0, IEC 60079-7, IEC 60079-31	
IECEXITA14.0013X	
TUEV14ATEX7606X	
LMP 21.0019X	
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	
9527590000 - KLIPPON K MF KIT 25	

Type	Qty.	Order No.
KLIPPON CS K51-2	1	1537570000

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS K51-4

Technical data

Enclosure	
Dimensions with installation (HxBxD)	250 / 120 / 103 mm
Material	Aluminium AlSi12
General characteristics	
Surface finish / Colour	Powder-coated / Silver grey
Protection class	IP54, IP66
Ambient temperature	-55 °C...+55 °C
Impact resistance	4 joules in acc. with IEC60079-0
Enclosure seal material	Silicone (VMQ)
Seal material of operating and display elements	EPDM
Type of mounting	Wall mounting
Internal earth	Earth terminal
External earth	M4 earthing studs, stainless steel
Lid attachment	TRX-20 slothead screws
Torque for lid screws	2.5 Nm
Earth stud torque	2.5 Nm
Electrical properties*	
Wire connection cross section, finely stranded, max.	2.5 mm²
Operating voltage, max.	250 V
Temperature class	T4, T5, T6
Enclosure assembly	
1 Position in enclosure	Light module - red
2 Position in enclosure	Pushbutton - red
3 Position in enclosure	Light module - green
4 Position in enclosure	Pushbutton - green
Contact design	2 NC contact, 2 NO contacts
Actuators	Pushbutton
Actuator colour	green, red
Illumination module colour	red, green
Illuminated button actuator colour	
Cable entries	
Drill holes side B	1 x M25
Cable gland	1460070000 - VG M25 EXE MS
Clamping range min. / max.	10 mm / 18 mm
Approval and Marking	
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-31
Certificate No. (IECEX)	IECEXITA14.0013X
Certificate No. (ATEX)	TUEV14ATEX7606X
Certificate no. Terminal Box (INMETRO)	LMP 21.0019X
Marking	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
Accessories	
Mounting feet	9527590000 - KLIPPON K MF KIT 25

Note

Ordering data

Type	Qty.	Order No.
KLIPPON CS K51-4	1	**1537580000**

Note

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® POK – Polyester Enclosures

Universal terminal boxes for standard industrial applications and for potentially explosive atmospheres in Zones 1 and 2, 21 and 22

The Klippon® POK enclosure range is made from a high-quality glass fibre reinforced polyester and is ideal for applications and environments where corrosion resistance, impact resistance and a high IP protection class is a requirement.

Key Features:

- Manufactured from glass fibre reinforced polyester
- Available in 17 sizes
- Two standard finishes (colours)
  Grey, similar to RAL 7001 (industrial use)
  Black, similar to RAL 9011 (harsh environments, Ex)
- Captive lid fixing screws are stainless steel
- Fixing holes are located outside of the lid sealing area to ensure high ingress protection of IP66
- Threaded holes for internal component mounting
- Silicone sealing for extreme temperature environments
- Impact resistance up to 7 Joules
- Approved to the latest international standards, including EN 62208 and IEC EN 60079

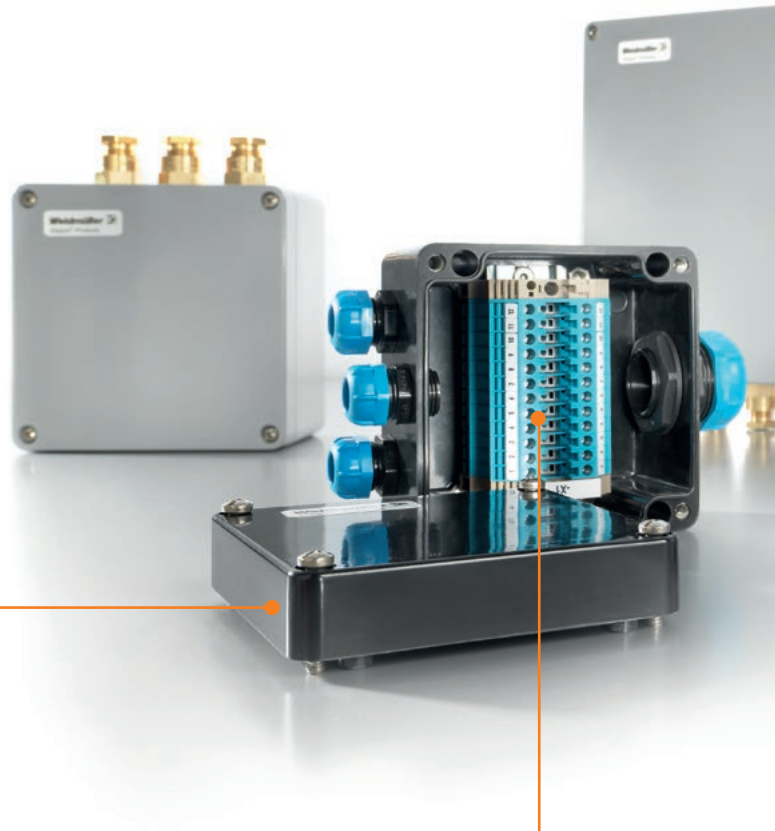

Cross-head screws
The enclosure lid is secured with stainless steel captive cross-head screws. Handling the enclosure is made simple. A single tool is the only requirement for quick and easy installation.

Mounting plates
Internal mounting plates for the installation of terminal rails, terminal blocks or other equipment are available.

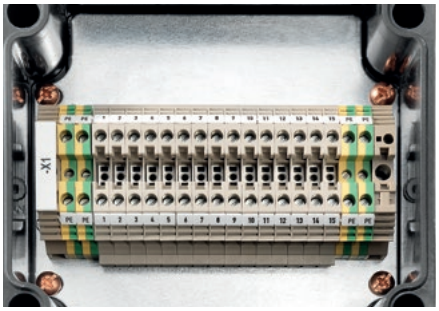

Brass Earth Continuity Plate
An angled design made to complement the Klippon® POK enclosures installed in potentially explosive atmospheres. The brass earth continuity plate is available as an optional accessory.

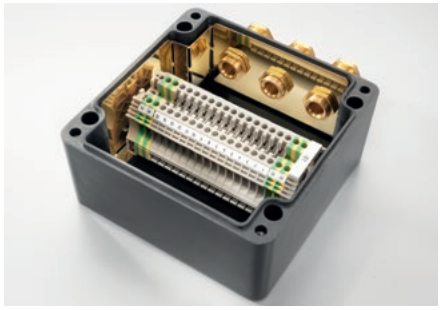

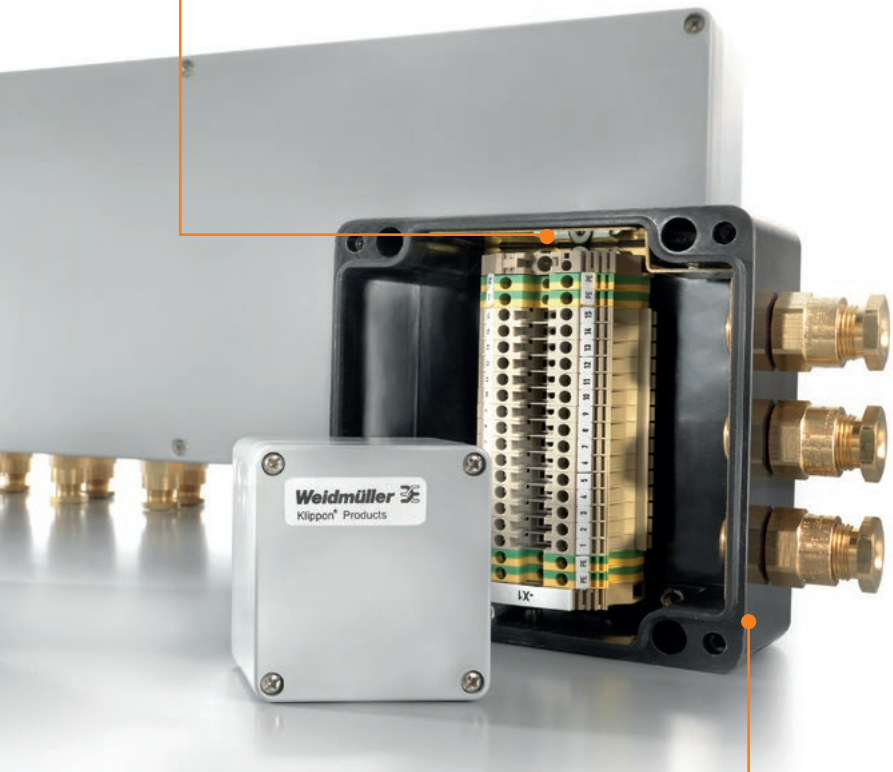

Earth kit
The Klippon® POK Ex enclosures are designed for applications installed in potentially explosive atmospheres. An M6 or M10 internal/external earth kit is available as an optional accessory.

Other Colour
Grey, similar to RAL7001
Black, simillar to RAL 9011
Other colours are available on request (subject to a minimum order quantity).

Enclosure wall fixing (direct or via mounting lugs)
The fixing positions of each enclosure are located outside of the sealing area. The enclosure can be fastened directly via fixing holes found on the rear side of the enclosure or alternatively, it is possible to secure the enclosure from the outside by means of mounting lugs that are separately available.

Closed moulded sealing
Robust and secure sealing increases the performance of each enclosure with enhanced ingress protection.

The Klippon® POK enclosures are supplied as standard with a removable and replaceable moulded gasket.
Available in either silicone or chloroprene material and depending upon the enclosure type they are adapted to the contour of each enclosure to ensure ingress performance is maintained.

Klippon® POK – Polyester enclosures

The Klippon® POK range of polyester enclosures are designed to protect and integrate with general purpose electrical and electronic equipment as well as control components in harsh environments or potentially explosive atmospheres.

Designed to meet the rigourous demands of industrial automation or process control and energy industries and with signal and component protection in mind, the Klippon POK enclosure range is designed to meet the customers' application needs.

Our customer specific assembly service can provide a fully customised enclosure solution, designed to meet the customer requirements.

Features:

- For use in potentially explosive atmospheres and industrial applications
- Extremely robust with a high impact resistance
- Approved to the latest international standards
- M4 or M6 mounting elements integrated into enclosure body for installation of mounting plates, mounting rails, printed circuit boards etc.

Note: The enclosure range Klippon® POK can be assembled with terminals or other approved equipment by our locally available Application-Specific Solutions service. Please ask us for more details.

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/klipponpok

WMC

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Hight x width x depth in mm	Standard (grey finish)	Ex Enclosures (black finish)	Reference product
Klippon® POK 080806	75 x 80 x 55	1305810000	1306000000	Klippon® POK 1
Klippon® POK 081106	75 x 110 x 56	1305820000	1306010000	Klippon® POK 2
Klippon® POK 081606	75 x 160 x 56	1305830000	1306020000	Klippon® POK 3
Klippon® POK 081906	75 x 190 x 55	1305840000	1306030000	Klippon® POK 31
Klippon® POK 082306	75 x 230 x 56	1305850000	1306040000	Klippon® POK 32
Klippon® POK 121209	120 x 122 x 90	1305870000	1306050000	Klippon® POK 4
Klippon® POK 122209	120 x 220 x 90	1305880000	1306070000	Klippon® POK 5
Klippon® POK 161609	160 x 160 x 90	1305890000	1306080000	Klippon® POK 51
Klippon® POK 162609	160 x 260 x 90	1305900000	1306090000	Klippon® POK 6
Klippon® POK 163609	160 x 360 x 90	1305910000	1306100000	Klippon® POK 7
Klippon® POK 165609	160 x 560 x 90	1305920000	1306110000	Klippon® POK 71
Klippon® POK 252512	250 x 255 x 120	1305930000	1306120000	Klippon® POK 8
Klippon® POK 252516	250 x 255 x 160.5	1305980000	1306170000	Klippon® POK 9
Klippon® POK 254012	250 x 400 x 120	1305940000	1306130000	Klippon® POK 91
Klippon® POK 254016	250 x 400 x 160.5	1305990000	1306180000	Klippon® POK 10
Klippon® POK 256012	250 x 600 x 120	1305950000	1306140000	Klippon® POK 11
Klippon® POK 404012	405 x 400 x 120	1305970000	1306150000	Klippon® POK 12
Hinweis				

Technical Overview

Technical data

	Ex	Standard
Enclosure material	Glass fibre-reinforced polyester to DIN 16913 with added graphite	Glass fibre-reinforced polyester to DIN 16913
Surface	Black, similar to RAL 9011	Grey, similar to RAL7001
IP Rating	IP 66 to DIN EN 60529	IP 66 to DIN EN 60529
NEMA Rating	4, 4x	4, 4x
Equipment mounting	M4 to M6 threaded bushes	M4 to M6 threaded bushes
Enclosure mounting	4 holes for M4 to M6 screw	4 holes for M4 to M6 screw
Lid fixing	M4/M6 slothead / crosshead screws from stainless steel	M4/M6 slothead / crosshead screws from stainless steel
Impact Resistance	7J to IEC 60079-0	IK08 (5J) to DIN EN 50102
Gasket material	Silicone (VMQ)	Chloroprene
Temperature range	-55 °C...+100 °C	-40 °C...+100 °C
Torque screws of lid M4	2.0 – 2.5 Nm	2.0 – 2.5 Nm
Torque screws of lid M6	2.5 – 3.0 Nm	2.5 – 3.0 Nm
Surface resistance (in ohms)	< 10^9 Ohm	10^{12} Ohm
Flammability	UL 94 V0, self extinguishing	UL 94 V0, self extinguishing HL 3 acc. to EN 45545-2 on request
Toxicity	Halogen and cadmium-free	
Note		

Approvals for empty enclosures

	Ex	Standard
ATEX certificate	IBExU13ATEX1003 U	
ATEX marking	Ex II 2G Ex e IIC Gb or Ex II 2G Ex eb IIC Ex II 2D Ex tb IIIC Db or Ex II 2D Ex tb IIIC	
IECEx certificate	IECEx IBE 13.0003U	
IECEx marking	Ex e IIC Gb or Ex eb IIC Ex tb IIIC Db or Ex tb IIIC	
cULus	E256877	E256877
INMETRO	In preparation	
DNV	TAE00002R2	TAE00002R2
AEx	E223792	
CCCEx	2020322303003288	
Note	Flamability norm EN 45545 on request	

Approvals terminal enclosures

ATEX certificate	IBExU13ATEX1004 X		
ATEX marking	Ex II 2G Ex e IIC T6...T5 Gb or Ex II 2G Ex eb IIC T6...T5 Ex II 1G Ex ia IIC T6...T5 Ga or Ex II 1G Ex ia IIC T6...T5 Ex II 2(1)G Ex e ia IIC T6...T5 Gb or Ex II 2(1)G Ex eb ia IIC T6...T5 Ex II 2D Ex tb IIIC T 85 °C...100 °C Db or Ex II 2D Ex tb IIIC T 85 °C...100 °C		
IECEx certificate	IECEx IBE 13.0004X		
IECEx marking	Ex e IIC T6...T5 Gb or Ex eb IIC T6...T5 Ex ia IIC T6...T5 Ga or Ex ia IIC T6...T5 Ex e ia IIC T6...T5 Gb or Ex eb ia IIC T6...T5 Ex tb IIIC T 85 °C...100 °C Db or Ex tb IIIC T 85 °C...100 °C		
INMETRO certificate	LMP 21.0021X	AEx certificate	E223792
INMETRO marking	Ex e IIC T6...T5 Gb ou Ex eb IIC T6...T5 Ex ia IIC T6...T5 Ga ou Ex ia IIC T6...T5 Ex e ia IIC T6...T5 Gb ou Ex eb ia IIC T6...T5 Ex tb III C T 85 °C ...100 °C Db ou Ex tb III C T 85 °C...100 °C	AEx marking	Class I, Zone 1, AEx e IIC Gb T6..T4 Class I, Zone 2, AEx e IIC Gc T6..T4 Class I Div.2 Group A,B,C,D T6...T4 Class II Div.2 Group F,G Zone 21, AEx tb IIIC Db
KOSHA certificate	16-AV4B0-246X	CCCEx certificate	2020322303002628
KOSHA marking	Ex e IIC T6...T5 Gb or Ex eb IIC T6...T5 Ex ia IIC T6...T5 Ga or Ex ia IIC T6...T5 Ex e ia IIC T6...T5 Gb or Ex eb ia IIC T6...T5 Ex tb IIIC T 85 °C...100 °C Db or Ex tb IIIC T 85 °C...100 °C	CCCEx marking	Ex e IIC T6...T5 Gb Ex ia IIC T6...T5 Ga Ex e ia IIC T6...T5 Gb Ex tD A21 IP66 T85 °C/100 °C
Note	If you have specific requirements for installations within potentially explosive atmospheres, please contact Weidmüller for a copy of the approval certificates. For details of power dissipation, please contact your Weidmüller representative.		

Klippon® POK 080806

Depth 55 mm

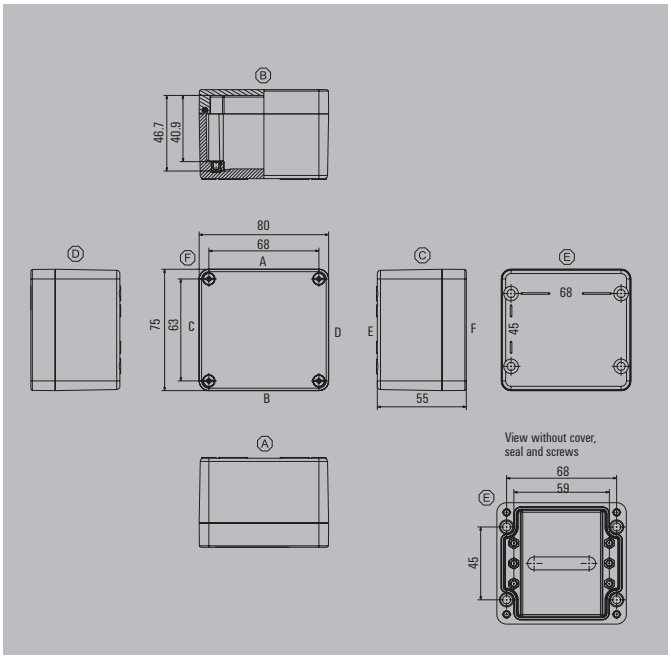

Height / Width / Depth	75 / 80 / 55 mm

Ordering data

RAL 7001	Order No.
Standard	1305810000
RAL 9011	
Ex enclosure	1306000000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510570000
Steel sheet, galvanized for applications with earthing plate	1534280000
Fastening screws for mounting plates	0642600000
Mounting rails, TS15x5	
Horizontally	8000003889
Brass Earth Continuity Plate	
Brass	1390910000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510900000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x1*	1x5
4 mm²	1x1*	1x4
6 mm²		
10 mm²		
16 mm²		

Note * Please refer to the Terminal Block catalogue or the SAK Series for more information about assembling the enclosures with terminal blocks. We recommend a maximum of one BK 6, e.g. BK 6 CRN (0625220000), for vertical installation. There are no specified mounting options available for mounting the enclosure in a vertical position.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
TS 32 mounting rail with clamping yoke technology SAK
TS 15 mounting rail with clamping yoke technology AKZ
Ordering information for the terminal blocks, please refer to the online catalogue.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	4	1
M16	2	1
M20	1	1
M25	1	
M32		
M40		
M50		
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

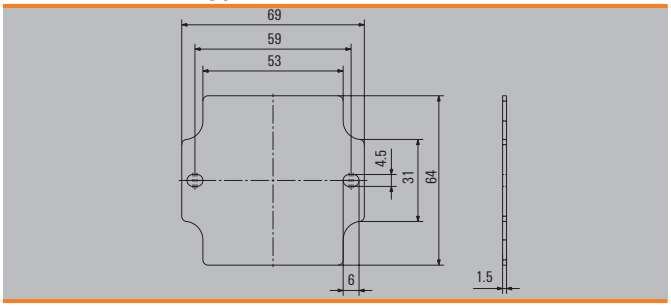

Note

Klippon® POK 081106

Depth 56 mm

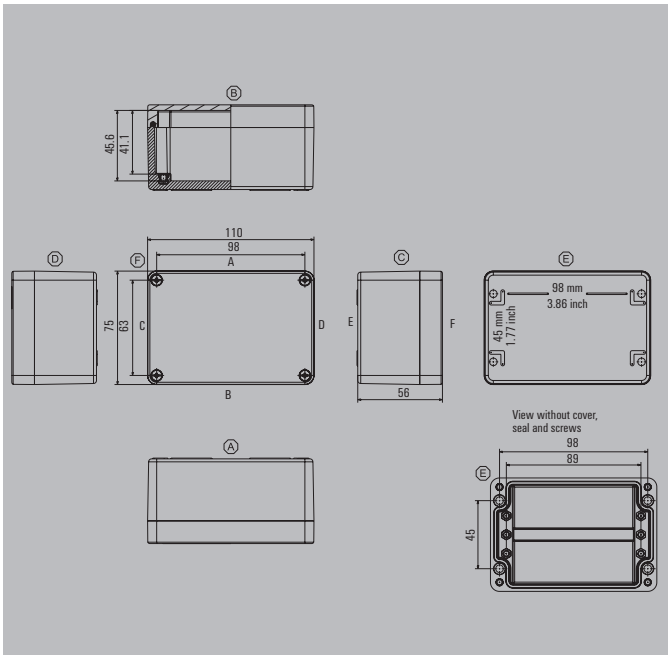

Height / Width / Depth	75 / 110 / 56 mm

Ordering data

RAL 7001	Order No.
Standard	1305820000
RAL 9011	
Ex enclosure	1306010000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510580000
Steel sheet, galvanized for applications with earthing plate	1534290000
Fastening screws for mounting plates	0642600000
Mounting rails, TS15x5	
Horizontally	8000003890
Brass Earth Continuity Plate	
Brass	1390920000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510900000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	1x1*	1x10
4 mm²	1x1*	1x9
6 mm²		
10 mm²		
16 mm²		

Note * Please refer to the Terminal Block catalogue or the SAK Series for more information about assembling the enclosures with terminal blocks. We recommend a maximum of one BK 6, e.g. BK 6 CRN (0625220000), for vertical installation. There are no specified mounting options available for mounting the enclosure in a vertical position.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
TS 32 mounting rail with clamping yoke technology SAK
TS 15 mounting rail with clamping yoke technology AKZ
Ordering information for the terminal blocks, please refer to the online catalogue.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	7	1
M16	3	1
M20	2	1
M25	2	
M32		
M40		
M50		
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

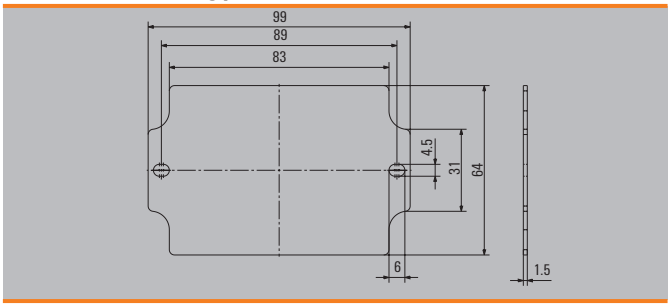

Note

Klippon® POK 081606

Depth 56 mm

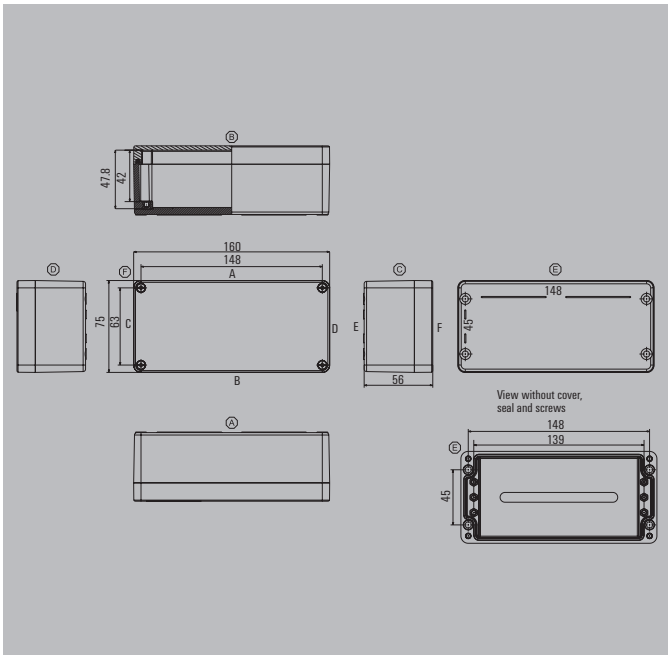

Height / Width / Depth	75 / 160 / 56 mm

Ordering data

RAL 7001	Order No.
Standard	1305830000
RAL 9011	
Ex enclosure	1306020000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510680000
Steel sheet, galvanized for applications with earthing plate	1534310000
Fastening screws for mounting plates	0642600000
Mounting rails, TS15x5	
Horizontally	8000003891
Brass Earth Continuity Plate	
Brass	1390930000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510900000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)

Assembly with terminal		vertical	horizontal
	2.5 mm²	*	1x20
	4 mm²	*	1x17
	6 mm²		
	10 mm²		
	16 mm²		

Note * Please refer to the Terminal Block catalogue or the SAK Series for more information about assembling the enclosures with terminal blocks. We recommend a maximum of one BK 6, e.g. BK 6 CRN (0625220000), for vertical installation. There are no specified mounting options available for mounting the enclosure in a vertical position.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
TS 32 mounting rail with clamping yoke technology SAK
TS 15 mounting rail with clamping yoke technology AKZ
Ordering information for the terminal blocks, please refer to the online catalogue.

Guide value for max. number of cable entries

Cable entries		A / B	C / D
	M12	11	1
	M16	5	1
	M20	4	1
	M25	3	
	M32		
	M40		
	M50		
	M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

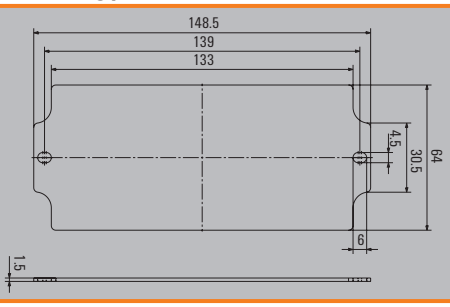

Klippon® POK 081906

Depth 55 mm

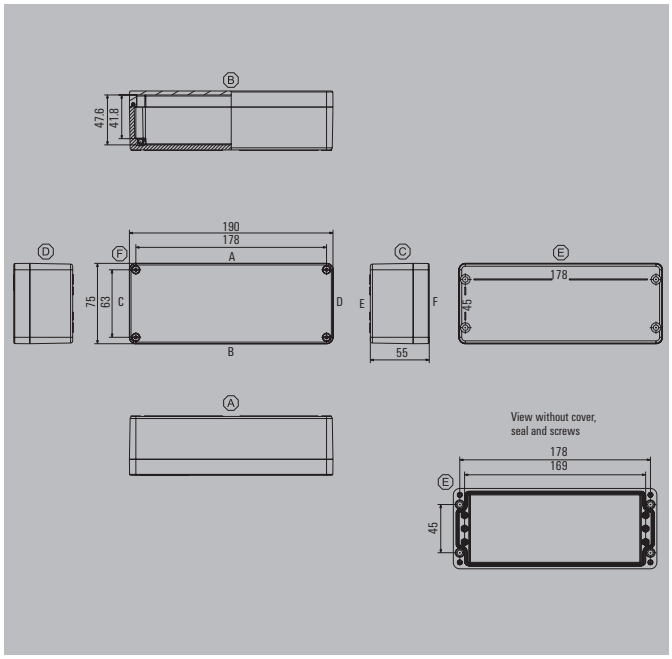

Height / Width / Depth	75 / 190 / 55 mm

Ordering data

RAL 7001	Order No.
Standard	1305840000
RAL 9011	
Ex enclosure	1306030000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510690000
Steel sheet, galvanized for applications with earthing plate	1534320000
Fastening screws for mounting plates	0642600000
Mounting rails, TS15x5	
Horizontally	8000003892
Brass Earth Continuity Plate	
Brass	1390940000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510900000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)

Assembly with terminal		vertical	horizontal
	2.5 mm²	*	1x26
	4 mm²	*	1x22
	6 mm²		
	10 mm²		
	16 mm²		

Note * Please refer to the Terminal Block catalogue or the SAK Series for more information about assembling the enclosures with terminal blocks. We recommend a maximum of one BK 6, e.g. BK 6 CRN (0625220000), for vertical installation. There are no specified mounting options available for mounting the enclosure in a vertical position.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
TS 32 mounting rail with clamping yoke technology SAK
TS 15 mounting rail with clamping yoke technology AKZ
Ordering information for the terminal blocks, please refer to the online catalogue.

Guide value for max. number of cable entries

Cable entries		A / B	C / D
	M12	14	1
	M16	6	1
	M20	5	1
	M25	4	
	M32		
	M40		
	M50		
	M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

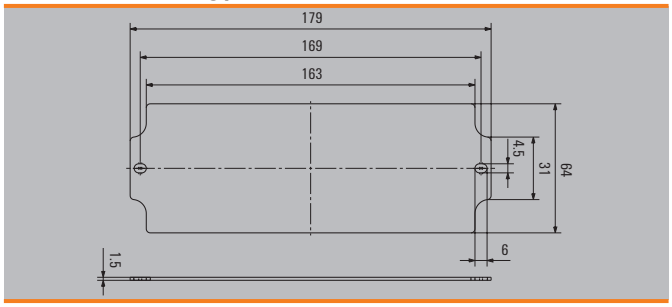

Klippon® POK 082306

Depth 56 mm

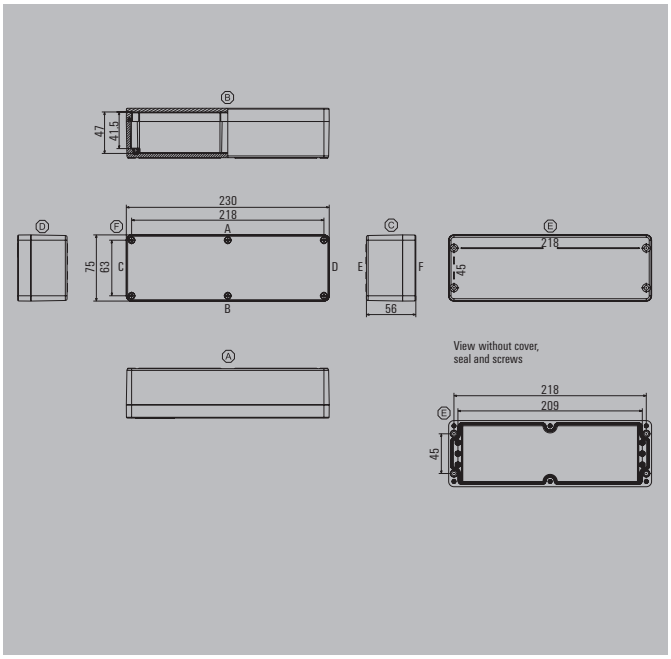

Height / Width / Depth	75 / 230 / 56 mm

Ordering data

RAL 7001	Order No.
Standard	1305850000
RAL 9011	
Ex enclosure	1306040000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, galvanized for applications with earthing plate	1534330000
Fastening screws for mounting plates	0642600000
Mounting rails, TS15x5	
Horizontally	8000032382
Brass Earth Continuity Plate	
Brass	1390950000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510900000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x33
4 mm²	*	1x28
6 mm²		
10 mm²		
16 mm²		

Note

* Please refer to the Terminal Block catalogue or the SAK Series for more information about assembling the enclosures with terminal blocks. We recommend a maximum of one BK 6, e.g. BK 6 CRN (0625220000), for vertical installation. There are no specified mounting options available for mounting the enclosure in a vertical position.
Order recommendations:
TS 35 mounting rail with WDU clamping yoke technology, ZDU spring-cage terminal block or A2C PUSH IN technology
TS 32 mounting rail with clamping yoke technology SAK
TS 15 mounting rail with clamping yoke technology AKZ
Ordering information for the terminal blocks, please refer to the online catalogue.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	16	1
M16	6	1
M20	6	1
M25	4	
M32		
M40		
M50		
M63		

Note

** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

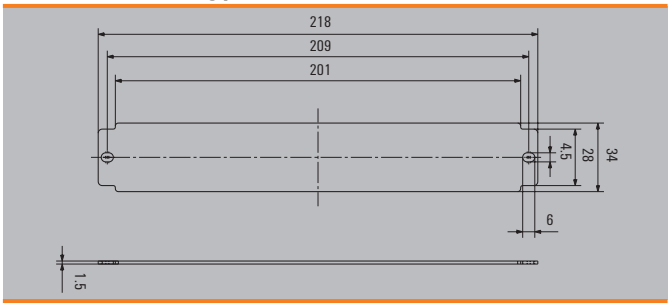

Klippon® POK 121209

Depth 90 mm

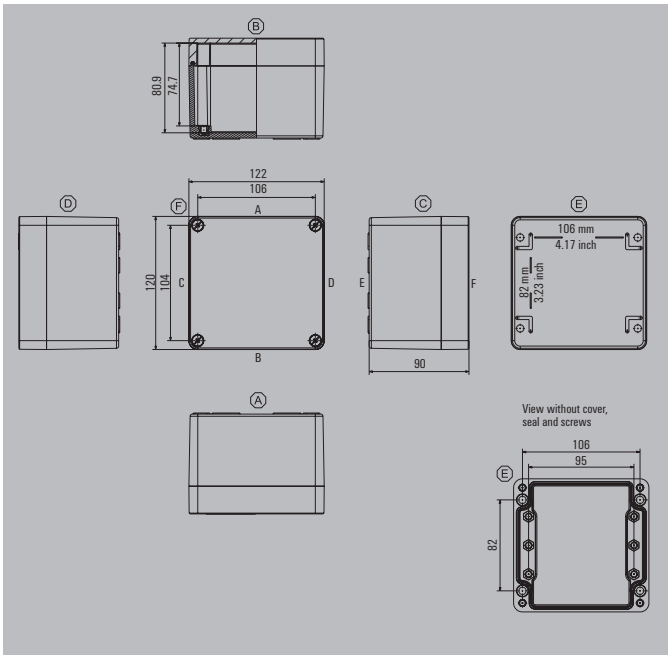

Height / Width / Depth	120 / 122 / 90 mm

Ordering data

RAL 7001	Order No.
Standard	1305870000
RAL 9011	
Ex enclosure	1306050000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510590000
Steel sheet, galvanized for applications with earthing plate	1534340000
Fastening screws for mounting plates	0642600000
Mounting rails, TS15x5	
Horizontally	8000003890
Brass Earth Continuity Plate	
Brass	1390970000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x12
4 mm²	*	1x10
6 mm²		1x7
10 mm²		1x6
16 mm²		1x5

Note
The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal block ZDU or PUSH IN technology A2C
TS 32 Mounting rail with clamping yoke technology SAK
TS 15 Mounting rail with clamping yoke technology AKZ
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	12	8
M16	6	4
M20	4	3
M25	2	1
M32	1	1
M40		
M50		
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

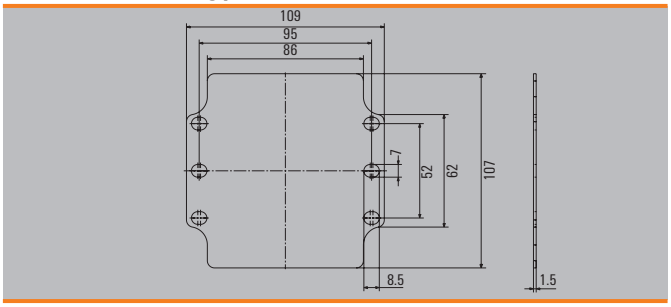

Klippon® POK 122209

Depth 90 mm

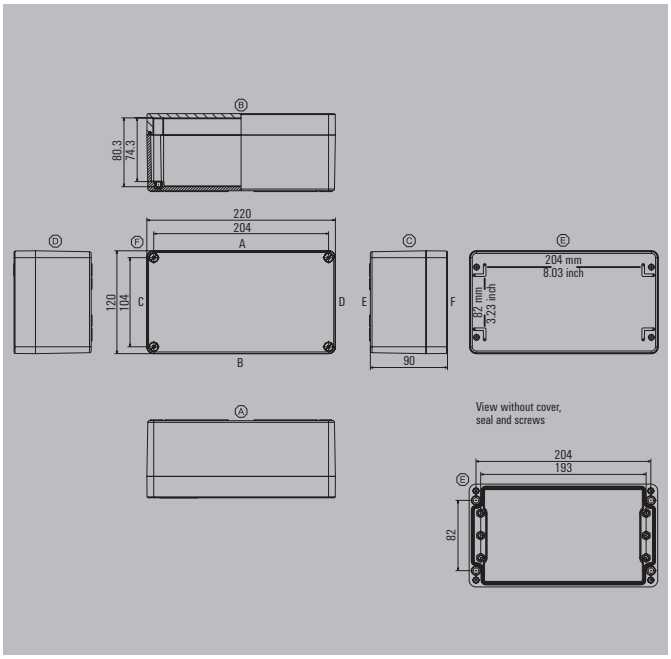

Height / Width / Depth	120 / 220 / 90 mm

Ordering data

RAL 7001	Order No.
Standard	1305880000
RAL 9011	
Ex enclosure	1306070000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510600000
Steel sheet, galvanized for applications with earthing plate	1534350000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000037568
Brass Earth Continuity Plate	
Brass	1390980000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x31
4 mm²	*	1x26
6 mm²		1x19
10 mm²		1x15
16 mm²		1x13

Note
The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	24	8
M16	14	4
M20	12	3
M25	5	1
M32	4	1
M40	3	
M50		
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

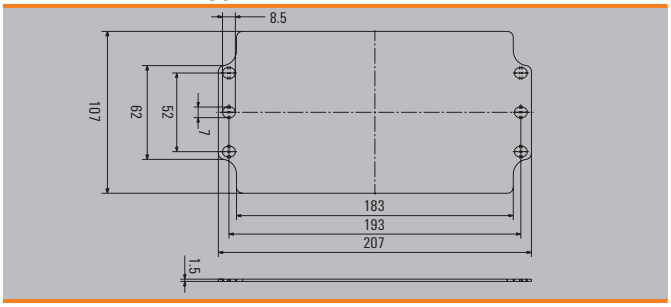

Klippon® POK 161609

Depth 90 mm

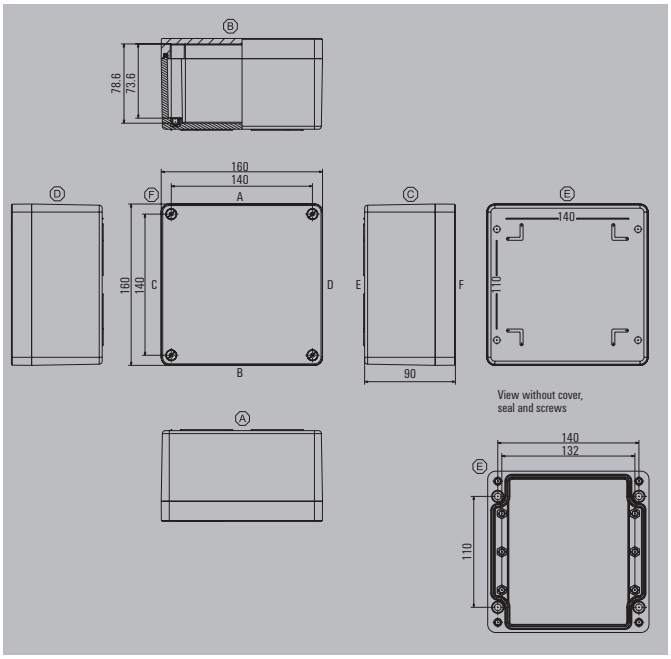

Height / Width / Depth	160 / 160 / 90 mm

Ordering data

RAL 7001	Order No.
Standard	1305890000
RAL 9011	
Ex enclosure	1306080000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510610000
Steel sheet, galvanized for applications with earthing plate	1534360000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000003908
Brass Earth Continuity Plate	
Brass	1390990000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)

Assembly with terminal		vertical	horizontal
	2.5 mm²	*	1x17
	4 mm²	*	1x14
	6 mm²		1x11
	10 mm²		1x9
	16 mm²		1x7

Note
The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries		A / B	C / D
	M12	15	11
	M16	12	6
	M20	6	4
	M25	3	2
	M32	2	2
	M40	2	1
	M50		
	M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

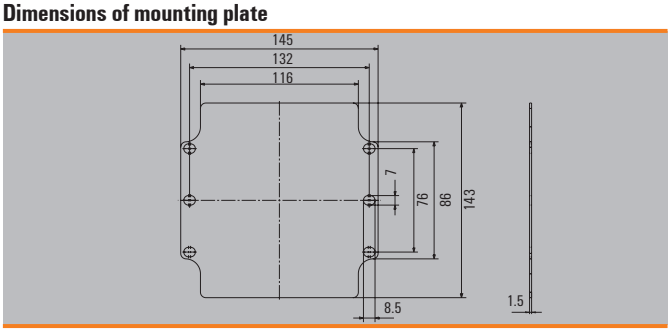

Klippon® POK 162609

Depth 90 mm

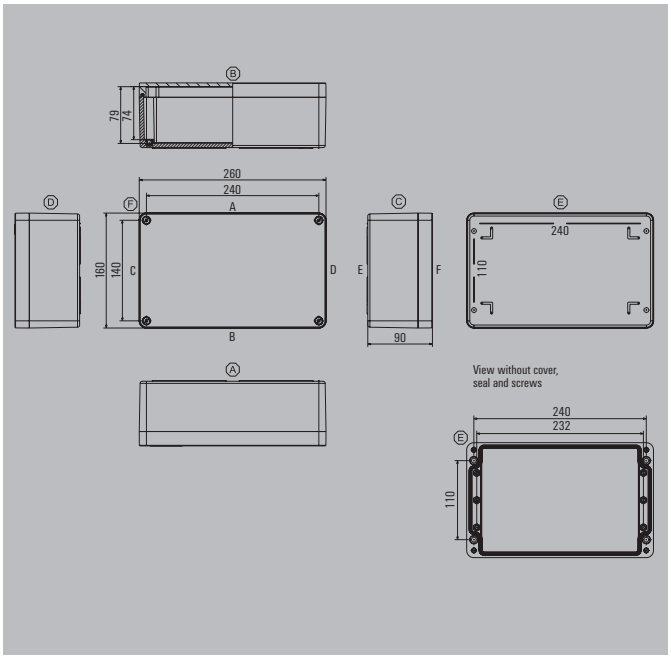

Height / Width / Depth	160 / 260 / 90 mm

Ordering data

RAL 7001	Order No.
Standard	1305900000
RAL 9011	
Ex enclosure	1306090000
Note The overview page lists the ambient temperatures.	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510620000
Steel sheet, galvanized for applications with earthing plate	1534370000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000003909
Brass Earth Continuity Plate	
Brass	1391000000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x36
4 mm²	*	1x30
6 mm²		1x23
10 mm²		1x16
16 mm²		1x16

Note

The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	30	11
M16	24	6
M20	14	4
M25	5	2
M32	4	2
M40	3	1
M50		
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

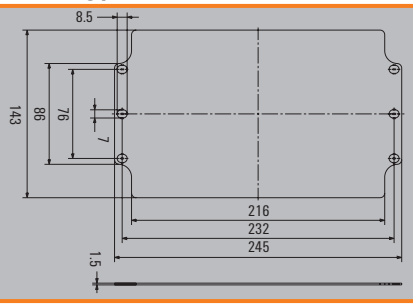

Note

Klippon® POK 163609

Depth 90 mm

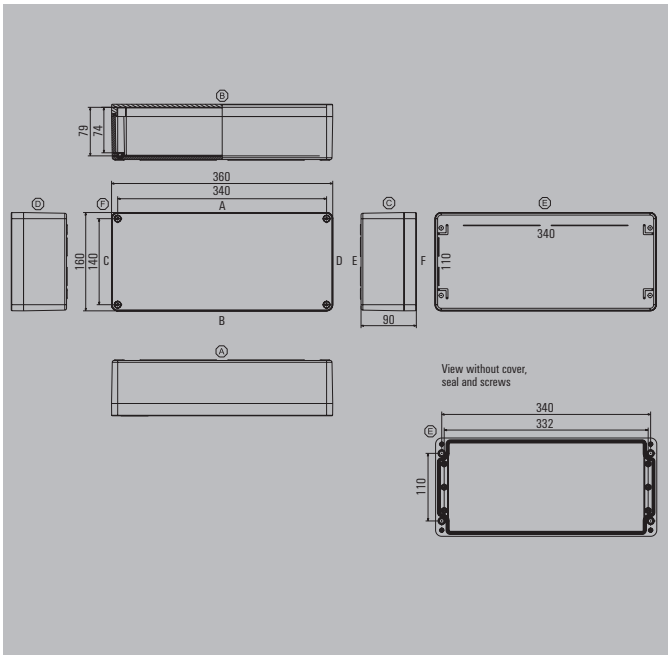

Height / Width / Depth	160 / 360 / 90 mm

Ordering data

RAL 7001	Order No.
Standard	1305910000
RAL 9011	
Ex enclosure	1306100000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510630000
Steel sheet, galvanized for applications with earthing plate	1534380000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000003910
Brass Earth Continuity Plate	
Brass	1391010000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x56
4 mm²	*	1x47
6 mm²		1x36
10 mm²		1x29
16 mm²		1x24

Note
The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	45	11
M16	36	6
M20	20	4
M25	8	2
M32	6	2
M40	5	1
M50		
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

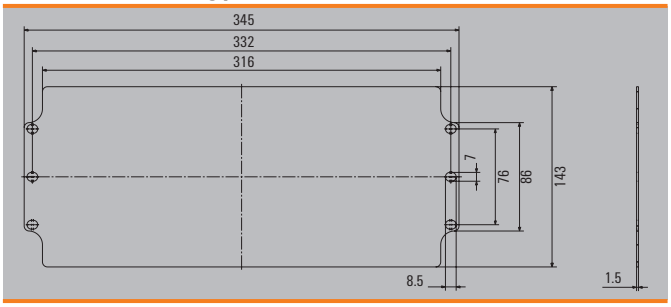

Klippon® POK 165609

Depth 90 mm

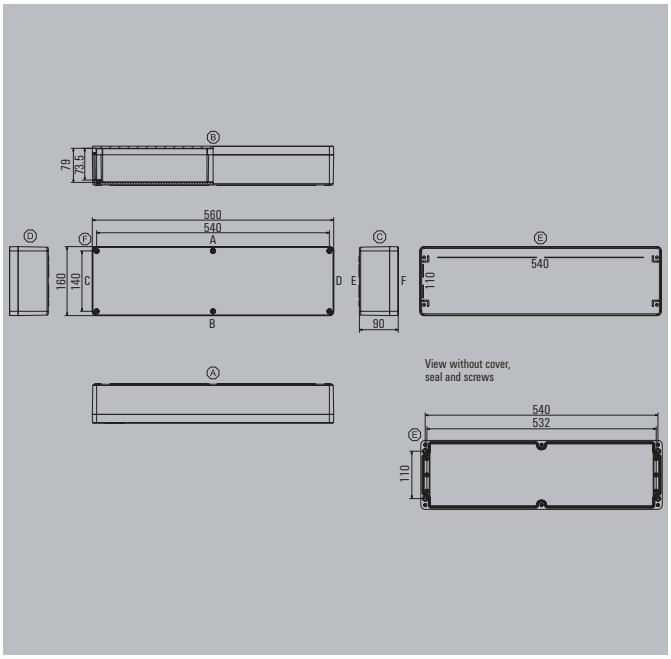

Height / Width / Depth	160 / 560 / 90 mm

Ordering data

RAL 7001	Order No.
Standard	1305920000
RAL 9011	
Ex enclosure	1306110000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510710000
Steel sheet, galvanized for applications with earthing plate	1534390000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000003911
Brass Earth Continuity Plate	
Brass	1391020000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)

Assembly with terminal	vertical	horizontal
2.5 mm²	*	1x94
4 mm²	*	1x79
6 mm²		1x60
10 mm²		1x49
16 mm²		1x41

Note
The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	66	11
M16	58	6
M20	32	4
M25	12	2
M32	10	2
M40	8	1
M50		
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

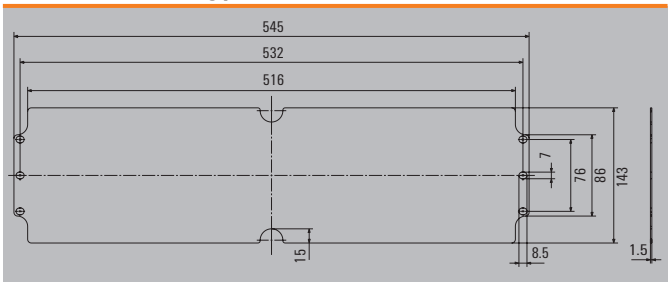

Klippon® POK 252512

Depth 120 mm

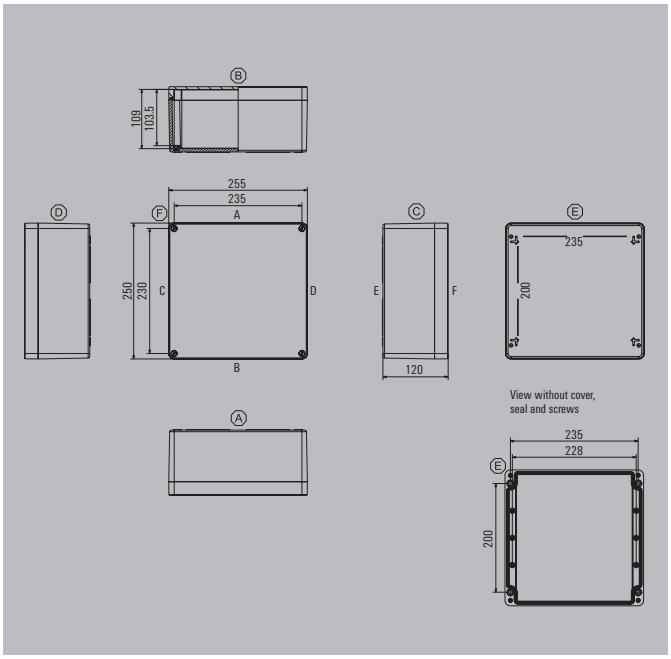

Height / Width / Depth	250 / 255 / 120 mm

Ordering data

RAL 7001	Order No.
Standard	1305930000
RAL 9011	
Ex enclosure	1306120000
Note The overview page lists the ambient temperatures.	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510640000
Steel sheet, galvanized for applications with earthing plate	1534410000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000003912
Brass Earth Continuity Plate	
Brass	1391030000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	2x38
4 mm²	*	2x31
6 mm²		2x23
10 mm²		2x19
16 mm²		2x15

Note

The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	36	32
M16	32	21
M20	10	15
M25	10	8
M32	8	3
M40	3	3
M50	2	2
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

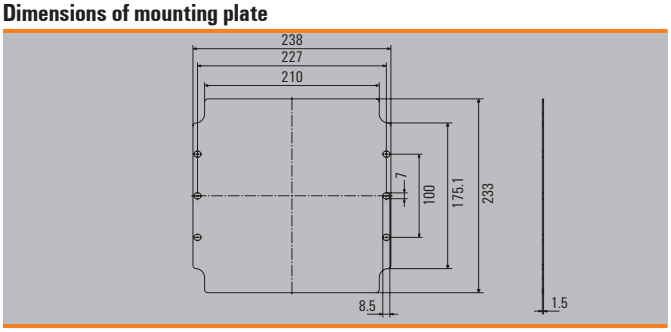

Klippon® POK 252516

Depth 160.5 mm

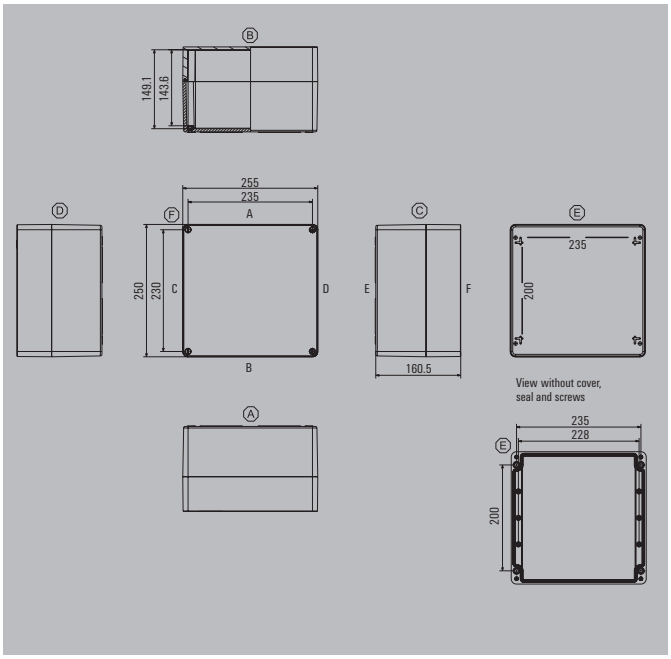

Height / Width / Depth	250 / 255 / 160.5 mm

Ordering data

RAL 7001	Order No.
Standard	1305980000
RAL 9011	
Ex enclosure	1306170000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510640000
Steel sheet, galvanized for applications with earthing plate	1534410000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000003912
Brass Earth Continuity Plate	
Brass	1391030000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	2x38
4 mm²	*	2x31
6 mm²		2x23
10 mm²		2x19
16 mm²		2x15

Note

The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	36	32
M16	32	21
M20	18	15
M25	10	8
M32	8	3
M40	3	3
M50	2	2
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

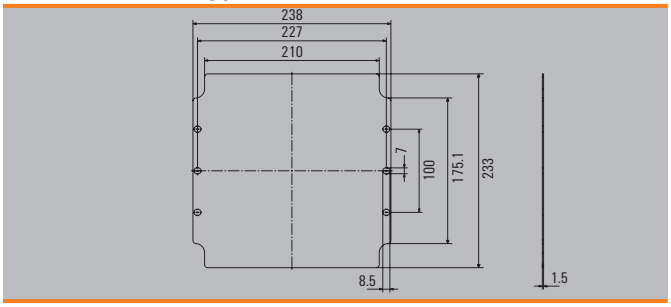

Klippon® POK 254012

Depth 120 mm

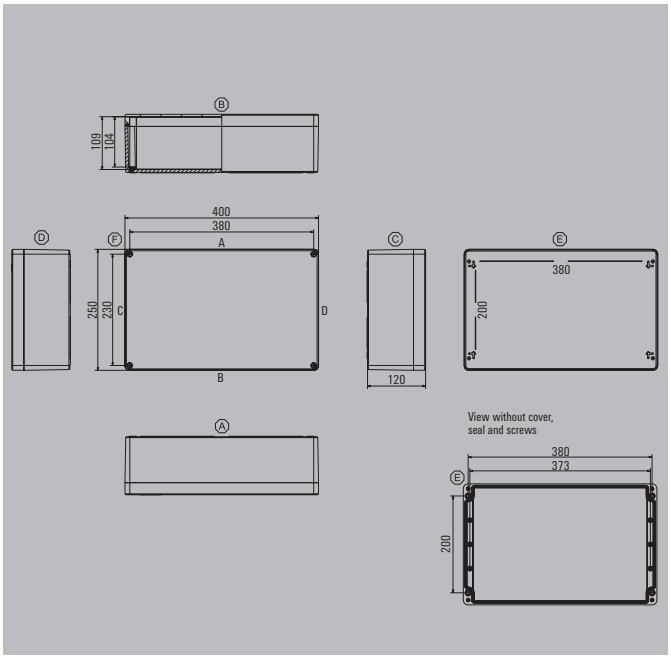

Height / Width / Depth	250 / 400 / 120 mm

Ordering data

RAL 7001	Order No.
Standard	1305940000
RAL 9011	
Ex enclosure	1306130000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510650000
Steel sheet, galvanized for applications with earthing plate	1534420000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000003913
Brass Earth Continuity Plate	
Brass	1391040000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	2x67
4 mm²	*	2x55
6 mm²		2x41
10 mm²		2x33
16 mm²		2x27

Note
The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	62	32
M16	54	21
M20	33	15
M25	18	8
M32	14	3
M40	6	3
M50	4	2
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

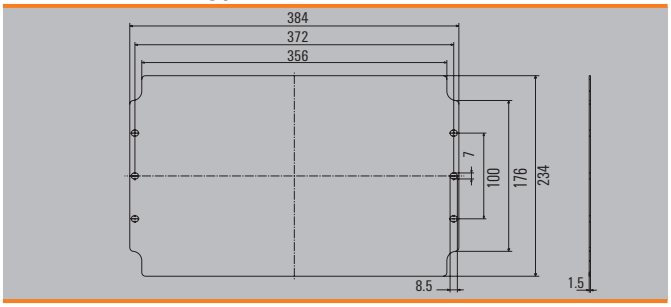

Klippon® POK 254016

Depth 160.5 mm

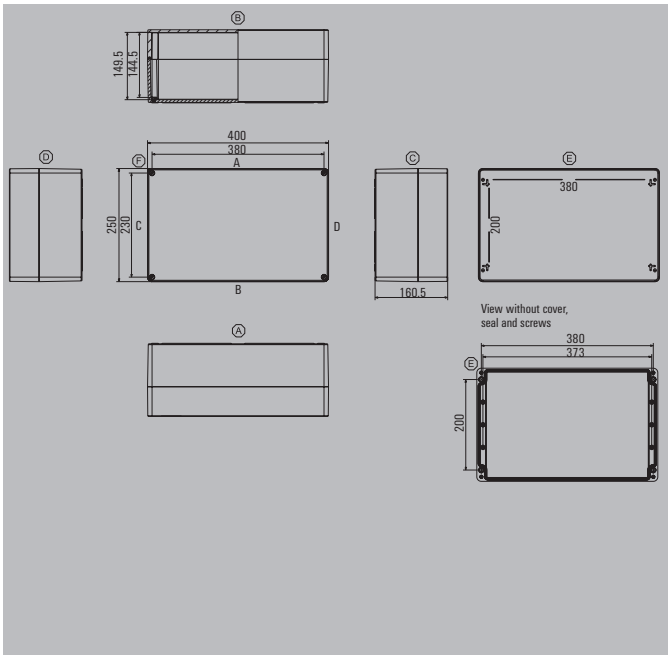

Height / Width / Depth	250 / 400 / 160.5 mm

Ordering data

RAL 7001	Order No.
Standard	1305990000
RAL 9011	
Ex enclosure	1306180000
Note The overview page lists the ambient temperatures.	

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510650000
Steel sheet, galvanized for applications with earthing plate	1534420000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000003913
Brass Earth Continuity Plate	
Brass	1391040000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	2x67
4 mm²	*	2x55
6 mm²		2x41
10 mm²		2x33
16 mm²		2x27

Note

The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	62	32
M16	54	21
M20	33	15
M25	18	8
M32	14	3
M40	6	3
M50	4	2
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

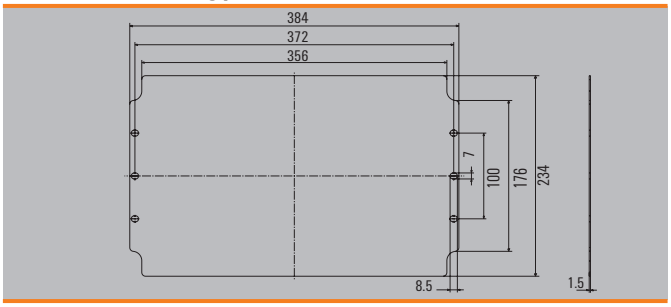

Klippon® POK 256012

Depth 120 mm

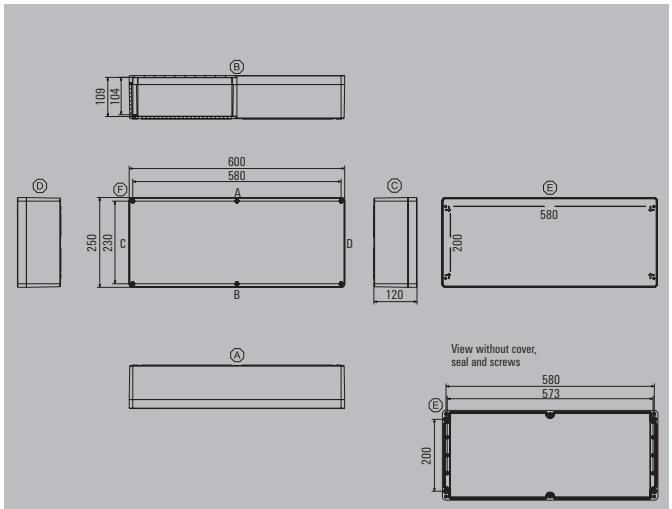

Height / Width / Depth	250 / 600 / 120 mm

Ordering data

RAL 7001	Order No.
Standard	1305950000
RAL 9011	
Ex enclosure	1306140000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510660000
Steel sheet, galvanized for applications with earthing plate	1534430000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000003914
Brass Earth Continuity Plate	
Brass	1391050000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)



Assembly with terminal	vertical	horizontal
2.5 mm²	*	2x107
4 mm²	*	2x89
6 mm²		2x66
10 mm²		2x53
16 mm²		2x44

Note
The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	96	32
M16	80	21
M20	24	15
M25	20	8
M32	20	3
M40	8	3
M50	6	2
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

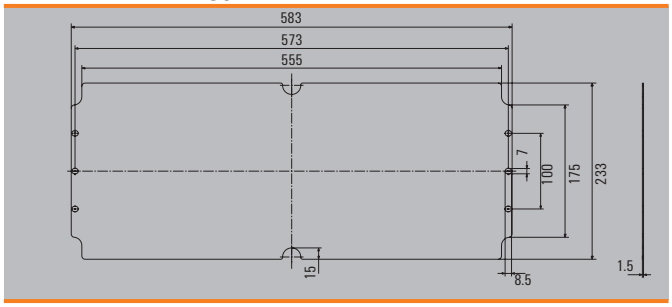

Klippon® POK 404012

Depth 120 mm

405 / 400 / 120 mm

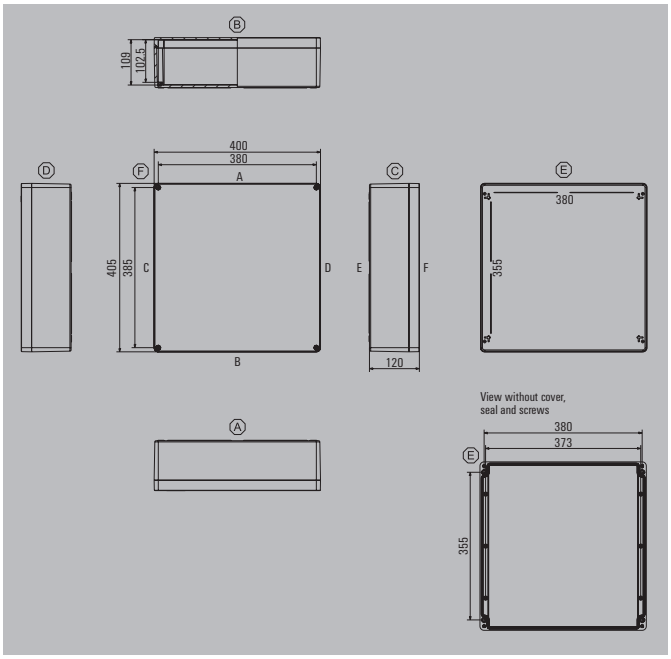

Ordering data

RAL 7001	Order No.
Standard	1305970000
RAL 9011	
Ex enclosure	1306150000

Note The overview page lists the ambient temperatures.

Accessories

Mounting plates and fastening screws	Order No.
Steel sheet, zinc plated	9510670000
Steel sheet, galvanized for applications with earthing plate	1534440000
Fastening screws for mounting plates	0642600000
Mounting rails, TS35x7.5	
Horizontally	8000003913
Brass Earth Continuity Plate	
Brass	1391070000
External mounting feet, set of 4	
Stainless steel 1.4301 natural	9510910000
Earthing stud	
Brass, M10	1277220000
Stainless steel 1.4404, M10	1283440000
Brass, M6	1277250000
Stainless steel 1.4404, M6	1283430000
Pressure compensation elements	
Polyamide 6, M12	1868570000
Stainless steel 1.4305, M12	1868550000
Stainless steel 1.4404, M20 for Ex applications	2519570000

Note

Guide value for max. number of terminals (industry)

Assembly with terminal	vertical	horizontal
2.5 mm²	*	3x67
4 mm²	*	3x55
6 mm²		3x41
10 mm²		3x33
16 mm²		3x27

Note
The assembly with terminal rails is designed for direct mounting.
The assembly with modular terminals gives consideration to a distance of 10 mm from the end of each mounting rail.
Recommendations for ordering:
TS 35 Mounting rail with clamping yoke technology WDU, spring-cage terminal ZDU or PUSH IN technology A2C
Order information for rail-mounted terminal blocks, please refer to the online catalogue
*There are no specified mounting options available for vertical mounting in the enclosure.

Guide value for max. number of cable entries

Cable entries	A / B	C / D
M12	62	60
M16	54	39
M20	33	30
M25	18	18
M32	14	7
M40	6	5
M50	4	4
M63		

Note ** Our IP 68 plastic cable glands are used as the reference for these guideline values.

Dimensions of mounting plate

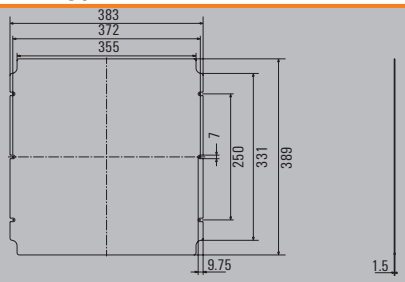

Note

Klippon® Protect Terminal Boxes
Product overview: Polyester enclosure

Use the product overview to find the right solution for you! Combine your own industrial version consisting of an enclosure, with or without threaded holes, a suitable mounting rail or pre-fitted terminal strips. The compatible components are always shown in a row.

Klippon® Protect offers you approved Terminal Boxes with for use in explosive areas can be found in the last column. They come with threaded holes and are already equipped with a terminal strip.

Polyester enclosure

Empty enclosure without threaded holes



Mounting rail (TS)
Mounting plate (MOPL)

Dimensions of the enclosure height x width x depth mm	Enclosure type	Order No.	Qty.	Type	Length mm	Rail mounting slot dimensions mm	Order No.	Qty.
Polyester, RAL 7001								
75 x 80 x 55	Klippon® 080806	**1305810000**	1	TS 15	68	4.5 x 20	**1928060000**	1
75 x 110 x 56	Klippon® 081106	**1305820000**	1	TS 15	98	4.5 x 20	**1928070000**	1
75 x 160 x 56	Klippon® 081606	**1305830000**	1	TS 15	147	4.5 x 20	**1928080000**	1
120 x 122 x 90	Klippon® 121209	**1305870000**	1	TS 35	105	6.3 x 20	**1910070000**	1
160 x 160 x 90	Klippon® 161609	**1305890000**	1	TS 35	140	6.3 x 20	**1910100000**	1
		protection class IP 66		suitable for the enclosure of the respective line				

[1] Multi-pole terminal blocks (block terminals BK 4, BK 6 or BK 12) can be directly fitted
[2] Space for further threaded holes up to M32

One Terminal Box
Ex-certified enclosures for customized solutions

Our One Terminal Boxes are equipped with one feed-through terminal (WDU 2.5 or WDU 4) as standard. You can flexibly expand the enclosure with terminals you need whereby you can count on our support at any time. The most convienient way to create Ex terminal boxes is to use our Fast Delivery Service with our Weidmüller Configurator (WMC): design your individual Ex terminal box in the WMC and receive your offer within minutes.



Empty enclosure with threaded holes



Terminal strip

Ex protected Terminal Boxes

Threaded hole Side A	Threaded hole Side B	Order No.	Qty.	Connection technology	Cross-section mm²	Number of DU*	Number of PE*	Order No.	Qty.	Order No.
2x M16	2x M16	**8000004160**	1	Screw connection	4	4	0	**8000004365**[1]	1	**8000004222**
2x M16	2x M16			Screw connection	4	6	2	**8000004144**	1	**8000004223**
2x M20	2x M20	**8000004161**	1	Screw connection	4	6	0	**8000004366**[1]	1	**8000004224**
2x M20	2x M20			Screw connection	4	10	2		1	**8000004225**
4x M20	4x M20	**8000004162**	1	Screw connection	4	12	0	**8000004367**[1]	1	**8000004226**
4x M20	4x M20			Screw connection	4	18	2	**8000004146**	1	**8000004228**
3x M20	3x M20	**8000003448**	1							**8000003593**
3x M20	3x M20									**8000003594**
4x M20	4x M20	**8000004164**[2]	1	Screw connection	4	16	2	**8000004142**	1	**8000004229**
4x M20	4x M20			Tension clamp connection	2.5	19	2	**8000004143**	1	**8000004230**

suitable for the enclosures of the respective line
*DU = feed-through terminals, PE = PE terminals

Ex enclosure with an external earthing connection, holes and strip terminals in each row

Klippon® POK 080806

55 mm

Height / Width / Depth	75 / 80 / 55 mm

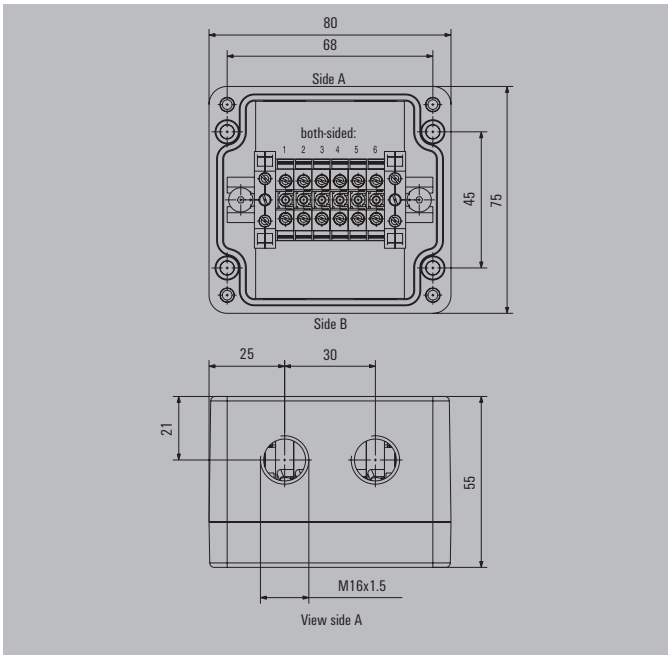

Accessories

Cable glands	Order No.
VG M16 EXE 5-8 SI7J G4	2722080000
VG M16 EXE 6-10 SI7J G4	2722090000
Stopping plugs	
VP M16 EX SI 7J	2066720000

Empty enclosure with tapped holes

Drill holes side A	Drill holes side B	Order No.
2 x M16x1.5	2 x M16x1.5	8000004160

Note

Note

Terminal block, suitable for empty enclosure

Type	Type of connection	Conductor can be clamped	Rated cross-section	No. of DU*	No. of PE*	Order No.
BK 4/E	Screw connection	Solid / stranded	0.5...4 mm² / 1.5...4 mm²	4	0	8000004365
		Flexible / flexible with wire-end ferrule	0.5...4 mm² / 0.5...4 mm²			
AKZ 4	Screw connection	Feed-through terminal for TS 15	0.5...6 mm² / 1.5...4 mm²	6	2	8000004144
			0.5...4 mm² / 0.5...2.5 mm²			

Note

Markers numbered 1-50 (horizontal text) and mounting screws are included in the delivery.
*DU = feed-through terminals, PE = PE terminals

Distribution box with ATEX II 2GD T85°C Ex e II T6

Drill holes side A	Drill holes side B	No. of DU*	No. of PE*	Order No.
2 x M16x1.5	2 x M16x1.5	6	2	8000004223
2 x M16x1.5	2 x M16x1.5	6	2	8000004222

Note

Enclosures are delivered in RAL 9011.
*DU = feed-through terminals, PE = PE terminals

Terminal rail / mounting plate set

Product type	Type	Length	Order No.
Rail	TS15 68 KLIPPON POK1 CSS		1928060000

Note

Klippon® POK 081106

56 mm

Height / Width / Depth	75 / 110 / 56 mm

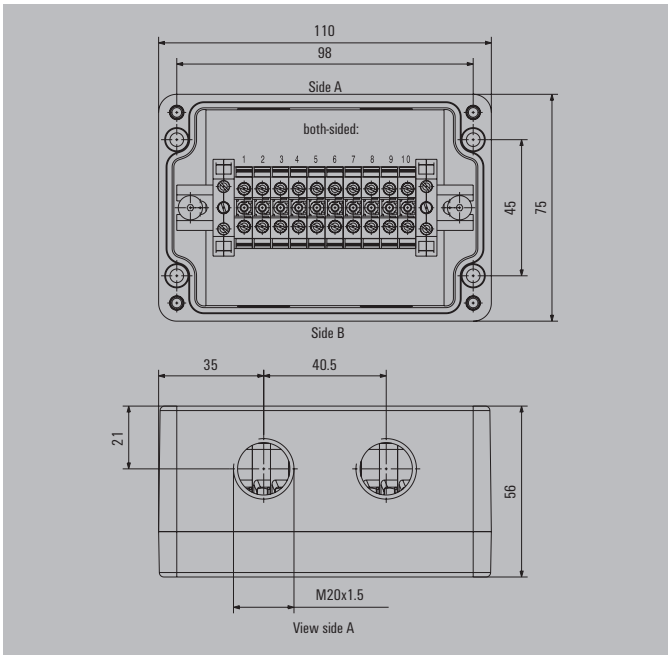

Accessories

Cable glands	Order No.
VG M20 EXE 7-13 SI7J G4	2722110000
VG M20 EXE 11-14 SI7J G4	2722120000

Stopping plugs	Order No.
VP M20 EX SI 7J	2066730000

Empty enclosure with tapped holes

Drill holes side A	Drill holes side B	Order No.
2 x M20x1.5	2 x M20x1.5	8000004161

Note

Note

Terminal block, suitable for empty enclosure

Type	Conductor can be clamped	Rated cross-section	No. of DU*	No. of PE*	Order No.
BK 6/E	Solid / stranded	0.5...4 mm² / 1.5...4 mm²	6	0	8000004366
	Flexible / flexible with wire-end ferrule	0.5...4 mm² / 0.5...4 mm²			

Note

Markers numbered 1-50 (horizontal text) and mounting screws are included in the delivery.
*DU = feed-through terminals, PE = PE terminals

Distribution box with ATEX II 2GD T85°C Ex e II T6

Drill holes side A	Drill holes side B	No. of DU*	No. of PE*	Order No.
2 x M20x1.5	2 x M20x1.5	10	2	8000004225
2 x M20x1.5	2 x M20x1.5	6	0	8000004224

Note

Enclosures are delivered in RAL 9011.
*DU = feed-through terminals, PE = PE terminals

Terminal rail / mounting plate set

Product type	Type	Length	Order No.
Rail	TS15 98 KLIPPON POK2 CSS		1928070000

Note

Klippon® POK 081606

56 mm

Height / Width / Depth	75 / 160 / 56 mm

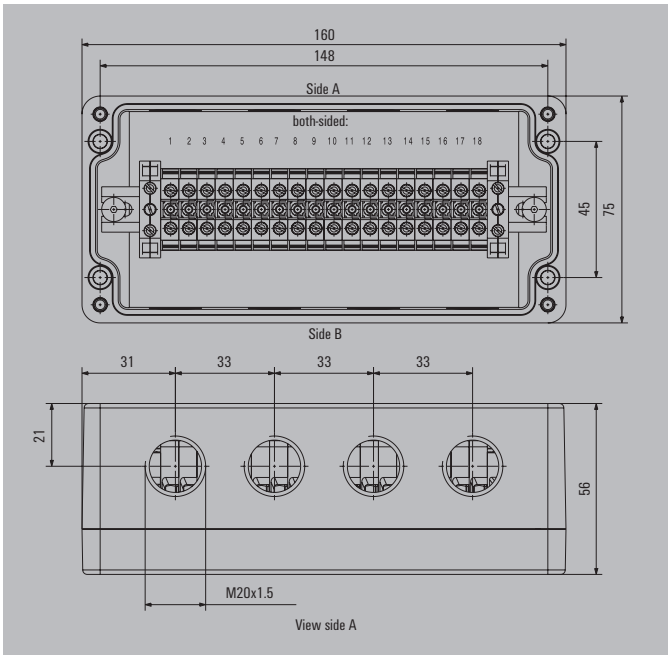

Accessories

Cable glands		Order No.
	VG M20 EXE 7-13 SI7J G4	2722110000
	VG M20 EXE 11-14 SI7J G4	2722120000
Stopping plugs		
	VP M20 EX SI 7J	2066730000

Empty enclosure with tapped holes

	Drill holes side A	Drill holes side B	Order No.
	4 x M20x1.5	4 x M20x1.5	8000004162

Note

Note

Terminal block, suitable for empty enclosure

	Type	Conductor can be clamped	Rated cross-section	No. of DU*	No. of PE*	Order No.
	BK 12/E	Solid / stranded	0.5...4 mm² / 1.5...4 mm²	12	0	8000004367
		Flexible / flexible with wire-end ferrule	0.5...4 mm² / 0.5...4 mm²			
	AKZ 4	Feed-through terminal for TS 15	0.5...6 mm² / 1.5...4 mm²	18	2	8000004146
			0.5...4 mm² / 0.5...2.5 mm²			

Note Markers numbered 1-50 (horizontal text) and mounting screws are included in the delivery.
*DU = feed-through terminals, PE = PE terminals

Distribution box with ATEX II 2GD T85°C Ex e II T6

Drill holes side A	Drill holes side B	No. of DU*	No. of PE*	Order No.
4 x M20x1.5	4 x M20x1.5	18	2	8000004228
4 x M20x1.5	4 x M20x1.5	12	0	8000004226

Terminal rail / mounting plate set

	Product type	Type	Length	Order No.
	Rail	TS15 147 KLIPPON POK3 CSS		1928080000

Note Enclosures are delivered in RAL 9011.
*DU = feed-through terminals, PE = PE terminals

Note

Klippon® POK 121209

90 mm

Height / Width / Depth	120 / 122 / 90 mm

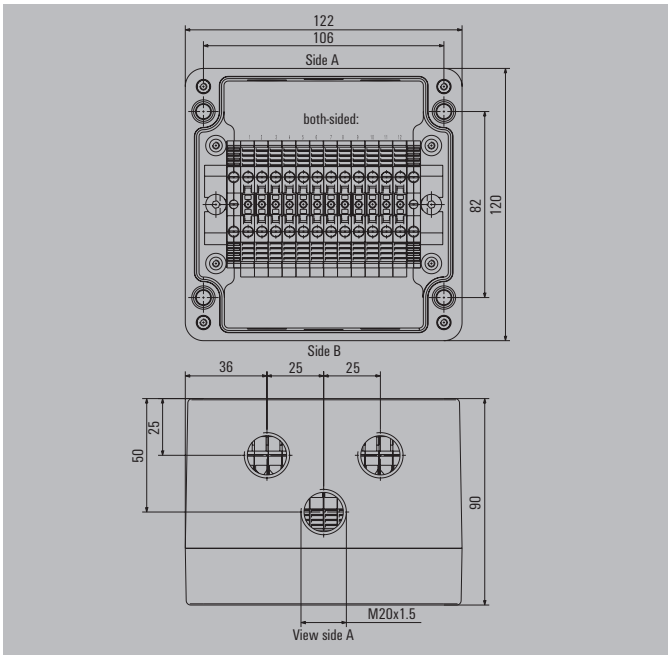

Accessories

Cable glands		Order No.
	VG M20 EXE 7-13 SI7J G4	2722110000
	VG M20 EXE 11-14 SI7J G4	2722120000
Stopping plugs		
	VP M20 EX SI 7J	2066730000

Empty enclosure with tapped holes

	Drill holes side A	Drill holes side B	Order No.
	3 x M20x1.5	3 x M20x1.5	8000003448

Note

Note

Distribution box with ATEX II 2GD T85°C Ex e II T6

Drill holes side A	Drill holes side B	No. of DU*	No. of PE*	Order No.
3 x M20x1.5	3 x M20x1.5	12	2	8000003593
3 x M20x1.5	3 x M20x1.5	9	2	8000003594

Note

Enclosures are delivered in RAL 9011.
*DU = feed-through terminals, PE = PE terminals

Terminal rail / mounting plate set

	Product type	Type	Length	Order No.
	Rail	TS35 105 KLIPPON K41/POK4		1910070000

Note

Klippon® POK 161609

90 mm

Height / Width / Depth	160 / 160 / 90 mm

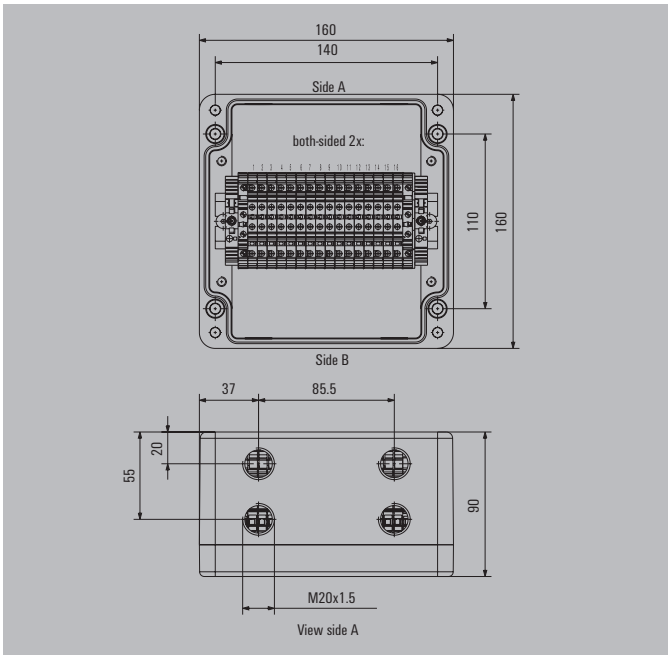

Accessories

Cable glands		Order No.
	VG M20 EXE 7-13 SI7J G4	2722110000
	VG M20 EXE 11-14 SI7J G4	2722120000
Stopping plugs		
	VP M20 EX SI 7J	2066730000

Empty enclosure with tapped holes

	Drill holes side A	Drill holes side B	Order No.
	4 x M20x1.5	4 x M20x1.5	8000004164

Note

Note

Terminal block, suitable for empty enclosure

	Type	Conductor can be clamped	Rated cross-section	No. of DU*	No. of PE*	Order No.
	ZDK 2.5	Double-level terminal	0.5...2.5 mm² / ... 0.5...2.5 mm² / 0.5...2.5 mm²	19	2	8000004143
	WDK 4N	Solid/stranded Flexible / flexible with wire-end ferrule	0.5...6 mm² / 1.5...6 mm² 0.5...4 mm² / 0.5...4 mm²	16	2	8000004142

Note

Markers numbered 1-50 (horizontal text) and mounting screws are included in the delivery.
*DU = feed-through terminals, PE = PE terminals

Distribution box with ATEX II 2GD T85°C Ex e II T6

Drill holes side A	Drill holes side B	No. of DU*	No. of PE*	Order No.
4 x M20x1.5	4 x M20x1.5	16	2	8000004229
4 x M20x1.5	4 x M20x1.5	19	2	8000004230

Note

Enclosures are delivered in RAL 9011.
*DU = feed-through terminals, PE = PE terminals

Terminal rail / mounting plate set

	Product type	Type	Length	Order No.
	Rail	TS35/140 KLIPPON K52 POK51		1910100000

Note

Safely control work processes in hazardous areas on site

With certified enclosure solutions with control and display elements

Harsh industrial environments and hazardous areas, such as in the oil and gas industry, place extreme demands on the safety, the robustness and quality of products and devices.

We meet these challenges with the Klippon® Control Station, the addition to our range of customised enclosure solutions. More than 50 years of expertise have made us market leader in this area with global competence centres. The basis of our enclosure solutions is provided by the usual Weidmüller quality and comprehensive approvals for explosion hazard areas. Based on this, our sturdy "on-site control station" is available in two standard sizes and with up to four control and display elements and provides a flexible solution to meet your specific needs.

Order your distributor enclosure as well as control and signaling units from a single source and from one enclosure design – for reliable security and reduced storage costs for maintenance and repair operations.

Your special advantages:
Ideal for urgent service calls
We have prepared modules of the proven Klippon® enclosures POK available for you for further processing. This means we manufacture a control solution suitable for your application at short notice.

Predestined for emergency shutdown applications: Klippon® Control Stations score when it comes to the safe shutdown of plant sections, such as in the process industry

Project solutions from a single source
Obtain command/signaling units and distribution and control boxes as a complete solution – tailored to the individual requirements of your projects in hazardous areas.

Customised assembly
In addition to standard types from stock, you can obtain enclosure solutions from us that are completely assembled and equipped according to customer requirements.

A variety of sizes and materials
Enclosures in stainless steel, aluminium or polyester are available for different environmental conditions. Depending on the size of the enclosure, it provides space for the integration of up to four control and display elements.

International certificates
The Klippon® Control Station is tested and certified among others according to ATEX and IECEx.

Robust solutions for demanding environments

Klippon® Protect provides high-quality polyester enclosures

Our enclosures made of high-quality polyester (Klippon® POK) are the ideal solutions for demanding electrical connectivity applications. They are particularly suitable for applications that demand corrosion resistance, impact resistance and a high protection class. Suitable for use within hazardous environments.

Additional features:

- Extremely robust, weather-proof and impact-resistant up to 7 joules
- Simple fastening of mounting rails
- High ingress protection IP66

Technical data	Polyester enclosures
Material	Glass-fibre reinforced polyester with graphite mixture
Surface finish	Natural, black
Colour	Similar to RAL 9011
IP protection class	IP 54; IP 66
Ambient temperature	-55 °C to 55 °C
Seal material of enclosure	Silicone (VMQ)
Seal material of command and signalling units	EPDM
Flammability rating	-
Impact resistance IK	7 joules in acc. with IEC60079-0 4 joules in acc. with IEC60079-0 with integrated illuminated pushbutton or light module
Cable gland material	Polyamide
Cable gland clamping area min. – max. in mm	
M20	Available on request
M25	6–12 mm
Max. rated cross-section	2.5 mm²
Max. operating voltage	400 V
with integrated illuminated pushbutton or lighting module	250 V
Maximum operating current at 40 °C ambient temperature	
1.5 mm² – T6	10 A
1.5 mm² – T5	16 A
2.5 mm² – T6	16 A
Maximum operating current at 55 °C ambient temperature	
1.5 mm² – T4	16 A
1.5 mm² – T5	10 A
2.5 mm² – T5	16 A
Temperature class	T4, T5, T6
Type of mounting	Wall mounting
Earthing inside	Earth terminal
Lid attachment	Crosshead screws, stainless steel
Lid screw torque	2.5–3.0 Nm
Earthing torque	-
Earthing outside	Available on request
Approvals	IECEXITA14.0013X TUEV14ATEX7606X LMP 21.0019X
Marking	2G Ex e d IIC T* Gb 2G Ex ib d [ia] IIC T* Gb 2D Ex tb IIIC T80/100 °C Db
Mounting feet	9510910000

Use our online catalogue to find additional product details, technical information and additional services:

www.weidmueller.com/klipponcontrolstation

	Number of built-in components				Emergency stop pushbutton	Key switch	Pushbutton		Illuminated pushbutton		Light module		Dimensions with built-in components HxWxD in mm	Designation	Cable gland	Order number	
	●	● ●	● ● ●	● ● ● ●	red	I – 0 – II	red	green	red	green	red	green					
Polyester	●				1								152x120x128	KLIPPON CS POK 121209-2	VG M25	**1537070000**	
	●							1					152x120x103	KLIPPON CS POK 121209-2	VG M25	**1537080000**	
	●					1							152x120x117	KLIPPON CS POK 121209-2	VG M25	**1537090000**	
	●									1			152x120x105	KLIPPON CS POK 121209-2	VG M25	**1537100000**	
		●					1	1					152x120x103	KLIPPON CS POK 121209-4	VG M25	**1537110000**	
		●						1				1	152x120x112	KLIPPON CS POK 121209-4	VG M25	**1537120000**	
		●			1						1		152x120x128	KLIPPON CS POK 121209-4	VG M25	**1537130000**	
			●				1	1				1	250x120x112	KLIPPON CS POK 122209-2	VG M25	**1537140000**	
			●				1	2					250x120x103	KLIPPON CS POK 122209-2	VG M25	**1537150000**	
			●		1		1	1					250x120x128	KLIPPON CS POK 122209-2	VG M25	**1537170000**	
				●			1	1			1	1	250x120x112	KLIPPON CS POK 122209-4	VG M25	**1537180000**	

Technical data

	Klippon® CS POK 121209-2	Klippon® CS POK 121209-2
Enclosure		
Dimensions with installation (HxBxD)	152 / 120 / 128 mm	152 / 120 / 103 mm
Material	Glass-fibre reinforced polyester with graphite mixture	Glass-fibre reinforced polyester with graphite mixture
General characteristics		
Surface finish / Colour	untreated / graphite black	untreated / graphite black
Protection class	IP54, IP66	IP54, IP66
Ambient temperature	-55 °C...+55 °C	-55 °C...+55 °C
Impact resistance	7 joules in acc. with IEC60079-0	7 joules in acc. with IEC60079-0
UL 94 flammability rating	V-0	V-0
Enclosure seal material	Silicone (VMQ)	Silicone (VMQ)
Seal material of operating and display elements	EPDM	EPDM
Type of mounting	Wall mounting	Wall mounting
External earth	Available on request	Available on request
Lid attachment	Crosshead screws, stainless steel	Crosshead screws, stainless steel
Torque for lid screws	2.5 Nm	2.5 Nm
Electrical properties*		
Wire connection cross section, finely stranded, max.	2.5 mm²	2.5 mm²
Operating voltage, max.	400 V	400 V
Temperature class	T4, T5, T6	T4, T5, T6
Enclosure assembly		
1 Position in enclosure	EMERGENCY-STOP pushbutton with yellow, contrasting label	Pushbutton - green
2 Position in enclosure		
3 Position in enclosure		
4 Position in enclosure		
Contact design	2 NC contact, positive opening contacts	1 NC contact, 1 NO contacts
Actuators	EMERGENCY STOP pushbutton	Pushbutton
Actuator colour	red	green
Illumination module colour		
Illuminated button actuator colour		
Cable entries		
Drill holes side B	1 x M25	1 x M25
Cable gland	2721990000 - VG M25 EXE 12-17 CR7J G4	2721990000 - VG M25 EXE 12-17 CR7J G4
Clamping range min. / max.	12 mm / 17 mm	12 mm / 17 mm
Approval and Marking		
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-31	IEC 60079-0, IEC 60079-7, IEC 60079-31
Certificate No. (IECEX)	IECEXITA14.0013X	IECEXITA14.0013X
Certificate No. (ATEX)	TUEV14ATEX7606X	TUEV14ATEX7606X
Certificate no. Terminal Box (INMETRO)	LMP 21.0019X	LMP 21.0019X
Marking	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
Accessories		
Mounting feet	9510910000 - MF POK BIG	9510910000 - MF POK BIG

Note

Ordering data

Type	Qty.	Order No.
KLIPPON CS POK 121209-2	1	**1537070000**

Type	Qty.	Order No.
KLIPPON CS POK 121209-2	1	**1537080000**

Note

*Other temperature classes and connection values on request, or see "Notice to Installer".

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS POK 121209-2

152 / 120 / 117 mm
Glass-fibre reinforced polyester with graphite mixture
untreated / graphite black
IP54, IP66
-55 °C...+55 °C
7 joules in acc. with IEC60079-0
V-0
Silicone (VMQ)
EPDM
Wall mounting
Available on request
Crosshead screws, stainless steel
2.5 Nm
2.5 mm²
400 V
T4, T5, T6
Key-operated switch
1 NC contact, 1 NO contacts
Key-operated switch, 3 switching positions, I - 0 - II, (I + II), latching, Key retractable
1 x M25
2721990000 - VG M25 EXE 12-17 CR7J G4
12 mm / 17 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
9510910000 - MF POK BIG

Type	Qty.	Order No.
KLIPPON CS POK 121209-2	1	**1537090000**

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS POK 121209-2

152 / 120 / 105 mm
Glass-fibre reinforced polyester with graphite mixture
untreated / graphite black
IP54, IP66
-55 °C...+55 °C
4 joules in acc. with IEC60079-0
V-0
Silicone (VMQ)
EPDM
Wall mounting
Available on request
Crosshead screws, stainless steel
2.5 Nm
2.5 mm²
250 V
T4, T5, T6
Illuminated pushbutton - green
2 NO contacts
Pushbutton
green
green
1 x M25
2721990000 - VG M25 EXE 12-17 CR7J G4
12 mm / 17 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
9510910000 - MF POK BIG

Type	Qty.	Order No.
KLIPPON CS POK 121209-2	1	**1537100000**

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS POK 121209-4

152 / 120 / 103 mm
Glass-fibre reinforced polyester with graphite mixture
untreated / graphite black
IP54, IP66
-55 °C...+55 °C
7 joules in acc. with IEC60079-0
V-0
Silicone (VMQ)
EPDM
Wall mounting
Available on request
Crosshead screws, stainless steel
2.5 Nm
2.5 mm²
400 V
T4, T5, T6
Pushbutton - red
Pushbutton - green
2 NC contact, 2 NO contacts
Pushbutton
red, green
1 x M25
2721990000 - VG M25 EXE 12-17 CR7J G4
12 mm / 17 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
9510910000 - MF POK BIG

Type	Qty.	Order No.
KLIPPON CS POK 121209-4	1	**1537110000**

*Other temperature classes and connection values on request, or see "Notice to Installer".

Technical data

	Klippon® CS POK 121209-4	Klippon® CS POK 121209-4
Enclosure		
Dimensions with installation (HxBxD)	152 / 120 / 112 mm	152 / 120 / 128 mm
Material	Glass-fibre reinforced polyester with graphite mixture	Glass-fibre reinforced polyester with graphite mixture
General characteristics		
Surface finish / Colour	untreated / graphite black	untreated / graphite black
Protection class	IP54, IP66	IP54, IP66
Ambient temperature	-55 °C...+55 °C	-55 °C...+55 °C
Impact resistance	4 joules in acc. with IEC60079-0	4 joules in acc. with IEC60079-0
UL 94 flammability rating	V-0	V-0
Enclosure seal material	Silicone (VMQ)	Silicone (VMQ)
Seal material of operating and display elements	EPDM	EPDM
Type of mounting	Wall mounting	Wall mounting
External earth	Available on request	Available on request
Lid attachment	Crosshead screws, stainless steel	Crosshead screws, stainless steel
Torque for lid screws	2.5 Nm	2.5 Nm
Electrical properties*		
Wire connection cross section, finely stranded, max.	2.5 mm²	2.5 mm²
Operating voltage, max.	250 V	250 V
Temperature class	T4, T5, T6	T4, T5, T6
Enclosure assembly		
1 Position in enclosure	Light module - green	Light module - red
2 Position in enclosure	Pushbutton - green	EMERGENCY-STOP pushbutton with yellow, contrasting label
3 Position in enclosure		
4 Position in enclosure		
Contact design	1 NC contact, 1 NO contacts	2 NC contact, positive opening contacts
Actuators	Pushbutton	EMERGENCY STOP pushbutton
Actuator colour	green	red
Illumination module colour	green	red
Illuminated button actuator colour		
Cable entries		
Drill holes side B	1 x M25	1 x M25
Cable gland	2721990000 - VG M25 EXE 12-17 CR7J G4	2721990000 - VG M25 EXE 12-17 CR7J G4
Clamping range min. / max.	12 mm / 17 mm	12 mm / 17 mm
Approval and Marking		
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-31	IEC 60079-0, IEC 60079-7, IEC 60079-31
Certificate No. (IECEX)	IECEXITA14.0013X	IECEXITA14.0013X
Certificate No. (ATEX)	TUEV14ATEX7606X	TUEV14ATEX7606X
Certificate no. Terminal Box (INMETRO)	LMP 21.0019X	LMP 21.0019X
Marking	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
Accessories		
Mounting feet	9510910000 - MF POK BIG	9510910000 - MF POK BIG

Note

Ordering data

Type	Qty.	Order No.
KLIPPON CS POK 121209-4	1	**1537120000**

Type	Qty.	Order No.
KLIPPON CS POK 121209-4	1	**1537130000**

Note

*Other temperature classes and connection values on request, or see "Notice to Installer".

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS POK 122209-2

250 / 120 / 112 mm
Glass-fibre reinforced polyester with graphite mixture
untreated / graphite black
IP54, IP66
-55 °C...+55 °C
4 joules in acc. with IEC60079-0
V-0
Silicone (VMQ)
EPDM
Wall mounting
Available on request
Crosshead screws, stainless steel
2.5 Nm
2.5 mm²
250 V
T4, T5, T6
Pushbutton - red
Light module - green
Pushbutton - green
2 NC contact, 2 NO contacts
Pushbutton
red, green
green
1 x M25
2721990000 - VG M25 EXE 12-17 CR7J G4
12 mm / 17 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
9510910000 - MF POK BIG

Type	Qty.	Order No.
KLIPPON CS POK 122209-2	1	**1537140000**

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS POK 122209-2

250 / 120 / 103 mm
Glass-fibre reinforced polyester with graphite mixture
untreated / graphite black
IP54, IP66
-55 °C...+55 °C
7 joules in acc. with IEC60079-0
V-0
Silicone (VMQ)
EPDM
Wall mounting
Available on request
Crosshead screws, stainless steel
2.5 Nm
2.5 mm²
400 V
T4, T5, T6
Pushbutton - green
Pushbutton - red
Pushbutton - green
3 NC contact, 3 NO contacts
Pushbutton
green, red
1 x M25
2721990000 - VG M25 EXE 12-17 CR7J G4
12 mm / 17 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
9510910000 - MF POK BIG

Type	Qty.	Order No.
KLIPPON CS POK 122209-2	1	**1537150000**

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS POK 122209-2

250 / 120 / 128 mm
Glass-fibre reinforced polyester with graphite mixture
untreated / graphite black
IP54, IP66
-55 °C...+55 °C
7 joules in acc. with IEC60079-0
V-0
Silicone (VMQ)
EPDM
Wall mounting
Available on request
Crosshead screws, stainless steel
2.5 Nm
2.5 mm²
400 V
T4, T5, T6
Pushbutton - green
Pushbutton - red
EMERGENCY-STOP pushbutton with yellow, contrasting label
2 NO contacts, 2 NC contact, positive opening contacts
Pushbutton, EMERGENCY STOP pushbutton
green, red
1 x M25
2721990000 - VG M25 EXE 12-17 CR7J G4
12 mm / 17 mm
IEC 60079-0, IEC 60079-7, IEC 60079-31
IECEXITA14.0013X
TUEV14ATEX7606X
LMP 21.0019X
II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
9510910000 - MF POK BIG

Type	Qty.	Order No.
KLIPPON CS POK 122209-2	1	**1537170000**

*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® CS POK 122209-4

Technical data

Enclosure	
Dimensions with installation (HxBxD)	250 / 120 / 112 mm
Material	Glass-fibre reinforced polyester with graphite mixture
General characteristics	
Surface finish / Colour	untreated / graphite black
Protection class	IP54, IP66
Ambient temperature	-55 °C...+55 °C
Impact resistance	4 joules in acc. with IEC60079-0
UL 94 flammability rating	V-0
Enclosure seal material	Silicone (VMQ)
Seal material of operating and display elements	EPDM
Type of mounting	Wall mounting
External earth	Available on request
Lid attachment	Crosshead screws, stainless steel
Torque for lid screws	2.5 Nm
Electrical properties*	
Wire connection cross section, finely stranded, max.	2.5 mm²
Operating voltage, max.	250 V
Temperature class	T4, T5, T6
Enclosure assembly	
1 Position in enclosure	Light module - red
2 Position in enclosure	Pushbutton - red
3 Position in enclosure	Light module - green
4 Position in enclosure	Pushbutton - green
Contact design	2 NC contact, 2 NO contacts
Actuators	Pushbutton
Actuator colour	green, red
Illumination module colour	red, green
Illuminated button actuator colour	
Cable entries	
Drill holes side B	1 x M25
Cable gland	2721990000 - VG M25 EXE 12-17 CR7J G4
Clamping range min. / max.	12 mm / 17 mm
Approval and Marking	
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-31
Certificate No. (IECEX)	IECEXITA14.0013X
Certificate No. (ATEX)	TUEV14ATEX7606X
Certificate no. Terminal Box (INMETRO)	LMP 21.0019X
Marking	II 2 G Ex d e IIC T* Gb II 2 D Ex tb IIIC T*°C Db
Accessories	
Mounting feet	9510910000 - MF POK BIG

Note	

Ordering data

Type	Qty.	Order No.
KLIPPON CS POK 122209-4	1	**1537180000**

Note	*Other temperature classes and connection values on request, or see "Notice to Installer".

Klippon® Fire Rated Box

High functional integrity thanks to robust industrial enclosures

Fire protection enclosures are often used in tunnel systems. There they ensure that important electrical installations function reliably, even in the event of a fire. This is especially the case when it comes to emergency systems for lighting and ventilation. Fire protection enclosures in the Klippon® Fire Rated Box range are designed to maintain electrical connections for defined periods of 30, 60 or 90 minutes at high temperatures of up to 1,000 °C. The products are configured according to requirements and comply with the most common international standard DIN 4102-12 (E30, E60 and E90). Testing for compliance with additional specific standards can be carried out on request. Fire resistance certificates are valid for specific configurations. Other configurations must be certified separately.

The Klippon® Fire Rated Box is available in variants made of glass fibre-reinforced plastic (Klippon® POK) or sheet steel (Klippon® STB). Both variants are extremely robust, durable and resistant to the extremely harsh environmental conditions of tunnel systems. They are highly corrosion-resistant, protected according to IP66 and impact-resistant up to 10 joules. They are fitted with high-quality ceramic terminals from the Weidmüller portfolio.

Your special advantages:

- Particularly robust and durable industrial enclosures
- Reliable protection of electrical functions in harsh environments
- Permanently available complete solution with high-quality components from the Weidmüller range
- Standard enclosures tested according to the most common standard DIN 4102-12 (E30, E60, E90)
- Available in four individually adaptable variants made of glass fibre-reinforced plastic or sheet steel, with or without fuse inserts
- Additional variations and customised assemblies available on request
- Ceramic terminals available with optional fuse holder

Use our online catalogue to find additional product details, technical information and additional services:

www.weidmueller.com/klipponfireratedbox

Technical Overview

Technical data

POK	
Enclosure material	Glass fibre-reinforced polyester to DIN 16913
Surface finish	Grey, similar to RAL7001
IP protection class	IP66 to DIN EN 60529
Installation mounting	M4 to M6 threaded bushes
Enclosure attachment	4 holes for M4 to M6 screws
Cover attachment	M4/M6 slotted / crosshead screws made of stainless steel
Impact resistance	IK08 (5J) acc. to DIN EN 50102
Gasket material	Chloroprene
Temperature range	-20 °C ... +80 °C
Torque screws for cover M4	2.0 – 2.5 Nm
Torque screws for cover M6	2.5 – 3.0 Nm
Surface resistance (in ohms)	1012 Ohm
Toxicity	Halogen and cadmium-free
Connection	SAKK Series ceramic terminals
Fuse carrier	optional
Switching integrity	max. E60
Conductor cross-section	1.5 - 10 mm²
Note	

Overview of enclosures

Ordering data

Description	Height x width x depth in mm (without cable glands)	functional integrity class* (DIN 4102)	Order No.
KLIPPON POK 252512 M25 E60	250 x 255 x 120	E60	**8000052518**
KLIPPON POK 252512 FH M25 E60	250 x 255 x 120	E60	**8000052636**
KLIPPON POK 252512 M32 E60	250 x 255 x 120	E60	**8000054730**
KLIPPON POK 252512 FH M32 E60	250 x 255 x 120	E60	**8000054731**

Note: *The enclosures were tested with the cable variants „Dätwyler E 90 5 x 1.5 mm²“ and „EUPEN Eurocase E90 5x10 mm²“.
The cabling was tested horizontally and vertically on the wall and also under the ceiling.
E30-certified for all tested variants
E60-certified for cable variant Dätwyler 5 x 1.5

KLIPPON POK 252512 FH M25 E60

Depth 120 mm

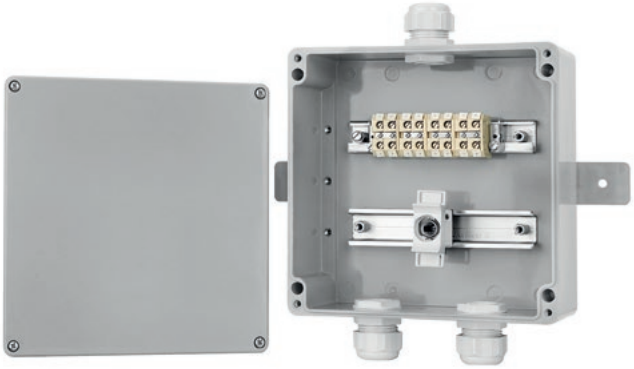

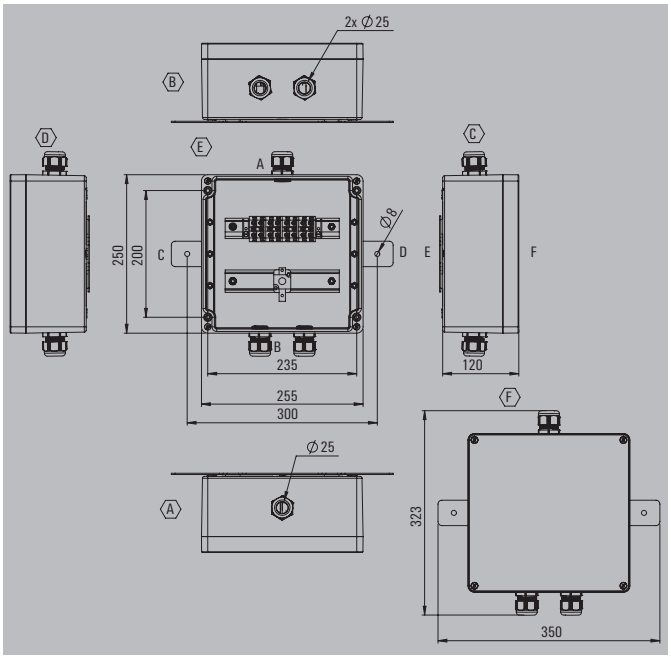

Height / Width / Depth	250 / 255 / 120 mm

Ordering data

	Order No.
KLIPPON POK 252512 FH M25 E60	**8000052636**
Note	

Technical data

Article - short description	Klippon POK (polyester empty enclosure), Enclosures, Height: 250 mm, Width: 255 mm, Depth: 120 mm, Material: Glass fibre-reinforced polyester, untreated, Light Grey
Ambient temperature	-20...80 °C
Protection class	IP66
Fire resistance class according to DIN 4102-12	E60
Standards	DIN 4102-04, DIN 4102-12
Impact resistance	5 J version standard
Assembly	
Fuse holder available	Yes
SAKK 10	8
Drill holes side A	1 x M25
Drill holes side B	2 x M25
Technical data, enclosure	
Material	Glass fibre-reinforced polyester
Surface finish	untreated
Seal material	Chloroprene
Lid attachment	Crosshead screws, stainless steel

Reference products

	Order No.
KLIPPON POK 252512	**1305930000**
TS 32X15 2M/ST/ZN	**0122800000**
TS 35X15 2M/ST/ZN	**0236400000**
SAKK 10	**9502610000**
QL 2 SAKK10	**9502650000**
KISC M3X20.5/10 EK4	**0303000000**
AP SAKK4/10 KER/WS	**9502630000**
VH 12.5 SAKK10	**9509510000**
MEW 1/32	**0445600000**
WS 8/8 MM WS	**2007170000**
VG M25-K67	**1909710000**
GWDR M25-NP	**1736250000**
SKMU M25 - K GR	**1772470000**
Note	

Note

KLIPPON POK 252512 FH M32 E60

Depth 120 mm

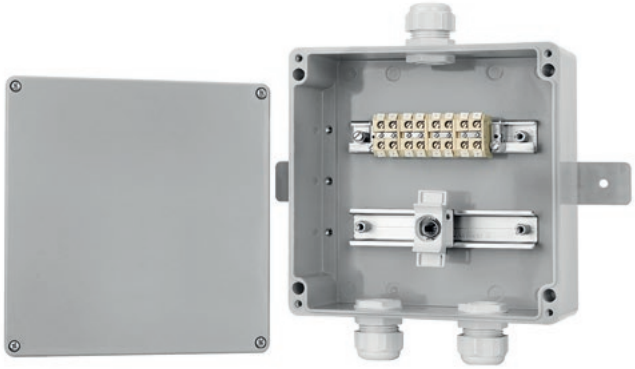

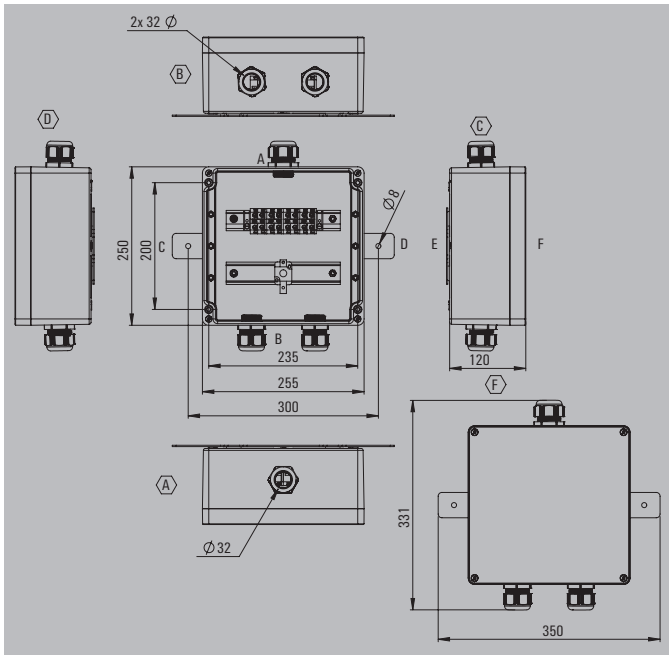

Height / Width / Depth	250 / 255 / 120 mm

Ordering data

	Order No.
KLIPPON POK 252512 FH M32 E60	**8000054731**
Note	

Technical data

Article - short description	Klippon POK (polyester empty enclosure), Enclosures, Height: 250 mm, Width: 255 mm, Depth: 120 mm, Material: Glass fibre-reinforced polyester, untreated, grey, Light Grey
Ambient temperature	-20...80 °C
Protection class	IP66
Fire resistance class according to DIN 4102-12	E60
Standards	DIN 4102-04, DIN 4102-12
Impact resistance	5 J version standard
Assembly	
Fuse holder available	Yes
SAKK 10	8
Drill holes side A	1 x M32
Drill holes side B	2 x M32
Technical data, enclosure	
Material	Glass fibre-reinforced polyester
Surface finish	untreated
Seal material	Chloroprene
Lid attachment	Crosshead screws, stainless steel

Reference products

	Order No.
KLIPPON POK 252512	**1305930000**
TS 32X15 2M/ST/ZN	**0122800000**
TS 35X15 2M/ST/ZN	**0236400000**
SAKK 10	**9502610000**
QL 2 SAKK10	**9502650000**
KISC M3X20.5/10 EK4	**0303000000**
AP SAKK4/10 KER/WS	**9502630000**
VH 12.5 SAKK10	**9509510000**
MEW 1/32	**0445600000**
WS 8/8 MM WS	**2007170000**
VG M32-K67	**1909720000**
GWDR M32-NP	**1736260000**
SKMU M32 - K GR	**1772480000**
Note	

Note

KLIPPON POK 252512 M25 E60

Depth 120 mm

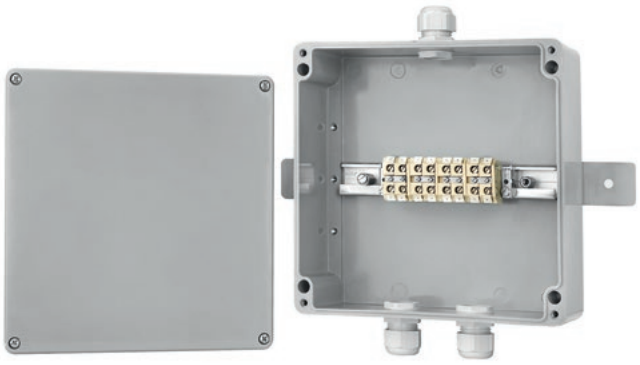

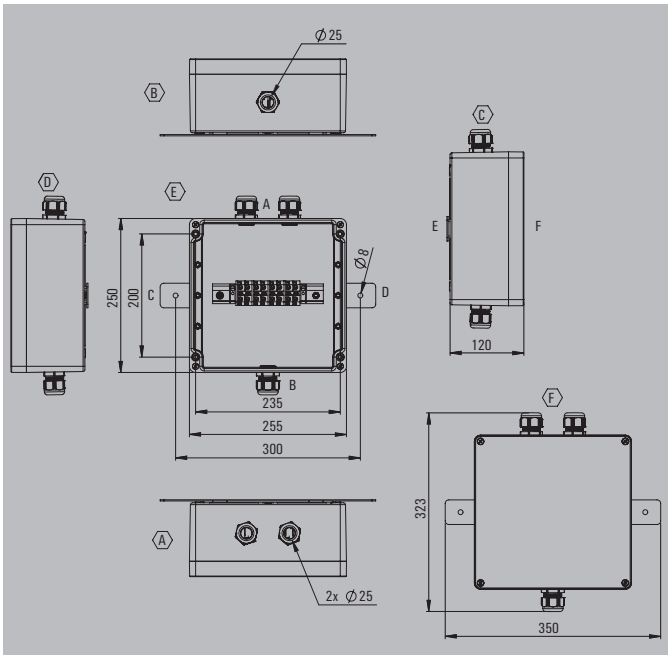

Height / Width / Depth	250 / 255 / 120 mm

Ordering data

		Order No.
	KLIPPON POK 252512 M25 E60	8000052518
Note		

Technical data

Article - short description	Klippon POK (polyester empty enclosure), Enclosures, Height: 250 mm, Width: 255 mm, Depth: 120 mm, Material: Glass fibre-reinforced polyester, untreated, grey, Light Grey
Ambient temperature	-20...80 °C
Protection class	IP66
Fire resistance class according to DIN 4102-12	E60
Standards	DIN 4102-04, DIN 4102-12
Impact resistance	5 J version standard
Assembly	
Fuse holder available	No
SAKK 10	8
Drill holes side A	2 x M25
Drill holes side B	1 x M25
Technical data, enclosure	
Material	Glass fibre-reinforced polyester
Surface finish	untreated
Seal material	Chloroprene
Lid attachment	Crosshead screws, stainless steel

Reference products

	Order No.
KLIPPON POK 252512	1305930000
TS 32X15 2M/ST/ZN	0122800000
SAKK 10	9502610000
QL 2 SAKK10	9502650000
KISC M3X20.5/10 EK4	0303000000
AP SAKK4/10 KER/WS	9502630000
VH 12.5 SAKK10	9509510000
MEW 1/32	0445600000
WS 8/8 MM WS	2007170000
VG M25-K67	1909710000
GWDR M25-NP	1736250000
SKMU M25 - K GR	1772470000
Note	

Note

KLIPPON POK 252512 M32 E60

Depth 120 mm

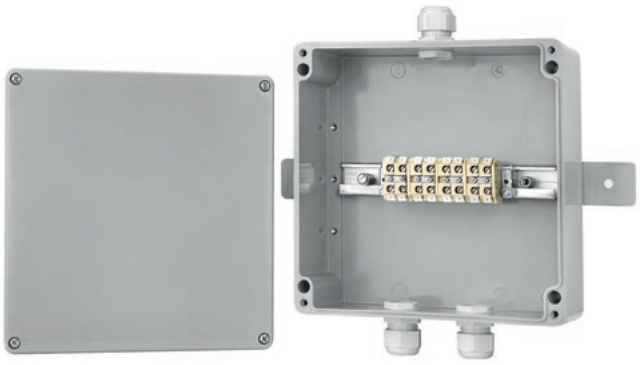

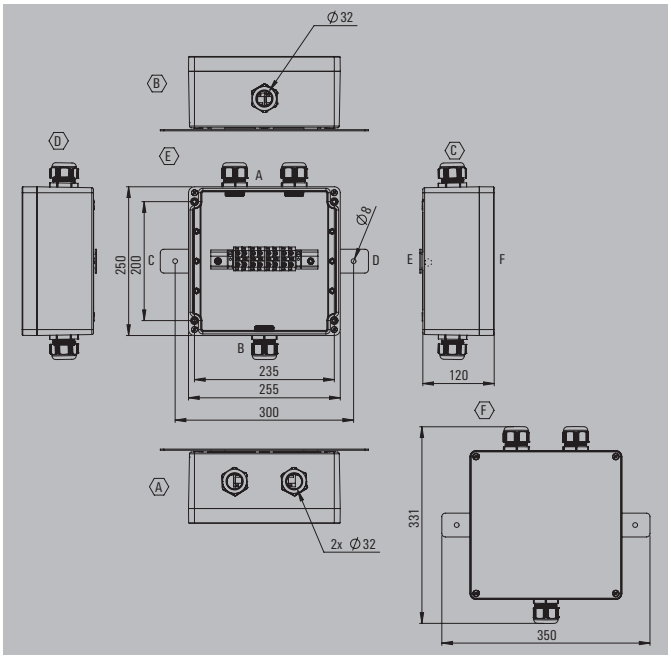

250 / 255 / 120 mm

Ordering data

		Order No.
	KLIPPON POK 252512 M32 E60	8000054730
Note		

Technical data

Article - short description	Klippon POK (polyester empty enclosure), Enclosures, Height: 250 mm, Width: 255 mm, Depth: 120 mm, Material: Glass fibre-reinforced polyester, untreated, Light Grey
Ambient temperature	-20...80 °C
Protection class	IP66
Fire resistance class according to DIN 4102-12	E60
Standards	DIN 4102-04, DIN 4102-12
Impact resistance	5 J version standard
Assembly	
Fuse holder available	No
SAKK 10	8
Drill holes side A	2 x M32
Drill holes side B	1 x M32
Technical data, enclosure	
Material	Glass fibre-reinforced polyester
Surface finish	untreated
Seal material	Chloroprene
Lid attachment	Crosshead screws, stainless steel

Reference products

	Order No.
KLIPPON POK 252512	1305930000
TS 32X15 2M/ST/ZN	0122800000
SAKK 10	9502610000
QL 2 SAKK10	9502650000
KISC M3X20.5/10 EK4	0303000000
AP SAKK4/10 KER/WS	9502630000
VH 12.5 SAKK10	9509510000
MEW 1/32	0445600000
WS 8/8 MM WS	2007170000
VG M32-K67	1909720000
GWDR M32-NP	1736260000
SKMU M32 - K GR	1772480000
Note	

Note

TBF – Large polyester enclosures

The enclosures in the TBF range are made from sturdy glass-fibre reinforced polyester. They offer a universal solution for protection of components such as controllers, measuring instruments, valves and other devices. Suitable applications include photovoltaics and energy distribution.

Key features of this product range include:
- Available in 9 sizes, with grey or transparent lids
- The lid has nylon screws fitted
- Mounting holes are outside the sealed area
- Thread for fitting to terminal rails and mounting plates
- High Ingress Protection (IP 66 and IP 67)

Weidmüller manufactures and supplies the enclosures to match customer specifications – fully fitted with terminals, electronics and cable glands.

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/tbf

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Dimensions in mm	Grey lid	Transparent lid
TBF 19/15	186 x 151 x 140	0360100000	
TBF 30/19	302 x 186 x 175	0360200000	0500600000
TBF 30/30	302 x 302 x 175	0360300000	0500700000
TBF 37/30	372 x 302 x 175	0360400000	0500800000
TBF 49/30	488 x 302 x 175 / 210	9502800000	9502840000
TBF 56/30	558 x 302 x 175 / 210	9502810000	9502850000
TBF 60/30	603 x 302 x 175 / 210	0360500000	0500900000
TBF 60/37	603 x 372 x 175 / 210	9502820000	9502860000
TBF 60/60	603 x 603 x 175 / 210	9502830000	9502870000
Note			

Technical Overview

Features

• Extremely tough and impact resistant thanks to the glass-fibre reinforced polyester
• Extremely weather resistant
• High IP rating
• Approved according to the latest international standards
Note We deliver enclosures through our assembly service which are ready to be connected and suitable for every application.

Technical data

	Grey lid	Transparent lid
Enclosure material	Base and lid made of glass-fibre reinforced polyester (GRP)	Base made of glass-fibre reinforced polyester (GRP) Lid is polycarbonate (PC)
Surface finish	grey, similar to RAL 7035	
IP protection class	IP66 and IP67	IP 66
Installation mounting	4 or 6 M4 clamping screws	4 or 6 M4 clamping screws
Enclosure mounting	4 holes of 7 mm diameter or with external fastening lugs, see accessories	4 holes of 7 mm diameter or with external fastening lugs, see accessories
Lid fixing	4, 6 or 8 captive cross-headed nylon screws	4, 6 or 8 captive cross-headed nylon screws
Impact resistance	IK08 to IEC 62208 IK10 to EN/IEC 62262	IK08 to IEC 62208 IK10 to EN/IEC 62262
Gasket material	Polyurethane	Polyurethane
Temperature range	-50 °C...+130 °C (permanent temperature max. 70°C)	-35 °C...+120 °C (permanent temperature max. 70°C)
Flammability characteristics	UL 94 HB	V2
Toxicity	Free from halogens	Free from halogens
Note	For details of power dissipation, please contact your Weidmüller representative.	

Mounting plates
Suitable mounting plates are available for attaching mounting rails, terminal blocks or other devices.

Impact resistance
Robust enclsoures thanks to glass fiber reinforced polyester.

High IP-Protection
The sealing ensures a reliable IP protection class of IP66 for enclosures with a transparent cover and an additional IP67 for enclosures with a grey cover.

Assembly and processing
Cut-outs, drillings, cable glands or equipped terminal rails can be realized as required. Individual processing and assembly possible using the Weidmüller configurator.

	TBF 19/15	140 mm	TBF 30/19	175 mm
	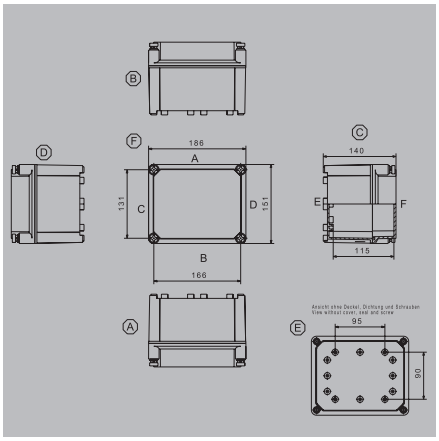		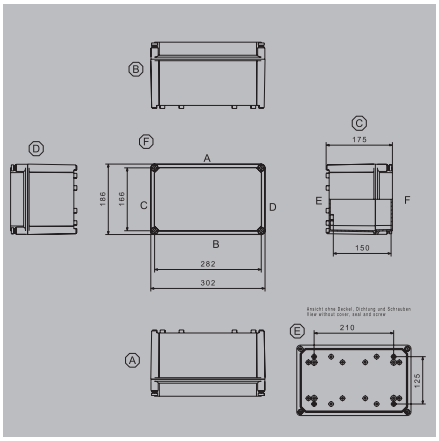	
Height / Width / Depth	186 / 151 / 140 mm		302 / 186 / 175 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	1x11	1x18	2x22	1x44
4 mm²	1x9	1x15	2x18	1x37
6 mm²	1x7	1x7	2x14	2x14
10 mm²	1x6	1x9	2x11	1x22
16 mm²	1x4	1x6	2x8	1x16
35 mm²	1x3	1x5	2x7	1x14
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	11	11	28	53
M16	6	6	14	30
M20	2	2	11	22
M25	2	2	6	10
M32	1	1	3	5
M40	1	1	3	3
M50			1	3
M63			1	2
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	TBF 19/15/14 7035	1	**0360100000**	TBF 30/19/18 7035	1	**0360200000**
Enclosure with transparent lid				TBF 30/19/18 TRSP	1	**0500600000**
Note						

Accessories

Mounting plates and fastening screws	Type	Qty.	Order No.	Type	Qty.	Order No.
Steel sheet, zinc plated	MP TBF 19/15	1	**9502720000**	MP TBF 30/19	1	**3018950000**
M4 screw	FKSC M4X6 D8/SW2	100	**1567480000**	FKSC M4X6 D8/SW2	100	**1567480000**
External mounting lug, set of 4						
Polyamide	MF TBF	1	**0360800000**	MF TBF	1	**0360800000**
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	**1277250000**	PEBZ M6 BR SET	1	**1277250000**
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	**1283430000**	PEBZ M6 S4 SET	1	**1283430000**
Brass, M10	PEBZ M10 BR SET	1	**1277220000**	PEBZ M10 BR SET	1	**1277220000**
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	**1283440000**	PEBZ M10 S4 SET	1	**1283440000**
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	**1868570000**	DAE M12 PA LONG	10	**1868570000**
Stainless steel 1.4305, M12	DAE M12 SS	10	**1868550000**	DAE M12 SS	10	**1868550000**
Note						

	TBF 30/30	175 mm	TBF 37/30	175 mm
	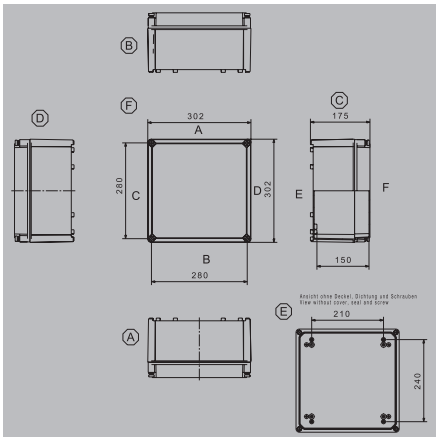		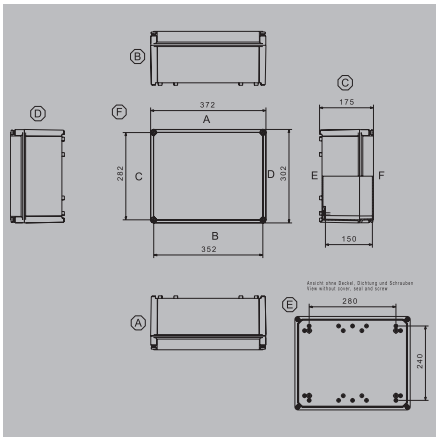	
Height / Width / Depth	302 / 302 / 175 mm		372 / 302 / 175 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	2x44	1x44	2x57	2x44
4 mm²	2x37	1x37	2x48	2x37
6 mm²	2x28	2x28	2x36	2x36
10 mm²	2x22	1x22	2x29	2x22
16 mm²	2x16	1x16	2x21	2x16
35 mm²	2x14	1x14	2x18	2x14
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	44	44	44	56
M16	24	24	24	30
M20	20	20	20	27
M25	10	10	10	12
M32	4	4	4	5
M40	3	3	3	4
M50	3	3	3	4
M63	2	2	2	3
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	TBF 30/30/18 7035	1	0360300000	TBF 37/30/18 7035	1	0360400000
Enclosure with transparent lid	TBF 30/30/18 TRSP	1	0500700000	TBF 37/30/18 TRSP	1	0500800000
Note						

Accessories

Mounting plates and fastening screws	Type	Qty.	Order No.	Type	Qty.	Order No.
Steel sheet, zinc plated	MP TBF 30/30	1	9502730000	MP TBF 37/30	1	9502740000
M4 screw	FKSC M4X6 D8/SW2	100	1567480000	FKSC M4X6 D8/SW2	100	1567480000
External mounting lug, set of 4						
Polyamide	MF TBF	1	0360800000	MF TBF	1	0360800000
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	1277250000	PEBZ M6 BR SET	1	1277250000
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	1283430000	PEBZ M6 S4 SET	1	1283430000
Brass, M10	PEBZ M10 BR SET	1	1277220000	PEBZ M10 BR SET	1	1277220000
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	1283440000	PEBZ M10 S4 SET	1	1283440000
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	1868570000	DAE M12 PA LONG	10	1868570000
Stainless steel 1.4305, M12	DAE M12 SS	10	1868550000	DAE M12 SS	10	1868550000

Note

	TBF 49/30	175 mm	TBF 56/30	175 mm
	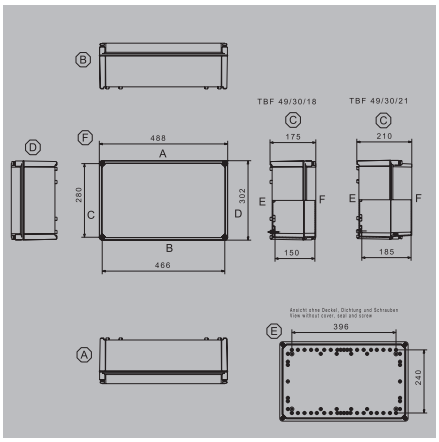		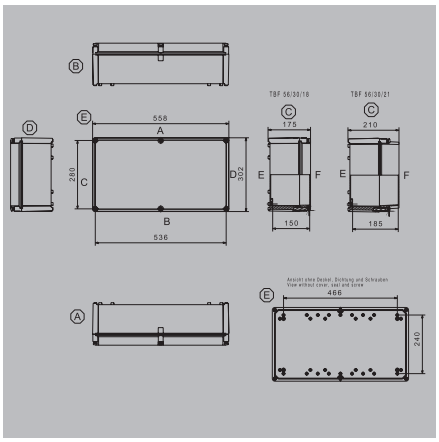	
Height / Width / Depth	488 / 302 / 175 mm		558 / 302 / 175 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	2x80	3x44	2x94	4x44
4 mm²	2x67	3x37	2x79	4x37
6 mm²	2x51	2x51	2x59	2x59
10 mm²	2x41	3x22	2x48	4x22
16 mm²	2x29	3x16	2x34	4x16
35 mm²	2x25	3x14	2x30	4x14
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	44	42	44	80
M16	24	42	24	46
M20	20	36	20	40
M25	10	18	10	18
M32	4	7	4	8
M40	3	5	3	6
M50	3	5	3	4
M63	2	4	2	4
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	TBF 49/30/18 7035	1	**9502800000**	TBF 56/30/18 7035	1	**9502810000**
Enclosure with transparent lid	TBF 49/30/21 TRSP	1	**9502840000**	TBF 56/30/21 TRSP	1	**9502850000**
Note	Grey lid: 130 mm internal height, 175 mm total height Transparent lid: 160 mm internal height, 210 mm total height			Grey lid: 130 mm internal height, 175 mm total height Transparent lid: 160 mm internal height, 210 mm total height		

Accessories

Mounting plates and fastening screws	Type	Qty.	Order No.	Type	Qty.	Order No.
Steel sheet, zinc plated	MP TBF 49/30	1	**9500960000**	MP TBF 56/30	1	**9500950000**
M4 screw	FKSC M4X6 D8/SW2	100	**1567480000**	FKSC M4X6 D8/SW2	100	**1567480000**
External mounting lug, set of 4						
Polyamide	MF TBF	1	**0360800000**	MF TBF	1	**0360800000**
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	**1277250000**	PEBZ M6 BR SET	1	**1277250000**
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	**1283430000**	PEBZ M6 S4 SET	1	**1283430000**
Brass, M10	PEBZ M10 BR SET	1	**1277220000**	PEBZ M10 BR SET	1	**1277220000**
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	**1283440000**	PEBZ M10 S4 SET	1	**1283440000**
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	**1868570000**	DAE M12 PA LONG	10	**1868570000**
Stainless steel 1.4305, M12	DAE M12 SS	10	**1868550000**	DAE M12 SS	10	**1868550000**
Note						

TBF 60/30 — 175 mm

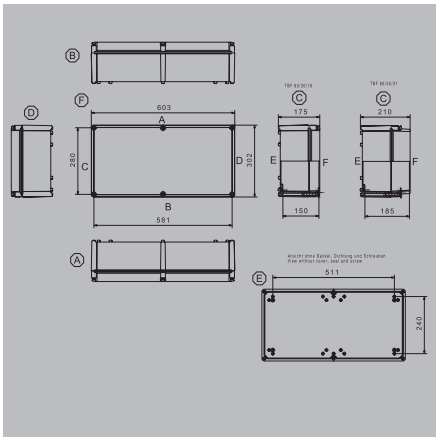

Height / Width / Depth	603 / 302 / 175 mm

Technical data

Assembly with terminal	vertical	horizontal
2.5 mm²	5x44	1x101
4 mm²	5x37	1x85
6 mm²	5x28	5x28
10 mm²	5x22	1x51
16 mm²	5x16	1x37
35 mm²	5x14	1x32
Guide value for max. number of cable entries	**A / B**	**C / D**
M12	44	88
M16	24	48
M20	20	40
M25	10	20
M32	4	8
M40	3	6
M50	3	6
M63	2	4
M75		

Note

Ordering data

	Type	Qty.	Order No.
Enclosure with grey lid	TBF 60/30/18 7035	1	0360500000
Enclosure with transparent lid	TBF 60/30/21 TRSP	1	0500900000

Note

Grey lid: 130 mm internal height, 175 mm total height
Transparent lid: 160 mm internal height, 210 mm total height

Accessories

Mounting plates and fastening screws	Type	Qty.	Order No.
Steel sheet, zinc plated	MP TBF 60/30	1	9502750000
M4 screw	FKSC M4X6 D8/SW2	100	1567480000
External mounting lug, set of 4			
Polyamide	MF TBF	1	0360800000
Earthing stud			
Brass, M6	PEBZ M6 BR SET	1	1277250000
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	1283430000
Brass, M10	PEBZ M10 BR SET	1	1277220000
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	1283440000
Pressure compensation elements			
Polyamide 6, M12	DAE M12 PA LONG	10	1868570000
Stainless steel 1.4305, M12	DAE M12 SS	10	1868550000

Note

	TBF 60/37	175 mm	TBF 60/60	175 mm
	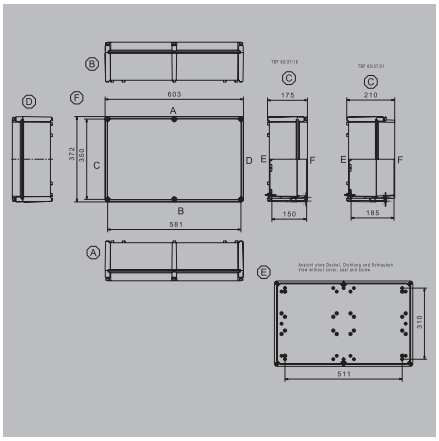		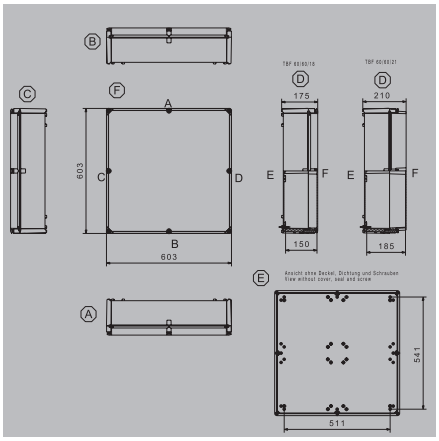	
Height / Width / Depth	603 / 372 / 175 mm		603 / 605 / 175 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	5x57	2x101	5x101	4x101
4 mm²	5x48	2x85	5x85	4x85
6 mm²	5x36	5x36	5x64	5x64
10 mm²	5x29	2x51	5x51	4x51
16 mm²	5x21	2x37	5x37	4x37
35 mm²	5x18	2x32	5x32	4x32
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	52	88	88	88
M16	30	48	48	48
M20	26	40	40	40
M25	12	20	20	20
M32	5	8	8	8
M40	4	6	6	6
M50	4	6	6	6
M63	3	4	4	4
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	TBF 60/37/18 7035	1	**9502820000**	TBF 60/60/18 7035	1	**9502830000**
Enclosure with transparent lid	TBF 60/37/21 TRSP	1	**9502860000**	TBF 60/60/21 TRSP	1	**9502870000**
Note	Grey lid: 130 mm internal height, 175 mm total height Transparent lid: 160 mm internal height, 210 mm total height			Grey lid: 130 mm internal height, 175 mm total height Transparent lid: 160 mm internal height, 210 mm total height		

Accessories

	Type	Qty.	Order No.	Type	Qty.	Order No.
Mounting plates and fastening screws						
Steel sheet, zinc plated	MP TBF 60/37	1	**9502910000**	MP TBF 60/60	1	**9502920000**
M4 screw	FKSC M4X6 D8/SW2	100	**1567480000**	FKSC M4X6 D8/SW2	100	**1567480000**
External mounting lug, set of 4						
Polyamide	MF TBF	1	**0360800000**	MF TBF	1	**0360800000**
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	**1277250000**	PEBZ M6 BR SET	1	**1277250000**
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	**1283430000**	PEBZ M6 S4 SET	1	**1283430000**
Brass, M10	PEBZ M10 BR SET	1	**1277220000**	PEBZ M10 BR SET	1	**1277220000**
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	**1283440000**	PEBZ M10 S4 SET	1	**1283440000**
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	**1868570000**	DAE M12 PA LONG	10	**1868570000**
Stainless steel 1.4305, M12	DAE M12 SS	10	**1868550000**	DAE M12 SS	10	**1868550000**
Note						

MPC – Small polycarbonate enclosures

The polycarbonate enclosures of the MPC range are ideal for enclosing electrical, electro-mechanical and pneumatic devices as well as PCBs. The enclosures are used in situations with extreme mechanical and chemical conditions.

The characteristics of the enclosures are:
- Available in 17 sizes, with grey or transparent lids
- Lid fixing screws equipped with sealing holes
- Fixing holes outside the sealed area
- Thread for fitting to terminal rails, mounting plates and PCBs

Weidmüller manufactures and supplies the enclosures to match customer specifications – fully fitted with terminals, electronics and cable glands.

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/mpc

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Dimensions in mm	Grey lid	Transparent lid
MPC 07/12/07	75 x 125 x 75	9535170000	9535180000
MPC 07/12/10	75 x 125 x 100	9535190000	9535200000
MPC 07/12/12	75 x 125 x 120	9535210000	9535220000
MPC 12/12/07	120 x 120 x 75	9535230000	9535240000
MPC 12/12/10	120 x 120 x 100	9535250000	9535260000
MPC 12/12/12	120 x 120 x 120	9535270000	9535280000
MPC 12/17/07	120 x 175 x 75	9535290000	9535300000
MPC 12/17/10	120 x 175 x 100	9535310000	9535320000
MPC 12/17/12	120 x 175 x 120	9535330000	9535340000
MPC 12/17/15	120 x 175 x 150	9535350000	9535360000
MPC 17/17/07	175 x 175 x 75	9535370000	9535380000
MPC 17/17/10	175 x 175 x 100	9535390000	9535400000
MPC 17/17/12	175 x 175 x 120	9535410000	
MPC 17/17/15	175 x 175 x 150	9535430000	9535440000
MPC 17/25/07	175 x 250 x 75	9535450000	
MPC 17/25/10	175 x 250 x 100	9535470000	9535480000
MPC 17/25/15	175 x 250 x150	9535490000	9535500000
Note			

Technical Overview

Features

• High thermal stability thanks to the polycarbonate
• Extremely tough and impact resistant thanks to the high fibre-glass content.
• Good IP rating, due to use of polyurethane (PUR) gasket material
• Approved according to the latest international standards
Note We deliver enclosures through our assembly service which are ready to be connected and suitable for every application.

Technical data

	Grey lid	Transparent lid
Enclosure material	Base and lid made of glass-fibre reinforced polycarbonate	Base made of glass-fibre reinforced polycarbonate, ABS lid
Cover	Grey	Transparent
Surface finish	Grey, similar to RAL 7035	Grey, similar to RAL 7035
IP protection class	IP 66, IP 67	IP 66, IP 67
Installation mounting	Self-tapping screws	Self-tapping screws
Enclosure mounting	4 holes (4.5 mm diameter) or external mounting brackets (optional)	4 holes (4.5 mm diameter) or external mounting brackets (optional)
Lid fixing	4 cross-head screws (polyamide)	4 cross-head screws (polyamide)
Gasket material	Polyurethane foam	Polyurethane foam
Temperature range	-50 °C...+100 °C	-40 °C...+60 °C
Impact resistance	IK 08 in accordance with EN 60529	IK 08 in accordance with EN 60529
Note	For details of power dissipation, please contact your Weidmüller representative.	

Mounting plates
Suitable mounting plates are available for attaching mounting rails, terminal blocks or other devices.

Cross-head screws
Fastening the enclosure cover with cross-head screws. Quick and easy installation with just one tool.

High IP-Protection
The sealing ensures a reliable IP protection class of IP66/IP67.

Assembly and processing
Cut-outs, drillings, cable glands or equipped terminal rails can be realized as required. Individual processing and assembly possible using the Weidmüller Configurator (WMC).

	MPC 07/12/07	75 mm	MPC 07/12/10	100 mm
	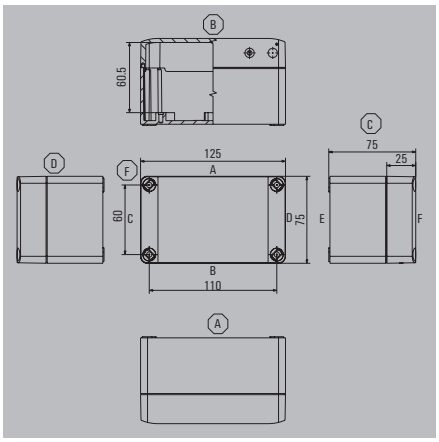		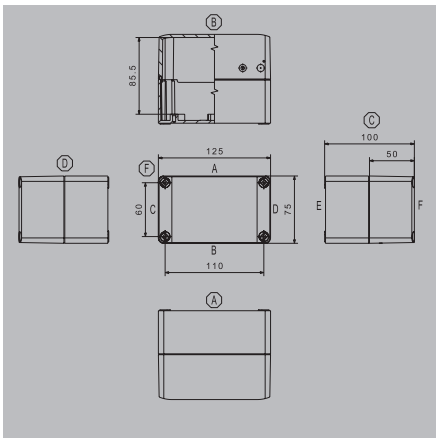	
Height / Width / Depth	75 / 125 / 75 mm		75 / 125 / 100 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	1x13	1x13	1x13	1x13
4 mm²	1x11	1x11	1x11	1x11
6 mm²	1x8	1x8	1x8	1x8
10 mm²	1x6	1x6	1x6	1x6
16 mm²				
35 mm²				
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	1	4	1	4
M16	1	3	1	3
M20	1	3	1	3
M25				
M32				
M40				
M50				
M63				
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	MPC 07/12/07 7035	1	**9535170000**	MPC 07/12/10 7035	1	**9535190000**
Enclosure with transparent lid	MPC 07/12/07 TRSP	1	**9535180000**	MPC 07/12/10 TRSP	20	**9535200000**
Note						

Accessories

	Type	Qty.	Order No.	Type	Qty.	Order No.
Mounting plates and fastening screws						
Steel sheet, zinc plated	MP MPC 07/12	10	**9535540000**	MP MPC 07/12	10	**9535540000**
M4 screw	FKSC M4X6 D8/SW2	100	**1567480000**	FKSC M4X6 D8/SW2	100	**1567480000**
				SC MPC	100	**9535640000**
Mounting rails, TS15x5						
Vertical	TS15X5 ST MPC1217 VER	20	**8000037598**	TS15X5 MPC1217 VER	20	**8000037598**
Horizontally	TS15X5 ST MPC0712 VER	20	**8000037599**	TS15X5 MPC0712 VER	20	**8000037599**
Mounting rails, TS35x7.5						
Horizontally	TS 35X105_MPC_12	20	**8000037603**			
Vertical						
External mounting lug, set of 4						
	MF MPC	1	**9535600000**	MF MPC	1	**9535600000**
Hinge, set of 2						
	HG MPC	1	**9535590000**	HG MPC	1	**9535590000**
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	**1277250000**	PEBZ M6 BR SET	1	**1277250000**
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	**1283430000**	PEBZ M6 S4 SET	1	**1283430000**
Brass, M10	PEBZ M10 BR SET	1	**1277220000**	PEBZ M10 BR SET	1	**1277220000**
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	**1283440000**	PEBZ M10 S4 SET	1	**1283440000**
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	**1868570000**	DAE M12 PA LONG	10	**1868570000**
Stainless steel 1.4305, M12	DAE M12 SS	10	**1868550000**	DAE M12 SS	10	**1868550000**
Note						

	MPC 07/12/12	125 mm	MPC 12/12/07	75 mm
	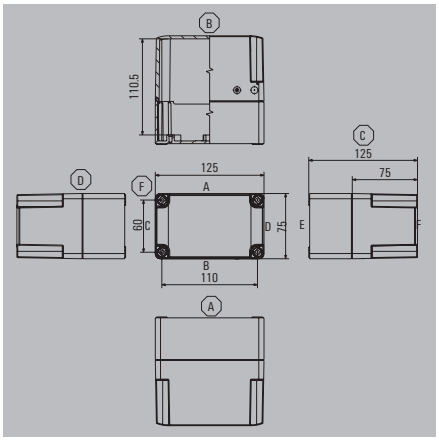		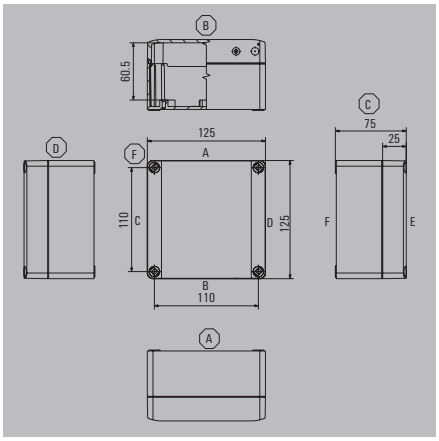	
Height / Width / Depth	75 / 125 / 125 mm		125 / 125 / 75 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	1x13	1x13	1x13	1x13
4 mm²	1x11	1x11	1x11	1x11
6 mm²	1x8	1x8	1x8	1x8
10 mm²	1x6	1x6	1x6	1x6
16 mm²	1x5	1x1		
35 mm²	1x4	1x1		
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	1	4	4	4
M16	1	3	3	3
M20	1	3	3	3
M25				
M32				
M40				
M50				
M63				
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	MPC 07/12/12 7035	1	9535210000	MPC 12/12/07 7035	1	9535230000
Enclosure with transparent lid	MPC 07/12/12 TRSP	1	9535220000	MPC 12/12/07 TRSP	1	9535240000
Note						

Accessories

Mounting plates and fastening screws	Type	Qty.	Order No.	Type	Qty.	Order No.
Steel sheet, zinc plated	MP MPC 07/12	10	9535540000	MP MPC 12/12	10	9535550000
M4 screw	FKSC M4X6 D8/SW2	100	1567480000	FKSC M4X6 D8/SW2	100	1567480000
Mounting rails, TS15x5						
Vertical	TS15X5 ST MPC1217 VER	20	8000037598	TS15X5 MPC1217 VER	20	8000037598
Horizontally	TS15X5 ST MPC0712 VER	20	8000037599			
Mounting rails, TS35x7.5						
Horizontally	TS 35X105_MPC_12	20	8000037603	TS 35X105_MPC_12	20	8000037603
Vertical				TS35 MPC 1717 VER	20	8000037605
External mounting lug, set of 4						
	MF MPC	1	9535600000	MF MPC	1	9535600000
Hinge, set of 2						
	HG MPC	1	9535590000	HG MPC	1	9535590000
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	1277250000	PEBZ M6 BR SET	1	1277250000
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	1283430000	PEBZ M6 S4 SET	1	1283430000
Brass, M10	PEBZ M10 BR SET	1	1277220000	PEBZ M10 BR SET	1	1277220000
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	1283440000	PEBZ M10 S4 SET	1	1283440000
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	1868570000	DAE M12 PA LONG	10	1868570000
Stainless steel 1.4305, M12	DAE M12 SS	10	1868550000	DAE M12 SS	10	1868550000
Note						

	MPC 12/12/10	100 mm	MPC 12/12/12	125 mm
	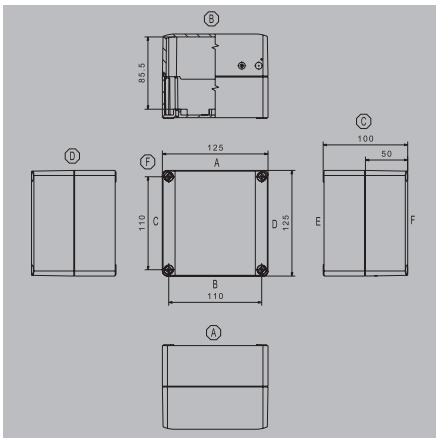		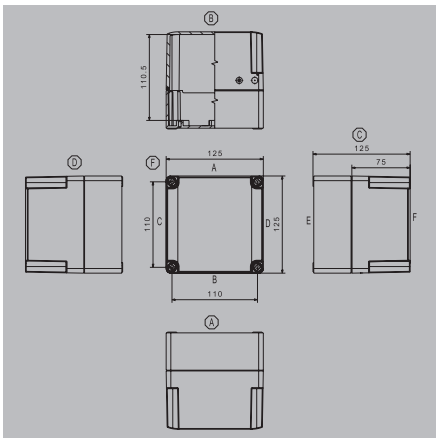	
Height / Width / Depth	125 / 125 / 100 mm		125 / 125 / 125 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	1x13	1x13	1x13	1x13
4 mm²	1x11	1x11	1x11	1x11
6 mm²	1x8	1x8	1x8	1x8
10 mm²	1x6	1x6	1x6	1x6
16 mm²				
35 mm²				
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	4	4	4	4
M16	3	3	3	3
M20	3	3	3	3
M25				
M32				
M40				
M50				
M63				
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	MPC 12/12/10 7035	1	**9535250000**	MPC 12/12/12 7035	1	**9535270000**
Enclosure with transparent lid	MPC 12/12/10 TRSP	12	**9535260000**	MPC 12/12/12 TRSP	1	**9535280000**
Note						

Accessories

	Type	Qty.	Order No.	Type	Qty.	Order No.
Mounting plates and fastening screws						
Steel sheet, zinc plated	MP MPC 12/12	10	**9535550000**	MP MPC 12/12	10	**9535550000**
M4 screw	FKSC M4X6 D8/SW2	100	**1567480000**	FKSC M4X6 D8/SW2	100	**1567480000**
	SC MPC	100	**9535640000**	SC MPC	100	**9535640000**
Mounting rails, TS15x5						
Vertical	TS15X5 ST MPC1217 VER	20	**8000037598**	TS15X5 MPC1217 VER	20	**8000037598**
Horizontally						
Mounting rails, TS35x7.5						
Horizontally						
Vertical						
External mounting lug, set of 4						
	MF MPC	1	**9535600000**	MF MPC	1	**9535600000**
Hinge, set of 2						
	HG MPC	1	**9535590000**	HG MPC	1	**9535590000**
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	**1277250000**	PEBZ M6 BR SET	1	**1277250000**
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	**1283430000**	PEBZ M6 S4 SET	1	**1283430000**
Brass, M10	PEBZ M10 BR SET	1	**1277220000**	PEBZ M10 BR SET	1	**1277220000**
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	**1283440000**	PEBZ M10 S4 SET	1	**1283440000**
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	**1868570000**	DAE M12 PA LONG	10	**1868570000**
Stainless steel 1.4305, M12	DAE M12 SS	10	**1868550000**	DAE M12 SS	10	**1868550000**
Note						

	MPC 12/17/07	75 mm	MPC 12/17/10	100 mm
	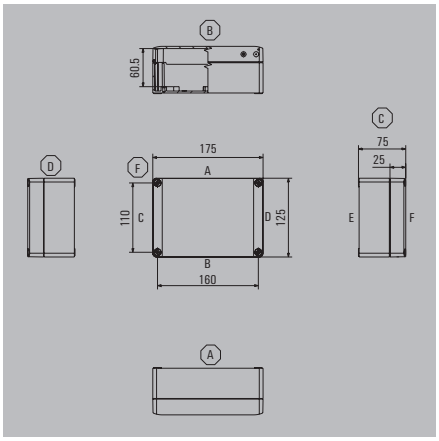		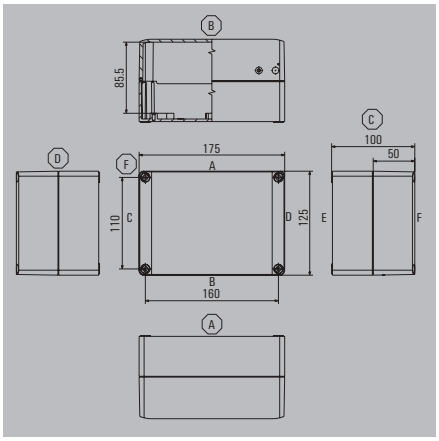	
Height / Width / Depth	125 / 175 / 75 mm		125 / 175 / 100 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	1x22	1x22	1x22	1x22
4 mm²	1x19	1x19	1x19	1x19
6 mm²	1x14	1x14	1x14	1x14
10 mm²	1x11	1x11	1x11	1x11
16 mm²			1x9	1x5
35 mm²			1x7	1x4
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	4	6	4	6
M16	3	4	3	4
M20	3	4	3	4
M25				
M32				
M40				
M50				
M63				
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	MPC 12/17/07 7035	1	9535290000	MPC 12/17/10 7035	1	9535310000
Enclosure with transparent lid	MPC 12/17/07 TRSP	1	9535300000	MPC 12/17/10 TRSP	1	9535320000
Note						

Accessories

Mounting plates and fastening screws	Type	Qty.	Order No.	Type	Qty.	Order No.
Steel sheet, zinc plated	MP MPC 12/17	1	9535560000	MP MPC 12/17	1	9535560000
M4 screw	FKSC M4X6 D8/SW2	100	1567480000	FKSC M4X6 D8/SW2	100	1567480000
Mounting rails, TS15x5						
Vertical				TS15X5 MPC1217 VER	20	8000037598
Horizontally						
Mounting rails, TS35x7.5						
Horizontally	TS 35X105_MPC_12	20	8000037603			
Vertical	TS35 MPC 1717 VER	20	8000037605	TS35 MPC 1717 VER	20	8000037605
External mounting lug, set of 4						
	MF MPC	1	9535600000	MF MPC	1	9535600000
Hinge, set of 2						
	HG MPC	1	9535590000	HG MPC	1	9535590000
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	1277250000	PEBZ M6 BR SET	1	1277250000
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	1283430000	PEBZ M6 S4 SET	1	1283430000
Brass, M10	PEBZ M10 BR SET	1	1277220000	PEBZ M10 BR SET	1	1277220000
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	1283440000	PEBZ M10 S4 SET	1	1283440000
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	1868570000	DAE M12 PA LONG	10	1868570000
Stainless steel 1.4305, M12	DAE M12 SS	10	1868550000	DAE M12 SS	10	1868550000
Note						

	MPC 12/17/12	125 mm	MPC 12/17/15	150 mm
	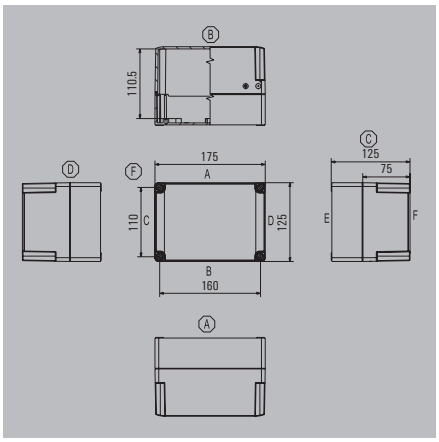		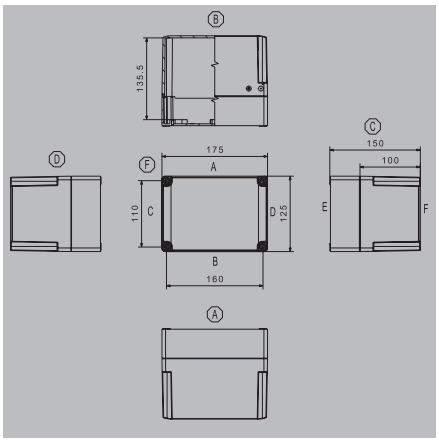	
Height / Width / Depth	125 / 175 / 125 mm		125 / 175 / 150 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	1x13	1x22	1x13	1x22
4 mm²	1x11	1x19	1x11	1x19
6 mm²	1x8	1x8	1x8	1x8
10 mm²	1x6	1x11	1x6	1x11
16 mm²	1x5	1x5	1x5	1x5
35 mm²	1x4	1x4	1x4	1x4
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	4	6	4	6
M16	3	4	3	4
M20	3	4	3	4
M25				
M32				
M40				
M50				
M63				
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	MPC 12/17/12 7035	1	9535330000	MPC 12/17/15 7035	1	9535350000
Enclosure with transparent lid	MPC 12/17/12 TRSP	1	9535340000	MPC 12/17/15 TRSP	1	9535360000
Note						

Accessories

Mounting plates and fastening screws						
Steel sheet, zinc plated	MP MPC 12/17	1	9535560000	MP MPC 12/17	1	9535560000
M4 screw	FKSC M4X6 D8/SW2	100	1567480000	FKSC M4X6 D8/SW2	100	1567480000
				SC MPC	100	9535640000
Mounting rails, TS15x5						
Vertical	TS15X5 ST MPC1217 VER	20	8000037598	TS15X5 MPC1217 VER	20	8000037598
Horizontally						
Mounting rails, TS35x7.5						
Horizontally						
Vertical	TS35 MPC 1717 VER	20	8000037605	TS35X7.5 MPC1725 VER	20	8000037600
External mounting lug, set of 4						
	MF MPC	1	9535600000	MF MPC	1	9535600000
Hinge, set of 2						
	HG MPC	1	9535590000	HG MPC	1	9535590000
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	1277250000	PEBZ M6 BR SET	1	1277250000
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	1283430000	PEBZ M6 S4 SET	1	1283430000
Brass, M10	PEBZ M10 BR SET	1	1277220000	PEBZ M10 BR SET	1	1277220000
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	1283440000	PEBZ M10 S4 SET	1	1283440000
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	1868570000	DAE M12 PA LONG	10	1868570000
Stainless steel 1.4305, M12	DAE M12 SS	10	1868550000	DAE M12 SS	10	1868550000
Note						

	MPC 17/17/07	75 mm	MPC 17/17/10	100 mm
			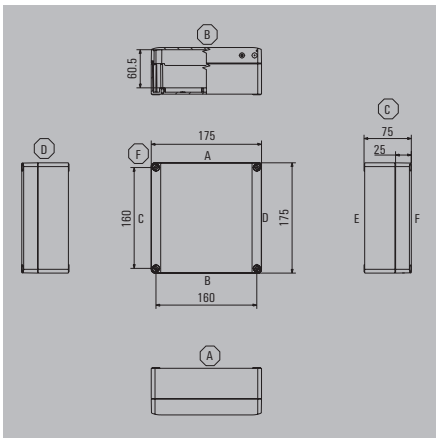	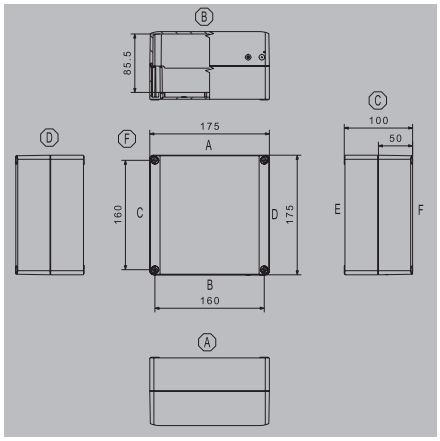
Height / Width / Depth	175 / 175 / 75 mm		175 / 175 / 100 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	1x22	1x22	1x22	1x22
4 mm²	1x19	1x19	1x19	1x19
6 mm²	1x14	1x14	1x14	1x14
10 mm²	1x11	1x11	1x11	1x11
16 mm²				
35 mm²				
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	6	6	6	6
M16	4	4	4	4
M20	4		4	
M25				
M32				
M40				
M50				
M63				
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	MPC 17/17/07 7035	1	9535370000	MPC 17/17/10 7035	1	9535390000
Enclosure with transparent lid	MPC 17/17/07 TRSP	1	9535380000	MPC 17/17/10 TRSP	1	9535400000
Note						

Accessories

Mounting plates and fastening screws	Type	Qty.	Order No.	Type	Qty.	Order No.
Steel sheet, zinc plated	MP MPC 17/17	1	9535570000	MP MPC 17/17	1	9535570000
M4 screw	FKSC M4X6 D8/SW2	100	1567480000	FKSC M4X6 D8/SW2	100	1567480000
				SC MPC	100	9535640000
Mounting rails, TS15x5						
Vertical						
Horizontally						
Mounting rails, TS35x7.5						
Horizontally	TS 35X105_MPC_12	20	8000037603			
Vertical	TS35 MPC 1717 VER	20	8000037605	TS35X7.5 MPC1725 VER	20	8000037600
External mounting lug, set of 4						
	MF MPC	1	9535600000	MF MPC	1	9535600000
Hinge, set of 2						
	HG MPC	1	9535590000	HG MPC	1	9535590000
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	1277250000	PEBZ M6 BR SET	1	1277250000
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	1283430000	PEBZ M6 S4 SET	1	1283430000
Brass, M10	PEBZ M10 BR SET	1	1277220000	PEBZ M10 BR SET	1	1277220000
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	1283440000	PEBZ M10 S4 SET	1	1283440000
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	1868570000	DAE M12 PA LONG	10	1868570000
Stainless steel 1.4305, M12	DAE M12 SS	10	1868550000	DAE M12 SS	10	1868550000
Note						

	MPC 17/17/12	125 mm	MPC 17/17/15	150 mm
	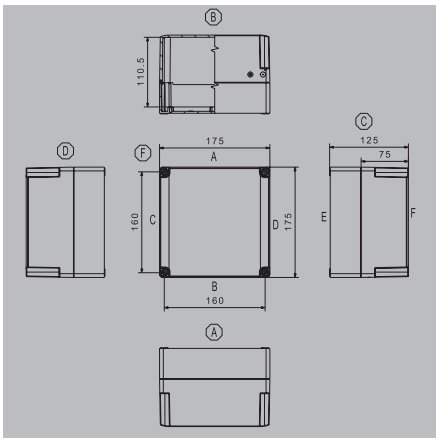		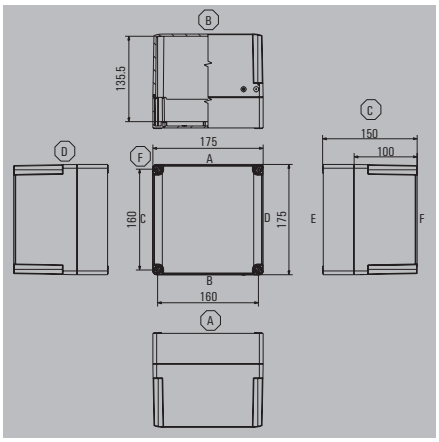	
Height / Width / Depth	175 / 175 / 125 mm		175 / 175 / 150 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	1x22	1x22	1x22	1x22
4 mm²	1x19	1x19	1x19	1x19
6 mm²	1x14	1x14	1x14	1x14
10 mm²	1x11	1x11	1x11	1x11
16 mm²	1x9	1x9	1x9	1x9
35 mm²	1x7	1x7	1x7	1x7
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	6	6	6	6
M16	4	4	4	4
M20	4		4	
M25				
M32				
M40				
M50				
M63				
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	MPC 17/17/12 7035	1	**9535410000**	MPC 17/17/15 7035	1	**9535430000**
Enclosure with transparent lid				MPC 17/17/15 TRSP	1	**9535440000**
Note						

Accessories

Mounting plates and fastening screws	Type	Qty.	Order No.	Type	Qty.	Order No.
Steel sheet, zinc plated	MP MPC 17/17	1	**9535570000**	MP MPC 17/17	1	**9535570000**
M4 screw	FKSC M4X6 D8/SW2	100	**1567480000**	FKSC M4X6 D8/SW2	100	**1567480000**
	SC MPC	100	**9535640000**			
Mounting rails, TS15x5						
Vertical						
Horizontally						
Mounting rails, TS35x7.5						
Horizontally						
Vertical	TS35X7.5 ST MPC1725 VER	20	**8000037600**	TS35X7.5 MPC1725 VER	20	**8000037600**
External mounting lug, set of 4						
	MF MPC	1	**9535600000**	MF MPC	1	**9535600000**
Hinge, set of 2						
	HG MPC	1	**9535590000**	HG MPC	1	**9535590000**
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	**1277250000**	PEBZ M6 BR SET	1	**1277250000**
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	**1283430000**	PEBZ M6 S4 SET	1	**1283430000**
Brass, M10	PEBZ M10 BR SET	1	**1277220000**	PEBZ M10 BR SET	1	**1277220000**
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	**1283440000**	PEBZ M10 S4 SET	1	**1283440000**
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	**1868570000**	DAE M12 PA LONG	10	**1868570000**
Stainless steel 1.4305, M12	DAE M12 SS	10	**1868550000**	DAE M12 SS	10	**1868550000**
Note						

	MPC 17/25/07	75 mm	MPC 17/25/10	100 mm
		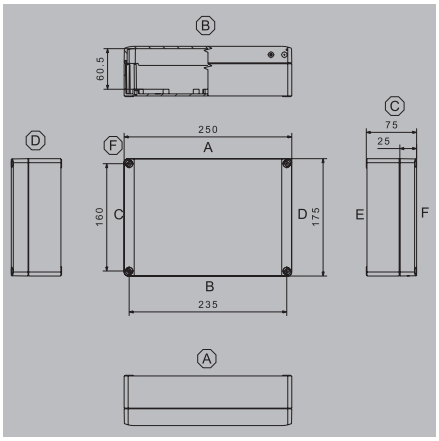		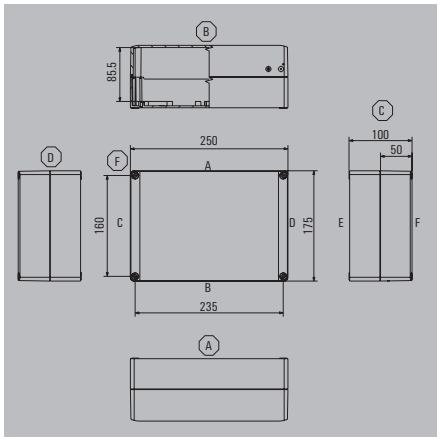
Height / Width / Depth		175 / 250 / 75 mm		175 / 250 / 100 mm

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	1x37	1x37	1x37	1x37
4 mm²	1x31	1x31	1x31	1x31
6 mm²	1x23	1x23	1x23	1x23
10 mm²	1x19	1x19	1x19	1x19
16 mm²	1x15	1x9	1x15	1x9
35 mm²	1x11	1x7	1x11	1x7
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	6	9	6	9
M16	4	7	4	7
M20	4	6	4	6
M25				
M32				
M40				
M50				
M63				
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	MPC 17/25/07 7035	1	**9535450000**	MPC 17/25/10 7035	1	**9535470000**
Enclosure with transparent lid				MPC 17/25/10 TRSP	1	**9535480000**
Note						

Accessories

Mounting plates and fastening screws	Type	Qty.	Order No.	Type	Qty.	Order No.
Steel sheet, zinc plated	MP MPC 17/25	1	**9535580000**	MP MPC 17/25	1	**9535580000**
M4 screw	FKSC M4X6 D8/SW2	100	**1567480000**	FKSC M4X6 D8/SW2	100	**1567480000**
Mounting rails, TS15x5						
Vertical						
Horizontally						
Mounting rails, TS35x7.5						
Horizontally	TS35X7.5 ST MPC1725 HOR	20	**8000037601**	TS35X7.5 MPC1725 HOR	20	**8000037601**
Vertical	TS35X7.5 ST MPC1725 VER	20	**8000037600**	TS35X7.5 MPC1725 VER	20	**8000037600**
External mounting lug, set of 4						
	MF MPC	1	**9535600000**	MF MPC	1	**9535600000**
Hinge, set of 2						
	HG MPC	1	**9535590000**	HG MPC	1	**9535590000**
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	**1277250000**	PEBZ M6 BR SET	1	**1277250000**
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	**1283430000**	PEBZ M6 S4 SET	1	**1283430000**
Brass, M10	PEBZ M10 BR SET	1	**1277220000**	PEBZ M10 BR SET	1	**1277220000**
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	**1283440000**	PEBZ M10 S4 SET	1	**1283440000**
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	**1868570000**	DAE M12 PA LONG	10	**1868570000**
Stainless steel 1.4305, M12	DAE M12 SS	10	**1868550000**	DAE M12 SS	10	**1868550000**
Note						

MPC 17/25/15 — 150 mm

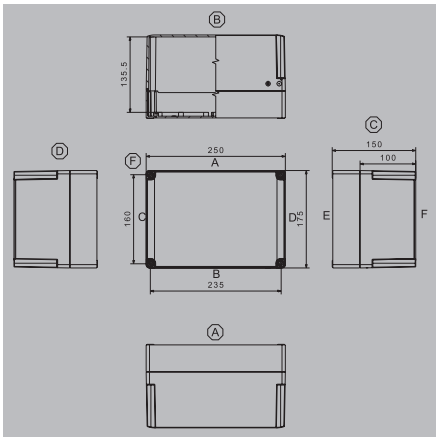

Height / Width / Depth	175 / 250 / 150 mm

Technical data

Assembly with terminal	vertical	horizontal
2.5 mm²	1x37	1x37
4 mm²	1x31	1x31
6 mm²	1x23	1x23
10 mm²	1x19	1x19
16 mm²	1x15	1x9
35 mm²	1x11	1x7
Guide value for max. number of cable entries	**A / B**	**C / D**
M12	6	9
M16	4	7
M20	4	6
M25		
M32		
M40		
M50		
M63		
M75		
Note		

Ordering data

	Type	Qty.	Order No.
Enclosure with grey lid	MPC 17/25/15 7035	1	**9535490000**
Enclosure with transparent lid	MPC 17/25/15 TRSP	1	**9535500000**
Note			

Accessories

Mounting plates and fastening screws	Type	Qty.	Order No.
Steel sheet, zinc plated	MP MPC 17/25	1	**9535580000**
M4 screw	FKSC M4X6 D8/SW2	100	**1567480000**
Mounting rails, TS15x5			
Vertical			
Horizontally			
Mounting rails, TS35x7.5			
Horizontally	TS35X7.5 ST MPC1725 HOR	20	**8000037601**
Vertical	TS35X7.5 ST MPC1725 VER	20	**8000037600**
External mounting lug, set of 4			
	MF MPC	1	**9535600000**
Hinge, set of 2			
	HG MPC	1	**9535590000**
Earthing stud			
Brass, M6	PEBZ M6 BR SET	1	**1277250000**
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	**1283430000**
Brass, M10	PEBZ M10 BR SET	1	**1277220000**
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	**1283440000**
Pressure compensation elements			
Polyamide 6, M12	DAE M12 PA LONG	10	**1868570000**
Stainless steel 1.4305, M12	DAE M12 SS	10	**1868550000**
Note			

FPC – Medium-sized polycarbonate enclosures

The FPC enclosure range is the next generation of the MPC range. The enclosures have the same technical characteristics and are ideal for enclosing electrical, electro-mechanical and pneumatic devices and PCBs. The enclosures are used in situations where extreme mechanical and chemical conditions exist.

The characteristics of the enclosures are:
- Available in 6 sizes, with grey or transparent lids
- Lid fixing screws equipped with sealing holes
- Fixing holes outside the sealed area
- Thread for fitting to terminal rails, mounting plates and PCBs

Weidmüller manufactures and supplies the enclosures to match customer specifications – fully fitted with terminals, electronics and cable glands.

Use our online catalogue to find additional product details, technical information and additional services:
www.weidmueller.com/fpc

WMC

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Overview of enclosures

Ordering data

Description	Dimensions in mm	Grey lid	Transparent lid
FPC 20/20/13	200 x 200 x 132	9535690000	9535680000
FPC 20/30/13	200 x 300 x 132	9535710000	9535700000
FPC 20/40/13	200 x 400 x 132	9535730000	9535720000
FPC 30/30/13	300 x 300 x 132	9535750000	9535740000
FPC 30/40/13	300 x 400 x 132	9535770000	9535760000
FPC 40/60/13	400 x 600 x 132	9535810000	9535820000
Note			

Technical data

	Grey lid	Transparent lid
Enclosure material	Base and lid made of glass-fibre reinforced polycarbonate	Base made of glass-fibre reinforced polycarbonate, ABS lid
Cover	Grey	Transparent
Surface finish	Grey, similar to RAL 7035	Grey, similar to RAL 7035
IP protection class	IP 66, IP 67	IP 66, IP 67
Installation mounting	Self-tapping screws	Self-tapping screws
Enclosure mounting	4 holes (7.5 mm diameter) or external mounting brackets (optional)	4 holes (7.5 mm diameter) or external mounting brackets (optional)
Lid fixing	4 or 6 cross-head screws (polyamide)	4 or 6 cross-head screws (polyamide)
Gasket material	Polyurethane foam	Polyurethane foam
Temperature range	-50 °C...+100 °C	-40 °C...+60 °C
Impact resistance	IK 08 in accordance with EN 60529	IK 08 in accordance with EN 60529
Note	For details of power dissipation, please contact your Weidmüller representative.	

Universal use in industrial applications indoors and outdoors

Cross-head screws
Fastening the enclosure cover with cross-head screws. Quick and easy installation with just one tool.

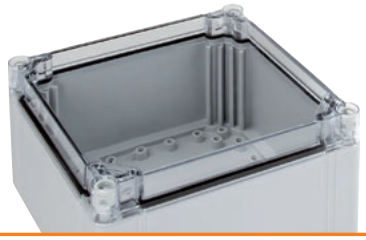

High IP protection
The sealing ensures a reliable IP protection rating of IP66/IP67.

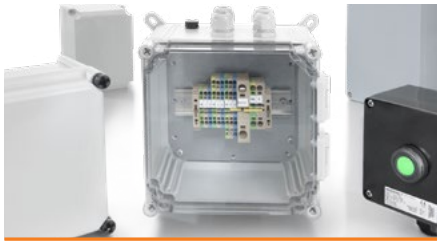

Assembly and processing
Cut-outs, drillings, cable glands or equipped terminal rails can be realized as required. Individual processing and assembly possible using the Weidmüller Configurator (WMC).

Mounting plates
Suitable mounting plates for attaching mounting rails, terminal blocks or other devices.

	FPC 20/20/13	132 mm	FPC 20/30/13	132 mm
	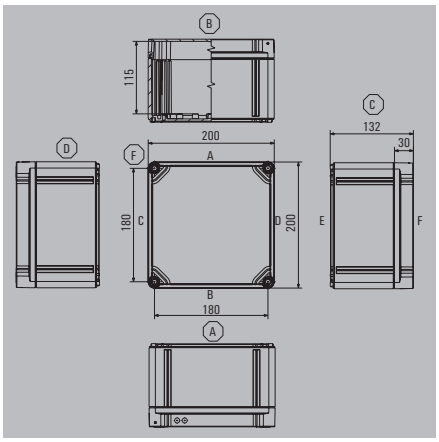		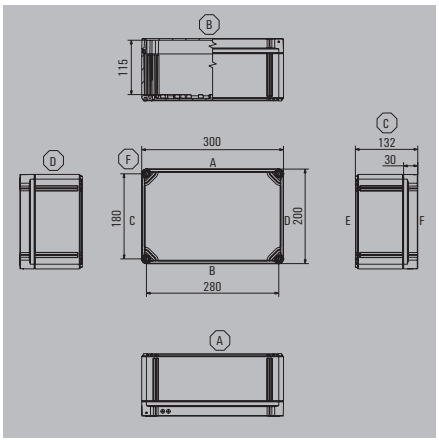	
Height / Width / Depth	200 / 200 / 132 mm		200 / 300 / 132 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	1x17	1x17	2x20	1x40
4 mm²	1x14	1x14	2x17	1x33
6 mm²	1x10	1x10	2x13	2x13
10 mm²	1x8	1x8	2x10	1x20
16 mm²	1x7	1x7	2x8	1x17
35 mm²	1x5	1x5	2x6	1x12
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	20	20	38	20
M16	11	11	21	11
M20	6	6	12	6
M25	4	4	8	4
M32	2	2	3	2
M40	1	1	3	1
M50	1	1	2	1
M63	1	1	2	1
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	FPC 20/20/13 7035	1	9535690000	FPC 20/30/13 7035	1	9535710000
Enclosure with transparent lid	FPC 20/20/13 TRSP	1	9535680000	FPC 20/30/13 TRSP	1	9535700000
Note						

Accessories

	Type	Qty.	Order No.	Type	Qty.	Order No.
Mounting plates and fastening screws	MP FPC 20/20	1	9535920000	MP FPC 20/30	1	9535930000
Steel sheet, zinc plated	FKSC M4X6 D8/SW2	100	1567480000	FKSC M4X6 D8/SW2	100	1567480000
M4 screw						
Mounting rails, TS15x5						
Vertical	TS15X5 ST FPC 20 VER	20	8000037604	TS15X5 FPC 20 VER	20	8000037604
Mounting rails, TS35x7.5						
Horizontally	TS35X7.5 ST FPC 20 HOR	20	8000037557	TS35X7.5 FPC 30 HOR	20	8000037559
Vertical	TS35X7.5 ST FPC 20 VER	20	8000037558	TS35X7.5 FPC 20 VER	20	8000037558
External mounting lug, set of 4						
	MF FPC	1	9536040000	MF FPC	1	9536040000
Hinge, set of 2						
	HG FPC	1	9535990000	HG FPC	1	9535990000
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	1277250000	PEBZ M6 BR SET	1	1277250000
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	1283430000	PEBZ M6 S4 SET	1	1283430000
Brass, M10	PEBZ M10 BR SET	1	1277220000	PEBZ M10 BR SET	1	1277220000
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	1283440000	PEBZ M10 S4 SET	1	1283440000
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	1868570000	DAE M12 PA LONG	10	1868570000
Stainless steel 1.4305, M12	DAE M12 SS	10	1868550000	DAE M12 SS	10	1868550000
Note						

	FPC 20/40/13	132 mm	FPC 30/30/13	132 mm
	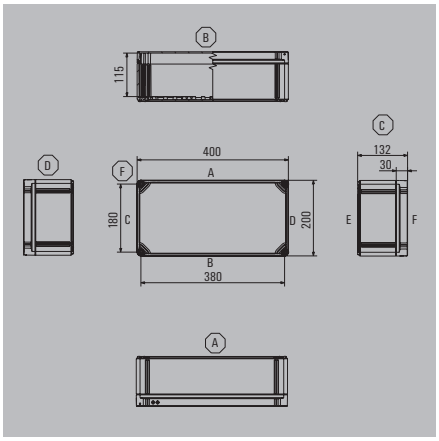		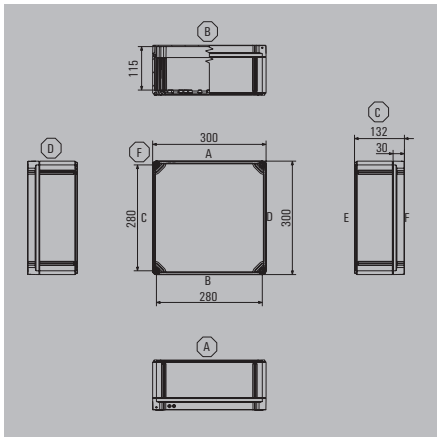	
Height / Width / Depth	200 / 400 / 132 mm		300 / 300 / 132 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	3x20	1x59	2x40	1x40
4 mm²	3x17	1x49	2x33	1x33
6 mm²	3x13	3x13	2x25	2x25
10 mm²	3x10	1x30	2x20	1x20
16 mm²	3x8	1x25	2x17	1x17
35 mm²	3x6	1x19	2x12	1x12
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	56	20	38	38
M16	30	11	21	21
M20	18	6	12	12
M25	12	4	8	8
M32	5	2	3	3
M40	4	1	3	3
M50	4	1	2	2
M63	3	1	2	2
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	FPC 20/40/13 7035	1	**9535730000**	FPC 30/30/13 7035	1	**9535750000**
Enclosure with transparent lid	FPC 20/40/13 TRSP	1	**9535720000**	FPC 30/30/13 TRSP	1	**9535740000**
Note						

Accessories

	Type	Qty.	Order No.	Type	Qty.	Order No.
Mounting plates and fastening screws	MP FPC 20/40	1	**9535940000**	MP FPC 30/30	1	**9535950000**
Steel sheet, zinc plated	FKSC M4X6 D8/SW2	100	**1567480000**	FKSC M4X6 D8/SW2	100	**1567480000**
Mounting rails, TS15x5						
Vertical	TS15X5 ST FPC 20 VER	20	**8000037604**	TS15X5 FPC 20 VER	20	**8000037604**
Mounting rails, TS35x7.5						
Horizontally	TS35X7.5 ST FPC 40 HOR	20	**8000037560**	TS35X7.5 FPC 40 HOR	20	**8000037560**
Vertical	TS35X7.5 ST FPC 20 VER	20	**8000037558**	TS35X7.5 FPC 20 VER	20	**8000037558**
External mounting lug, set of 4						
	MF FPC	1	**9536040000**	MF FPC	1	**9536040000**
Hinge, set of 2						
	HG FPC	1	**9535990000**	HG FPC	1	**9535990000**
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	**1277250000**	PEBZ M6 BR SET	1	**1277250000**
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	**1283430000**	PEBZ M6 S4 SET	1	**1283430000**
Brass, M10	PEBZ M10 BR SET	1	**1277220000**	PEBZ M10 BR SET	1	**1277220000**
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	**1283440000**	PEBZ M10 S4 SET	1	**1283440000**
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	**1868570000**	DAE M12 PA LONG	10	**1868570000**
Stainless steel 1.4305, M12	DAE M12 SS	10	**1868550000**	DAE M12 SS	10	**1868550000**
Note						

	FPC 30/40/13	132 mm	FPC 40/60/13	132 mm
	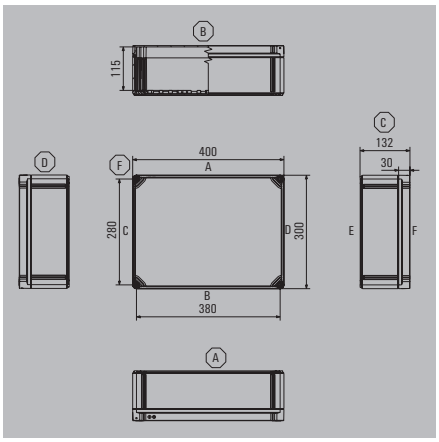		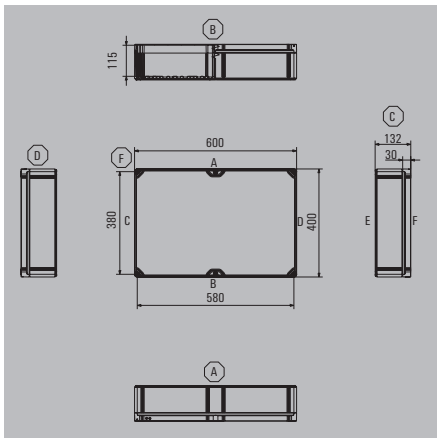	
Height / Width / Depth	300 / 400 / 132 mm		400 / 600 / 132 mm	

Technical data

Assembly with terminal	vertical	horizontal	vertical	horizontal
2.5 mm²	3x40	1x59	5x59	2x97
4 mm²	3x33	1x49	5x49	2x81
6 mm²	3x25	3x25	5x37	5x37
10 mm²	3x20	1x30	5x30	2x49
16 mm²	3x17	1x25	5x25	2x41
35 mm²	3x12	1x19	5x19	2x31
Guide value for max. number of cable entries	**A / B**	**C / D**	**A / B**	**C / D**
M12	56	38	76	56
M16	30	21	42	30
M20	18	12	24	18
M25	12	8	16	12
M32	5	3	6	5
M40	4	3	6	4
M50	4	2	4	4
M63	3	2	4	3
M75				
Note				

Ordering data

	Type	Qty.	Order No.	Type	Qty.	Order No.
Enclosure with grey lid	FPC 30/40/13 7035	1	**9535770000**	FPC 40/60/13 7035	1	**9535810000**
Enclosure with transparent lid	FPC 30/40/13 TRSP	1	**9535760000**	FPC 40/60/13 TRSP	1	**9535820000**
Note						

Accessories

	Type	Qty.	Order No.	Type	Qty.	Order No.
Mounting plates and fastening screws						
Steel sheet, zinc plated	MP FPC 30/40	1	**9535960000**	MP FPC 40/60	1	**9535980000**
M4 screw	FKSC M4X6 D8/SW2	100	**1567480000**	FKSC M4X6 D8/SW2	100	**1567480000**
Mounting rails, TS15x5						
Vertical						
Mounting rails, TS35x7.5						
Horizontally	TS35X7.5 ST FPC 40 HOR	20	**8000037560**	TS35X7.5 FPC 60 HOR	20	**8000037563**
Vertical	TS35X7.5 ST FPC 30 VER	20	**8000037561**	TS35X7.5 FPC 40 VER	20	**8000037562**
External mounting lug, set of 4						
	MF FPC	1	**9536040000**	MF FPC	1	**9536040000**
Hinge, set of 2						
	HG FPC	1	**9535990000**	HG FPC	1	**9535990000**
Earthing stud						
Brass, M6	PEBZ M6 BR SET	1	**1277250000**	PEBZ M6 BR SET	1	**1277250000**
Stainless steel 1.4404, M6	PEBZ M6 S4 SET	1	**1283430000**	PEBZ M6 S4 SET	1	**1283430000**
Brass, M10	PEBZ M10 BR SET	1	**1277220000**	PEBZ M10 BR SET	1	**1277220000**
Stainless steel 1.4404, M10	PEBZ M10 S4 SET	1	**1283440000**	PEBZ M10 S4 SET	1	**1283440000**
Pressure compensation elements						
Polyamide 6, M12	DAE M12 PA LONG	10	**1868570000**	DAE M12 PA LONG	10	**1868570000**
Stainless steel 1.4305, M12	DAE M12 SS	10	**1868550000**	DAE M12 SS	10	**1868550000**
Note						

Cable entries

Cable entries	Introduction	D.2
	Overview	D.4
	Standard cable glands – Plastic	D.6
	Standard cable glands – Brass	D.8
	EMC cable glands	D.11
	Standard cable glands – Stainless steel	D.13
	Standard cable glands	D.15
	Ex-cable glands – Introduction	D.16
	Ex-cable glands	D.18
	Ex-cable glands – Plastic	D.30
	Accessories – Lock nuts	D.34
	Accessories – Flat IP washer	D.40
	Accessories – Earthing rings	D.43
	Accessories – Washers	D.44
	Blanking plugs	D.45
	Ex-Blanking plugs	D.47
	Compensating elements	D.51
	Ex-Compensating elements	D.53
	Adapter	D.54

Cable entries

Weidmüller offers a variety of add-on components for a multitude of purposes and applications to complement its extensive Klippon® Protect range.

In addition to brass, plastic and stainless steel cable glands, there are also sealing plugs, pressure-equalising elements, adapters and relevant accessories – such as lock nuts, flat gaskets, flat washers and earthing rings – available.

To match the assembled enclosures, the cable glands meet the requirements of IP protection classes IP54 to IP69K. They can be used in standard industrial applications, EMC applications or even in potentially explosive atmospheres as required, and they comply with the approvals required for these purposes.

Ex-certified cable glands also allow for the connection of cables and conductors with different reinforcements with and without lead sheathing, as well as the connection of steel wire and steel tape cables. They can also be used in a temperature range of between -50 °C and +120 °C.

Depending on the cable gland variants and application, the cable glands, sealing plugs, adaptors, pressure-equalising elements and accessories are manufactured and certified according to the following standards:

- IEC/EN 62444 (construction and performance)
- IEC/EN 60529 (IP protection class testing)
- IEC/EN 60079-0 (general Ex requirements)
- IEC/EN 60079-1 (Ex d Ex standard)
- IEC/EN 60079-7 (Ex e Ex standard)
- IEC/EN 60079-11 (Ex i Ex standard)
- IEC/EN 60423 (metric screw thread)
- DIN 40430 (PG and NPT thread)

The range of cable glands, sealing plugs and pressure-equalising elements is available in metric (M) and high-strength (PG) threads in sizes ranging from M12 to M75 and PG7 to PG48. When choosing cable glands and sealing plugs, please refer to the table with the sealing characteristics of the O-rings, flat gaskets and seal inserts. O-rings and flat gaskets are always intended for sealing the connecting thread on an enclosure, for example, while the sealing insert of each cable gland is intended for actually sealing and clamping the connecting cable.

WMC

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

You should always observe the maximum drill-hole diameter when installing a cable gland, sealing plug, adaptor, or pressure compensation element (e.g. onto the gland plate of an enclosure). These must not exceed the following specified maximum values / tolerances so that the protection degree of the whole enclosure can be guaranteed.
Please also refer to the instruction manual; deviating information is possible.

Through-hole information

M thread	Through-hole, in mm
M 12	12.2
M 16	16.2
M 20	20.2
M 25	25.2
M 32	32.2
M 40	40.2
M 50	50.2
M 63	63.2
M 75	75.2
PG thread	**Through-hole, in mm**
PG 7	12.4
PG 9	15.1
PG 11	18.5
PG 13.5	20.4
PG 16	22.5
PG 21	28.3
PG 29	37.4
PG 36	47.2
PG 42	54.2
PG 48	59.5

Overview of sealing materials for O-rings, flat gaskets as well as seal inserts

Abbreviation	Material	Trade name	Temperature range	Chemical resistance	Fire resistant	Shore	Free from halogens	UV resistance
TPE	Thermo-plastic elastomer	Santroprene	–40 °C to +130 °C	Hydrocarbons, oils, acids	UL94, HB	64	Yes	very good
CR	Chloroprene rubber	Neoprene	–40 °C to +130 °C	Mineral oils, greases, fuels	very good	40 - 90	No	very good
NBR	Nitrile rubber	Perbunan, Nitrile	–40 °C to +130 °C	Hydrocarbons, oils, acids, aliphatic solvents, greases, fuels	weak	40 - 90	No	good
EPDM	Ethylene-propylene-diene rubber	Keltan	–50 °C to +130 °C	Weather-, grease-, mineral oil-, chlorine-,and ozone resistant, hydrocarbons	weak	20 - 90		very good
FPM	Fluoro-rubber	Viton	–25 °C to +200 °C	ozone, oxygen, mineral oils, synthetic hydraulic fluids, fuels, aromatics, many organic solvents and chemicals	weak	65 - 95		good

Note: The data refer only to the sealing material, not to the entire component.

Abbreviations – technical data

A, L	Length in mm
L1	Length of thread in mm
D	Diameter in mm
S	Thickness in mm
S1,S2	Depth in mm
SW, SW1, SW2	Distance across flats in mm
KB	Clamping range in mm
KB ZE	Clamping range strain relief in mm
Thread	External thread
SUHB	Shroud / Protective cap
DR	Tightening torque in Nm
HM	Cap nut / pressure screw
Qty.	Packing unit in pieces

Product designation

VP HEX	Sealing plugs with hexagon head
A2L	Ex Cable gland
A2LC	Ex Cable gland with conduit connection thread
E1W	Ex Cable Gland with double sealing for SWA armoured cable
E1XZ	Ex Cable Gland with double sealing for SWB/STA armoured cable
VG	Cable gland
VP	Sealing plugs
SKMU	Hexagon nut
DAE	Pressure compensation element
BD	Breather drain (compensation element)
SZS	Serrated Star Washers (Serrated washers)
ZE	Strain relief
EMV	Electromagnetic compatibility
EA	Earthing ring
SKS	Spiral kink protection
GWDR	Thread sealing ring or flat gasket

Glands and accessories

The tables below provide an overview of the Weidmüller cable glands and the recommended accessories.

Standard cable glands

Material/Type		Approvals: IP class of protection without seal	Approvals: IP class of protection with seal	Ex	EMC	Armouring	Thread sealing rings: CSM GWDR PO	Thread sealing rings: CR GWDR...NP	Thread sealing rings: O-Ring	Locknuts: grey SKMU...K GR	Locknuts: black SKMU...K SW	Locknuts: brass SKMU...MS	Locknuts: MS EMC SKMU EMV...
Plastic													
	VG ... K68	IP68 / 5 bar								●			
	VG ... K68 SKS	IP68 / 5 bar								●			
Nickel-plated brass													
	VG ... MS68		IP54,IP66, IP68 / 5 bar, IP69k						included			●	
	VGM...MS68...BG		IP68						included			●	
	VG ... EMV-4		IP66, IP68 / 5 bar, IP69k		●				included				●
	VGM...EMC...SET		IP68		●				included				●
Stainless steel													
	VG...SS68		IP54,IP66, IP68 / 5 bar, IP69k						included			●	
	VGM...SS68...BG		IP68						included			●	

Cable glands HQ

Material/Type		Approvals: IP class of protection without seal	Approvals: IP class of protection with seal	Ex	EMC	Armouring	Thread sealing rings: CSM GWDR PO	Thread sealing rings: CR GWDR...NP	Thread sealing rings: O-Ring	Locknuts: grey SKMU...K GR	Locknuts: black SKMU...K SW	Locknuts: brass SKMU...MS	Locknuts: MS EMC SKMU EMV...
Nickel-plated brass, Ex													
	VG ... K68 ...	IP65											
Brass Ex													
	VG ... MS68 ...	IP65											
	VG ... EMV68 ...	IP65			●								

Cable glands Ex

Material/Type		Approvals: IP class of protection ohne Dichtring	Approvals: IP class of protection mit Dichtring	Ex	EMV	Armouring	Thread sealing rings: GWDR...WM	Thread sealing rings: CR GWDR...NP	Thread sealing rings: O-Ring	Locknuts: grey SKMU...K GR	Locknuts: black SKMU...K SW	Locknuts: brass SKMU...MS	Locknuts: MS EMV SKMU EMV...
Nickel-plated brass, Ex													
	A2L		IP66, IP68	Ex e/d			optional		included			●	
	A2LC		IP66, IP68	Ex e/d			optional		included			●	
	E1W		IP66, IP68	Ex e/d		●	optional		included			●	
	E1XZ		IP66, IP68	Ex e/d		●	optional		included			●	
Plastic Ex													
	VG...EXI...7J		IP54, IP66, IP68 / 5 bar	Ex e					included		●		
	VG...EXE...7J		IP54, IP66, IP68 / 5 bar	Ex i					included		●		
Note:	* Available on request. Ex - Stainless steel glands on request												

Adaptor

Material/Type		Approvals		Thread sealing rings			Locknuts			
		IP class of protection with seal	Ex	GWDR PO	CR GWDR...NP	O-Ring	grey SKMU...K GR	black SKMU...K SW	brass SKMU...MS	MS EMC SKMU EMV...
Plastic										
	DAE M12 PA	IP66, IP68, IP69K				included				
	DAE M12 PA long	IP66, IP68, IP69K				included		•		
Stainless steel										
	DAE M12 SS	IP66, IP68, IP69K				included			•	•
Brass Ex										
	KLIPPON BDX ... B	IP66	•			included				
Stainless steel Ex										
	KLIPPON BDX ... S	IP66	•			included				

Stopping plugs

Material/Type		Approvals			Thread sealing rings			Locknuts			
		IP class of protection without seal	IP class of protection with seal	Ex	GWDR PO	CR GWDR...NP	O-Ring	grey SKMU...K GR	black SKMU...K SW	brass SKMU...MS	MS EMV SKMU EMV...
Plastic											
	VP ... K54	IP54	IP65					•			
Nickel-plated brass											
	VP ... MS65		IP68				included			•	
Stainless steel											
	VPS...		IP66, IP68	Ex e/d			included			•	
Plastic Ex											
	VP...Ex SW	IP54, IP66	IP66, IP68	Ex e		optional			•		
Nickel-plated brass, Ex											
	VP...HEX		IP54, IP66, IP68	Ex e/d			included			•	
Nickel-plated brass, Ex											
	VP...		IP66, IP68	Ex e/d			included			•	

Cable glands – Plastic – IP68

Cable gland made of plastic with integrated strain relief for industrial applications where IP67 or IP68 protection is required. Tested and approved according to EN 62444 and UL514B.



Technical data

Material / Colour	Polyamide 6 / Light Grey / RAL 7035
Seal insert	CR
Temperature range	-40 °C...100 °C
Protection class	IP67, IP68 - 5 bar (30 min.)
Flammability rating	V-2
Note	Version with moulded sealing lip. Length L varies depending on the cable diameter used.

Ordering data

Type	Thread	KB	L/L1	SW	Qty.	Order No.
metric						
VG M12-1/K68	M 12	3-6.5	30.5 / 8	15	100	**1772280000**
VG M16-1/K68	M 16	4-8	34.5 / 8	19	50	**1909860000**
VG M16 - K 68	M 16	5-10	40 / 10	22	50	**1772290000**
VG M20-1/K68	M 20	6-12	39.5 / 10	24	50	**1772300000**
VG M25-1/K68	M 25	11-17	43 / 8	29	50	**1909870000**
VG M25 - K 68	M 25	13-18	47 / 10	33	25	**1772310000**
VG M32-1/K68	M 32	15-21	52 / 10	36	20	**1909880000**
VG M32 - K 68	M 32	18-25	56 / 15	42	20	**1772320000**
VG M40-1/K68	M 40	19-28	57 / 10	46	10	**1909890000**
VG M40 - K 68	M 40	22-32	69.5 / 18	53	10	**1772330000**
VG M50 - K 68	M 50	30-38	71 / 18	60	10	**1772340000**
VG M63-1/K68	M 63	34-44	71 / 18	65	10	**1772350000**
PG						
VG 7-K68	PG 7	3-6.5	30 / 8	15	100	**1568970000**
VG 9-K68	PG 9	4-8	34.5 / 8	19	50	**1568980000**
VG 11-K68	PG 11	5-10	37 / 8	22	50	**1568990000**
VG 13.5-K68	PG 13.5	6-12	39 / 10	24	50	**1569000000**
VG 16-K68	PG 16	10-14	41 / 10	27	50	**1569010000**
VG 21-K68	PG 21	13-18	48 / 11	33	25	**1569020000**
VG 29-K68	PG 29	18-25	52 / 11	42	20	**1569030000**
VG 36-K68	PG 36	22-32	64.5 / 13	53	10	**1569040000**
VG 42-K68	PG 42	30-38	66.5 / 13	60	10	**1569050000**
VG 48-K68	PG 48	34-44	67.5 / 14	65	10	**1718770000**
Note	Long-thread version on request, halogen-free without sealing ring. Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.					

Cable glands – Plastic – SKS

Cable gland made of plastic with spiral bending protection and integrated strain relief, specially suited for moving connections. It prevents cables from bending at acute angles.

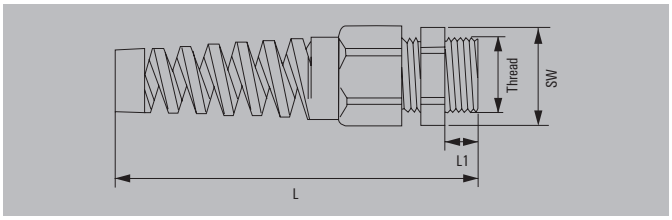

Technical data

Material / Colour	Polyamide 6 / Light Grey / RAL 7035
Seal insert	CR
Temperature range	-20 °C...100 °C
Protection class	IP68 - 5 bar (30 min.)
Flammability rating	V-2
Note	Version with moulded sealing lip Length L varies depending on the cable diameter used.

Ordering data

Type	Thread	KB	L/L1	SW	Qty.	Order No.
metric						
VG M12-K68 SKS	M 12	3-6.5	63.5 / 8	15	100	**1776700000**
VG M16-K68 SKS	M 16	5-10	94.5 / 15	22	50	**1776710000**
VG M20-K68 SKS 6-12	M 20	6-12	101.5 / 11	24	50	**1778860000**
VG M20-K68 SKS 10-14	M 20	10-14	116 / 15	27	25	**1776720000**
VG M25-K68 SKS	M 25	13-18	132.5 / 15	33	25	**1776730000**
PG						
VG 7-K68 SKS	PG 7	3-6.5	63 / 8	15	50	**1720470000**
VG 9-K68 SKS	PG 9	4-8	74 / 8	19	50	**1720480000**
VG 11-K68 SKS	PG 11	5-10	87 / 8	22	100	**1720490000**
VG 13.5-K68 SKS	PG 13.5	6-12	98 / 9	24	50	**1720500000**
VG 16-K68 SKS	PG 16	10-14	112 / 10	27	25	**1720510000**
VG 21-K68 SKS	PG 21	13-18	130 / 11	33	20	**1720520000**
Note	Long-thread version on request, halogen-free without sealing ring. Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.					

Cable glands – Brass – IP68

Cable gland made of brass for industrial applications where IP68 or IP69K protection is required.

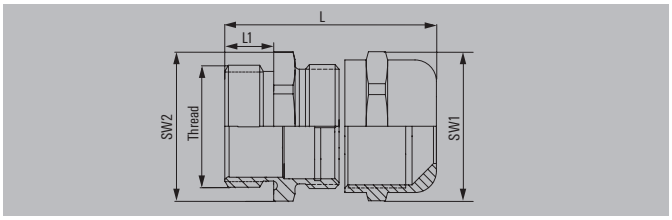

Technical data

Material	Brass, nickel-plated
O-ring / Seal insert	NBR / CR
Temperature range	-40 °C...100 °C
Clamp insert	Polyamide
Protection degree with GWDR	IP54, IP66, IP67, IP68 - 5 bar (30 min.), IP69K
Note	Length "L" varies depending on the cable diameter used; IP69K protection applies to all metric cable glands; the following thread sizes are excluded from IP69K: PG29, PG36, PG42 and PG48.

Ordering data

Type	Thread	KB	L/L1	SW1/SW2	Qty.	Order No.
metric						
VG M12 - MS 68	M 12	3-6.5	28 / 6	14 / 14	50	**1772200000**
VG M16 - MS 68	M 16	4-8	30 / 7	17 / 18	50	**1772210000**
VG M16-1/MS68	M 16	5-10	35.5 / 7	20 / 20	50	**1909910000**
VG M20 - MS 68	M 20	6-12	34.5 / 8	22 / 22	50	**1772220000**
VG M25 - MS 68	M 25	10-14	35.7 / 8	24 / 27	25	**1772230000**
VG M25-1/MS68	M 25	11-17	40.5 / 8	27 / 27	25	**1909920000**
VG M32 - MS 68	M 32	13-18	42 / 9	30 / 34	10	**1772240000**
VG M32-1/MS68	M 32	15-21	44 / 8	34 / 34	10	**1909930000**
VG M40 - MS 68	M 40	18-25	47 / 9	40 / 43	10	**1772250000**
VG M40-1/MS68	M 40	19-28	52.5 / 9	43 / 43	10	**1909940000**
VG M50 - MS 68	M 50	22-32	57 / 9	50 / 55	5	**1772260000**
VG M50-1/MS68	M 50	27-38	61 / 9	58 / 58	5	**1909950000**
VG M63 - MS 68	M 63	34-44	67 / 14	64 / 68	5	**1772270000**
PG (IP69K)						
VG 7-MS68	PG 7	3-6.5	28 / 6	14 / 14	50	**1569060000**
VG 9-MS68	PG 9	4-8	29.5 / 6	17 / 17	50	**1569070000**
VG 11-MS68	PG 11	5-10	32 / 6	20 / 20	50	**1569080000**
VG 13,5-MS68	PG 13.5	6-12	31 / 6.5	22 / 22	50	**1569090000**
VG 16-MS68	PG 16	10-14	34.5 / 6.5	24 / 24	25	**1569100000**
VG 21-MS68	PG 21	13-18	39.7 / 7.2	30 / 30	25	**1569110000**
PG (IP68)						
VG 29-MS68	PG 29	18-25	46.5 / 8	40 / 40	10	**1569120000**
VG 36-MS68	PG 36	22-32	57 / 9	50 / 50	5	**1569130000**
VG 42-MS68	PG 42	30-38	60.5 / 12	58 / 58	5	**1569140000**
VG 48-MS68	PG 48	34-44	69 / 14	64 / 64	5	**1718790000**

Note

Long-thread version on request
VDE for metric version
Installation specifications and tightening torques can be found in the installation instructions.
For further information please use our online catalogue: eshop.weidmueller.com.

Cable glands – Brass – IP68

EN 45545

Cable gland made of brass with spherical sealing insert which squeezes the cable gently over a large area. This cable gland is suitable for railway applications; its sealing material conforms to the requirements of EN 45545.

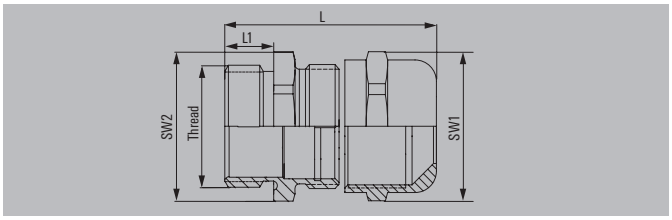

Technical data

Material	Brass, nickel-plated
O-Ring / Seal insert	NBR / T80s
Temperature range	-40 °C ... 130 °C
Protection class	IP68 - 15 bar
Note	

Ordering data

Type	Thread	KB	L/L1	SW	Qty.	Order No.
VGM25-MS68 11-20 BG	M 25	11-20	36.5 / 7.5	30	50	**1193600000**
VGM32-MS68 15-25 BG	M 32	15-25	40 / 8	36	25	**1193610000**
VGM40-MS68 20-32 BG	M 40	20-32	43 / 8	45	10	**1193620000**
VGM40/1-MS68 20-32 BG	M 40	20-32	82 / 8	45	10	**1205890000**

Note

When using mounting covers with 3 X M 40 cable input threads, the elongated version must be used for the cable gland in the middle.
Installation specifications and tightening torques can be found in the installation instructions.
For further information please use our online catalogue: catalog.weidmueller.com

Clamping screws – Brass – IP65

The special cable glands (clamping screws) are designed for use in HDC RockStar® base enclosures. The seal insert used contains several removable or separable inlets.

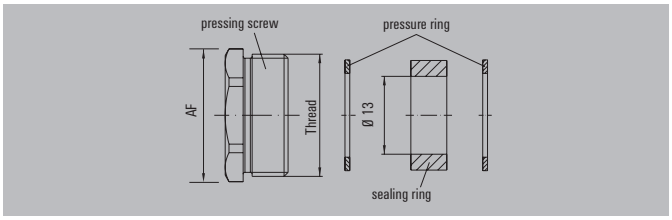

Technical data

Clamping screw material	Brass, nickel-plated
Sealing ring material	SBR/NBR
Pressure ring material	Polyamide
Temperature range	-20 °C...60 °C
Protection class	IP65
Note	

Ordering data

Type	Thread	Inserts in mm	SW	Qty.	Order No.
metric					
VG H M20 MS	M 20	4 / 7 / 10 / 13	20	50	**1921720000**
VG H M25 MS	M 25	8.5 / 11.5 / 14.5 / 18	25	25	**1921740000**
VG H M32 MS	M 32	16 / 19 / 22 / 25	32	20	**1921760000**
VG H M40 MS	M 40	23 / 26 / 29 / 32	40	10	**1921770000**
PG					
KV 11-M	PG 11	7.5 / 10 / 12.5	18	10	**1656390000**
KV 13-M	PG 13	7.5 / 10 / 12.5	20	10	**1656400000**
KV 16-M	PG 16	7.5 / 10 / 12.5 / 15	22	10	**1656410000**
KV 21-M	PG 21	10 / 13 / 16 / 19	28	10	**1656420000**
KV 29-M	PG 29	18 / 21 / 24 / 27	37	10	**1656430000**
Note					

Cable glands – Brass – EMC–4

Cable gland made of brass with EMC contact system for the particularly time-saving installation of shielded cables. It is characterised by the following features: very low installation effort, vibration-resistant and patented active contact system.

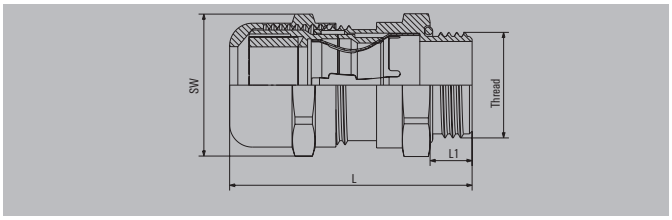

Technical data

Material	Brass, nickel-plated
O-Ring / Seal insert	NBR / CR
Temperature range	-40 °C...100 °C
Protection class	IP66, IP68 - 5 bar (30 min.), IP69K
Clamp insert	Polyamide
Note	

Ordering data

Type	Thread	KB	Shield Ø	L/L1	SW	Qty.	Order No.
VG M12 EMV-4 MS 3-6.5	M 12	3-6.5	2.00-5.00	34 / 6	14	50	**2435070000**
VG M16 EMV-4 MS 5-10	M 16	5-10	3.50-8.00	39 / 6	20	50	**2435140000**
VG M20 EMV-4 MS 6-12	M 20	6-12	4.50-10.00	38 / 6	22	50	**2435150000**
VG M20 EMV-4 MS 8-14	M 20	7.5-14	5.50-11.50	48 / 8	24	50	**2435160000**
VG M25 EMV-4 MS 10-18	M 25	10-18	7.00-14.00	51 / 8	30	25	**2435170000**
VG M32 EMV-4 MS 16-25	M 32	16-25	12.00-20.00	62 / 9	40	10	**2435180000**
VG M40 EMV-4 MS 22-32	M 40	22-32	18.00-27.00	69.5 / 9	50	5	**2435190000**
VG M50 EMV-4 MS 30-38	M 50	30-38	26.00-34.00	62 / 9	58	5	**2435200000**
VG M63 EMV-4 MS 34-44	M 63	34-44	30.00-40.00	73 / 14	68	5	**2435210000**

Note

Installation specifications and tightening torques can be found in the installation instructions.
For further information please use our online catalogue: eshop.weidmueller.com.

Cable glands – Brass – EMC SET

EN 45545

Cable gland made of brass for internal shield connection or potential equalisation; easy-to-use, permanent, secure shield connection. This cable gland is suitable for railway applications; its sealing material meets the requirements of EN 45545.

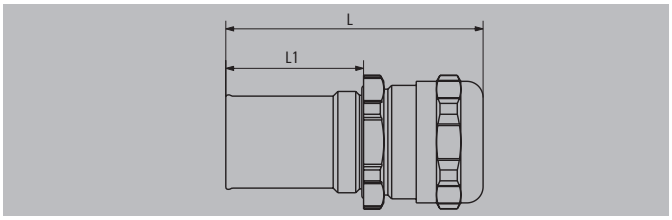

Technical data

Material	Brass, nickel-plated
O-Ring / Seal insert	NBR / T80s
Temperature range	-40 °C ... 130 °C
Protection class	IP68 - 15 bar
Note	

Ordering data

Type	Thread	KB	L/L1	SW	Qty.	Order No.
VGM25-MS68 EMC 11-20SET	M 25	11-20	63.5 / 34	30	1	**1463720000**
VGM32-MS68 EMC 15-25SET	M 32	15-25	66.5 / 34	36	1	**1463730000**

Note

Installation specifications and tightening torques can be found in the installation instructions.
For further information please use our online catalogue: eshop.weidmueller.com.

Cable glands – Stainless steel – IP68

Cable gland made of stainless steel for standard industrial applications that require a high degree of protection (IP68 or IP69K). These cable glands – with their resistance to impact and sea water – are also suitable for use in applications under extreme environmental conditions.

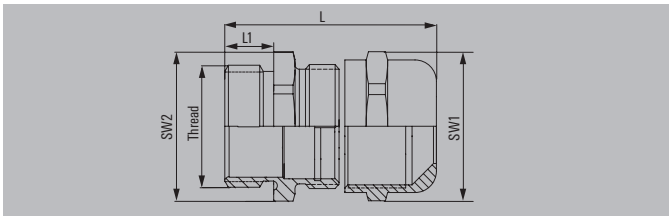

Technical data

Material	Stainless steel 1.4305 (303)
O-Ring / Seal insert	NBR / CR
Temperature range	-40 °C...100 °C
Protection class	IP54, IP66, IP67, IP68 - 5 bar (30 min.), IP69K
Note	

Ordering data

Type	Thread	KB	L/L1	SW1/SW2	Qty.	Order No.
metric						
VGM12-SS 68 KB 3-6.5	M 12	3-6.5	28 / 6	14 / 14	50	**1009840000**
VGM16-SS 68 KB 4-8	M 16	4-8	30 / 7	17 / 19	50	**1009850000**
VGM20-SS 68 KB 6-12	M 20	6-12	32 / 8	22 / 22	50	**1009860000**
VGM25-SS 68 KB 10-14	M 25	10-14	35.5 / 8	24 / 27	25	**1009870000**
VGM32-SS 68 KB 13-18	M 32	13-18	41.5 / 9	30 / 36	20	**1009880000**
VGM40-SS 68 KB 18-25	M 40	18-25	49.6 / 9	41 / 46	20	**1009890000**
VGM50-SS 68 KB 22-32	M 50	22-32	55 / 9	50 / 55	5	**1009900000**
VGM63-SS 68 KB 34-44	M 63	34-44	67 / 14	65 / 70	5	**1009910000**
PG						
VG 7-SS 68 KB 3-6.5	PG 7	3-6.5	28 / 6	14 / 14	50	**1009740000**
VG 9-SS 68 KB 4-8	PG 9	4-8	29 / 6	17 / 17	50	**1009750000**
VG 11-SS 68 KB 5-10	PG 11	5-10	31.5 / 6	22 / 22	50	**1009760000**
VG 16-SS 68 KB 10-14	PG 16	10-14	34 / 6.5	24 / 24	25	**1009780000**
VG 21-SS 68 KB 13-18	PG 21	13-18	39.7 / 7.2	30 / 30	25	**1009790000**
VG 29-SS 68 KB 18-25	PG 29	18-25	46.5 / 8	41 / 41	20	**1009800000**
VG 36-SS 68 KB 22-32	PG 36	22-32	55 / 9	50 / 50	15	**1009810000**

Note

1.4404 (316L) on request.
Installation specifications and tightening torques can be found in the installation instructions.
For further information please use our online catalogue: eshop.weidmueller.com.

Cable gland – Stainless steel – IP68

EN 45545

Cable gland with spherical seal insert that squeezes the cable gently over a large area. This cable gland is suitable for railway applications; its sealing material meets the requirements of EN 45545.

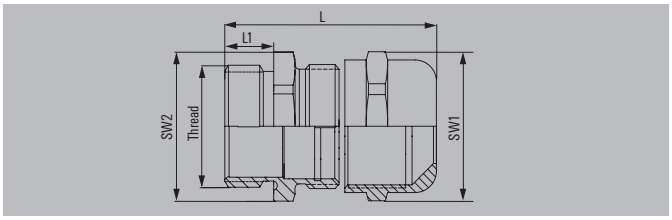

Technical data

Material	Stainless steel 1.4305 (303)
O-Ring / Seal insert	Silicone / T80s
Temperature range	-40 °C ... 130 °C
Protection class	IP68 - 15 bar
Note	

Ordering data

Type	Thread	KB	L/L1	SW	Qty.	Order No.
VGM25-SS68 11-20 BG	M 25	11-20	36.5 / 7.5	30	50	**1193570000**
VGM32-SS68 15-25 BG	M 32	15-25	40 / 8	36	25	**1193580000**
VGM40-SS68 20-32 BG	M 40	20-32	43 / 8	45	10	**1193590000**
VGM40/1-SS68 20-32 BG	M 40	20-32	82 / 8	45	10	**1205920000**

Note

When using mounting covers with 3 X M 40 cable input threads, the elongated version must be used for the cable gland in the middle.
Installation specifications and tightening torques can be found in the installation instructions.
For further information please use our online catalogue: catalog.weidmueller.com

HQ cable glands

Cable gland especially for heavy-duty connectors of the HQ series, available in plastic, brass and as brass EMC version.

Technical data

Material	Polycarbonate
Seal insert	TPE
Temperature range	-20 °C ... 100 °C
Protection class	IP68
Note	

Ordering data

Type	Thread	KB	SW	Qty.	Order No.
Plastic					
VG 16 HQ K68 4-6.5	PG 16	4-6.5	27	1	**2715990000**
VG 16 HQ K68 6.5-9.5	PG 16	6.5-9.5	27	1	**1273890000**
VG 16 HQ K68 9-13	PG 16	9-13	27	1	**1016070000**
VG 16 HQ K68 11.5-15.5	PG 16	11.5-15.5	27	1	**1016080000**
brass					
VG 21 HQ MS68 9-13	PG 21	9-13	30	1	**1016090000**
VG 21 HQ MS68 11.5-15.5	PG 21	11.5-15.5	30	1	**1016100000**
VG 21 HQ MS68 14-18	PG 21	14-18	30	1	**1016110000**
EMC					
VG 21 HQ EMV68 11-15.5	PG 21	11-15.5	30	1	**1016120000**
VG 21 HQ EMV68 14-18	PG 21	14-18	30	1	**1016130000**
only for angled HQ base enclosure (order number 1003110000)					
VG16 HQ K68 9-12SH	PG 16	9-12	30	50	**1045530000**
VG16 HQ K68 11,5-15,5SH	PG 16	11.5-15.5	30	1	**1045540000**

Note

Installation specifications and tightening torques can be found in the installation instructions.
For further information please use our online catalogue: eshop.weidmueller.com.

Overview: Ex-cable glands

ATEX / IECEx certified cable glands

Cable Gland Type	Outer seal	Inner seal	Armouring	Certification	IP Rating	Page No.
A2L	YES	NO	None	Ex d / Ex e	IP66, IP68	D.18
A2LC	YES	NO	None	Ex d / Ex e	IP66, IP68	D.24
E1W	YES	YES	Single wire	Ex d / Ex e	IP66, IP68	D.20
E1XZ	YES	YES	Braiding / foil	Ex d / Ex e	IP66, IP68	D.22

General

Health & Safety

When Weidmüller cable glands and the accessories are used and installed as prescribed within the data sheet provided, they will not cause any danger or hazard to the health or safety of persons, animals or property. The products should be installed by suitably trained/skilled personnel and in full accordance with the relevant legislative regulations and the accepted code of practice for the industry concerned.

Warning

Weidmüller cable glands and accessories should not be used within any application other than those specified for each product, unless Weidmüller issue a statement in writing that the product is suitable for the specified application. For further information on each product, we refer you to the specific Assembly Instructions and General Arrangement drawings, which are available on request. Weidmueller takes no responsibility for any damage, unjury or other consequential loss caused where the glands are not installed or used according to our Assembly Instructions.

Installation in hazardous area applications

If cable glands and accessories are installed in hazardous area applications, international and national standards of the Explosion Protection have to be considered.

Ex-cable glands – Nickel–plated Brass – Ex e, Ex d, IP68 for non-armoured cables

Type A2L cable glands are suitable for non-armoured cables and are approved for flameproof Ex d and Ex e explosion protection with increased safety.

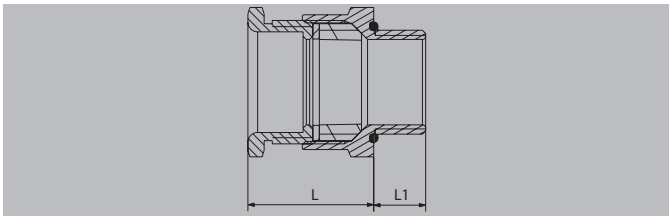

Technical data

Material	Brass, nickel-plated
O-Ring / Seal insert	Silicone / Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	Length "L" depends on the cable diameter used. Cable glands made of brass with natural surface are available in the online catalogue (eshop.weidmueller.com).

Ordering data

Type	Thread	D1 outer cable Ø	L/L1	SW	Qty.	Order No.
metric						
A2L/16/M16-WM	M 16 x 1.5	4.5-8.7	51.8 / 16	24	24	**1186880000**
A2L/20/M20-WM	M 20 x 1.5	10-14	51.8 / 16	28	24	**1186900000**
A2L/20S/M20-WM	M 20 x 1.5	8-11.7	51.8 / 16	26	24	**1186890000**
A2L/25/M25-WM	M 25 x 1.5	13.5-20	53.8 / 16	36	12	**1186910000**
A2L/32/M32-WM	M 32 x 1.5	19.5-26.3	54.8 / 16	42	12	**1186920000**
A2L/40/M40-WM	M 40 x 1.5	25.5-32.2	56.8 / 16	50	9	**1186930000**
A2L/50/M50-WM	M 50 x 1.5	37.5-44.1	58.3 / 16	65	6	**1186950000**
A2L/50S/M50-WM	M 50 x 1.5	31.5-38.2	59.3 / 16	60	6	**1186940000**
A2L/63/M63-WM	M 63 x 1.5	49.5-56	61.8 / 19	80	4	**1186980000**
A2L/63S/M63-WM	M 63 x 1.5	43.5-50.1	62.8 / 19	75	4	**1186970000**
inch NPT						
A2L/16/NPT1/2-WM	1/2" NPT	4.5-8.7	51.8 / 13.6	24	24	**1186990000**
A2L/16/NPT3/4-WM	3/4" NPT	4.5-8.7	51.8 / 13.9	24	24	**1187100000**
A2L/20/NPT1/2-WM	1/2" NPT	10-14	51.8 / 13.6	28	24	**1187010000**
A2L/20/NPT3/4-WM	3/4" NPT	10-14	51.8 / 13.9	28	24	**1187120000**
A2L/20S/NPT1/2-WM	1/2" NPT	8-11.7	51.8 / 13.6	26	24	**1187000000**
A2L/20S/NPT3/4-WM	3/4" NPT	8-11.7	51.8 / 13.9	26	24	**1187110000**
A2L/25/NPT3/4-WM	3/4" NPT	13.5-20	53.8 / 13.9	36	12	**1187020000**
A2L/25/NPT1-WM	1" NPT	13.5-20	53.8 / 17.3	36	12	**1187130000**
A2L/32/NPT1-WM	1" NPT	19.5-26.3	54.8 / 17.3	42	12	**1187030000**
A2L/32/NPT1-1/4-WM	1 1/4" NPT	19.5-26.3	54.8 / 18	42	12	**1187140000**
A2L/40/NPT1-1/2-WM	1 1/2" NPT	25.5-32.2	56.8 / 18.4	50	9	**1187150000**
A2L/40/NPT1-1/4-WM	1 1/4" NPT	25.5-32.2	56.8 / 18	50	9	**1187040000**
A2L/50S/NPT1-1/2-WM	1 1/2" NPT	31.5-38.2	59.3 / 18.4	60	6	**1187050000**
A2L/50/NPT2-WM	2" NPT	37.5-44.1	58.3 / 19.2	65	6	**1187070000**
A2L/50S/NPT2-WM	2" NPT	31.5-38.2	59.3 / 19.2	60	6	**1187160000**
A2L/63S/NPT2-WM	2" NPT	43.5-50.1	62.8 / 19.2	75	4	**1187080000**
A2L/63/NPT2-1/2-WM	2 1/2" NPT	49.5-56	61.8 / 28.9	80	4	**1187090000**
A2L/63S/NPT2-1/2-WM	2 1/2" NPT	43.5-50.1	62.8 / 28.9	75	4	**1187170000**

Note

- All cable glands have a thread pitch of 1.5 mm.
- In the case of Ex d applications, the inner threads used for cable glands must meet the requirements of section 5.3 of EN/IEC 60079-1. In the screwed in position, at least 5 threads must be engaged.
- If the cable glands are installed in non-metallic Ex e connection equipment, these must be connected to the protective earth of the system.
- The connection cable must be laid securely and inflexibly to rule out tensile stress.
- Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.

Ex-cable glands – Stainless steel – Ex e, Ex d, IP68 for non-armoured cables

Type A2LS cable glands are suitable for non-armoured cables and are approved for flameproof Ex d and Ex e explosion protection with increased safety.

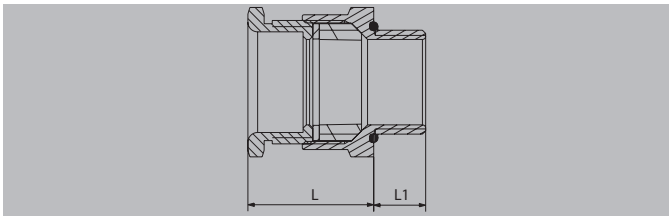

Technical data

Material	Stainless steel 1.4404
O-Ring / Seal insert	Silicone / Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	D1 outer cable Ø	L/L1	SW	Qty.	Order No.
metric						
A2LS/16/M16-WM	M 16 x 1.5	4.5-8.7	51.8 / 13.6	24	24	**1185280000**
A2LS/20/M20-WM	M 20 x 1.5	10-14	51.8 / 16	28	24	**1185300000**
A2LS/20S/M20-WM	M 20 x 1.5	8-11.7	51.8 / 16	26	24	**1185290000**
A2LS/25/M25-WM	M 25 x 1.5	13.5-20	53.8 / 16	36	12	**1185310000**
A2LS/32/M32-WM	M 32 x 1.5	19.5-26.3	54.8 / 16	42	12	**1185320000**
A2LS/40/M40-WM	M 40 x 1.5	25.5-32.2	56.8 / 16	50	9	**1185330000**
A2LS/50/M50-WM	M 50 x 1.5	37.5-44.1	58.3 / 16	65	6	**1185350000**
A2LS/50S/M50-WM	M 50 x 1.5	31.5-38.2	59.3 / 16	60	6	**1185340000**
A2LS/63/M63-WM	M 63 x 1.5	49.5-56	61.8 / 19	80	4	**1185380000**
A2LS/63S/M63-WM	M 63 x 1.5	43.5-50.1	62.8 / 19	75	4	**1185370000**
inch NPT						
A2LS/16/NPT1/2-WM	1/2" NPT	4.5-8.7	51.8 / 13.6	24	24	**1185390000**
A2LS/16/NPT3/4-WM	3/4" NPT	4.5-8.7	51.8 / 13.9	24	24	**1185500000**
A2LS/20/NPT1/2-WM	1/2" NPT	10-14	51.8 / 13.6	28	24	**1185410000**
A2LS/20/NPT3/4-WM	3/4" NPT	10-14	51.8 / 13.9	28	24	**1185520000**
A2LS/20S/NPT1/2-WM	1/2" NPT	8-11.7	51.8 / 13.6	26	24	**1185400000**
A2LS/20S/NPT3/4-WM	3/4" NPT	8-11.7	51.8 / 13.9	26	24	**1185510000**
A2LS/25/NPT3/4-WM	3/4" NPT	13.5-20	53.8 / 13.9	36	12	**1185420000**
A2LS/25/NPT1-WM	1" NPT	13.5-20	53.8 / 17.3	36	12	**1185530000**
A2LS/32/NPT1-WM	1" NPT	19.5-26.3	54.8 / 17.3	42	12	**1185430000**
A2LS/32/NPT1-1/4-WM	1 1/4" NPT	19.5-26.3	54.8 / 18	42	12	**1185540000**
A2LS/40/NPT1-1/4-WM	1 1/4" NPT	25.5-32.2	56.8 / 18	50	9	**1185440000**
A2LS/40/NPT1-1/2-WM	1 1/2" NPT	25.5-32.2	56.8 / 18.4	50	9	**1185550000**
A2LS/50S/NPT1-1/2-WM	1 1/2" NPT	31.5-38.2	59.3 / 18.4	60	6	**1185450000**
A2LS/50/NPT2-WM	2" NPT	37.5-44.1	58.3 / 19.2	65	6	**1185470000**
A2LS/50S/NPT2-WM	2" NPT	31.5-38.2	59.3 / 19.2	60	6	**1185570000**
A2LS/63S/NPT2-WM	2" NPT	43.5-50.1	62.8 / 19.2	75	4	**1185480000**
A2LS/63/NPT2-1/2-WM	2 1/2" NPT	49.5-56	61.8 / 28.9	80	4	**1185490000**
A2LS/63S/NPT2-1/2-WM	2 1/2" NPT	43.5-50.1	62.8 / 28.9	75	4	**1185580000**

Note

- All cable glands have a thread pitch of 1.5 mm.
- In the case of Ex d applications, the inner threads used for cable glands must meet the requirements of section 5.3 of EN/IEC 60079-1. In the screwed in position, at least 5 threads must be engaged.
- If the cable glands are installed in non-metallic Ex e connection equipment, these must be connected to the protective earth of the system.
- The connection cable must be laid securely and inflexibly to rule out tensile stress.
- Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.

Ex-cable glands – Nickel–plated Brass – Ex e, Ex d, IP66 / IP68 for cables with single wire armouring - SWA

Type E1W cable glands are suitable for SWA steel wire armouring cables, type E1W glands receive flameproof Ex d and increased safety Ex e explosion protection. And the armouring provides an electrical connection between the cable armouring and the glands.

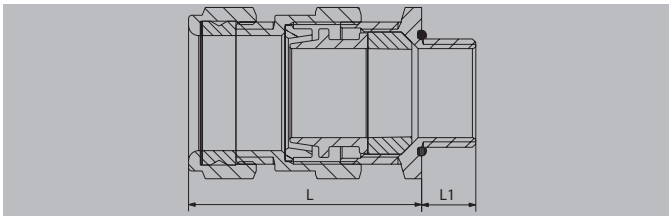

Technical data

Material	Brass, nickel-plated
Seal insert	Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Type of armouring	Single-wire armouring
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	D1 outer cable Ø	D2 inner cable Ø	Cable armour	L/L1	SW	Qty.	Order No.
metric								
E1W/16/M16-WM	M 16 x 1.5	8-13.5	4.50-8.70	0.9-0.9	78 / 16	24	24	**1184650000**
E1W/20/M20-WM	M 20 x 1.5	15-21	10.00-14.00	0.9-1.25	78.5 / 16	30	24	**1184680000**
E1W/20S/M20-WM	M 20 x 1.5	12.5-16	8.00-11.70	0.9-1.25	78.5 / 16	26	24	**1184670000**
E1W/25/M25-WM	M 25 x 1.5	20-27.5	13.50-20.00	1.25-1.6	80 / 16	38	12	**1184690000**
E1W/32/M32-WM	M 32 x 1.5	26-34	19.50-26.30	1.6-2	83 / 16	46	12	**1184700000**
E1W/40/M40-WM	M 40 x 1.5	30.5-40.5	25.50-32.20	1.6-2	93.5 / 16	55	4	**1184710000**
E1W/50/M50-WM	M 50 x 1.5	45.5-53	37.50-44.10	2-2.5	92.5 / 16	65	4	**1184730000**
E1W/50S/M50-WM	M 50 x 1.5	38.5-46.5	31.50-38.20	2-2.5	93.5 / 16	60	4	**1184720000**
E1W/63/M63-WM	M 63 x 1.5	58-66	49.50-56.00	2.5-2.5	96.5 / 19	80	4	**1184750000**
E1W/63S/M63-WM	M 63 x 1.5	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 19	75	4	**1184740000**
inch NPT								
E1W/16/NPT1/2-WM	1/2" NPT	8-13.5	4.50-8.70	0.9-0.9	78 / 13.6	24	24	**1184770000**
E1W/16/NPT3/4-WM	3/4" NPT	8-13.5	4.50-8.70	0.9-0.9	78 / 13.9	24	24	**1184880000**
E1W/20/NPT1/2-WM	1/2" NPT	15-21	10.00-14.00	0.9-1.25	78.5 / 13.6	30	24	**1184790000**
E1W/20/NPT3/4-WM	3/4" NPT	15-21	10.00-14.00	0.9-1.25	78.5 / 13.9	30	24	**1184900000**
E1W/20S/NPT1/2-WM	1/2" NPT	12.5-16	8.00-11.70	0.9-1.25	78.5 / 13.6	26	24	**1184780000**
E1W/20S/NPT3/4-WM	3/4" NPT	12.5-16	8.00-11.70	0.9-1.25	78.5 / 13.9	26	24	**1184890000**
E1W/25/NPT3/4-WM	3/4" NPT	20-27.5	13.50-20.00	1.25-1.6	80 / 13.9	38	12	**1184800000**
E1W/25/NPT1-WM	1" NPT	20-27.5	13.50-20.00	1.25-1.6	80 / 17.3	38	12	**1184910000**
E1W/32/NPT1-WM	1" NPT	26-34	19.50-26.30	1.6-2	83 / 17.3	46	12	**1184810000**
E1W/32/NPT1-1/4-WM	1 1/4" NPT	26-34	19.50-26.30	1.6-2	83 / 18	46	12	**1184920000**
E1W/40/NPT1-1/4-WM	1 1/4" NPT	30.5-40.5	25.50-32.20	1.6-2	93.5 / 18	55	4	**1184820000**
E1W/40/NPT1-1/2-WM	1 1/2" NPT	30.5-40.5	25.50-32.20	1.6-2	93.5 / 18.4	55	4	**1184930000**
E1W/50S/NPT1-1/2-WM	1 1/2" NPT	38.5-46.5	31.50-38.20	2-2.5	93.5 / 18.4	60	4	**1184830000**
E1W/50/NPT2-WM	2" NPT	45.5-53	37.50-44.10	2-2.5	92.5 / 19.2	65	4	**1184840000**
E1W/50S/NPT2-WM	2" NPT	38.5-46.5	31.50-38.20	2-2.5	93.5 / 19.2	60	4	**1184940000**
E1W/63S/NPT2-WM	2" NPT	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 19.2	75	4	**1184850000**
E1W/63/NPT2-1/2-WM	2 1/2" NPT	58-66	49.50-56.00	2.5-2.5	96.5 / 28.9	80	4	**1184870000**
E1W/63S/NPT2-1/2-WM	2 1/2" NPT	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 28.9	75	4	**1184950000**

Note

- All cable glands have a thread pitch of 1.5 mm.
- In the case of Ex d applications, the inner threads used for cable glands must meet the requirements of section 5.3 of EN/IEC 60079-1. In the screwed in position, at least 5 threads must be engaged.
- If the cable glands are installed in non-metallic Ex e connection equipment, these must be connected to the protective earth of the system.
- The connection cable must be laid securely and inflexibly to rule out tensile stress.
- Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.

Ex-cable glands – Stainless steel – Ex e, Ex d, IP66 / IP68 for cables with single wire armouring - SWA

Type E1WS cable glands are suitable for SWA steel wire armouring cables, type E1W glands receive flameproof Ex d and increased safety Ex e explosion protection. And the armouring provides an electrical connection between the cable armouring and the glands.



Technical data

Material	Stainless steel 1.4404
Seal insert	Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Type of armouring	Single-wire armouring
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	D1 outer cable Ø	D2 inner cable Ø	Cable armour	L/L1	SW	Qty.	Order No.
metric								
E1WS/16/M16-WM	M 16 x 1.5	8-13.5	4.50-8.70	0.9-0.9	78 / 16	24	24	**1188840000**
E1WS/20/M20-WM	M 20 x 1.5	15-21	10.00-14.00	0.9-1.25	78.5 / 16	30	24	**1188860000**
E1WS/20S/M20-WM	M 20 x 1.5	12.5-16	8.00-11.70	0.9-1.25	78.5 / 16	26	24	**1188850000**
E1WS/25/M25-WM	M 25 x 1.5	20-27.5	13.50-20.00	1.25-1.6	80 / 16	38	12	**1188870000**
E1WS/32/M32-WM	M 32 x 1.5	26-34	19.50-26.30	1.6-2	83 / 16	46	12	**1188880000**
E1WS/40/M40-WM	M 40 x 1.5	30.5-40.5	25.50-32.20	1.6-2	93.5 / 16	55	4	**1188890000**
E1WS/50/M50-WM	M 50 x 1.5	45.55-53	37.50-44.10	2-2.5	92.5 / 16	65	4	**1188910000**
E1WS/50S/M50-WM	M 50 x 1.5	38.5-46.5	31.50-38.20	2-2.5	93.5 / 16	60	4	**1188900000**
E1WS/63/M63-WM	M 63 x 1.5	58-66	49.50-56.00	2.5-2.5	96.5 / 19	80	4	**1188930000**
E1WS/63S/M63-WM	M 63 x 1.5	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 19	75	4	**1188920000**
inch NPT								
E1WS/16/NPT1/2-WM	1/2" NPT	8-13.5	4.50-8.70	0.9-0.9	78 / 13.6	24	24	**1188940000**
E1WS/16/NPT3/4-WM	3/4" NPT	8-13.5	4.50-8.70	0.9-0.9	78 / 13.9	24	24	**1189040000**
E1WS/20/NPT1/2-WM	1/2" NPT	15-21	10.00-14.00	0.9-1.25	78.5 / 13.6	30	24	**1188960000**
E1WS/20/NPT3/4-WM	3/4" NPT	15-21	10.00-14.00	0.9-1.25	78.5 / 13.9	30	24	**1189060000**
E1WS/20S/NPT1/2-WM	1/2" NPT	12.5-16	8.00-11.70	0.9-1.25	78.5 / 13.6	26	24	**1188950000**
E1WS/20S/NPT3/4-WM	3/4" NPT	12.5-16	8.00-11.70	0.9-1.25	78.5 / 13.9	26	24	**1189050000**
E1WS/25/NPT3/4-WM	3/4" NPT	20-27.5	13.50-20.00	1.25-1.6	80 / 13.9	38	12	**1188970000**
E1WS/25/NPT1-WM	1" NPT	20-27.5	13.50-20.00	1.25-1.6	80 / 17.3	38	12	**1189070000**
E1WS/32/NPT1-WM	1" NPT	26-34	19.50-26.30	1.6-2	83 / 17.3	46	12	**1188980000**
E1WS/32/NPT1-1/4-WM	1 1/4" NPT	26-34	19.50-26.30	1.6-2	83 / 18	46	12	**1189080000**
E1WS/40/NPT1-1/4-WM	1 1/4" NPT	30.5-40.5	25.50-32.20	1.6-2	93.5 / 18	55	4	**1188990000**
E1WS/40/NPT1-1/2-WM	1 1/2" NPT	30.5-40.5	25.50-32.20	1.6-2	93.5 / 18.4	55	4	**1189090000**
E1WS/50S/NPT1-1/2-WM	1 1/2" NPT	38.5-46.5	31.50-38.20	2-2.5	93.5 / 18.4	60	4	**1189000000**
E1WS/50/NPT2-WM	2" NPT	45.55-53	37.50-44.10	2-2.5	92.5 / 19.2	65	4	**1189010000**
E1WS/50S/NPT2-WM	2" NPT	38.5-46.5	31.50-38.20	2-2.5	93.5 / 19.2	60	4	**1189100000**
E1WS/63S/NPT2-WM	2" NPT	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 19.2	75	4	**1189020000**
E1WS/63/NPT2-1/2-WM	2 1/2" NPT	58-66	49.50-56.00	2.5-2.5	96.5 / 28.9	80	4	**1189030000**
E1WS/63S/NPT2-1/2-WM	2 1/2" NPT	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 28.9	75	4	**1189110000**

Note

- All cable glands have a thread pitch of 1.5 mm.
- In the case of Ex d applications, the inner threads used for cable glands must meet the requirements of section 5.3 of EN/IEC 60079-1. In the screwed in position, at least 5 threads must be engaged.
- If the cable glands are installed in non-metallic Ex e connection equipment, these must be connected to the protective earth of the system.
- The connection cable must be laid securely and inflexibly to rule out tensile stress.
- Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.

Ex-cable glands – Nickel–plated Brass – Ex e, Ex d, IP66 / IP68 for cables with braided or foil armouring

Type E1XZ cable glands are suitable for SWB steel wire braiding or STA foil armouring, type E1XZ glands are given explosion protection Ex d and increased safety Ex e. The armouring provides an electrical connection between the cable armouring and the glands.

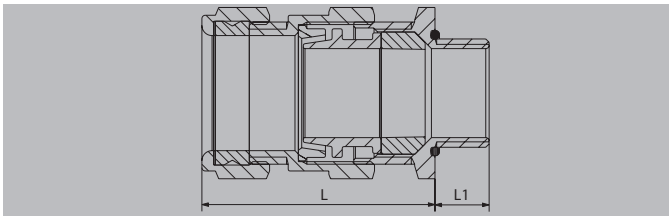

Technical data

Material	Brass, nickel-plated
Seal insert	Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Type of armouring	Braided armouring, Metal foil armouring
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	D1 outer cable Ø	D2 inner cable Ø	Cable armour	L/L1	SW	Qty.	Order No.
metric								
E1XZ/16/M16-WM	M 16 x 1.5	8-13.5	4.50-8.70	0.9-0.9	78 / 16	24	24	**1184970000**
E1XZ/20/M20-WM	M 20 x 1.5	15-21	10.00-14.00	0.9-1.25	78.5 / 16	30	24	**1184990000**
E1XZ/20S/M20-WM	M 20 x 1.5	12.5-16	8.00-11.70	0.9-1.25	78.5 / 16	26	24	**1184980000**
E1XZ/25/M25-WM	M 25 x 1.5	20-27.5	13.50-20.00	1.25-1.6	80 / 16	38	12	**1185000000**
E1XZ/32/M32-WM	M 32 x 1.5	26-34	19.50-26.30	1.6-2	83 / 16	46	12	**1185010000**
E1XZ/40/M40-WM	M 40 x 1.5	30.5-40.5	25.50-32.20	1.6-2	93.5 / 16	55	4	**1185020000**
E1XZ/50/M50-WM	M 50 x 1.5	45.5-53	37.50-44.10	2-2.5	92.5 / 16	65	4	**1185040000**
E1XZ/50S/M50-WM	M 50 x 1.5	38.5-46.5	31.50-38.20	2-2.5	93.5 / 16	60	4	**1185030000**
E1XZ/63/M63-WM	M 63 x 1.5	58-66	49.50-56.00	2.5-2.5	96.5 / 19	80	4	**1185070000**
E1XZ/63S/M63-WM	M 63 x 1.5	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 19	75	4	**1185050000**
inch NPT								
E1XZ/16/NPT1/2-WM	1/2" NPT	8-13.5	4.50-8.70	0.9-0.9	78 / 13.6	24	24	**1185080000**
E1XZ/16/NPT3/4-WM	3/4" NPT	8-13.5	4.50-8.70	0.9-0.9	78 / 13.9	24	24	**1185190000**
E1XZ/20/NPT1/2-WM	1/2" NPT	15-21	10.00-14.00	0.9-1.25	78.5 / 13.6	30	24	**1185100000**
E1XZ/20/NPT3/4-WM	3/4" NPT	15-21	10.00-14.00	0.9-1.25	78.5 / 13.9	30	24	**1185210000**
E1XZ/20S/NPT1/2-WM	1/2" NPT	12.5-16	8.00-11.70	0.9-1.25	78.5 / 13.6	26	24	**1185090000**
E1XZ/20S/NPT3/4-WM	3/4" NPT	12.5-16	8.00-11.70	0.9-1.25	78.5 / 13.9	26	24	**1185200000**
E1XZ/25/NPT3/4-WM	3/4" NPT	20-27.5	13.50-20.00	1.25-1.6	80 / 13.9	38	12	**1185110000**
E1XZ/25/NPT1-WM	1" NPT	20-27.5	13.50-20.00	1.25-1.6	80 / 17.3	38	12	**1185220000**
E1XZ/32/NPT1-WM	1" NPT	26-34	19.50-26.30	1.6-2	83 / 17.3	46	12	**1185120000**
E1XZ/32/NPT1-1/4-WM	1 1/4" NPT	26-34	19.50-26.30	1.6-2	83 / 18	46	12	**1185230000**
E1XZ/40/NPT1-1/4-WM	1 1/4" NPT	30.5-40.5	25.50-32.20	1.6-2	93.5 / 18	55	4	**1185130000**
E1XZ/40/NPT1-1/2-WM	1 1/2" NPT	30.5-40.5	25.50-32.20	1.6-2	93.5 / 18.4	55	4	**1185240000**
E1XZ/50S/NPT1-1/2-WM	1 1/2" NPT	38.5-46.5	31.50-38.20	2-2.5	93.5 / 18.4	60	4	**1185140000**
E1XZ/50/NPT2-WM	2" NPT	45.5-53	37.50-44.10	2-2.5	92.5 / 19.2	65	4	**1185150000**
E1XZ/50S/NPT2-WM	2" NPT	38.5-46.5	31.50-38.20	2-2.5	93.5 / 19.2	60	4	**1185250000**
E1XZ/63S/NPT2-WM	2" NPT	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 19.2	75	4	**1185170000**
E1XZ/63/NPT2-1/2-WM	2 1/2" NPT	58-66	49.50-56.00	2.5-2.5	96.5 / 28.9	80	4	**1185180000**
E1XZ/63S/NPT2-1/2-WM	2 1/2" NPT	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 28.9	75	4	**1185270000**

Note

- All cable glands have a thread pitch of 1.5 mm.
- In the case of Ex d applications, the inner threads used for cable glands must meet the requirements of section 5.3 of EN/IEC 60079-1. In the screwed in position, at least 5 threads must be engaged.
- If the cable glands are installed in non-metallic Ex e connection equipment, these must be connected to the protective earth of the system.
- The connection cable must be laid securely and inflexibly to rule out tensile stress.
- Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.

Ex-cable glands – Stainless steel – Ex e, Ex d, IP66 / IP68 for armoured cables

Type E1XZS cable glands are suitable for SWB steel wire braiding or STA foil armouring, type E1XZ glands are given explosion protection Ex d and increased safety Ex e. The armouring provides an electrical connection between the cable armouring and the glands.

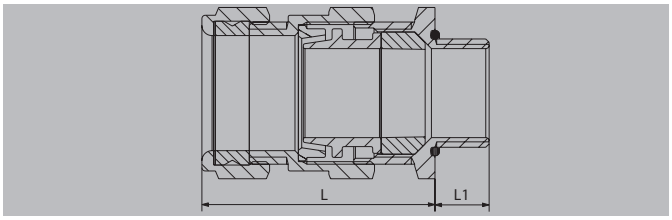

Technical data

Material	Stainless steel 1.4404
Seal insert	Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Type of armouring	Braided armouring, Metal foil armouring
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	D1 outer cable Ø	D2 inner cable Ø	Cable armour	L/L1	SW	Qty.	Order No.
metric								
E1XZS/16/M16-WM	M 16 x 1.5	8-13.5	4.50-8.70	0.9-0.9	78 / 16	24	24	**1188020000**
E1XZS/20/M20-WM	M 20 x 1.5	15-21	10.00-14.00	0.9-1.25	78.5 / 16	30	24	**1188040000**
E1XZS/20S/M20-WM	M 20 x 1.5	12.5-16	8.00-11.70	0.9-1.25	78.5 / 16	26	24	**1188030000**
E1XZS/25/M25-WM	M 25 x 1.5	20-27.5	13.50-20.00	1.25-1.6	80 / 16	38	12	**1188050000**
E1XZS/32/M32-WM	M 32 x 1.5	26-34	19.50-26.30	1.6-2	83 / 16	46	12	**1188060000**
E1XZS/40/M40-WM	M 40 x 1.5	30.5-40.5	25.50-32.20	1.6-2	93.5 / 16	55	4	**1188070000**
E1XZS/50/M50-WM	M 50 x 1.5	45.55-53	37.50-44.10	2-2.5	92.5 / 16	65	4	**1188090000**
E1XZS/50S/M50-WM	M 50 x 1.5	38.5-46.5	31.50-38.20	2-2.5	93.5 / 16	60	4	**1188080000**
E1XZS/63/M63-WM	M 63 x 1.5	58-66	49.50-56.00	2.5-2.5	96.5 / 19	80	4	**1188110000**
E1XZS/63S/M63-WM	M 63 x 1.5	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 19	75	4	**1188100000**
inch NPT								
E1XZS/16/NPT1/2-WM	1/2" NPT	8-13.5	4.50-8.70	0.9-0.9	78 / 13.6	24	24	**1188120000**
E1XZS/16/NPT3/4-WM	3/4" NPT	8-13.5	4.50-8.70	0.9-0.9	78 / 13.9	24	24	**1188230000**
E1XZS/20/NPT1/2-WM	1/2" NPT	15-21	10.00-14.00	0.9-1.25	78.5 / 13.6	30	24	**1188150000**
E1XZS/20/NPT3/4-WM	3/4" NPT	15-21	10.00-14.00	0.9-1.25	78.5 / 13.9	30	24	**1188250000**
E1XZS/20S/NPT1/2-WM	1/2" NPT	12.5-16	8.00-11.70	0.9-1.25	78.5 / 13.6	26	24	**1188140000**
E1XZS/20S/NPT3/4-WM	3/4" NPT	12.5-16	8.00-11.70	0.9-1.25	78.5 / 13.9	26	24	**1188240000**
E1XZS/25/NPT3/4-WM	3/4" NPT	20-27.5	13.50-20.00	1.25-1.6	80 / 13.9	38	12	**1188160000**
E1XZS/25/NPT1-WM	1" NPT	20-27.5	13.50-20.00	1.25-1.6	80 / 17.3	38	12	**1188260000**
E1XZS/32/NPT1-WM	1" NPT	26-34	19.50-26.30	1.6-2	83 / 17.3	46	12	**1188170000**
E1XZS/32/NPT1-1/4-WM	1 1/4" NPT	26-34	19.50-26.30	1.6-2	83 / 18	46	12	**1188270000**
E1XZS/40/NPT1-1/4-WM	1 1/4" NPT	30.5-40.5	25.50-32.20	1.6-2	93.5 / 18	55	4	**1188180000**
E1XZS/40/NPT1-1/2-WM	1 1/2" NPT	30.5-40.5	25.50-32.20	1.6-2	93.5 / 18.4	55	4	**1188280000**
E1XZS/50S/NPT1-1/2-WM	1 1/2" NPT	38.5-46.5	31.50-38.20	2-2.5	93.5 / 18.4	60	4	**1188190000**
E1XZS/50/NPT2-WM	2" NPT	45.55-53	37.50-44.10	2-2.5	92.5 / 19.2	65	4	**1188200000**
E1XZS/50S/NPT2-WM	2" NPT	38.5-46.5	31.50-38.20	2-2.5	93.5 / 19.2	60	4	**1188290000**
E1XZS/63S/NPT2-WM	2" NPT	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 19.2	75	4	**1188210000**
E1XZS/63/NPT2-1/2-WM	2 1/2" NPT	58-66	49.50-56.00	2.5-2.5	96.5 / 28.9	80	4	**1188220000**
E1XZS/63S/NPT2-1/2-WM	2 1/2" NPT	51.5-59.5	43.50-50.10	2.5-2.5	97.5 / 28.9	75	4	**1188300000**

Note

- All cable glands have a thread pitch of 1.5 mm.
- In the case of Ex d applications, the inner threads used for cable glands must meet the requirements of section 5.3 of EN/IEC 60079-1. In the screwed in position, at least 5 threads must be engaged.
- If the cable glands are installed in non-metallic Ex e connection equipment, these must be connected to the protective earth of the system.
- The connection cable must be laid securely and inflexibly to rule out tensile stress.
- Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.

Ex-cable glands – Nickel–plated Brass – Ex e, Ex d, IP66 / IP68 for non-armoured cables with raw thread connection

Cable glands type A2LC are suitable for non-armoured cables and have a conduit internal thread, maintaining explosion protection Ex d and increased safety Ex e.

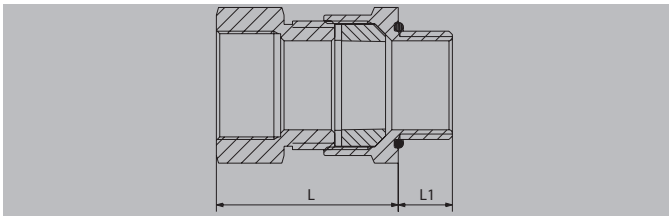

Technical data

Material	Brass, nickel-plated
O-ring / Seal insert	Silicone / Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	Conduit thread size	KB	L/L1	SW	Qty.	Order No.
metric to metric							
A2LC/16/M16-M20F-WM	M 16 x 1.5	M20	4.5-8.7	69.8 / 16	24	24	**1205080000**
A2LC/20/M20-M20F-WM	M 20 x 1.5	M20	10-14	68.8 / 16	28	24	**1205110000**
A2LC/20S/M20-M20F-WM	M 20 x 1.5	M20	8-11.7	68.8 / 16	26	24	**1205090000**
A2LC/25/M25-M25F-WM	M 25 x 1.5	M25	13.5-20	69.8 / 16	36	12	**1205120000**
A2LC/32/M32-M32F-WM	M 32 x 1.5	M32	19.5-26.3	69.8 / 16	42	12	**1205130000**
A2LC/40/M40-M40F-WM	M 40 x 1.5	M40	25.5-32.2	71.8 / 16	50	9	**1205140000**
A2LC/50/M50-M50F-WM	M 50 x 1.5	M50	37.5-44.1	72.3 / 16	65	6	**1205160000**
A2LC/50S/M50-M50F-WM	M 50 x 1.5	M50	31.5-38.2	73.3 / 16	60	6	**1205150000**
A2LC/63/M63-M63F-WM	M 63 x 1.5	M63	49.5-56	78.8 / 19	80	4	**1205180000**
A2LC/63S/M63-M63F-WM	M 63 x 1.5	M63	43.5-50.1	79.8 / 19	75	4	**1205170000**
metric to inch NPT							
A2LC/16/M16-NPT1/2F-WM	M 16 x 1.5	NPT 1/2"	4.5-8.7	69.8 / 16	24	24	**1205190000**
A2LC/16/M16-NPT3/4F-WM	M 16 x 1.5	NPT 3/4"	4.5-8.7	69.8 / 16	24	24	**1205270000**
A2LC/20/M20-NPT1/2F-WM	M 20 x 1.5	NPT 1/2"	10-14	68.8 / 16	28	24	**1205220000**
A2LC/20/M20-NPT3/4F-WM	M 20 x 1.5	NPT 3/4"	10-14	68.8 / 16	28	24	**1205290000**
A2LC/20S/M20-NPT1/2F-WM	M 20 x 1.5	NPT 1/2"	8-11.7	68.8 / 16	26	24	**1205210000**
A2LC/20S/M20-NPT3/4F-WM	M 20 x 1.5	NPT 3/4"	8-11.7	68.8 / 16	26	24	**1205280000**
A2LC/25/M25-NPT1F-WM	M 25 x 1.5	NPT 1"	13.5-20	69.8 / 16	36	12	**1205310000**
A2LC/25/M25-NPT3/4F-WM	M 25 x 1.5	NPT 3/4"	13.5-20	69.8 / 16	36	12	**1205230000**
A2LC/32/M32-NPT1-1/4F	M 32 x 1.5	NPT 1-1/4"	19.5-26.3	69.8 / 16	42	12	**1205580000**
A2LC/32/M32-NPT1F-WM	M 32 x 1.5	NPT 1"	19.5-26.3	69.8 / 16	42	12	**1205240000**
A2LC/40/M40-NPT1-1/2F	M 40 x 1.5	NPT 1-1/2"	25.5-32.2	71.8 / 16	50	9	**1205070000**
A2LC/40/M40-NPT1-1/4F	M 40 x 1.5	NPT 1-1/4"	25.5-32.2	71.8 / 16	50	9	**1205550000**
A2LC/50/M50-NPT2F-WM	M 50 x 1.5	NPT 2"	37.5-44.1	72.3 / 16	65	6	**1205250000**
A2LC/50S/M50-NPT1-1/2F	M 50 x 1.5	NPT 1-1/2"	31.5-38.2	73.3 / 16	60	6	**1205560000**
A2LC/50S/M50-NPT2F-WM	M 50 x 1.5	NPT 2"	31.5-38.2	73.3 / 16	60	6	**1205320000**
A2LC/63/M63-NPT2-1/2F	M 63 x 1.5	NPT 2-1/2"	49.5-56	78.8 / 19	80	4	**1205570000**
A2LC/63S/M63-NPT2-1/2F	M 63 x 1.5	NPT 2-1/2"	43.5-50.1	79.8 / 19	75	4	**1205590000**
A2LC/63S/M63-NPT2F-WM	M 63 x 1.5	NPT 2"	43.5-50.1	79.8 / 19	75	4	**1205260000**

Note

- All cable glands have a thread pitch of 1.5 mm.
- In the case of Ex d applications, the inner threads used for cable glands must meet the requirements of section 5.3 of EN/IEC 60079-1. In the screwed in position, at least 5 threads must be engaged.
- If the cable glands are installed in non-metallic Ex e connection equipment, these must be connected to the protective earth of the system.
- The connection cable must be laid securely and inflexibly to rule out tensile stress.
- Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.

Ex-cable glands – Nickel–plated Brass – Ex e, Ex d, IP66 / IP68 for non-armoured cables with raw thread connection

Cable glands type A2LC are suitable for non-armoured cables and have a conduit internal thread, maintaining explosion protection Ex d and increased safety Ex e.

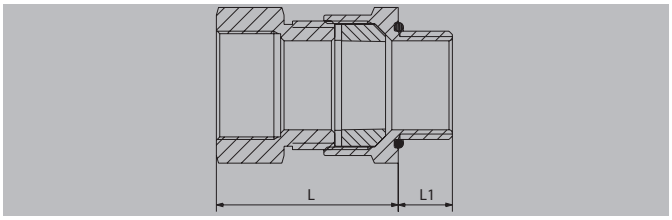

Technical data

Material	Brass, nickel-plated
O-ring / Seal insert	Silicone / Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	Conduit thread size	KB	L/L1	SW	Qty.	Order No.
inch NPT to metric							
A2LC/16/NPT1/2-M20F-WM	1/2" NPT	M20	4.5-8.7	69.8 / 13.6	24	24	**1205330000**
A2LC/16/NPT3/4-M20F-WM	3/4" NPT	M20	4.5-8.7	69.8 / 13.9	24	24	**1205450000**
A2LC/20/NPT1/2-M20F-WM	1/2" NPT	M20	10-14	68.8 / 13.6	28	24	**1205350000**
A2LC/20/NPT3/4-M20F-WM	3/4" NPT	M20	10-14	68.8 / 13.9	28	24	**1205470000**
A2LC/20S/NPT1/2-M20F-WM	1/2" NPT	M20	8-11.7	68.8 / 13.6	26	24	**1205340000**
A2LC/20S/NPT3/4-M20F-WM	3/4" NPT	M20	8-11.7	68.8 / 13.9	26	24	**1205460000**
A2LC/25/NPT1-M25F-WM	1" NPT	M25	13.5-20	69.8 / 17.3	36	12	**1205480000**
A2LC/25/NPT3/4-M25F-WM	3/4" NPT	M25	13.5-20	69.8 / 13.9	36	12	**1205360000**
A2LC/32/NPT1-1/4-M32F	1 1/4" NPT	M32	19.5-26.3	69.8 / 18	42	12	**1206390000**
A2LC/32/NPT1-M32F-WM	1" NPT	M32	19.5-26.3	69.8 / 17.3	42	12	**1205370000**
A2LC/40/NPT1-1/2-M40F	1 1/2" NPT	M40	25.5-32.2	71.8 / 18.4	50	9	**1206710000**
A2LC/40/NPT1-1/4-M40F	1 1/4" NPT	M40	25.5-32.2	71.8 / 18	50	9	**1205610000**
A2LC/50/NPT2-M50F-WM	2" NPT	M50	37.5-44.1	72.3 / 19.2	65	6	**1205380000**
A2LC/50S/NPT1-1/2-M50F	1 1/2" NPT	M50	31.5-38.2	73.3 / 18.4	60	6	**1205620000**
A2LC/50S/NPT2-M50F-WM	2" NPT	M50	31.5-38.2	73.3 / 19.2	60	6	**1205490000**
A2LC/63/NPT2-1/2-M63F	2 1/2" NPT	M63	49.5-56	78.8 / 28.9	80	4	**1205630000**
A2LC/63S/NPT2-1/2-M63F	2 1/2" NPT	M63	43.5-50.1	79.8 / 28.9	75	4	**1206690000**
A2LC/63S/NPT2-M63F-WM	2" NPT	M63	43.5-50.1	79.8 / 19.2	75	4	**1205390000**

Note

- All cable glands have a thread pitch of 1.5 mm.
- In the case of Ex d applications, the inner threads used for cable glands must meet the requirements of section 5.3 of EN/IEC 60079-1. In the screwed in position, at least 5 threads must be engaged.
- If the cable glands are installed in non-metallic Ex e connection equipment, these must be connected to the protective earth of the system.
- The connection cable must be laid securely and inflexibly to rule out tensile stress.
- Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.

Ex-cable glands – Nickel–plated Brass – Ex e, Ex d, IP66 / IP68 for non-armoured cables with raw thread connection

Cable glands type A2LC are suitable for non-armoured cables and have a conduit internal thread, maintaining explosion protection Ex d and increased safety Ex e.

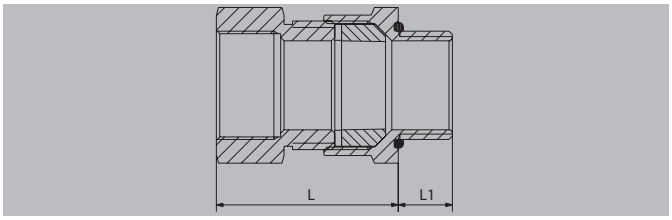

Technical data

Material	Brass, nickel-plated
O-ring / Seal insert	Silicone / Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	

Ordering data

Type	Thread	Conduit thread size	KB	L/L1	SW	Qty.	Order No.
inch NPT to inch NPT							
A2LC/16/NPT1/2-NPT1/2F	1/2" NPT	NPT 1/2"	4.5-8.7	69.8 / 13.6	24	24	**1205640000**
A2LC/16/NPT1/2-NPT3/4F	1/2" NPT	NPT 3/4"	4.5-8.7	69.8 / 13.6	24	24	**1206310000**
A2LC/16/NPT3/4-NPT1/2F	3/4" NPT	NPT 1/2"	4.5-8.7	69.8 / 13.9	24	24	**1206680000**
A2LC/16/NPT3/4-NPT3/4F	3/4" NPT	NPT 3/4"	4.5-8.7	69.8 / 13.9	24	24	**1206560000**
A2LC/20/NPT1/2-NPT1/2F	1/2" NPT	NPT 1/2"	10-14	68.8 / 13.6	28	24	**1205670000**
A2LC/20/NPT1/2-NPT3/4F	1/2" NPT	NPT 3/4"	10-14	68.8 / 13.6	28	24	**1206320000**
A2LC/20/NPT3/4-NPT1/2F	3/4" NPT	NPT 1/2"	10-14	68.8 / 13.9	28	24	**1206660000**
A2LC/20/NPT3/4-NPT3/4F	3/4" NPT	NPT 3/4"	10-14	68.8 / 13.9	28	24	**1206540000**
A2LC/20S/NPT1/2-NPT1/2F	1/2" NPT	NPT 1/2"	8-11.7	68.8 / 13.6	26	24	**1205660000**
A2LC/20S/NPT1/2-NPT3/4F	1/2" NPT	NPT 3/4"	8-11.7	68.8 / 13.6	26	24	**1205960000**
A2LC/20S/NPT3/4-NPT1/2F	3/4" NPT	NPT 1/2"	8-11.7	68.8 / 13.9	26	24	**1206670000**
A2LC/20S/NPT3/4-NPT3/4F	3/4" NPT	NPT 3/4"	8-11.7	68.8 / 13.9	26	24	**1206550000**
A2LC/25/NPT1-NPT1F-WM	1" NPT	NPT 1"	13.5-20	69.8 / 17.3	36	12	**1205520000**
A2LC/25/NPT1-NPT3/4F-WM	1" NPT	NPT 3/4"	13.5-20	69.8 / 17.3	36	12	**1205510000**
A2LC/25/NPT3/4-NPT1F-WM	3/4" NPT	NPT 1"	13.5-20	69.8 / 13.9	36	12	**1205440000**
A2LC/25/NPT3/4-NPT3/4F	3/4" NPT	NPT 3/4"	13.5-20	69.8 / 13.9	36	12	**1205680000**
A2LC/32/NPT1-1/4-NPT1-1	1 1/4" NPT	NPT 1-1/4"	19.5-26.3	69.8 / 18	42	12	**1206630000**
A2LC/32/NPT1-1/4-NPT1F	1 1/4" NPT	NPT 1"	19.5-26.3	69.8 / 18	42	12	**1206620000**
A2LC/32/NPT1-NPT1-1/4F	1" NPT	NPT 1-1/4"	19.5-26.3	69.8 / 17.3	42	12	**1206330000**
A2LC/32/NPT1-NPT1F-WM	1" NPT	NPT 1"	19.5-26.3	69.8 / 17.3	42	12	**1205410000**
A2LC/40/NPT1-1/2-NPT1	1 1/2" NPT	NPT 1-1/4"	25.5-32.2	71.8 / 18.4	50	9	**1206590000**
A2LC/40/NPT1-1/2-NPT1-1	1 1/2" NPT	NPT 1-1/2"	25.5-32.2	71.8 / 18.4	50	9	**1206640000**
A2LC/40/NPT1-1/4-NPT1	1 1/4" NPT	NPT 1-1/2"	25.5-32.2	71.8 / 18	50	9	**1206360000**
A2LC/50/NPT2-NPT2F-WM	2" NPT	NPT 2"	37.5-44.1	72.3 / 19.2	65	6	**1205420000**
A2LC/50S/NPT1-1/2-NPT1	1 1/2" NPT	NPT 1-1/2"	31.5-38.2	73.3 / 18.4	60	6	**1206280000**
A2LC/50S/NPT1-1/2-NPT2F	1 1/2" NPT	NPT 2"	31.5-38.2	73.3 / 18.4	60	6	**1206380000**
A2LC/50S/NPT2-NPT1-1/2F	2" NPT	NPT 1-1/2"	31.5-38.2	73.3 / 19.2	60	6	**1206580000**
A2LC/50S/NPT2-NPT2F-WM	2" NPT	NPT 2"	31.5-38.2	73.3 / 19.2	60	6	**1205530000**
A2LC/63/NPT2-1/2-NPT2	2 1/2" NPT	NPT 2-1/2"	49.5-56	78.8 / 28.9	80	4	**1206290000**
A2LC/63S/NPT2-1/2-NPT2	2 1/2" NPT	NPT 2-1/2"	43.5-50.1	79.8 / 19.2	75	4	**1206650000**
A2LC/63S/NPT2-1/2-NPT2F	2 1/2" NPT	NPT 2"	43.5-50.1	79.8 / 19.2	75	4	**1206570000**
A2LC/63S/NPT2-NPT2-1/2F	2" NPT	NPT 2-1/2"	43.5-50.1	79.8 / 19.2	75	4	**1206370000**
A2LC/63S/NPT2-NPT2F-WM	2" NPT	NPT 2"	43.5-50.1	79.8 / 19.2	75	4	**1205430000**
Note							

Ex-cable glands – Stainless steel – Ex e, Ex d, IP66 / IP68 for non-armoured cables with raw thread connection

Cable glands type A2LCS are suitable for non-armoured cables and have a conduit internal thread, maintaining explosion protection Ex d and increased safety Ex e.

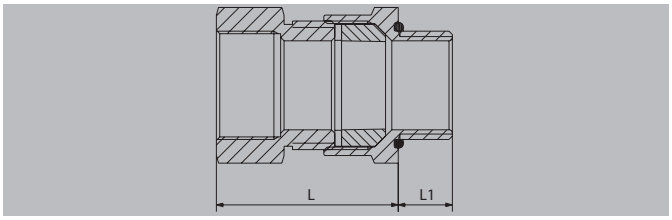

Technical data

Material	Stainless steel 1.4404
O-ring / Seal insert	Silicone / Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	Conduit thread size	KB	L/L1	SW	Qty.	Order No.
metric to metric							
A2LCS/16/M16-M20F-WM	M 16 x 1.5	M20	4.5-8.7	69.8 / 16	24	24	**1187180000**
A2LCS/20/M20-M20F-WM	M 20 x 1.5	M20	10-14	68.8 / 16	28	24	**1187200000**
A2LCS/20S/M20-M20F-WM	M 20 x 1.5	M20	8-11.7	68.8 / 16	26	24	**1187190000**
A2LCS/25/M25-M25F-WM	M 25 x 1.5	M25	13.5-20	69.8 / 16	36	12	**1187210000**
A2LCS/32/M32-M32F-WM	M 32 x 1.5	M32	19.5-26.3	69.8 / 16	42	12	**1187220000**
A2LCS/40/M40-M40F-WM	M 40 x 1.5	M40	25.5-32.2	71.8 / 16	50	9	**1187230000**
A2LCS/50/M50-M50F-WM	M 50 x 1.5	M50	37.5-44.1	72.3 / 16	65	6	**1187250000**
A2LCS/50S/M50-M50F-WM	M 50 x 1.5	M50	31.5-38.2	73.3 / 16	60	6	**1187240000**
A2LCS/63/M63-M63F-WM	M 63 x 1.5	M63	49.5-56	78.8 / 19	80	4	**1187270000**
A2LCS/63S/M63-M63F-WM	M 63 x 1.5	M63	43.5-50.1	79.8 / 19	75	4	**1187260000**
metric to inch NPT							
A2LCS/16/M16-NPT1/2F-WM	M 16 x 1.5	NPT 1/2"	4.5-8.7	69.8 / 16	24	24	**1187280000**
A2LCS/16/M16-NPT3/4F-WM	M 16 x 1.5	NPT 3/4"	4.5-8.7	69.8 / 16	24	24	**1187380000**
A2LCS/20/M20-NPT1/2F-WM	M 20 x 1.5	NPT 1/2"	10-14	68.8 / 16	28	24	**1187300000**
A2LCS/20/M20-NPT3/4F-WM	M 20 x 1.5	NPT 3/4"	10-14	68.8 / 16	28	24	**1187400000**
A2LCS/20S/M20-NPT1/2F	M 20 x 1.5	NPT 1/2"	8-11.7	68.8 / 16	26	24	**1187290000**
A2LCS/20S/M20-NPT3/4F	M 20 x 1.5	NPT 3/4"	8-11.7	68.8 / 16	26	24	**1187390000**
A2LCS/25/M25-NPT1F-WM	M 25 x 1.5	NPT 1"	13.5-20	69.8 / 16	36	12	**1187410000**
A2LCS/25/M25-NPT3/4F-WM	M 25 x 1.5	NPT 3/4"	13.5-20	69.8 / 16	36	12	**1187310000**
A2LCS/32/M32-NPT1-1/4F	M 32 x 1.5	NPT 1-1/4"	19.5-26.3	69.8 / 16	42	12	**1187420000**
A2LCS/32/M32-NPT1F-WM	M 32 x 1.5	NPT 1"	19.5-26.3	69.8 / 16	42	12	**1187320000**
A2LCS/40/M40-NPT1-1/2F	M 40 x 1.5	NPT 1-1/2"	25.5-32.2	71.8 / 16	50	9	**1187430000**
A2LCS/40/M40-NPT1-1/4F	M 40 x 1.5	NPT 1-1/4"	25.5-32.2	71.8 / 16	50	9	**1187330000**
A2LCS/50/M50-NPT2F-WM	M 50 x 1.5	NPT 2"	37.5-44.1	72.3 / 16	65	6	**1187350000**
A2LCS/50S/M50-NPT1-1/2F	M 50 x 1.5	NPT 1-1/2"	31.5-38.2	73.3 / 16	60	6	**1187340000**
A2LCS/50S/M50-NPT2F-WM	M 50 x 1.5	NPT 2"	31.5-38.2	73.3 / 16	60	6	**1187440000**
A2LCS/63/M63-NPT2-1/2F	M 63 x 1.5	NPT 2-1/2"	49.5-56	78.8 / 19	80	4	**1187370000**
A2LCS/63S/M63-NPT2-1/2F	M 63 x 1.5	NPT 2-1/2"	43.5-50.1	79.8 / 19	75	4	**1187450000**
A2LCS/63S/M63-NPT2F-WM	M 63 x 1.5	NPT 2"	43.5-50.1	79.8 / 19	75	4	**1187360000**

Note

- All cable glands have a thread pitch of 1.5 mm.
- In the case of Ex d applications, the inner threads used for cable glands must meet the requirements of section 5.3 of EN/IEC 60079-1. In the screwed in position, at least 5 threads must be engaged.
- If the cable glands are installed in non-metallic Ex e connection equipment, these must be connected to the protective earth of the system.
- The connection cable must be laid securely and inflexibly to rule out tensile stress.
- Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.

Ex-cable glands – Stainless steel – Ex e, Ex d, IP66 / IP68 for non-armoured cables with raw thread connection

Cable glands type A2LCS are suitable for non-armoured cables and have a conduit internal thread, maintaining explosion protection Ex d and increased safety Ex e.

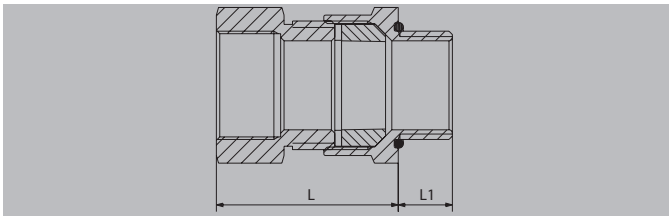

Technical data

Material	Stainless steel 1.4404
O-ring / Seal insert	Silicone / Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	Conduit thread size	KB	L/L1	SW	Qty.	Order No.
inch NPT to metric							
A2LCS/16/NPT1/2-M20F-WM	1/2" NPT	M20	4.5-8.7	69.8 / 13.6	24	24	**1187460000**
A2LCS/16/NPT3/4-M20F-WM	3/4" NPT	M20	4.5-8.7	69.8 / 13.9	24	24	**1187740000**
A2LCS/20/NPT1/2-M20F-WM	1/2" NPT	M20	10-14	68.8 / 13.6	28	24	**1187480000**
A2LCS/20/NPT3/4-M20F-WM	3/4" NPT	M20	10-14	68.8 / 13.9	28	24	**1187760000**
A2LCS/20S/NPT1/2-M20F	1/2" NPT	M20	8-11.7	68.8 / 13.6	26	24	**1187470000**
A2LCS/20S/NPT3/4-M20F	3/4" NPT	M20	8-11.7	68.8 / 13.9	26	24	**1187750000**
A2LCS/25/NPT1-M25F-WM	1" NPT	M25	13.5-20	69.8 / 17.3	36	12	**1187770000**
A2LCS/25/NPT3/4-M25F-WM	3/4" NPT	M25	13.5-20	69.8 / 13.9	36	12	**1187490000**
A2LCS/32/NPT1-1/4-M32F	1 1/4" NPT	M32	19.5-26.3	69.8 / 18	42	12	**1187780000**
A2LCS/32/NPT1-M32F-WM	1" NPT	M32	19.5-26.3	69.8 / 17.3	42	12	**1187500000**
A2LCS/40/NPT1-1/4-M40F	1 1/4" NPT	M40	25.5-32.2	71.8 / 18	50	9	**1187510000**
A2LCS/50/NPT2-M50F-WM	2" NPT	M50	37.5-44.1	72.3 / 19.2	65	6	**1187530000**
A2LCS/50S/NPT1-1/2-M50F	1 1/2" NPT	M50	31.5-38.2	73.3 / 18.4	60	6	**1187520000**
A2LCS/50S/NPT2-M50F-WM	2" NPT	M50	31.5-38.2	73.3 / 19.2	60	6	**1187800000**
A2LCS/63/NPT2-1/2-M63	2 1/2" NPT	M63	49.5-56	78.8 / 28.9	80	4	**1187550000**
A2LCS/63S/NPT2-1/2-M63F	2 1/2" NPT	M63	43.5-50.1	79.8 / 28.9	75	4	**1187810000**
A2LCS/63S/NPT2-M63F-WM	2" NPT	M63	43.5-50.1	79.8 / 19.2	75	4	**1187540000**
A2LCS/40/NPT1-1/2-M40F	1 1/2" NPT	M40	25.5-32.2	71.8 / 18.4	50	9	**1187790000**

Note

- All cable glands have a thread pitch of 1.5 mm.
- In the case of Ex d applications, the inner threads used for cable glands must meet the requirements of section 5.3 of EN/IEC 60079-1. In the screwed in position, at least 5 threads must be engaged.
- If the cable glands are installed in non-metallic Ex e connection equipment, these must be connected to the protective earth of the system.
- The connection cable must be laid securely and inflexibly to rule out tensile stress.
- Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com.

Ex-cable glands – Stainless steel – Ex e, Ex d, IP66 / IP68 for non-armoured cables with raw thread connection

Cable glands type A2LCS are suitable for non-armoured cables and have a conduit internal thread, maintaining explosion protection Ex d and increased safety Ex e.

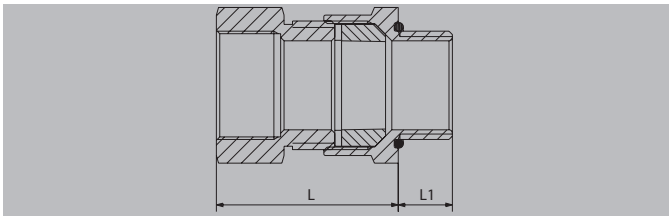

Technical data

Material	Stainless steel 1.4404
O-ring / Seal insert	Silicone / Silicone
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Identification	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Certificate no. (ATEX / IECEx / CCC)	TÜV IT 16ATEX 059X / IECEx TPS 16.0004X / 2020322313000069
Note	

Ordering data

Type	Thread	Conduit thread size	KB	L/L1	SW	Qty.	Order No.
inch NPT to inch NPT							
A2LCS/16/NPT1/2-NPT1/2	1/2" NPT	NPT 1/2"	4.5-8.7	69.8 / 13.6	24	24	**1187560000**
A2LCS/16/NPT1/2-NPT3/4F	1/2" NPT	NPT 3/4"	4.5-8.7	69.8 / 13.6	24	24	**1187660000**
A2LCS/16/NPT3/4-NPT1/2F	3/4" NPT	NPT 1/2"	4.5-8.7	69.8 / 13.9	24	24	**1187820000**
A2LCS/16/NPT3/4-NPT3/4	3/4" NPT	NPT 3/4"	4.5-8.7	69.8 / 13.9	24	24	**1187900000**
A2LCS/20/NPT1/2-NPT1/2	1/2" NPT	NPT 1/2"	10-14	68.8 / 13.6	28	24	**1187580000**
A2LCS/20/NPT1/2-NPT3/4F	1/2" NPT	NPT 3/4"	10-14	68.8 / 13.6	28	24	**1187680000**
A2LCS/20/NPT3/4-NPT	3/4" NPT	NPT 1/2"	10-14	68.8 / 13.9	28	24	**1187840000**
A2LCS/20/NPT3/4-NPT3/4F	3/4" NPT	NPT 3/4"	10-14	68.8 / 13.9	28	24	**1187920000**
A2LCS/20S/NPT1/2-NPT1/2	1/2" NPT	NPT 1/2"	8-11.7	68.8 / 13.6	26	24	**1187570000**
A2LCS/20S/NPT1/2-NPT3/4	1/2" NPT	NPT 3/4"	8-11.7	68.8 / 13.6	26	24	**1187670000**
A2LCS/20S/NPT3/4-NPT1/2	3/4" NPT	NPT 1/2"	8-11.7	68.8 / 13.9	26	24	**1187830000**
A2LCS/20S/NPT3/4-NPT3/4	3/4" NPT	NPT 3/4"	8-11.7	68.8 / 13.9	26	24	**1187910000**
A2LCS/25/NPT1-NPT1F-WM	1" NPT	NPT 1"	13.5-20	69.8 / 17.3	36	12	**1187930000**
A2LCS/25/NPT1-NPT3/4F	1" NPT	NPT 3/4"	13.5-20	69.8 / 17.3	36	12	**1187850000**
A2LCS/25/NPT3/4-NPT1F	3/4" NPT	NPT 1"	13.5-20	69.8 / 13.9	36	12	**1187690000**
A2LCS/25/NPT3/4-NPT3/4	3/4" NPT	NPT 3/4"	13.5-20	69.8 / 13.9	36	12	**1187590000**
A2LCS/32/NPT1-1/4-NPT1	1 1/4" NPT	NPT 1-1/4"	19.5-26.3	69.8 / 18	42	12	**1187940000**
A2LCS/32/NPT1-NPT1-1/4F	1" NPT	NPT 1-1/4"	19.5-26.3	69.8 / 17.3	42	12	**1187700000**
A2LCS/32/NPT1-NPT1F-WM	1" NPT	NPT 1"	19.5-26.3	69.8 / 17.3	42	12	**1187600000**
A2LCS/40/NPT1-1/2-NPT1	1 1/2" NPT	NPT 1-1/4"	25.5-32.2	71.8 / 18.4	50	9	**1187950000**
A2LCS/40/NPT1-1/4-NPT1	1 1/4" NPT	NPT 1-1/2"	25.5-32.2	71.8 / 18	50	9	**1187710000**
A2LCS/50/NPT2-NPT2F-WM	2" NPT	NPT 2"	37.5-44.1	72.3 / 19.2	65	6	**1187630000**
A2LCS/50S/NPT1-1/2-NPT1	1 1/2" NPT	NPT 1-1/2"	31.5-38.2	73.3 / 18.4	60	6	**1187620000**
A2LCS/50S/NPT1-1/2-NPT2	1 1/2" NPT	NPT 2"	31.5-38.2	73.3 / 18.4	60	6	**1187720000**
A2LCS/50S/NPT2-NPT1-1/2	2" NPT	NPT 1-1/2"	31.5-38.2	73.3 / 19.2	60	6	**1187880000**
A2LCS/50S/NPT2-NPT2F-WM	2" NPT	NPT 2"	31.5-38.2	73.3 / 19.2	60	6	**1187960000**
A2LCS/63/NPT2-1/2-NPT2	2 1/2" NPT	NPT 2-1/2"	49.5-56	78.8 / 28.9	80	4	**1187650000**
A2LCS/63S/NPT2-1/2-NPT	2 1/2" NPT	NPT 2-1/2"	43.5-50.1	79.8 / 19.2	75	4	**1187970000**
A2LCS/63S/NPT2-1/2-NPT2	2 1/2" NPT	NPT 2"	43.5-50.1	79.8 / 19.2	75	4	**1187890000**
A2LCS/63S/NPT2-NPT2-1/2	2" NPT	NPT 2-1/2"	43.5-50.1	79.8 / 19.2	75	4	**1187730000**
A2LCS/63S/NPT2-NPT2F-WM	2" NPT	NPT 2"	43.5-50.1	79.8 / 19.2	75	4	**1187640000**
Note							

Safeguard processes in potentially explosive atmospheres

Ex cable glands for safe devices as per EN 60079-0:2012 + A11 : 2013

The environmental conditions in many industry and explosion-proof applications pose a real challenge for the system components. Dust, vibrations, moisture and extreme temperatures all have an impact on the installed devices and the cable glands must also be able to withstand these stresses too.

Ex cable glands from Weidmüller guarantee process reliability in demanding environments. They are designed such that they can be used universally in any enclosure series. They are also just as easy to use in both high and low-temperature environments.

With impact resistance of 7 Joules, the explosion-proof polyamide cable glands offer extremely high levels of protection against external influences such as shocks or impacts. Together with their suitability for use in an extended temperature range and their proven conformity with current standards, these cable glands ensure safe and reliable functioning in a wide range of applications.

Your special advantages:
Impact and temperature resistant: The cable glands for use in areas at risk of explosion can withstand extreme temperature conditions. They are impact-resistant up to 7 Joules and can be used in any Weidmüller enclosures, guaranteeing versatile applicability with full standard conformity.

In process-intensive industries such as petrochemistry, energy production, machine construction, motor and drive technology and device components which are subjected to extremely high stresses. The cable glands can withstand even the harshest environmental conditions. Guarantee impact-resistance of up to 7 Joules over an extended temperature range.

Flexible application
Available in 8 standard sizes from M12 to M63 (additional thread types on request) and with 14 different clamping ranges, the new range of cable glands is suitable for an extremely wide range of applications.

Resistant to high temperatures
The cable glands have an operating temperature range of –40 °C to +70 °C with a chloroprene seal, and a range of as wide as –60 °C to +70 °C with a silicone seal.

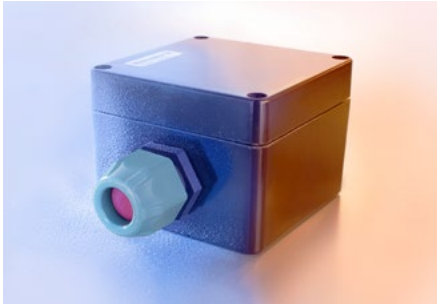

Extremely impact-resistant
With impact resistance of 7 Joules, the explosion-proof cable glands offer extremely high levels of protection against external influences such as shocks or impacts, in accordance with EN 60079-0:2012 + A11 : 2013.

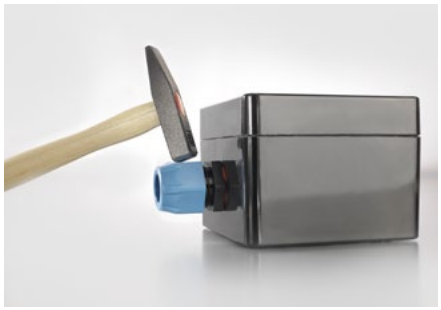

Comprehensive approvals
Whether for Ex e or Ex i applications:
The plastic cable glands comply consistently with EN 60079-0:2012 + A11 : 2013 and are approved in accordance with ATEX and IECEx.

Ex cable glands – Plastic – Ex e, Ex i, IP66 / IP68, 7J, –40°C – +70°C

Plastic cable gland for Ex applications with integrated strain relief, especially for Ex e and Ex i applications with chloroprene seal and 7 Joule impact resistance. Complete with integral membrane seal for clean transportation and storage.



Technical data

Material	Polyamide 6
Temperature range	-40 °C...70 °C
Seal insert	CR
Protection class	IP54, IP66, IP67, IP68 - 5 bar (30 min.)
Impact resistance	7 joules in acc. with IEC 60079-0
Marking	Ex eb IIC Gb, Ex tb IIIC Db IP66/68
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	KB	L/L1	SW	Qty.	Order No.
Ex e, deep black						
VG M12 EXE 4-6.5 CR7J G4	M 12	4-6.5 mm	22 / 10 mm	15 mm	100	**2721930000**
VG M16 EXE 5-8 CR7J G4	M 16	5-8 mm	26 / 10 mm	19 mm	50	**2721940000**
VG M16 EXE 6-10 CR7J G4	M 16	6-10 mm	29.5 / 10 mm	22 mm	50	**2721950000**
VG M20 EXE 7-12 CR7J G4	M 20	7-12 mm	30 / 10 mm	24 mm	50	**2721960000**
VG M20 EXE 7-13 CR7J G4	M 20	7-13 mm	33 / 10 mm	25 mm	50	**2721970000**
VG M20 EXE 11-14 CR7J G4	M 20	11-14 mm	30 / 10 mm	27 mm	50	**2721980000**
VG M25 EXE 12-17 CR7J G4	M 25	12-17 mm	34 / 10 mm	29 mm	50	**2721990000**
VG M25 EXE 14-18 CR7J G4	M 25	14-18 mm	35 / 10 mm	33 mm	25	**2722000000**
VG M32 EXE 16-21 CR7J G4	M 32	16-21 mm	42 / 10 mm	36 mm	25	**2722010000**
VG M32 EXE 19-25 CR7J G4	M 32	19-25 mm	40.5 / 15 mm	42 mm	20	**2722020000**
VG M40 EXE 20-28 CR7J G4	M 40	20-28 mm	46 / 10 mm	46 mm	15	**2722030000**
VG M40 EXE 23-32 CR7J G4	M 40	23-32 mm	50 / 18 mm	53 mm	10	**2722040000**
VG M63 EXE 35-44 CR7J G4	M 63	35-44 mm	54 / 18 mm	65 mm	10	**2722060000**
Ex i, light blue, deep black						
VG M12 EXI 4-6.5 CR7J G4	M 12	4-6.5 mm	22 / 10 mm	15 mm	100	**2722210000**
VG M16 EXI 5-8 CR7J G4	M 16	5-8 mm	26 / 10 mm	19 mm	50	**2722220000**
VG M16 EXI 6-10 CR7J G4	M 16	6-10 mm	29.5 / 10 mm	22 mm	50	**2722230000**
VG M20 EXI 7-12 CR7J G4	M 20	7-12 mm	30 / 10 mm	24 mm	50	**2722240000**
VG M20 EXI 7-13 CR7J G4	M 20	7-13 mm	33 / 10 mm	25 mm	50	**2722250000**
VG M20 EXI 11-14 CR7J G4	M 20	11-14 mm	30 / 10 mm	27 mm	50	**2722260000**
VG M25 EXI 12-17 CR7J G4	M 25	12-17 mm	34 / 10 mm	29 mm	50	**2722270000**
VG M25 EXI 14-18 CR7J G4	M 25	14-18 mm	35 / 10 mm	33 mm	25	**2722280000**
VG M32 EXI 16-21 CR7J G4	M 32	16-21 mm	42 / 10 mm	36 mm	25	**2722290000**
VG M32 EXI 19-25 CR7J G4	M 32	19-25 mm	40.5 / 15 mm	42 mm	20	**2722300000**
VG M40 EXI 20-28 CR7J G4	M 40	20-28 mm	46 / 10 mm	46 mm	15	**2722310000**
Note	Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com					

Ex cable glands – Plastic – Ex e, Ex i, IP66 / IP68, 7J, –60°C – +70°C

Plastic cable gland for Ex applications with integrated strain relief, especially for Ex e and Ex i applications with silicone seal and 7 Joule impact resistance. Complete with integral membrane seal for clean transportation and storage.



Technical data

Material	Polyamide 6
Temperature range	-60 °C...70 °C
Seal insert	Silicone
Protection class	IP54, IP66, IP67, IP68 - 5 bar (30 min.)
Impact resistance	7 joules in acc. with IEC 60079-0
Marking	Ex eb IIC Gb, Ex tb IIIC Db IP66/68
Note	Length "L" depends on the cable diameter used.

Ordering data

Type	Thread	KB	L/L1	SW	Qty.	Order No.
Ex e, deep black						
VG M12 EXE 4-6.5 SI7J G4	M 12	4-6.5 mm	22 / 10 mm	15 mm	100	**2722070000**
VG M16 EXE 5-8 SI7J G4	M 16	5-8 mm	26 / 10 mm	19 mm	50	**2722080000**
VG M16 EXE 6-10 SI7J G4	M 16	6-10 mm	29.5 / 10 mm	22 mm	50	**2722090000**
VG M20 EXE 7-12 SI7J G4	M 20	7-12 mm	30 / 10 mm	24 mm	50	**2722100000**
VG M20 EXE 7-13 SI7J G4	M 20	7-13 mm	33 / 10 mm	25 mm	50	**2722110000**
VG M20 EXE 11-14 SI7J G4	M 20	11-14 mm	30 / 10 mm	27 mm	50	**2722120000**
VG M25 EXE 12-17 SI7J G4	M 25	12-17 mm	34 / 10 mm	29 mm	50	**2722130000**
VG M25 EXE 14-18 SI7J G4	M 25	14-18 mm	35 / 10 mm	33 mm	25	**2722140000**
VG M32 EXE 16-21 SI7J G4	M 32	16-21 mm	42 / 10 mm	36 mm	25	**2722150000**
VG M32 EXE 19-25 SI7J G4	M 32	19-25 mm	40.5 / 15 mm	42 mm	20	**2722160000**
VG M40 EXE 20-28 SI7J G4	M 40	20-28 mm	46 / 10 mm	46 mm	15	**2722170000**
VG M40 EXE 23-32 SI7J G4	M 40	23-32 mm	50 / 18 mm	53 mm	10	**2722180000**
Ex i, light blue, deep black						
VG M12 EXI 4-6.5 SI7J G4	M 12	4-6.5 mm	22 / 10 mm	15 mm	100	**2722350000**
VG M16 EXI 5-8 SI7J G4	M 16	5-8 mm	26 / 10 mm	19 mm	50	**2722360000**
VG M16 EXI 6-10 SI7J G4	M 16	6-10 mm	29.5 / 10 mm	22 mm	50	**2722370000**
VG M20 EXI 7-12 SI7J G4	M 20	7-12 mm	30 / 10 mm	24 mm	50	**2722380000**
VG M20 EXI 7-13 SI7J G4	M 20	7-13 mm	33 / 10 mm	25 mm	50	**2722390000**
VG M20 EXI 11-14 SI7J G4	M 20	11-14 mm	30 / 10 mm	27 mm	50	**2722400000**
VG M25 EXI 12-17 SI7J G4	M 25	12-17 mm	34 / 10 mm	29 mm	50	**2722410000**
VG M25 EXI 14-18 SI7J G4	M 25	14-18 mm	35 / 10 mm	33 mm	25	**2722420000**
VG M32 EXI 16-21 SI7J G4	M 32	16-21 mm	42 / 10 mm	36 mm	25	**2722430000**
VG M32 EXI 19-25 SI7J G4	M 32	19-25 mm	40.5 / 15 mm	42 mm	20	**2722440000**
VG M40 EXI 20-28 SI7J G4	M 40	20-28 mm	46 / 10 mm	46 mm	15	**2722450000**
VG M40 EXI 23-32 SI7J G4	M 40	23-32 mm	50 / 18 mm	53 mm	10	**2722460000**
Note	Installation specifications and tightening torques can be found in the installation instructions. For further information please use our online catalogue: eshop.weidmueller.com					

Lock nuts – Plastic 7035

For fastening cable glands and accessories if no threaded hole is available. With circumferential collar to prevent damage to the substrate during installation.

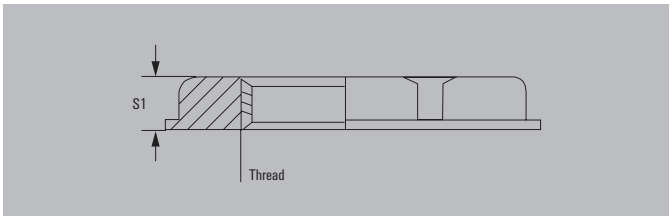

Technical data

Material / Colour	Polyamid 6 (PA6 - GF30) / Light Grey / RAL 7035
Temperature range	-40 °C...100 °C
Flammability rating	HB
Note	

Ordering data

Type	Thread	S1	SW	Qty.	Order No.
metric					
SKMU M12 - K GR	M 12	5.00	18	100	**1772440000**
SKMU M16 - K GR	M 16	5.00	22	100	**1772450000**
SKMU M20 - K GR	M 20	6.00	26	100	**1772460000**
SKMU M25 - K GR	M 25	6.00	32	100	**1772470000**
SKMU M32 - K GR	M 32	7.00	41	100	**1772480000**
SKMU M40 - K GR	M 40	7.00	50	50	**1772490000**
SKMU M50 - K GR	M 50	8.00	60	10	**1772500000**
SKMU M63 - K GR	M 63	8.00	75	10	**1772510000**
PG					
SKMU PG7-K GR	PG 7	5.00	19	100	**1697440000**
SKMU PG9-K GR	PG 9	5.00	22	100	**1697450000**
SKMU PG11-K GR	PG 11	5.00	24	100	**1697460000**
SKMU PG 13,5-K GR	PG 13.5	6.00	27	100	**1697470000**
SKMU PG16-K GR	PG 16	6.00	30	100	**1697480000**
SKMU PG21-K GR	PG 21	7.00	36	100	**1698220000**
SKMU PG29-K GR	PG 29	7.00	46	50	**1698230000**
SKMU PG36-K GR	PG 36	8.00	60	25	**1698240000**
SKMU PG42-K GR	PG 42	8.00	65	25	**1698250000**
SKMU PG48-K GR	PG 48	8.00	70	25	**1719090000**
Note	Further versions on request.				

Lock nuts – Plastic 9005

Lock nuts with collar for preventing enclosure damage on installation. These are used to secure plastic cable glands and blanking plugs - recommended for Ex e and Ex i plastic cable glands.

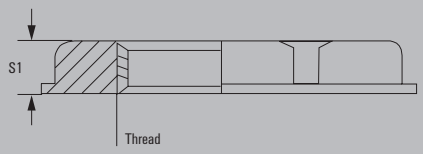

Technical data

Material / Colour	Polyamid 6 (PA6 - GF30) / Deep black / RAL 9005
Temperature range	-40 °C...100 °C
Flammability rating	HB
Note	Accessories for Ex cable glands are not subject to approval.

Ordering data

Type	Thread	S1	SW	Qty.	Order No.
metric					
SKMU M12 K SW	M 12	5.00	18	100	**1806540000**
SKMU M16 K SW	M 16	5.00	22	100	**1736920000**
SKMU M20 K SW	M 20	6.00	26	100	**1736930000**
SKMU M25 K SW	M 25	6.00	32	25	**1736940000**
SKMU M32 K SW	M 32	7.00	41	100	**1736950000**
SKMU M40 K SW	M 40	7.00	50	10	**1736960000**
SKMU M50 K SW	M 50	8.00	60	5	**1736970000**
SKMU M63 K SW	M 63	8.00	75	5	**1736980000**
PG					
SKMU PG7-K SW	PG 7	5.00	19	100	**1719100000**
SKMU PG9-K SW	PG 9	5.00	22	50	**1719110000**
SKMU PG11-K SW	PG 11	5.00	24	50	**1719120000**
SKMU PG13,5-K SW	PG 13.5	6.00	27	50	**1719130000**
SKMU PG16-K SW	PG 16	6.00	30	100	**1719140000**
SKMU PG21-K SW	PG 21	7.00	36	100	**1719150000**
SKMU PG29-K SW	PG 29	7.00	46	20	**1719160000**
SKMU PG36-K SW	PG 36	8.00	60	10	**1719170000**
SKMU PG42-K SW	PG 42	8.00	65	25	**1719180000**
SKMU PG48-K SW	PG 48	8.00	70	25	**1719190000**
Note	Further versions on request.				

Lock nuts – Brass – nickel-plated

For fastening cable glands and accessories if no threaded hole is available. Recommended when working with Ex applications.

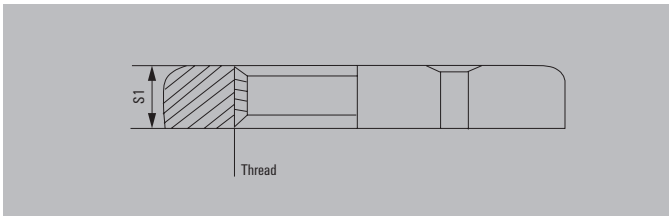

Technical data

Material	Brass, nickel-plated
Note	

Ordering data

Type	Thread	S1	SW	Qty.	Order No.
metric					
SKMU M12 MS	M 12	2.8	15	100	**1772360000**
SKMU M16 MS	M 16	2.8	19	100	**1736990000**
SKMU M20 MS	M 20	3	24	100	**1737000000**
SKMU M25 MS	M 25	3.5	30	100	**1737010000**
SKMU M32 MS	M 32	4	36	100	**1737020000**
SKMU M40 MS	M 40	5	46	50	**1737030000**
SKMU M50 MS	M 50	5	57	25	**1737040000**
SKMU M63 MS	M 63	6	70	25	**1737050000**
SKMU M75 MS	M 75	7	80	5	**1737060000**
PG					
SKMU PG7-MS	PG 7	2.8	15	100	**1694070000**
SKMU PG9-MS	PG 9	2.8	18	100	**1694080000**
SKMU PG11-MS	PG 11	3	21	100	**1694090000**
SKMU PG13,5-MS	PG 13.5	3	23	100	**1694100000**
SKMU PG16-MS	PG 16	3	26	100	**1694110000**
SKMU PG21-MS	PG 21	3.5	32	100	**1719200000**
SKMU PG29-MS	PG 29	4	41	50	**1719210000**
SKMU PG36-MS	PG 36	5	51	50	**1719220000**
SKMU PG42-MS	PG 42	5	60	25	**1719230000**
SKMU PG48-MS	PG 48	5.5	64	10	**1719240000**
Note	Further versions on request.				

Lock nuts – Brass – natural

For fastening cable glands and accessories if no threaded hole is available. Recommended when working with Ex applications.

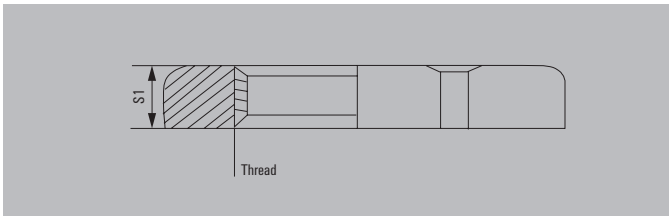

Technical data

Material	Brass
Note	

Ordering data

Type	Thread	S1	SW	Qty.	Order No.
metric					
SKMU M16 MS SC	M 16	4	22	50	**0930640001**
SKMU M20 MS SC	M 20	4	24	50	**0930640002**
SKMU M25 MS SC	M 25	4	30	25	**0930640003**
SKMU M32 MS SC	M 32	4	40	20	**0930640004**
SKMU M40 MS SC	M 40	4.8	46	10	**0930640005**
SKMU M50 MS SC	M 50	5	65	5	**0930640006**
SKMU M63 MS SC	M 63	6.4	80	5	**0930640007**
SKMU M75 MS SC	M 75	7	90	5	**0930640008**
Note					

Lock nuts – Brass – EMC

For fastening cable glands and accessories if no threaded hole is available. Specially equipped with 6 edges which contact the enclosure when the lock nut is tightened.

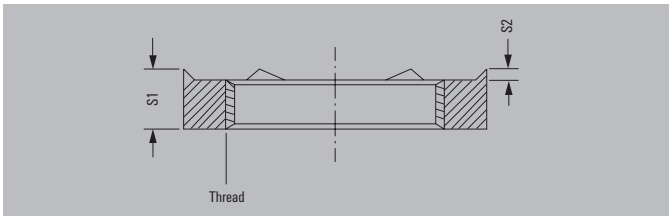

Technical data

Material	Brass, nickel-plated
Note	

Ordering data

Type	Thread	S1	SW	Qty.	Order No.
metric					
SKMU EMV M12	M 12	3.6	15	100	**1777610000**
SKMU EMV M16	M 16	3.6	19	100	**1777620000**
SKMU EMV M20	M 20	3.6	24	100	**1777630000**
SKMU EMV M25	M 25	3.6	30	50	**1777640000**
SKMU EMV M32	M 32	4.1	36	50	**1777650000**
SKMU EMV M40	M 40	4.6	46	10	**1777660000**
SKMU EMV M50	M 50	4.6	60	10	**1777670000**
SKMU EMV M63	M 63	6.6	70	10	**1777680000**
PG					
SKMU EMV PG7	PG 7	4.7	15	20	**1718900000**
SKMU EMV PG9	PG 9	4.7	18	20	**1718910000**
SKMU EMV PG11	PG 11	4.7	21	20	**1718920000**
SKMU EMV PG13,5	PG 13.5	4.7	23	10	**1718930000**
SKMU EMV PG16	PG 16	4.7	26	10	**1718940000**
SKMU EMV PG21	PG 21	5.2	32	10	**1718950000**
SKMU EMV PG29	PG 29	5.7	41	15	**1718960000**
SKMU EMV PG 36	PG 36	4.6	51	1	**1777710000**
Note	Further versions on request.				

Lock nuts – Stainless steel

For fastening cable glands and accessories if no threaded hole is available. Recommended for Ex applications.

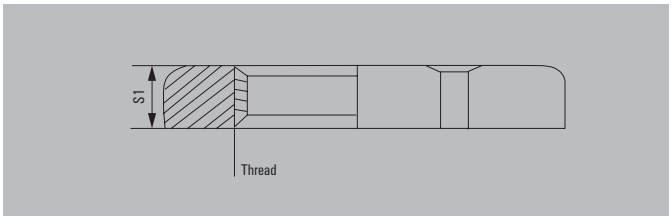

Technical data

Material	Stainless steel 1.4404
Note	

Ordering data

Type	Thread	S1	SW	Qty.	Order No.
metric					
SKMUS M16-W	M 16	2.80	20	240	**1185680000**
SKMUS M20-W	M 20	3.00	24	240	**1185690000**
SKMUS M25-W	M 25	3.00	30	240	**1185700000**
SKMUS M32-W	M 32	4.00	38	144	**1185710000**
SKMUS M40-W	M 40	4.50	46	144	**1185720000**
SKMUS M50-W	M 50	5.00	60	30	**1185730000**
SKMUS M63-W	M 63	6.00	75	20	**1185740000**
Note					

Flat IP washer – Standard – Polyethylene

For better sealing of the connection thread of a cable gland or accessory.

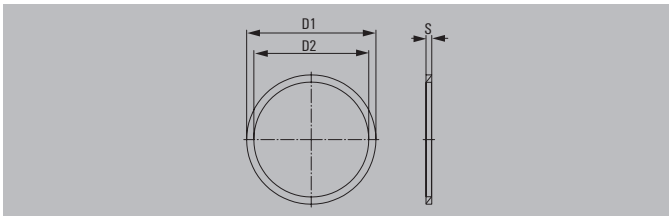

Technical data

Material / Colour	Polyethylene / Transparent
Temperature range	-30 °C...90 °C
Note	

Ordering data

Type	Thread	D1	D2	S	Qty.	Order No.
metric						
GWDR M12-PO	M 12	16.00	12.00	2.00	50	**1777920000**
GWDR M16-PO	M 16	20.00	16.00	2.00	50	**1777930000**
GWDR M20-PO	M 20	24.00	20.00	2.00	100	**1777940000**
GWDR M25-PO	M 25	29.00	25.00	2.00	50	**1777950000**
GWDR M32-PO	M 32	36.00	32.00	2.00	50	**1777960000**
GWDR M40-PO	M 40	45.00	40.00	2.00	50	**1777970000**
GWDR M50-PO	M 50	56.00	50.00	2.00	50	**1777980000**
GWDR M63-PO	M 63	70.00	63.00	2.00	50	**1777990000**
PG						
GWDR PG7-PO	PG 7	16.50	12.50	2.00	100	**1719440000**
GWDR PG9-PO	PG 9	19.00	15.20	2.00	100	**1719450000**
GWDR PG11-PO	PG 11	22.50	18.60	2.00	100	**1719460000**
GWDR PG13,5-PO	PG 13.5	25.00	20.40	2.00	100	**1719470000**
GWDR PG16-PO	PG 16	27.00	22.50	2.00	100	**1719480000**
GWDR PG21-PO	PG 21	33.50	28.30	3.00	100	**1719490000**
GWDR PG29-PO	PG 29	43.50	37.00	3.00	50	**1719500000**
GWDR PG36-PO	PG 36	55.00	47.00	3.00	50	**1719510000**
GWDR PG42-PO	PG 42	63.00	54.00	3.00	10	**1719520000**
GWDR PG48-PO	PG 48	69.00	59.30	3.00	5	**1719530000**
Note	Further versions on request.					

Flat IP washer – Standard – Neoprene

For better sealing of the connection thread of a cable gland or accessory.



Technical data

Material / Colour	Neoprene / Deep black
Temperature range	-40 °C...100 °C
Note	

Ordering data

Type	Thread	D1	D2	S	Qty.	Order No.
metric						
GWDR M12-NP	M 12	18.00	12.00	1.20	50	**1913320000**
GWDR M16-NP	M 16	22.00	16.00	1.20	50	**1736230000**
GWDR M20-NP	M 20	24.00	20.00	1.20	50	**1736240000**
GWDR M25-NP	M 25	30.00	25.00	1.50	100	**1736250000**
GWDR M32-NP	M 32	42.00	32.00	1.50	50	**1736260000**
GWDR M40-NP	M 40	52.00	40.00	1.50	20	**1736270000**
GWDR M50-NP	M 50	63.00	50.00	1.50	20	**1736280000**
GWDR M63-NP	M 63	77.00	63.00	2.00	10	**1736290000**
PG						
GWDR PG7-NP	PG 7	17.00	11.60	1.20	100	**1719540000**
GWDR PG9-NP	PG 9	21.00	14.00	1.20	100	**1719550000**
GWDR PG11-NP	PG 11	24.00	17.00	1.20	100	**1719560000**
GWDR PG13,5-NP	PG 13.5	27.00	19.50	1.20	100	**1719570000**
GWDR PG16-NP	PG 16	30.00	22.50	1.20	100	**1719580000**
GWDR PG21-NP	PG 21	35.00	28.30	1.50	100	**1719590000**
GWDR PG29-NP	PG 29	45.00	37.00	1.50	50	**1719600000**
GWDR PG36-NP	PG 36	60.00	47.00	1.50	20	**1719610000**
GWDR PG42-NP	PG 42	65.00	54.00	1.50	10	**1719620000**
GWDR PG48-NP	PG 48	71.00	59.30	1.50	5	**1719630000**
Note	Further versions on request.					

Flat IP washer – Standard – Nylon

For better sealing of the connection thread of a cable gland or accessory.

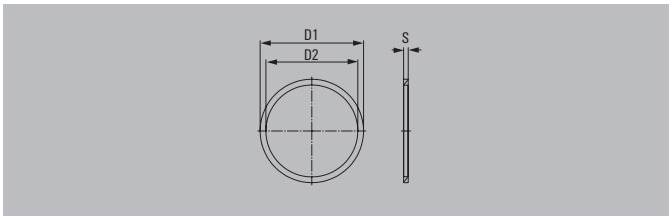

Technical data

Material / Colour	Nylon 6 / white / RAL 9010
Temperature range	-50 °C...120 °C
Note	

Ordering data

Type	Thread	D1	D2	S	Qty.	Order No.
metric						
GWDR M16-W	M 16	26	16.30	2.00	100	**1185600000**
GWDR M20-W	M 20	30	20.30	2.00	100	**1185610000**
GWDR M25-W	M 25	38	25.30	2.00	100	**1185620000**
GWDR M32-W	M 32	46	32.30	2.00	160	**1185630000**
GWDR M40-W	M 40	55	40.30	2.00	50	**1185640000**
GWDR M50-W	M 50	65	50.30	2.00	25	**1185650000**
GWDR M63-W	M 63	80	63.30	2.00	10	**1185670000**
Note						

Accessories – Earth tags – Brass

Earth tags are best used when a cable shielding is being tightened onto the cable gland, and when it has the same potential as another cable gland on the enclosure.

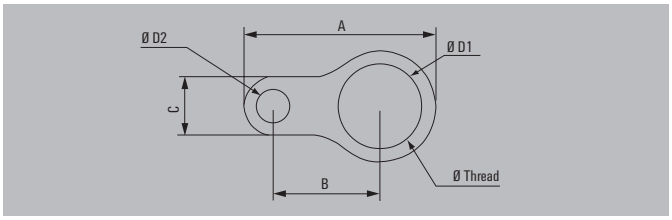

Technical data

Material	Brass, nickel-plated
Note	

Ordering data

Type	Thread	A	B	C	D1	D2	Qty.	Order No.
metric, nickel-plated brass								
EA-RING MS/M 16	M 16	48.75	30.00	13.00	24.5	6.75	20	**1736480000**
EA-RING MS/M 20	M 20	53.8	33.00	13.00	28.6	7.00	20	**1736490000**
EA-RING MS/M 25	M 25	61.5	36.00	17.00	34	10.50	20	**1736500000**
EA-RING MS/M 32	M 32	73	41.00	22.00	42	12.20	20	**1736510000**
EA-RING MS/M 40	M 40	86.5	44.50	30.00	54	13.50	10	**1736520000**
EA-RING MS/M 50	M 50	111.5	58.00	40.00	67	13.50	10	**1736530000**
EA-RING MS/M 63	M 63	125.5	67.00	40.00	77	13.50	10	**1736540000**
EA-RING MS/M 75	M 75	137.5	73.00	40.00	89	13.50	10	**1736550000**
metric, brass natural								
EA-RING MS/M16 SC	M 16	50.8	31.80	12.80	25.4	6.90	20	**0930710001**
EA-RING MS/M20 SC	M 20	54	33.00	12.80	28.6	6.90	20	**0930710002**
EA-RING MS/M25 SC	M 25	60.2	36.50	12.80	34.8	6.90	20	**0930710003**
EA-RING MS/M32 SC	M 32	74.6	42.50	22.30	44.6	11.80	20	**0930710004**
EA-RING MS/M40 SC	M 40	86.7	45.40	31.70	53	13.50	10	**0930710005**
EA-RING MS/M50 SC	M 50	111	58.10	41.30	65.2	13.50	10	**0930710006**
EA-RING MS/M63 SC	M 63	128.7	66.80	41.30	82.6	13.50	10	**0930710007**
EA-RING MS/M75 SC	M 75	141.3	73.00	41.30	95.3	13.50	10	**0930710008**
Note	Further versions on request.							

Accessories – Serrated washers, Stainless steel

Serrated stainless-steel washers to prevent mounted cable glands from loosening. Can also be used to roughen painted or passivated surfaces.



Technical data

Material	Stainless steel 1.4404 (316L)
Note	

Ordering data

Type	Thread	D1	D2	Qty.	Order No.
metric					
SZS M16	M 16	25.5	17.30	50	**1736300000**
SZS M20	M 20	32.4	21.30	10	**1736310000**
SZS M25	M 25	37.4	25.30	10	**1736320000**
SZS M32	M 32	48	33.00	10	**1736330000**
SZS M40	M 40	60	41.00	5	**1736340000**
SZS M50	M 50	71	51.00	5	**1736350000**
SZS M63	M 63	87	64.00	5	**1736360000**
Note					

Blanking plugs – Plastic

Plastic blanking plug with cross-head is used to seal surplus threaded holes and to maintain the IP protection degree.

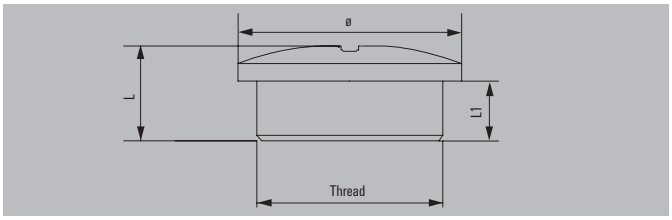

Technical data

Material / Colour	Polyamid 6 (PA6 - GF30) / Light Grey / RAL 7035
Temperature range	-40 °C...100 °C
Protection class	IP54
Flammability rating	V-2
Note	Optional sealing ring.

Ordering data

Type	Thread	L	L1	Head Ø	Qty.	Order No.
metric						
VP M12 K54	M 12	5.5	6	15.00	100	**1776930000**
VP M16 K54	M 16	5.5	7	20.00	100	**1776920000**
VP M20 K54	M 20	6.5	7	24.00	100	**1776910000**
VP M25 K54	M 25	7	10	30.00	100	**1776900000**
VP M32 K54	M 32	7	11	37.00	50	**1776940000**
VP M40 K54	M 40	7	13	46.00	25	**1776950000**
VP M50 K54	M 50	8.5	14	56.00	10	**1776960000**
VP M63 K54	M 63	8.5	15	69.50	5	**1776970000**
PG						
VP 7-K54	PG 7	8	6	15.00	100	**1719250000**
VP 9-K54	PG 9	9.5	5	19.00	100	**0294760000**
VP 11-K54	PG 11	10	6.5	22.00	100	**0294860000**
VP 13,5-K54	PG 13.5	10	5	25.00	100	**0294960000**
VP 16-K54	PG 16	10	5	27.00	100	**0295060000**
VP 21-K54	PG 21	12	8	33.00	50	**0295160000**
VP 29-K54	PG 29	11.5	8	44.00	25	**0501160000**
VP 36-K54	PG 36	14	10	55.00	10	**0501260000**
VP 42-K54	PG 42	14	10	62.00	5	**0501360000**
VP 48-K54	PG 48	16	12	69.00	5	**1719260000**
Note	Other versions available on request. The blanking plugs must be tightened "hand-tight" with the screwdriver.					

Blanking plugs – Brass – Nickel-plated

Brass blanking plug with cross-head is used to seal surplus threaded holes and to maintain the IP protection degree.

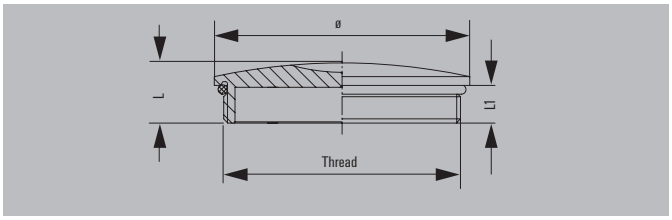

Technical data

Material	Brass, nickel-plated
O-Ring	NBR
Temperature range	-40 °C...100 °C
Protection class	IP68 - 5 bar (30 min.)

Note

Ordering data

Type	Thread	L	L1	Head Ø	Qty.	Order No.
metric						
VP M12-MS65	M 12	7.5	5	14.00	100	**1777720000**
VP M16-MS65	M 16	8	5	18.00	100	**1777730000**
VP M20-MS65	M 20	9.5	6	22.00	100	**1777740000**
VP M25-MS65	M 25	11	7	28.00	100	**1777750000**
VP M32-MS65	M 32	12	8	35.00	50	**1777760000**
VP M40-MS65	M 40	13	8	44.00	50	**1777770000**
VP M50-MS65	M 50	15	9	54.00	25	**1777780000**
VP M63-MS65	M 63	16	10	67.00	10	**1777790000**
PG						
VP 7-MS65	PG 7	7.5	5	15.00	100	**0521600000**
VP 9-MS65	PG 9	8	5	18.00	100	**0294700000**
VP 11-MS65	PG 11	8	5	22.00	100	**0294800000**
VP 13,5-MS65	PG 13.5	9	6	24.00	100	**0294900000**
VP 16-MS65	PG 16	9	6	26.00	100	**0295000000**
VP 21-MS65	PG 21	10	6	32.00	50	**0295100000**
VP 29-MS65	PG 29	12	8	40.00	50	**0501100000**
VP 36-MS65	PG 36	15	9	50.00	25	**0501200000**
VP 42-MS65	PG 42	16	10	57.00	25	**0501300000**
VP 48-MS65	PG 48	16	10	64.00	10	**1719270000**

Note Other versions available on request. The blanking plugs must be tightened "hand-tight" with the screwdriver.

Blanking plugs – Brass and Stainless steel – Ex e, Ex d, IP66 / IP68

The VP(S) series plugs provide a method of filling unused inlets in Ex equipment while maintaining flameproof Ex d and increased safety Ex e explosion protection and IP66/67/68 rating.

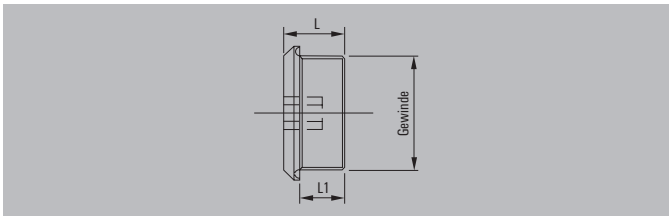

Technical data

Material / Colour	Brass, nickel-plated / silver / RAL 7001
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Marking	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Note	

Ordering data

Type	Thread	L	L1	SW	Qty.	Order No.
Nickel-plated brass						
VP-HEX M16-EX W	M 16 x 1.5	20	16	23	24	**1218940000**
VP-HEX M20-EX W	M 20 x 1.5	20	16	27	24	**1218950000**
VP-HEX M25-EX W	M 25 x 1.5	21	16	33	16	**1218960000**
VP-HEX M32-EX W	M 32 x 1.5	21	16	40	12	**1218970000**
VP-HEX M40-EX W	M 40 x 1.5	22	16	50	9	**1218980000**
VP-HEX M50-EX W	M 50 x 1.5	22	16	60	6	**1218990000**
VP-HEX M63-EX W	M 63 x 1.5	22	16	75	4	**1219010000**
Stainless steel, rust-proof						
VPS-HEX M16-EX W	M 16 x 1.5	20	16	23	24	**1219020000**
VPS-HEX M20-EX W	M 20 x 1.5	20	16	27	24	**1219030000**
VPS-HEX M25-EX W	M 25 x 1.5	21	16	33	16	**1219040000**
VPS-HEX M32-EX W	M 32 x 1.5	21	16	40	12	**1219050000**
VPS-HEX M40-EX W	M 40 x 1.5	22	16	50	9	**1219060000**
VPS-HEX M50-EX W	M 50 x 1.5	22	16	60	6	**1219070000**
VPS-HEX M63-EX W	M 63 x 1.5	22	16	75	4	**1219080000**
Note						

Blanking plugs – Brass and Stainless steel – Ex e, Ex d, IP66 / IP68

The VP(S) series plugs provide a method of filling unused inlets in Ex equipment while maintaining flameproof Ex d and increased safety Ex e explosion protection and IP66/67/68 rating.

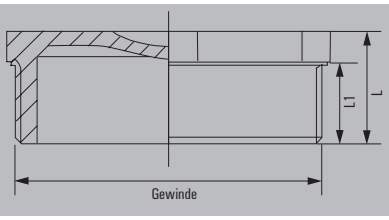

Technical data

Material / Colour	Brass, nickel-plated / silver / RAL 7001
Operating temperature	-50 °C...120 °C
Protection class	IP66, IP68
Marking	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
Note	

Ordering data

Type	Thread	L	L1	Qty.	Order No.
Nickel-plated brass					
VP M16-EX W	M 16 x 1.5	21.5	16	24	**1188470000**
VP M20-EX W	M 20 x 1.5	21.5	16	24	**1188480000**
VP M25-EX W	M 25 x 1.5	21.5	16	16	**1188490000**
VP M32-EX W	M 32 x 1.5	21.5	16	12	**1188500000**
VP M40-EX W	M 40 x 1.5	21.5	16	12	**1188510000**
VP M50-EX W	M 50 x 1.5	21.5	16	6	**1188520000**
VP M63-EX W	M 63 x 1.5	21.5	16	40	**1188530000**
VP NPT3/4-EX W	3/4" NPT	16	16	24	**1188550000**
VP NPT1/2-EX W	1/2" NPT	15.5	15.5	24	**1188540000**
VP NPT1-EX W	1" NPT	19.5	19.5	16	**1188560000**
VP NPT1-1/4-EX W	1 1/4" NPT	20	20	12	**1188570000**
VP NPT1-1/2-EX W	1 1/2" NPT	20.5	20.5	12	**1188580000**
VP NPT2-EX W	2" NPT	21.5	21.5	6	**1188590000**
VP NPT2-1/2-EX W	2 1/2" NPT	31.5	31.5	40	**1188600000**
Stainless steel, rust-proof					
VPS M16-EX W	M 16 x 1.5	21.5	16	24	**1188690000**
VPS M20-EX W	M 20 x 1.5	21.5	16	24	**1188700000**
VPS M25-EX W	M 25 x 1.5	21.5	16	16	**1188710000**
VPS M32-EX W	M 32 x 1.5	21.5	16	12	**1188720000**
VPS M40-EX W	M 40 x 1.5	21.5	16	12	**1188730000**
VPS M50-EX W	M 50 x 1.5	21.5	16	6	**1188740000**
VPS M63-EX W	M 63 x 1.5	21.5	16	4	**1188750000**
VPS NPT1/2-EX W	1/2" NPT	15.5	15.5	24	**1188760000**
VPS NPT3/4-EX W	3/4" NPT	16	16	24	**1188770000**
VPS NPT1-EX W	1" NPT	19.5	19.5	16	**1188780000**
VPS NPT1-1/4-EX W	1 1/4" NPT	20	20	12	**1188790000**
VPS NPT1-1/2-EX W	1 1/2" NPT	20.5	20.5	12	**1188800000**
VPS NPT2-EX W	2" NPT	21.5	21.5	6	**1188810000**
VPS NPT2-1/2-EX W	2 1/2" NPT	31.5	31.5	4	**1188820000**
Note					

Blanking plugs – Plastic – Ex e, IP66

For secure connection of unused screw-in threads or through-hole in enclosures. For Ex e applications with an impact resistance of 7 Joule in accordance with IEC 60079-0.

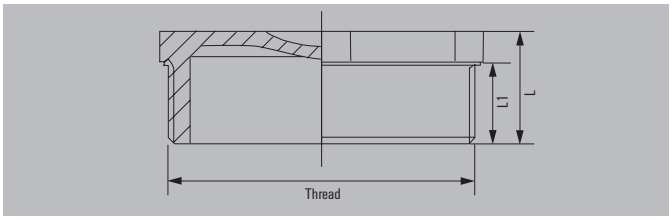

Technical data

Material / Colour	Polyamide 6 / Deep black / RAL 9005
O-Ring	Silicone
Temperature range	-60 °C...70 °C
Protection class	IP54, IP66, IP67, IP68 - 5 bar (30 min.)
Impact resistance	7 joules in acc. with IEC60079-0
Marking	Ex eb IIC Gb, Ex tb IIIC Db IP66/68
Note	

Ordering data

Type	Thread	L	L1	SW	Qty.	Order No.
VP M12 EX SI 7J	M 12	15	10	15	100	**2066710000**
VP M16 EX SI 7J	M 16	16.3	12	19	100	**2066720000**
VP M20 EX SI 7J	M 20	17	11	23	100	**2066730000**
VP M25 EX SI 7J	M 25	15.8	10	28	100	**2066740000**
VP M32 EX SI 7J	M 32	22.8	15	36	100	**2066750000**
VP M40 EX SI 7J	M 40	26.5	18	46	20	**2066760000**
VP M50 EX SI 7J	M 50	27.5	18	55	20	**2066770000**
VP M63 EX SI 7J	M 63	27.5	18	69	20	**2066940000**

Note

Installation specifications and tightening torques can be found in the installation instructions.
For further information please use our online catalogue: eshop.weidmueller.com.

Blanking plugs – Plastic – Ex e, IP66

For secure connection of unused screw-in threads or through-hole in enclosures. For Ex e applications with an impact resistance of 7 Joule in accordance with IEC 60079-0.

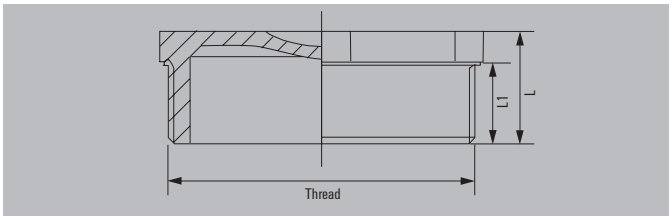

Technical data

Material / Colour	Polyamide 6 / black / RAL 9011
Sealing	Chloroprene
Temperature range	-40 °C...70 °C
Protection class	IP66, IP68
Impact resistance	7 joules in acc. with IEC 60079-0
Marking	Ex eb IIC Gb, Ex tb IIIC Db
Note	

Ordering data

Type	Thread	L	L1	SW	Qty.	Order No.
metric						
VP M12/10 EX CR 7J BK	M 12	15	10	15	100	**2978890000**
VP M16/15 EX CR 7J BK	M 16	15	15	19	100	**2978900000**
VP M20/15 EX CR 7J BK	M 20	21	15	23	100	**2978910000**
VP M25/15 EX CR 7J BK	M 25	20.8	15	28	100	**2978920000**
VP M32/15 EX CR 7J BK	M 32	22.8	15	36	100	**2978990000**
VP M40/18 EX CR 7J BK	M 40	26.5	18	46	20	**2978930000**
VP M50/18 EX CR 7J BK	M 50	27.5	18	55	20	**2978940000**
VP M63/18 EX CR 7J BK	M 63	27.5	18	69	20	**2978950000**
inch NPT						
VP NPT 1 EX 7J BK	1" NPT	22.8	15	36	20	**2978980000**
VP NPT 1/2 EX 7J BK	1/2" NPT	21	15	23	20	**2978960000**
VP NPT 3/4 EX 7J BK	3/4" NPT	20.8	15	28	1	**2978970000**

Note

Installation specifications and tightening torques can be found in the installation instructions.
For further information please use our online catalogue: eshop.weidmueller.com.

Compensation elements – Plastic – DAE

The DAE pressure-compensation element provides good ventilation for the enclosure and prevents moisture build-up. At the same time it maintains the high IP69k protection level. The membrane repels water and oil.



Technical data

Material / Colour	Polyamide 6 / Deep black / RAL 9005
O-Ring	NBR
Temperature range	-40 °C...105 °C
Protection class	IP66, IP68 (1 m / 60 min), IP69K
Air flow	0.8 l/min at 0.1 bar ΔP, up to 7.6 l/min at 1bar ΔP
Wasser inlet point	> 1.5 bar
UL 94 flammability rating	V-2
Note	

Ordering data

Type	Thread	L	L1	SW	Qty.	Order No.
metric						
DAE M12 PA LONG	M 12	17.4	10	17	10	**1868570000**
DAE M12 PA SHORT	M 12	13.4	6	17	10	**1868560000**
Note	Light grey version - RAL 7035 - on request.					

Compensation elements – Stainless steel – DAE

The DAE pressure-compensation element provides good ventilation for the enclosure and prevents moisture build-up. At the same time it maintains the high IP69k protection level. The membrane repels water and oil.

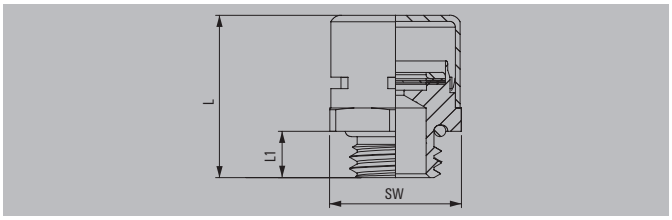

Technical data

Material	Stainless steel 1.4305 (303)
O-Ring	NBR
Temperature range	-40 °C...105 °C
Protection class	IP66, IP68 (1 m / 60 min), IP69K
Air flow	0.4 l/min at 0.1 bar ΔP, up to 5.0 l/min at 1bar ΔP
Wasser inlet point	> 1.5 bar
Note	

Ordering data

Type	Thread	L	L1	SW	Qty.	Order No.
metric						
DAE M12 SS	M 12	21.1	10	17	10	**1868550000**
Note						

Breather drains – Klippon® BDX

The BDX compensating element is used for ventilating the enclosure and preventing a buildup of moisture, particularly in Ex applications.

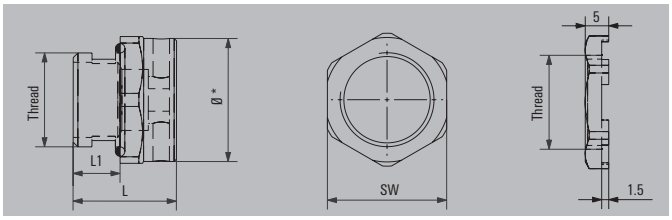

Technical data

Material	Brass / Stainless steel 1.4404 (316L)
Protection class	IP66
Impact resistance	7 J ATEX version
Filter	Bronze insert (90% copper, 10% tin)
Air flow	0.25 l / 1 h
Sealing	Silicone / O-Ring
Temperature range	-60 °C...200 °C
Colour	Natural
Note	

Ordering data

Type	Material	Thread	L / L1	SW	*Diameter	Qty.	Order No.
KLIPPON BDX M20 B	Brass	M 20	22 / 10	27	26.20	1	**2519520000**
KLIPPON BDX M20 S	Stainless steel 1.4404 (316L)	M 20	22 / 10	27	26.20	1	**2519550000**
KLIPPON BDX M20X15 S	Stainless steel 1.4404 (316L)	M 20	22 / 15	27	26.20	1	**2519570000**
KLIPPON BDX M25 S	Stainless steel 1.4404 (316L)	M 25	22 / 10	32	31.00	1	**2519590000**

Note

- The breather-drain is only to be fitted on the bottom side of the enclosure, aligned vertically with the thread upwards, and at the lowest point to permit proper drainage.
- The water flow rate has been tested by a water filled empty enclosure (no pressure or heat producing internal components). The water flow rate can slightly differ by influences from operational parameter and environmental conditions.
- Installation specifications and torques can be found in the installation instructions.
- For further information please use our online catalogue: eshop.weidmueller.com.

Adapter with NPT male threads – Brass, nickel-plated

The ADAP series adapters offer flexibility and versatility in re-using existing entries in Ex equipment, while flameproof Ex d and increased safety Ex e explosion protection and IP66/67/68 protection.

Technical data

Material	Brass, nickel-plated
Operating temperature	-50 °C...120 °C
Protection class	IP66
Marking	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da

Ordering data

External thread	1/2" NPT	3/4" NPT	1" NPT	1 1/4" NPT	1 1/2" NPT	2" NPT
Inner thread	**Order No.**	**Order No.**	**Order No.**	**Order No.**	**Order No.**	**Order No.**
M16	**1263150000**					
M20	**1263170000**	**1263180000**				
M25		**1263190000**	**1263200000**			
M32			**1263210000**	**1263220000**		
M40				**1263230000**	**1263240000**	
M50					**1263250000**	**1263270000**
1/2" NPT		**1262480000**				
3/4" NPT	**1262470000**		**1262510000**			
1" NPT		**1262490000**		**1262530000**		
1 1/4" NPT			**1262520000**		**1262550000**	
1 1/2" NPT		**1424090000**	**1424110000**	**1262540000**		**1262570000**
2" NPT					**1262560000**	

Note

Adapter with metric male threads – Brass, nickel-plated

The ADAP series adapters offer flexibility and versatility in re-using existing entries in Ex equipment, while flameproof Ex d and increased safety Ex e explosion protection and IP66/67/68 protection.

Technical data

Material	Brass, nickel-plated
Operating temperature	-50 °C...120 °C
Protection class	IP66
Marking	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da

Ordering data

External thread	M20	M16	M25	M32	M40	M50
Inner thread	**Order No.**	**Order No.**	**Order No.**	**Order No.**	**Order No.**	**Order No.**
M16	1262740000					
M20		1262730000	1262760000			
M25	1262750000			1262780000		
M32			1262770000		1262800000	
M40				1262790000		1262830000
M50					1262810000	
1/2" NPT	1262860000	1262840000	1262880000			
3/4" NPT	1262870000	1262850000	1262890000	1262910000		
1" NPT			1262900000	1262930000	1262960000	
1 1/4" NPT				1262940000	1262970000	1263000000
1 1/2" NPT				1262950000	1262980000	1263010000
2" NPT					1262990000	1263030000
Note						

Adapter with NPT male threads – Stainless steel

The ADAP(S) series adapters offer flexibility and versatility in re-using existing entries in Ex equipment, while flameproof Ex d and increased safety Ex e explosion protection and IP66/67/68 protection.

Technical data

Material	Stainless steel 1.4404
Operating temperature	-50 °C...120 °C
Protection class	IP66
Marking	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da

Ordering data

External thread	1/2" NPT	3/4" NPT	1" NPT	1 1/4" NPT	1 1/2" NPT	2" NPT
Inner thread	**Order No.**	**Order No.**	**Order No.**	**Order No.**	**Order No.**	**Order No.**
M16	**1262330000**					
M20	**1262340000**	**1262350000**				
M25		**1262370000**	**1262380000**			
M32			**1262390000**	**1262410000**		
M40				**1262420000**	**1262430000**	
M50					**1262440000**	**1262450000**
1/2" NPT		**1265650000**				
3/4" NPT	**1265640000**		**1265680000**			
1" NPT		**1265670000**		**1265700000**		
1 1/4" NPT			**1265690000**		**1265720000**	
1 1/2" NPT				**1265710000**		**1265740000**
2" NPT					**1265730000**	

Note

Adapter with metric male threads – Stainless steel

The ADAP(S) series adapters offer flexibility and versatility in re-using existing entries in Ex equipment, while flameproof Ex d and increased safety Ex e explosion protection and IP66/67/68 protection.

Technical data

Material	Stainless steel 1.4404
Operating temperature	-50 °C...120 °C
Protection class	IP66
Marking	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da

Ordering data

External thread	M20	M16	M25	M32	M40	M50
Inner thread	**Order No.**	**Order No.**	**Order No.**	**Order No.**	**Order No.**	**Order No.**
M16	1261920000					
M20		1261910000	1261940000			
M25	1261930000			1261960000		
M32			1261950000		1261980000	
M40				1261970000		1262010000
M50					1261990000	
1/2" NPT	1262040000	1262020000	1262060000			
3/4" NPT	1262050000	1262030000	1262070000	1262090000		
1" NPT			1262080000	1262100000	1262130000	
1 1/4" NPT				1262110000	1262140000	1262180000
1 1/2" NPT				1262120000	1262150000	1262190000
2" NPT					1262170000	1262200000
Note						

Cable entry system

Cable entry system	Cable Management – Cable Entry System – Cabtite	E.2
	Cable grommets	E.8
	Cable entry frames	E.9
	Divisible cable gland and accessories	E.13
	Cable Entry Plates	E.16

Flexible and safe insertion of pre-assembled cables

Cabtite – the modular system cable entry system

Managing facility cabling requirements is challenging for many manufacturing facilities, especially when the cables run through cabinet or enclosure walls. Our flexible modular cable entry system speeds up installation, facilitates service, and minimizes downtime, providing the lowest possible installed cost.

With the Cabtite cable entry system, maximal flexibility and time savings in cable management can be achieved. Assembled and unassembled cables in control cabinets, enclosures and machines are securely sealed and protected against tensile stress. The modular design consisting of a frame or cable gland, snap-in inlays and sealing elements allows quick configuration of cable entry cut-outs – without tools and with reliable sealing in IP66 according to DIN EN 60529.

Your special advantages:

- Up to 50% more space and time saved thanks to greater flexibility
- High IP protection class (IP66) as well NEMA 4x and 12
- Integrated strain relief acc. to DIN EN 62444
- Installation safety through simple handling with acoustic feedback
- Preservation of the manufacturer's guarantee for pre-assembled cables
- Fast adaptation of cable management in the event of system changes, service and maintenance cases
- Up to 30% cost savings compared to conventional cable glands

EN 45545

c UL us

Handling-Video:
Cabtite Cable Entry System
Frame Solutio
www.weidmueller.com/handling-cabtite-fs

WMC

You can find this product family in our Weidmüller Configurator:
www.weidmueller.com/wmc

Handling-Video:
Handling – Cabtite Cable Entry System separable retrofit Cable Gland Solution
www.weidmueller.com/handling-cabtite-cgs

Please use our website for further product information:
www.weidmueller.com/cabtite

Individual assembly
Whether with frames or with separable cable glands with inlay and sealing elements: the basic modular components guarantee maximal flexibility and a wide range of variants.

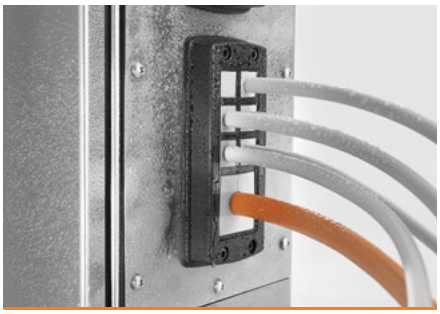

High reliability
One click informs the user about the correct installation and guarantees error-free operation. The foamed-in seals guarantee high IP and NEMA protection.

No loss of warranty
Due to the cut-in sealing elements, the cables and wires are precisely encased. Existing connectors do not have to be dismantled – and the manufacturer's warranty is maintained.

Maximum flexibility thanks to modular system

Cabtite FR – our original frame design with assembly from the inside of the frame

The Cabtite cable entry system offers lowest installed cost and maximum flexibility for management of cable entry into cabinets, enclosures and machinery. Cabtite frames reduce material costs, save time and space while providing secure sealing and strain relief for pre-assembled and non-assembled cables.

Cabtite's modular design consisting of a frame or separable cable gland, snap-in inlays and sealing elements enables rapid configuration of cable entry openings for pre-assembled cables – without the use of tools and with a reliable IP66 seal according to DIN EN 60529. Even in tight spaces Cabtite frames can be used to seal cables from the inside of the enclosure or from the outside.

Frame. Snap-in inlay. Sealing elements.
Three basic modular components guarantee maximal flexibility, variability and variety.

Handling-Video

Cabtite FrameSolution
www.weidmueller.com/handling-cabtite-fs

Handling-Video

Cabtite Cable Gland Solution
www.weidmueller.com/handling-cabtite-cgs

The basic components in the modular system

Frame

The frame, fabricated from a single piece, is quick and easy to assemble and consists of dimensionally stable, fiberglass reinforced plastic. The integral gaskets guarantee effective IP66 sealing in accordance with DIN EN 60529, even on painted and rough surfaces.

Inlays

The snap-in with a "click" inlays allow the frame openings to be configured as required for use with small or large sealing elements. An audible "click" when installing the sealing elements confirms.

Sealing elements

The conical shape of the sealing elements enables them to be pressed in easily and perfectly every time. The seal inserts combined with the frames ensure an IP66 degree of protection and provides strain relief in accordance with DIN EN 62444. As a result of its slotted design with wave cut, it is especially suitable for pre-assembled cables.

Separable cable glands

The separable cable glands are suitable for cable diameters M20 thru M63. If moves, adds or changes are required this can be accomplished quickly and easily – no tools required!

Even more flexibility thanks to new frame solution

Cabtite FRFT – FrontTight-Installation from the outside of the enclosure

NEW

Our proven modular system Cabtite is now complemented by a new, innovative frame solution:
Cabtite FrontTight. With FrontTight, pre-assembled and non-pre-assembled cables and wires can now be installed or retrofitted from the front or outside of the enclosure. Just like Cabtite FR, a secure IP66 seal and protection against tensile stresses are provided. A small wall cut-out in the enclosure is all that is needed: Now you are free to choose which frame is most suitable for your application.

With four frame sizes, FrontTight offers maximum flexibility and adaptability. The snap-in inlays and sealing elements that are part of the Cabtite system can be used for both the standard frame and the new FrontTight frame.

Your special advantages:

- Accommodates up to 40 individual cables in a single frame
- Open frame architecture maximizes flexibility and simplifies design and implementation
- Fast & Easy installation – installing components and cables from the front/outside. Easy retrofits
- Compatible seals and snap-in inlays for both frame solutions
- IP66 ingress protection rating according to DIN EN 60529, as well NEMA 4x and 12
- No tools needed for installation
- Reliable protection provided by integral gaskets and captive sealing elements

c UL us

Handling-Video:

Cabtite FrontTight
www.weidmueller.com/handling-cabtite-fronttight

Cabtite FrontTight Installation

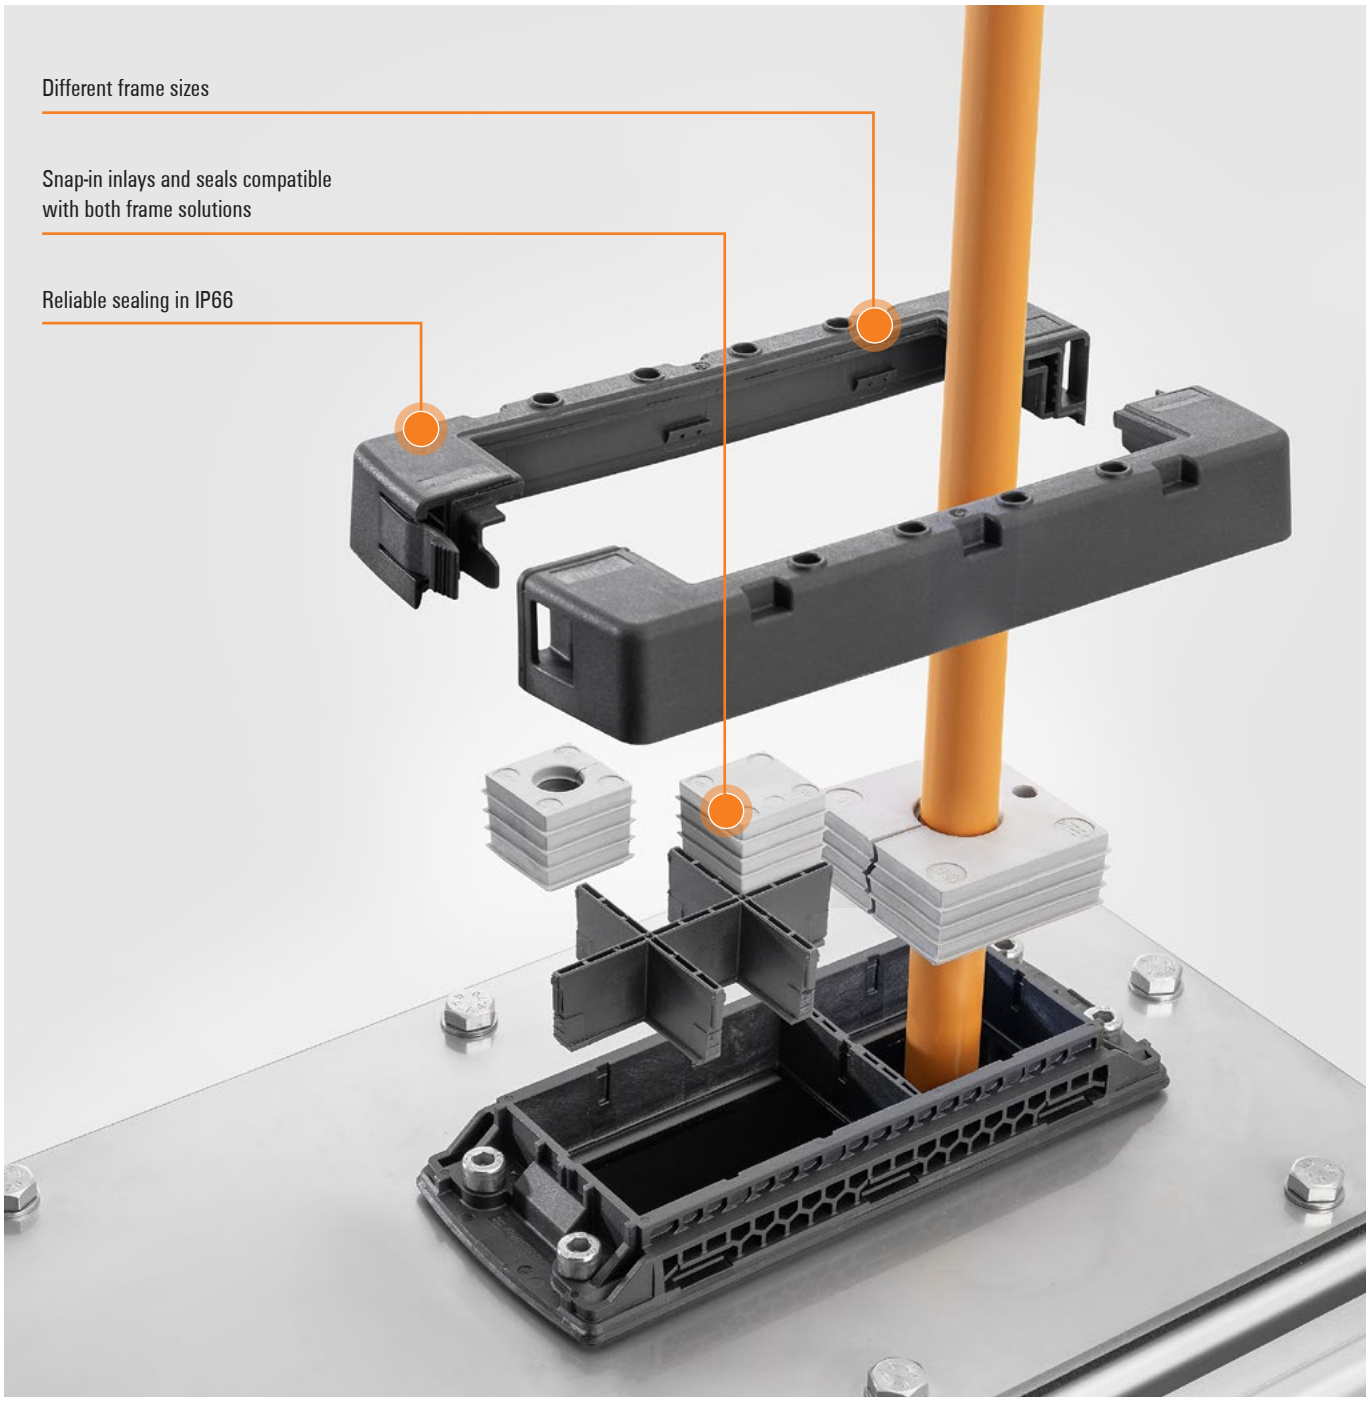

Cabtite SE - Sealing element small

Cable grommets for ASI cables

The Cabtite SE sealing elements are used in the frame or in the separable cable gland. The conical design allows easy installation, reliably seals gaps and provides strain relief in accordance with DIN EN 62444. For installation, the sealing elements are pressed into the snap-in inlays previously fitted in the frame or, in the case of the divisible cable gland, are placed between the cable gland half-shells. Various sealing elements with different cable diameters and geometries are available.

Technical data

Material	TPE
Halogen / Silicone	No / No
Operating temperature, min.	Light Grey: -40 °C; Deep black: -40 °C
Operating temperature, max.	Light Grey: 90 °C; Deep black: 120 °C
UL 94 flammability rating	Light Grey: V-0; Deep black: HB
Note	

Ordering data

Type	Clamping range	Qty.	Deep black	Light Grey
			Order No.	Order No.
Individual sealing elements				
CABTITE SE 1.5-2 SML	1.5...2 mm	10	**2584780000**	**2583360000**
CABTITE SE 2-3 SML	2...3 mm	10	**2584760000**	**2583380000**
CABTITE SE 3-4 SML	3...4 mm	10	**2584730000**	**2583400000**
CABTITE SE 4-5 SML	4...5 mm	10	**2584680000**	**2583440000**
CABTITE SE 5-6 SML	5...6 mm	10	**2584710000**	**2583450000**
CABTITE SE 6-7 SML	6...7 mm	10	**2584690000**	**2583460000**
CABTITE SE 7-8 SML	7...8 mm	10	**2584670000**	**2584660000**
CABTITE SE 8-9 SML	8...9 mm	10	**2584330000**	**2584650000**
CABTITE SE 9-10 SML	9...10 mm	10	**2584080000**	**2584630000**
CABTITE SE 10-11 SML	10...11 mm	10	**2584060000**	**2584610000**
CABTITE SE 11-12 SML	11...12 mm	10	**2584040000**	**2584600000**
CABTITE SE 12-13 SML	12...13 mm	10	**2584020000**	**2584590000**
CABTITE SE 13-14 SML	13...14 mm	10	**2584000000**	**2584570000**
CABTITE SE 14-15 SML	14...15 mm	10	**2583980000**	**2584560000**
CABTITE SE 15-16 SML	15...16 mm	10	**2583960000**	**2584550000**
Special geometry ASI				
CABTITE SE 1/ASI SML		10	**2583530000**	**2584810000**
CABTITE SE 2/ASI SML		10	**2583520000**	**2584800000**
Multiple sealing element				
CABTITE SE 2/4-5 SML	4...5 mm	10	**2583620000**	**2584900000**
CABTITE SE 2/5-6 SML	5...6 mm	10	**2583610000**	**2584890000**
CABTITE SE 2/7 SML	7...8 mm	10	**2583550000**	**2584830000**
CABTITE SE 2/8 SML	8...9 mm	10	**2583540000**	**2584820000**
CABTITE SE 3/5-6 SML	5...6 mm	10	**2652280000**	**2652290000**
CABTITE SE 4/2-3 SML	2...3 mm	10	**2583590000**	**2584870000**
CABTITE SE 4/3-4 SML	3...4 mm	10	**2583580000**	**2584860000**
CABTITE SE 4/4-5 SML	4...5 mm	10	**2583560000**	**2584840000**
Cone sealing element				
CABTITE CSE 2-11 SML	2...11 mm	10	**2583510000**	
Blind plugs				
CABTITE BSE SML		10	**2584790000**	**2583350000**
Note				

Cabtite SE - sealing elements large

Blanking plugs

Cone sealing element

The Cabtite SE sealing elements in large design are identical in construction to those in small design.However, they can accommodate cables with a larger outer diameter.

Technical data

Material	TPE
Halogen / Silicone	No / No
Operating temperature, min.	Deep black: -40 °C; Light Grey: -40 °C
Operating temperature, max.	Deep black: 120 °C; Light Grey: 90 °C
UL 94 flammability rating	Deep black: HB; Light Grey: V-0
Note	

Ordering data

Type	Clamping range	Qty.	Deep black	Light Grey
			Order No.	Order No.
Individual sealing elements				
CABTITE SE 14-15 LRG	14...15 mm	10	**2583880000**	**2584510000**
CABTITE SE 15-16 LRG	15...16 mm	10	**2583860000**	**2584500000**
CABTITE SE 16-17 LRG	16...17 mm	10	**2583850000**	**2584490000**
CABTITE SE 17-18 LRG	17...18 mm	10	**2583840000**	**2584480000**
CABTITE SE 18-19 LRG	18...19 mm	10	**2583830000**	**2584470000**
CABTITE SE 19-20 LRG	19...20 mm	10	**2583810000**	**2584460000**
CABTITE SE 20-21 LRG	20...21 mm	10	**2583790000**	**2584450000**
CABTITE SE 21-22 LRG	21...22 mm	10	**2583770000**	**2584440000**
CABTITE SE 22-23 LRG	22...23 mm	10	**2583750000**	**2584430000**
CABTITE SE 23-24 LRG	23...24 mm	10	**2583730000**	**2584420000**
CABTITE SE 24-25 LRG	24...25 mm	10	**2583710000**	**2584410000**
CABTITE SE 25-26 LRG	25...26 mm	10	**2583700000**	**2584400000**
CABTITE SE 26-27 LRG	26...27 mm	10	**2583690000**	**2584390000**
CABTITE SE 27-28 LRG	27...28 mm	10	**2583680000**	**2584370000**
CABTITE SE 28-29 LRG	28...29 mm	10	**2583670000**	**2584350000**
CABTITE SE 29-30 LRG	29...30 mm	10	**2583660000**	**2584380000**
CABTITE SE 30-31 LRG	30...31 mm	10	**2583650000**	**2584360000**
CABTITE SE 31-32 LRG	31...32 mm	10	**2583640000**	**2584340000**
CABTITE SE 32-33 LRG	32...33 mm	10	**2583630000**	**2584920000**
CABTITE SE 33-34 LRG	33...34 mm	10	**2595510000**	**2584910000**
CABTITE SE 34-35 LRG	34...35 mm	10	**2595520000**	**2595530000**
Cone sealing element				
CABTITE CSE 7-24 LRG	7...24 mm	10	**2583500000**	
Blind plugs				
CABTITE BSE LRG		10	**2583900000**	**2584520000**
Note				

Cabtite FR - CABTITE FR 4-1 BK SET

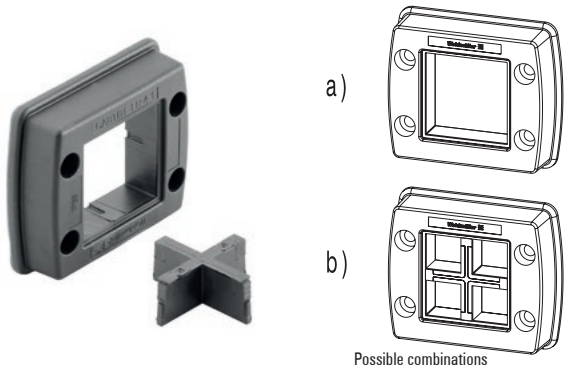

Possible combinations

The one-piece frame, consisting of a dimensionally stable, fibreglass-reinforced plastic, is quick and easy to assemble. The foamed, captive seal guarantees a high degree of impermeability to IP66, even with painted or rough surfaces. The frame sets contain the appropriate Rastinlays to realize the individual configuration (see above a or b) of small and large sealing elements. The sealing elements are not included in the frame set and must be selected to match the cable diameter.

Technical data

Material	Polyamide, glass fibre-reinforced
Colour	Deep black
Operating temperature	-40...120 °C
Protection class / Protection class (UL)	IP66 / Type 12, Type 4X
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
Set		
CABTITE FR 4-1 BK SET	1	**2583780000**
Single frame (without snap-in inlay)		
CABTITE FR 4-1 BK	1	**2583490000**
Note The individual frames do not contain any Rastinlays or sealing elements.		

Accessories

Product type	Type	Qty.	Order No.
Locking frame (inside)	CABTITE FRL 4-1 BK	10	**2584260000**
Operating tool	CABTITE TOOL ATSE PA	1	**2637360000**
Mounting screw set	CABTITE SC M5X25 SET	1	**2635120000**
Note			

Dimensioned drawing

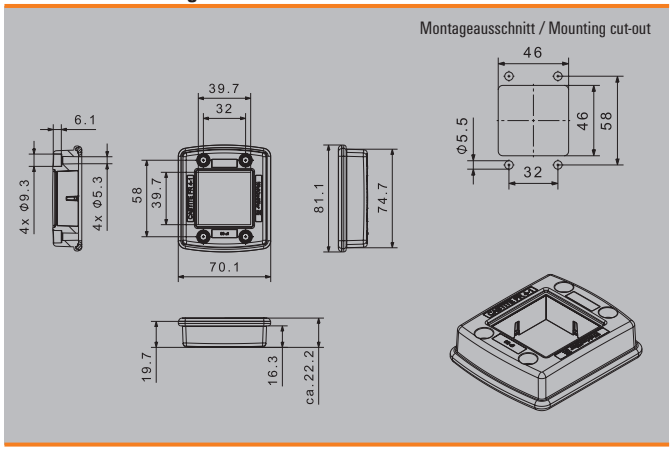

Cabtite FR - CABTITE FR 10/6 BK SET

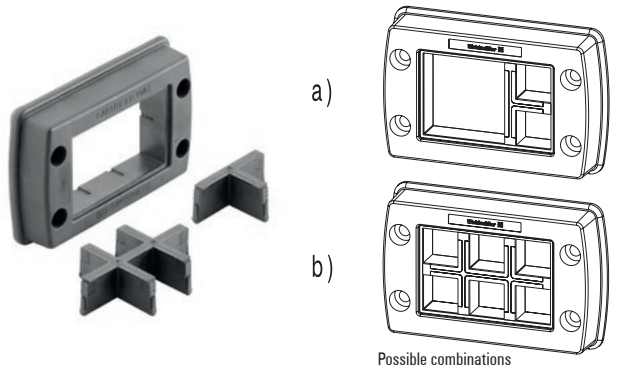

Possible combinations

The one-piece frame, consisting of a dimensionally stable, fibreglass-reinforced plastic, is quick and easy to assemble. The foamed, captive seal guarantees a high degree of impermeability to IP66, even with painted or rough surfaces. The frame sets contain the appropriate Rastinlays to realize the individual configuration (see above a or b) of small and large sealing elements. The sealing elements are not included in the frame set and must be selected to match the cable diameter.

Technical data

Material	Polyamide, glass fibre-reinforced
Colour	Deep black
Operating temperature	-40...120 °C
Protection class / Protection class (UL)	IP66 / Type 12, Type 4X
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
Set		
CABTITE FR 10/6 BK SET	1	**2583760000**
Single frame (without snap-in inlay)		
CABTITE FR 10/6 BK	1	**2583480000**
Note The individual frames do not contain any Rastinlays or sealing elements.		

Accessories

Product type	Type	Qty.	Order No.
Locking frame (inside)	CABTITE FRL 10/6 BK	10	**2584240000**
Operating tool	CABTITE TOOL ATSE PA	1	**2637360000**
Mounting screw set	CABTITE SC M5X25 SET	1	**2635120000**
Note			

Dimensioned drawing

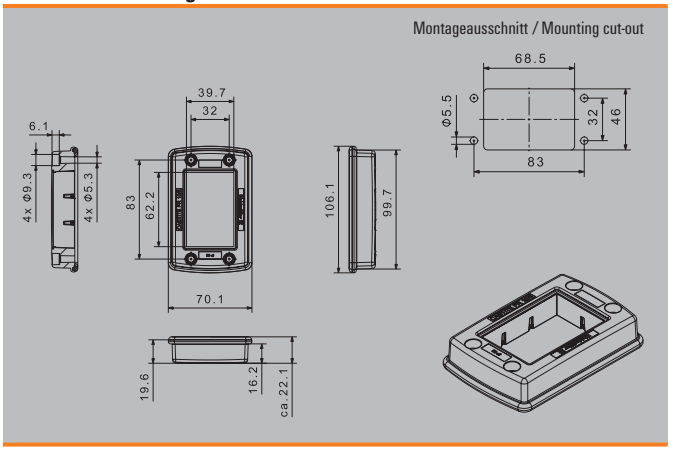

Cabtite FR - CABTITE FR 16/8 BK SET

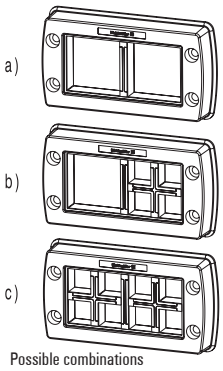

Possible combinations

The one-piece frame, consisting of a dimensionally stable, fibreglass-reinforced plastic, is quick and easy to assemble. The foamed, captive seal guarantees a high degree of impermeability to IP66, even with painted or rough surfaces. The frame sets contain the appropriate Rastinlays to realize the individual configuration (see above a, b or c) of small and large sealing elements. The sealing elements are not included in the frame set and must be selected to match the cable diameters.

Technical data

Material	Polyamide, glass fibre-reinforced
Colour	Deep black
Operating temperature	-40...120 °C
Protection class / Protection class (UL)	IP66 / Type 12, Type 4X
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
Set		
CABTITE FR 16/8 BK SET	1	**2583740000**
Single frame (without snap-in inlay)		
CABTITE FR 16/8 BK	1	**2583470000**
Note The individual frames do not contain any Rastinlays or sealing elements.		

Accessories

Product type	Type	Qty.	Order No.
Locking frame (inside)	CABTITE FRL 16/8 BK	10	**2584220000**
Operating tool	CABTITE TOOL ATSE PA	1	**2637360000**
Mounting screw set	CABTITE SC M5X25 SET	1	**2635120000**
Note			

Dimensioned drawing

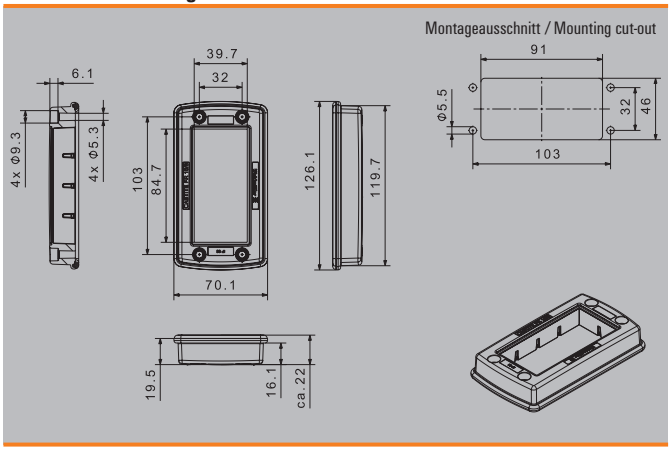

Cabtite FR - CABTITE FR 24/10 BK SET

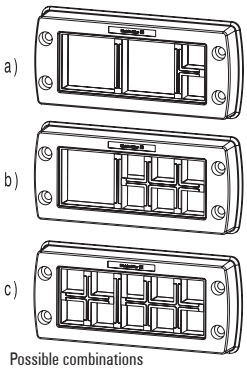

Possible combinations

The one-piece frame, consisting of a dimensionally stable, fibreglass-reinforced plastic, is quick and easy to assemble. The foamed, captive seal guarantees a high degree of impermeability to IP66, even with painted or rough surfaces. The frame sets contain the appropriate Rastinlays to realize the individual configuration (see above a, b or c) of small and large sealing elements. The sealing elements are not included in the frame set and must be selected to match the cable diameters.

Technical data

Material	Polyamide, glass fibre-reinforced
Colour	Deep black
Operating temperature	-40...120 °C
Protection class / Protection class (UL)	IP66 / Type 12, Type 4X
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
Set		
CABTITE FR 24/10 BK SET	1	**2583720000**
Single frame (without snap-in inlay)		
CABTITE FR 24/10 BK	1	**2583800000**
Note The individual frames do not contain any Rastinlays or sealing elements.		

Accessories

Product type	Type	Qty.	Order No.
Locking frame (inside)	CABTITE FRL 24/10 BK	10	**2584210000**
Operating tool	CABTITE TOOL ATSE PA	1	**2637360000**
Mounting screw set	CABTITE SC M5X25 SET	1	**2635120000**
Note			

Dimensioned drawing

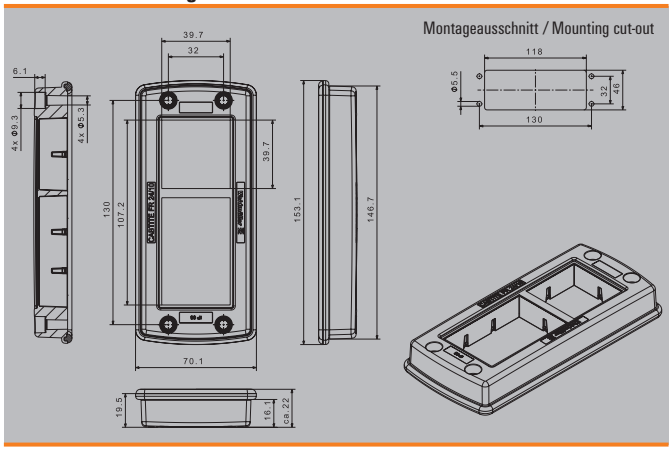

Cabtite FT - CABTITE FRFT 4-1 SET

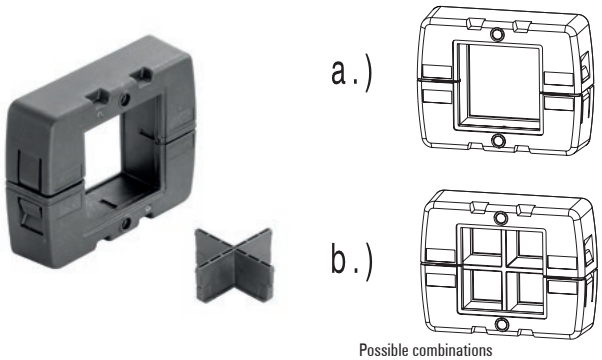

Possible combinations

The frame, consisting of a dimensionally stable, fibreglass-reinforced plastic, is quick and easy to assemble, the sealing elements are mounted from the outside. The captive seal guarantees a high degree of impermeability to IP66, even with painted or rough surfaces. The frame sets contain the appropriate Rastinlays to realize the individual configuration (see above a or b) of small and large sealing elements. The sealing elements are not included in the frame set and must be selected to match the cable diameter.

Technical data

Material	Polyamide, glass fibre-reinforced
Colour	Deep black
Operating temperature	-40...120 °C
Protection class / Protection class (UL)	IP66 / Type 12, Type 4X
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
Set		
CABTITE FRFT 4-1 SET	1	**2891470000**
Single frame (without snap-in inlay)		
CABTITE FRFT 4-1	1	**2891450000**
Note The individual frames do not contain any Rastinlays or sealing elements.		

Accessories

Product type	Type	Qty.	Order No.
Locking frame (outside)	CABTITE OFRL BK	20	**2907560000**
Operating tool	CABTITE TOOL ATSE PA	1	**2637360000**
Mounting screw set	CABTITE SC M5X25 SET	1	**2635120000**
Note			

Dimensioned drawing

Montageausschnitt / Mounting cut-out

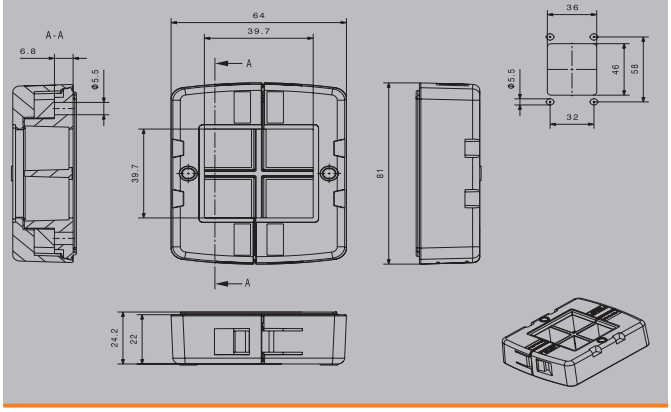

Cabtite FT - CABTITE FRFT 10/6 SET

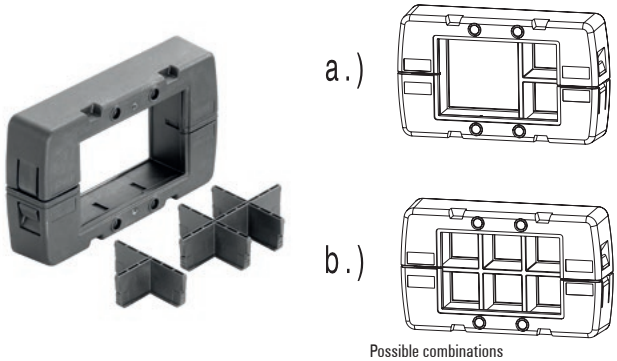

Possible combinations

The frame, consisting of a dimensionally stable, fibreglass-reinforced plastic, is quick and easy to assemble, the sealing elements are mounted from the outside. The captive seal guarantees a high degree of impermeability to IP66, even with painted or rough surfaces. The frame sets contain the appropriate Rastinlays to realize the individual configuration (see above a or b) of small and large sealing elements. The sealing elements are not included in the frame set and must be selected to match the cable diameter.

Technical data

Material	Polyamide, glass fibre-reinforced
Colour	Deep black
Operating temperature	-40...120 °C
Protection class / Protection class (UL)	IP66 / Type 12, Type 4X
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
Set		
CABTITE FRFT 10/6 SET	1	**2891500000**
Single frame (without snap-in inlay)		
CABTITE FRFT 10/6	1	**2891480000**
Note The individual frames do not contain any Rastinlays or sealing elements.		

Accessories

Product type	Type	Qty.	Order No.
Locking frame (outside)	CABTITE OFRL BK	20	**2907560000**
Operating tool	CABTITE TOOL ATSE PA	1	**2637360000**
Mounting screw set	CABTITE SC M5X25 SET	1	**2635120000**
Note			

Dimensioned drawing

Montageausschnitt / Mounting cut-out

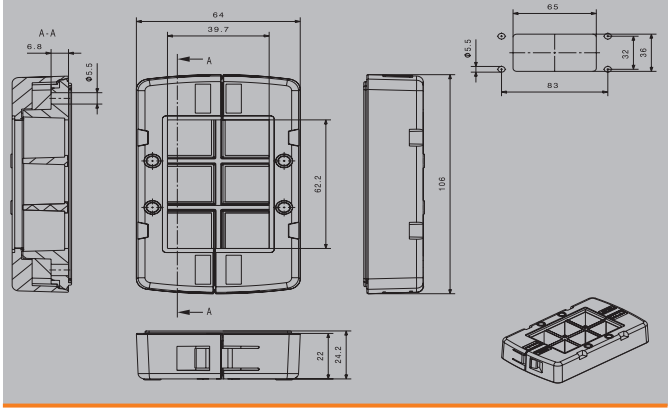

Cabtite FT - CABTITE FRFT 16/8 SET



Possible combinations

The frame, consisting of a dimensionally stable, fibreglass-reinforced plastic, is quick and easy to assemble, the sealing elements are mounted from the outside. The captive seal guarantees a high degree of impermeability to IP66, even with painted or rough surfaces. The frame sets contain the appropriate Rastinlays to realize the individual configuration (see above a or b) of small and large sealing elements. The sealing elements are not included in the frame set and must be selected to match the cable diameter.

Technical data

Material	Polyamide, glass fibre-reinforced
Colour	Deep black
Operating temperature	-40...120 °C
Protection class / Protection class (UL)	IP66 / Type 12, Type 4X
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
Set		
CABTITE FRFT 16/8 SET	1	**2891530000**
Single frame (without snap-in inlay)		
CABTITE FRFT 16/8	1	**2891510000**
Note The individual frames do not contain any Rastinlays or sealing elements.		

Accessories

Product type	Type	Qty.	Order No.
Locking frame (outside)	CABTITE OFRL BK	20	**2907560000**
Operating tool	CABTITE TOOL ATSE PA	1	**2637360000**
Mounting screw set	CABTITE SC M5X25 SET	1	**2635120000**
Note			

Dimensioned drawing

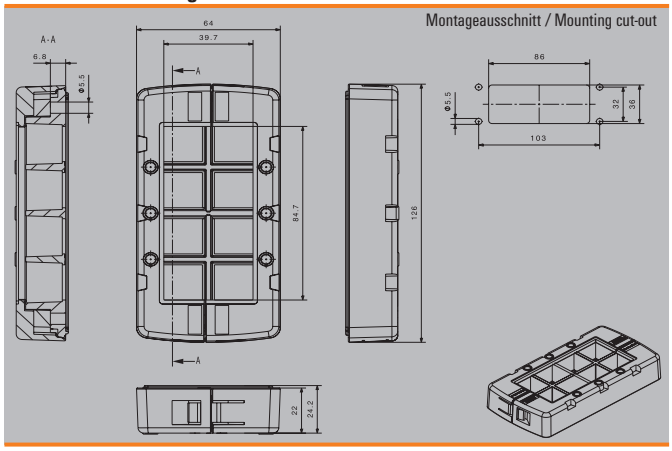

Cabtite FT - CABTITE FRFT 24/10 SET



Possible combinations

The frame, consisting of a dimensionally stable, fibreglass-reinforced plastic, is quick and easy to assemble, the sealing elements are mounted from the outside. The captive seal guarantees a high degree of impermeability to IP66, even with painted or rough surfaces. The frame sets contain the appropriate Rastinlays to realize the individual configuration (see above a or b) of small and large sealing elements. The sealing elements are not included in the frame set and must be selected to match the cable diameter.

Technical data

Material	Polyamide, glass fibre-reinforced
Colour	Deep black
Operating temperature	-40...120 °C
Protection class / Protection class (UL)	IP66 / Type 12, Type 4X
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
Set		
CABTITE FRFT 24/10 SET	1	**2891560000**
Single frame (without snap-in inlay)		
CABTITE FRFT 24/10	1	**2891540000**
Note The individual frames do not contain any Rastinlays or sealing elements.		

Accessories

Product type	Type	Qty.	Order No.
Locking frame (outside)	CABTITE OFRL BK	20	**2907560000**
Operating tool	CABTITE TOOL ATSE PA	1	**2637360000**
Mounting screw set	CABTITE SC M5X25 SET	1	**2635120000**
Note			

Dimensioned drawing

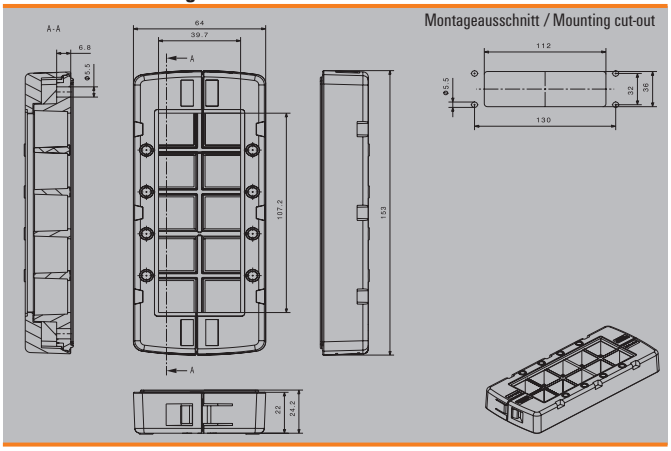

Cabtite CGS - separable cable gland

Spare counter nut

For metric through holes from M20 to M63, the Cabtite cable entry system offers separable cable glands for cables with and without plugs. In case of maintenance or changes in the system, pre-assembled cables with diameters from 2 to 35 mm can be quickly and safely inserted into switch cabinets or housings. After inserting the sealing elements (Cabtite SE), the two halves of the cable gland are simply snapped together. A likewise separable lock nut on the inside of the cabinet ensures a secure and firm hold.

Technical data

Material	Polyamide, glass fibre-reinforced
Colour	Deep black
Operating temperature	-40...120 °C
Protection class	IP66
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
Divisible cable gland*		
CABTITE CGS M20 BK	10	**2584200000**
CABTITE CGS M25 BK	10	**2584180000**
CABTITE CGS M32 BK	10	**2584160000**
CABTITE CGS M40 BK	5	**2584150000**
CABTITE CGS M50 BK	5	**2584130000**
CABTITE CGS M63 BK	5	**2584120000**
Articulated locknut		
CABTITE LNS M20 BK	10	**2584110000**
CABTITE LNS M25 BK	10	**2584090000**
CABTITE LNS M32 BK	10	**2584070000**
CABTITE LNS M40 BK	5	**2584050000**
CABTITE LNS M50 BK	5	**2584030000**
CABTITE LNS M63 BK	5	**2584010000**
Rastinly for M40-M63**		
CABTITE GI X BK	5	**2584290000**
Note	*The cable glands are supplied with a locknut. **The snap-in insert is required to install 4 small sealing elements in the cable gland.	

Dimensioned drawing

Example:

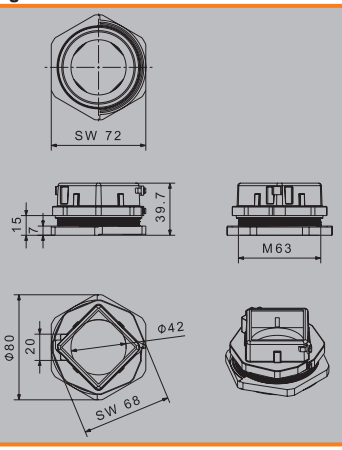

Cabtite GI - Rastinlay

The insertable snap-in inlay allows the frame openings/cable glands to be configured as required for the small or large sealing elements used. Thus the Cabtite cable entry system can be variably configured for different requirements (cables, lines, hoses, pneumatic and hydraulic lines).

Technical data

Material	Polyamide, glass fibre-reinforced
Colour	Deep black
Operating temperature	-40...120 °C
Protection class	IP66
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
CABTITE GI I BK	5	**2584320000**
CABTITE GI T BK	5	**2584300000**
CABTITE GI H BK	5	**2584270000**
Rastinly for M40-M63**		
CABTITE GI X BK	5	**2584290000**
Note	**The locking inlay is required to install 4 small sealing elements in the cable gland.	

Dimensioned drawing

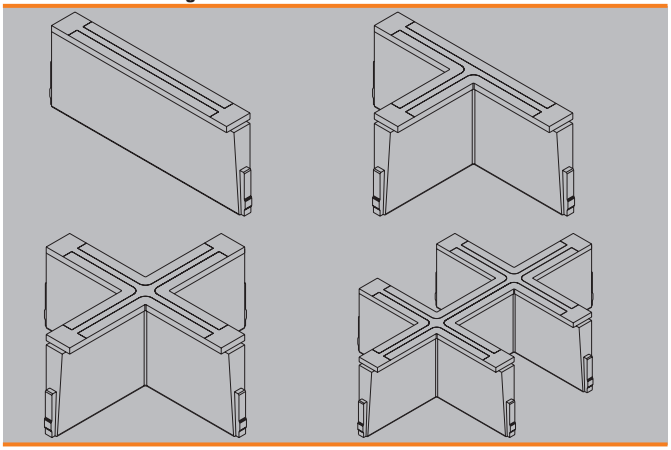

Divisible cable gland and accessories

CABTITE CR - Cable support strips (EMC)

In combination with a large number of different shield connection clamps (KLBÜ), the shield connection rails enable practical, uncomplicated and fast shielding of cables.

Technical data

Material	Steel, galvanized
Colour	silver

Note

Ordering data

Type	Qty.	Order No.
CABTITE CR 4/1 EMV	10	2583950000
CABTITE CR 10/6 EMV	10	2583930000
CABTITE CR 16/8 EMV	10	2583910000
CABTITE CR 24/10 EMV	10	2583890000

Note

Dimensioned drawing

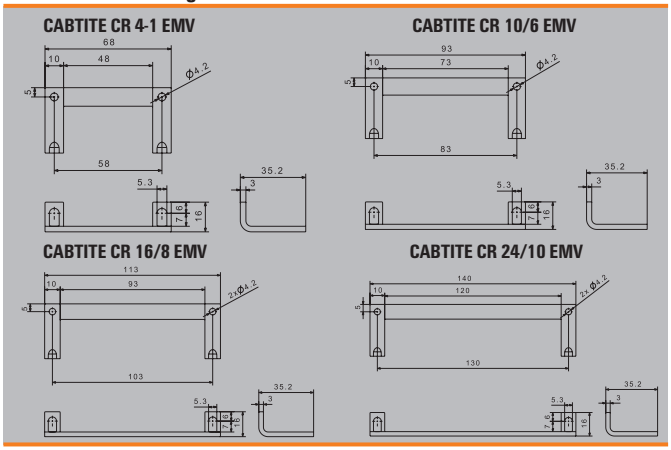

CABTITE BP - Blanking plug

The blind plugs are used for the safe closing of unneeded cable passages in the sealing elements.

Technical data

Material	Polyamide
Colour	white
Operating temperature	-40...120 °C

Note

Ordering data

Type	Qty.	Order No.
CABTITE BP 2MM PA	25	2652300000
CABTITE BP 3MM PA	25	2652310000
CABTITE BP 4MM PA	25	2652320000
CABTITE BP 5MM PA	25	2652330000
CABTITE BP 6MM PA	25	2652340000
CABTITE BP 7MM PA	25	2652350000
CABTITE BP 8MM PA	25	2652360000
CABTITE BP 9MM PA	25	2652370000
CABTITE BP 10MM PA	25	2652380000
CABTITE BP 12MM PA	25	2652400000
CABTITE BP 13MM PA	25	2652410000
CABTITE BP 14MM PA	25	2652420000
CABTITE BP 17MM PA	25	2652430000

Note

Cabtite cable entry plates

Space-saving insertion of plugless cables into control cabinets, enclosures and machines

If multiple hoses or cables are to be inserted into control cabinets or enclosures, cable entry plates are the best choice. They seal, minimise tensile stress, save space, and are an economical alternative to conventional cable glands.

Cabtite cable entry plates only require a small rectangular wall cut-out in the enclosure. Plugless cables, hoses, or optical fibres can be inserted effortlessly. Installation time is reduced by up to 40% compared to cable glands. Cabtite cable entry plates comply with degree of protection IP54 or IP66 (snap or screw variant) and are tested according to DIN EN 60529. They are made of UL94 V-0 certified TPE material and are suitable for temperature ranges between -40°C and +90°C.

Your special advantages:

- For external installation on control cabinet walls
- Suitable for different wall thicknesses
- Fast and simple solution for inserting plugless cables, hoses and conductors
- High packing density with low space requirement
- Available in high protection classes IP54 and IP66, as well NEMA 1, 4x and 12
- Up to 40% more time saved compared to cable glands

Handling-Video

Cabtite Cable Entry Platest, Screw-version
www.weidmueller.com/handling-cabtite-ep-fs

Handling-Video

Cabtite Cable Entry Plates, Snap-version
www.weidmueller.com/handling-cabtite-ep-snap

IP54 Snap version

Insert cables and wires without plugs into control cabinets, enclosures or machines easily and in the smallest possible space. The tool-free IP54 snap-in version of the cable entry plates is tested according to DIN EN 60529 and made of UL94 V-0 certified TPE material.

Technical data

Material	TPE
Colour	grey
Operating temperature	-40...90 °C
Protection class / Protection class (UL)	IP54 / Type 1, Type 12
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
Type A - for wall thicknesses 1.5 - 2.5 mm		
CABTITE EP A 24/12 GY	10	**2743540000**
CABTITE EP A 24/14 GY	10	**2743550000**
CABTITE EP A 24/17 GY	10	**2743560000**
CABTITE EP A 24/18 GY	10	**2743570000**
CABTITE EP A 24/19 GY	10	**2743580000**
CABTITE EP A 24/26 GY	10	**2743590000**
CABTITE EP A 24/42 GY	10	**2743600000**
CABTITE EP A 24/48 GY	10	**2743610000**
CABTITE EP A 24/50 GY	10	**2743620000**
Type B - for wall thicknesses 2.5 - 4 mm		
CABTITE EP B 24/12 GY	10	**2743630000**
CABTITE EP B 24/14 GY	10	**2743640000**
CABTITE EP B 24/17 GY	10	**2743650000**
CABTITE EP B 24/18 GY	10	**2743660000**
CABTITE EP B 24/19 GY	10	**2743670000**
CABTITE EP B 24/26 GY	10	**2743680000**
CABTITE EP B 24/42 GY	10	**2743690000**
CABTITE EP B 24/48 GY	10	**2743700000**
CABTITE EP B 24/50 GY	10	**2743710000**
Note		

Mounting Cut-out



CABTITE EP ... 24/12 GY



12x 1.0 - 15.0 mm

CABTITE EP ... 24/14 GY



14x 1.00 - 12.1 mm

CABTITE EP ... 24/17 GY



5x 1.0 - 10.5 mm
12x 1.0 - 12.6 mm

CABTITE EP ... 24/18 GY



4x 1.0 - 6.5 mm
5x 1.0 - 10.5 mm
5x 1.0 - 12.5 mm
4x 1.0 - 16.1 mm

CABTITE EP ... 24/19 GY



12x 1.0 - 6.5 mm
7x 1.0 - 12.1 mm

CABTITE EP ... 24/26 GY



16x 1.0 - 6.5 mm
4x 1.0 - 12.1 mm
4x 1.0 - 16.1 mm
2x ASI

CABTITE EP ... 24/42 GY



12x 1.0 - 7.2 mm
17x 1.0 - 6.4 mm
12x 1.0 - 5.0 mm
1x 1.0 - 4.7 mm

CABTITE EP ... 24/48 GY



48x 1.0 - 6.5 mm

CABTITE EP ... 24/50 GY

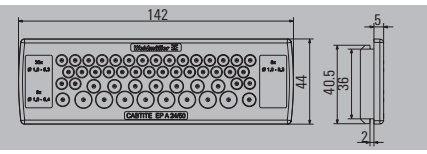

33x 1.0 - 5.3 mm
9x 1.0 - 6.4 mm
8x 1.0 - 8.3 mm

IP66 Screw version

Insert cables and wires without plugs into control cabinets, enclosures or machines easily and in the smallest possible space. The IP66 screw version of the cable entry plates is tested according to DIN EN 60529 and made of UL94 V-0 certified TPE material with a hard plastic core.

Technical data

Material	TPE
Colour	grey
Operating temperature	-40...90 °C
Protection class / Protection class (UL)	IP66 / Type 1, Type 12, Type 4X
UL 94 flammability rating	V-0
Note	

Ordering data

Type	Qty.	Order No.
CABTITE EP 24/13 GY	10	**2779310000**
CABTITE EP 24/14 GY	10	**2779320000**
CABTITE EP 24/16 GY	10	**2779330000**
CABTITE EP 24/16-1 GY	10	**2779340000**
CABTITE EP 24/17 GY	10	**2779350000**
CABTITE EP 24/20 GY	10	**2779360000**
CABTITE EP 24/21 GY	10	**2779370000**
CABTITE EP 24/32 GY	10	**2779380000**
Note		

Mounting Cut-out



CABTITE EP 24/13

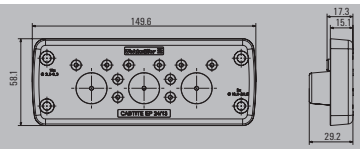

10x 3.2 - 6.3 mm
3x 16.0 - 20.5 mm

CABTITE EP 24/14



5x 3.2 - 6.3 mm
2x 4.0 - 7.5 mm
3x 5.5 - 10.5 mm
1x 8.0 - 12.5 mm
3x 12.0 - 16.2 mm

CABTITE EP 24/16



8x 3.2 - 5.5 mm
6x 5.0 - 6.5 mm
2x 9.5 - 14.5 mm

CABTITE EP 24/16-1



2x 3.2 - 6.3 mm
9x 4.0 - 7.5 mm
1x 5.5 - 10.5 mm
1x 8.0 - 12.5 mm
3x 12.0 - 16.2 mm

CABTITE EP 24/17



4x 3.2 - 6.3 mm
2x 4.0 - 7.5 mm
1x 5.5 - 10.5 mm
10x 8.0 - 12.5 mm

CABTITE EP 24/20



12x 3.2 - 6.3 mm
8x 5.5 - 10 5 mm

CABTITE EP 24/21



1x 3.2 - 6.3 mm
14x 4.0 - 7.5 mm
4x 5.5 - 10.5 mm
2x 8.0 - 12.5 mm

CABTITE EP 24/32



32x 3.2 - 6.3 mm

Tools

Tools	Overview	F.2

Tools

At Weidmüller, we have been developing and manufacturing quality tools to meet the most stringent requirements for over 30 years. When we develop new solutions, we always keep our goal in mind: to make your job easier, optimise processes and help protect the long-term productivity of your business.

The best conditions for this can be created by using perfectly coordinated products and tools from a single source. Our range includes professional manual tools for cutting, stripping, crimping, testing and screwing. The assortment is supplemented by tool sets that sensibly and efficiently combine tools and matching accessories. Our machines simplify continually recurring tasks and save valuable time.

Your special advantages:

- Increased safety thanks to the tool certification service
- Flexibility in form and function
- High level of efficiency thanks to sophisticated ergonomics and multiple actions per work process
- Profitable interplay between products and tools from a single source

Stripping tools
Thanks to the exact adaptation to the insulation and wire cross-section, our professional stripping tools guarantee defect-free processing with consistently reliable stripping results. With its wide range of stripping tools, Weidmüller satisfies all the criteria for professional cable processing.

Cable gland tools
The Weidmüller cable gland tools are suitable for an extremely wide range of cable glands. They enable you to tighten or loosen several rows of connections without deforming the cable glands.

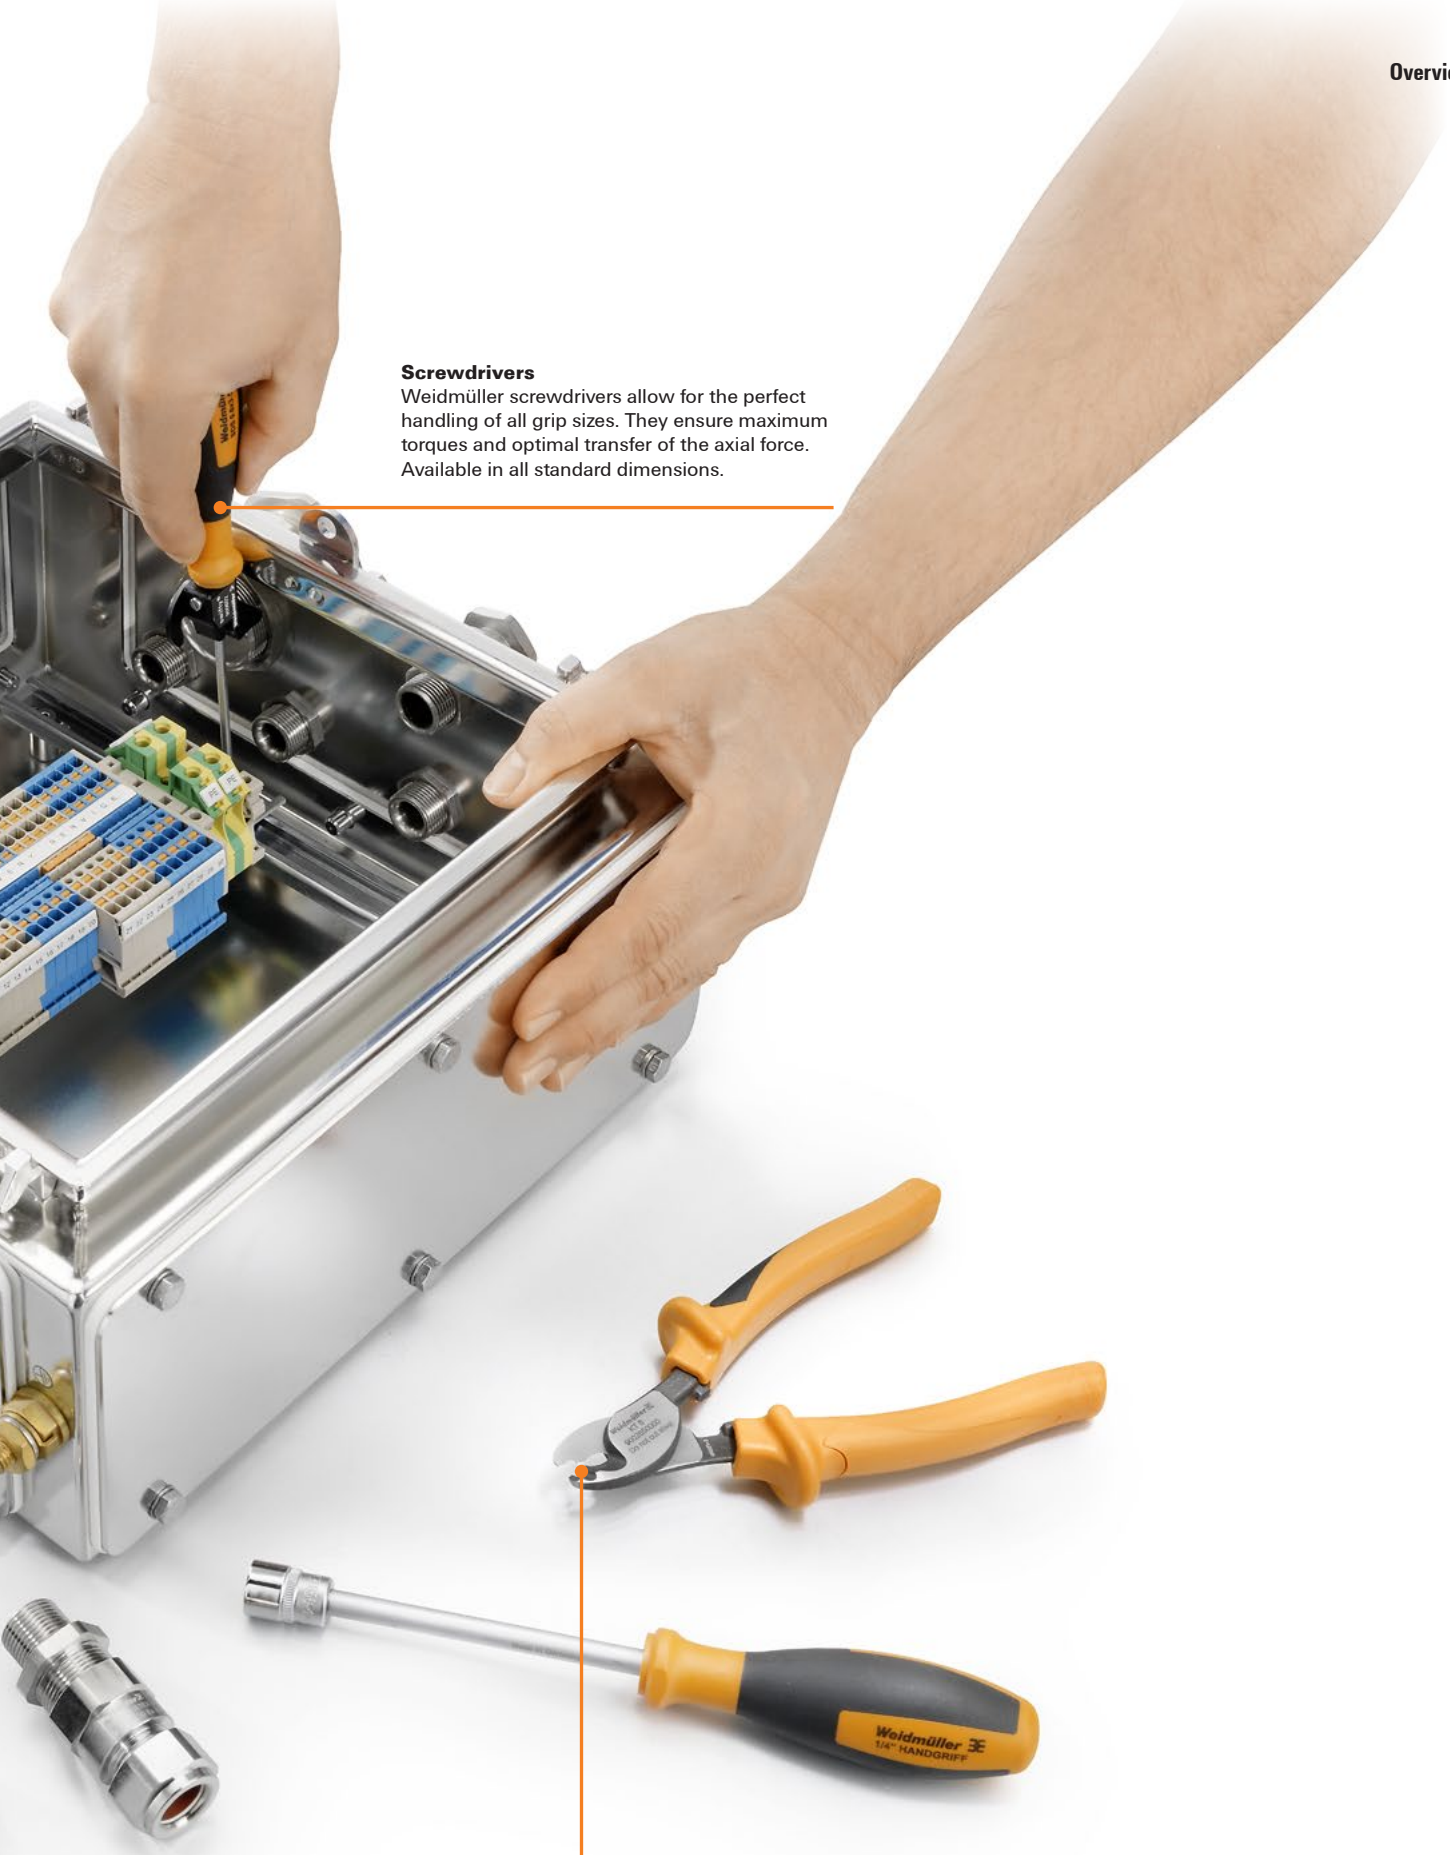

Screwdrivers
Weidmüller screwdrivers allow for the perfect handling of all grip sizes. They ensure maximum torques and optimal transfer of the axial force. Available in all standard dimensions.

Cutting tools
Weidmüller is a specialist in the cutting of copper and aluminium cables. The range of products extends from cutting tools with direct force application for small cross-sections to cutting tools for large diameters.

Service and support

Service and support	Service connects – worldwide	V.2
	Engineering services and customised products	V.3
	easyConnect – Your Industrial Service Platform	V.4
	Support Center	V.6
	Additional support services	V.7
	Weidmüller Configurator: intuitive, uncomplicated & fast digital engineering	V.8
	Your digital ordering options at Weidmüller	V.10

Our expertise for your requirements
Service connects – worldwide

Automation technology functions are becoming more complex in a globally-oriented world facing ambitious targets in terms of energy efficiency and smart production. We are your equal partners for the best connections in Industrial Connectivity.

Our personal support answers all questions reliably and expertly. During planning, installation or operation our service and support offer is your best companion.

In short: Weidmüller's global service combines our expertise with your requirements.

Your way to our service
www.weidmueller.com/service

Engineering services and customised products

Automation engineering and connectivity consulting belongs to our services as well as assembly of engineered products. We also support the process from the idea to the product with our Weidmüller Configurator and the Configure-to-Order process.

Consulting and engineering
The challenge for you is reducing costs and increasing efficiency. This requires intelligent, individual solutions. Whether it is modified products, pre-fitted mounting rails or complete small cabinets – our application centres provide a highly qualified custom-made engineering and production service.

Connectivity Consulting
Increase your competitiveness - supported by our experts
Our drive is to optimise your competitiveness. That's why our team of experts supports you in significantly increasing your efficiency in electrical machine design and control cabinet construction. With proven products and services from the Weidmüller portfolio – and with the experience gained from over 300 projects worldwide.

Assembled terminal rails - Flexibly designed to suit your requirements
Your processes in panel building have to be fast, flexible and productive. This is the only way you can cut your costs and increase efficiency. Depending on the application in question, you will have different requirements with respect to the engineering service, delivery speed and flexibility to be provided.

Modified and assembled enclosures - Competitive advantages included
To compete internationally, your plants need to satisfy high standards of safety, quality and performance. The smart combination of consultation, application expertise and industry know-how is our key to finding a custom-fit solution for your application. Reduce costs and increase efficiency.

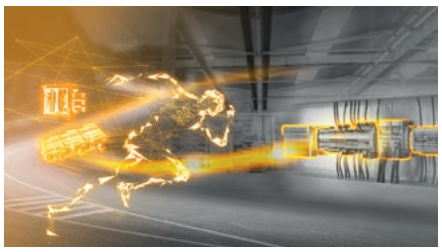

Fast Delivery Service - Your ideas deserve a quick realisation
Obtain offers 24/7 and within minutes, including directly orderable article numbers with our Fast Delivery Service. The Weidmüller Configurator (WMC) for planning and configuration is key for consistent processes. Dispatch your orders in 5 days. Assemble individual terminal strips and enclosures from batch size 1!

Your ticket to the world of digital service
easyConnect – Your Industrial Service Platform

Our cloud-based platform is your ticket to the world of digital services from Weidmüller, and the intuitive and future-proof tool for your way to the Industrial IoT. Realise your use cases easily, consistently and without any relevant prior knowledge, thanks to the perfect interaction of platform, devices and diverse software services.

As an open, modular and perfectly integrable system, the platform is your enabler for a wide range of use cases. Increase your efficiency and unleash your full innovation potential with easyConnect.

Interested in using easyConnect?
Learn how to get started with easyConnect step-by-step.

www.weidmueller.com/easyconnect

Why should you use easyConnect?

- You want to enter your digital transformation step-by-step?
- You want to make the step into Industrial IOT, but have no or little IT expertise?
- You want to use your digital data for smart & scalable services?
- You want to offer digital services (such as customised dashboard) to your customers?
- You want to improve your service offering and efficiency, e.g. through remote access?
- You feel Weidmüller's digital services are interesting, but you have „your cloud" already?

Weidmüller comes up with the solution: easyConnect, the new digitalisation platform. It bundles Weidmüller's digital services at one place in the cloud and connects them with various Weidmüller devices.

With easyConnect you start digitalising your application step-by-step without ballast in a secure way.

The following services are initially available on easyConnect:

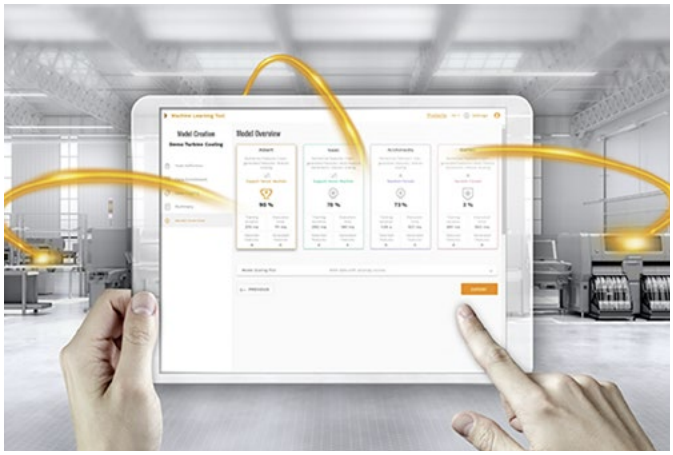

Device management
Adding and managing cloud-connected devices is typically the first step in any Industrial IoT use case.

Asset management
The asset management service is a modelling tool that allows users to model their assets and processes and link them to relevant time series data.

Remote access (u-link)
u-link guarantees a quick and secure access to machines and plants while also allowing for efficient management.

Data visualisation
easyConnect data visualisation services enable users to view, monitor and display live and historical data.

AutoML
With Weidmüller Industrial AutoML, you can optimize operations, increase product quality and develop new business models by benefiting from advanced analytics.

Expand the possibilities of our products

Our Support Center provides you with comprehensive, clear and personal assistance

Receive fast and intuitive support to get the most out of our products in your application. In our new Support Center you can search or navigate to the many application notes, product information, video tutorials or software downloads of our products.

- **Everything at a glance –** One central support hub, where all relevant information is available
- **Powerful search –** Provides filter functions for various types of information and products
- **Different views and navigations –** Content provided in views product information, engineering support or software downloads
- **More than 170,000 downloads –** Application notes, video tutorials, templates and examples, user documentation, engineering data, ...
- **Personal contact –** Direct access to your personal technical contact in your country

Explore the world of our new Support Center
support.weidmueller.com

Additional support services

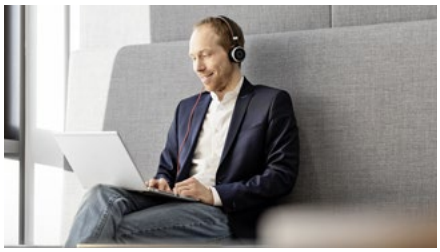

Training and Webinars
Stay tuned in a world that is accelerating. In our entertaining interactive webinars, we offer you the opportunity to learn about new products and technology topics and to interact with our experts.

Repairs and replacement parts
We offer repair and components for our Workplace Solutions as well as assistance for other Weidmüller products. Find out how our experts can help you with your repair request.

Security advisory board
Our Product Security Incident Response Team (PSIRT) continuously informs you about possible security-related vulnerabilities of our products.

Engineering data
For the quick integration of our products into your design, there are a lot of digital product data for engineering systems like EPLAN, Zuken E3.series, WSCAD and many others available for download.

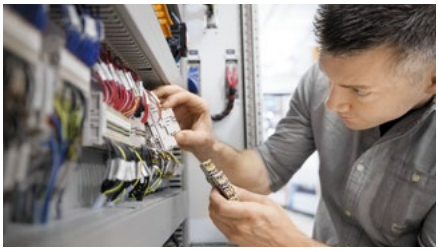

Product change notifications
Technical modifications of our products always available online.

Technical product catalogues
Technical data for our entire program in Industrial Connectivity for download in PDF-format.

From the idea to the finished solution

Weidmüller Configurator: intuitive, uncomplicated & fast digital engineering

Digital engineering can be so easy – with the Weidmüller Configurator!

It´s a **free to use** software application to easily configure industrial solutions. It features more than **12,000 articles** from multiple product families including rail-mounted components, industrial and ex-certified enclosures, Heavy Duty Connectors, remote I/O-systems and PCB connectors.

Unleash the full power of digital engineering:

Our application wizards help you choose the right articles.
Place, mark or modify them to your needs and get your solution **visualized in 3D –** what you see is what you get!

Our promise: Speed up your solution planning process by up to 70%!

Your benefits:

- **Proven configuration designs in real 3D:** The plausibility and collision check with the complete digital documentation ensures that you can rely 100% on your configuration.
- **Seamless E-CAD Roundtrip:** Interfaces enable the simple exchange of product data between the WMC and all common engineering tools, such as Zuken E3 or EPLAN Electric P8.
- **Sample Service & Fast Delivery Service:** to support your design-in process, we offer a **3-day sample service** for many products. Inquire them directly online – for free!
  You want your solution right away? Our **Fast Delivery Service** guarantees delivery of individually assembled terminal strips or enclosures within a few days.

Get started online now!

The Weidmüller Configurator makes solution planning easy. Visit our website for more information, tutorials and download it for free:

www.weidmueller.com/wmc

or register on **easyconnect.weidmueller.com**
and use it online.

WMC

E3 series® ePLAN electric P8

Wizards:
Design complete applications within few clicks – even without detailed product knowledge – for signal wiring, load monitoring, instrument transformers, enclosures, remote I/O-systems and many more.

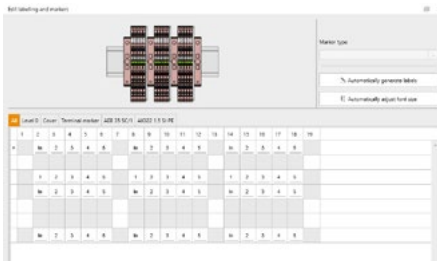

Assistants:
Finalize your solutions with supporting assistants to add cross-connectors, markers or colors and verify the faultlessness. Automatic modes save valuable time!

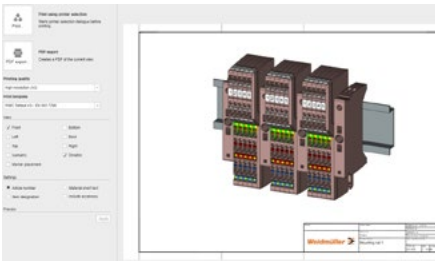

1-click documentation:
Get assembly drawings for production – only 1 click. Bill of material – only 1 click. The complete solution documentation including all component data sheets – you´re right, only 1 click!

Digital ordering options
Your digital ordering options at Weidmüller

Find and easily select the products you need, with convenient ordering: as your Partner in Industrial Connectivity, we know what counts in purchasing. That is why we offer you a variety of options for ordering products from us and optimising your purchasing processes to meet your individual requirements and your workflow. The choice is yours.

Order via the Weidmüller eShop

Our eShop offers you access to the complete Weidmüller product range around the clock – directly from a PC, tablet, or smartphone. The intuitive user guidance supports you as you select from over 50,000 products. Technical data, prices, and availabilities are available at any time. The shopping basket with check out function lets you place an order in seconds. Convenient additional functions like CSV upload, order history, reports, or custom order templates make your ordering processes even more efficient.

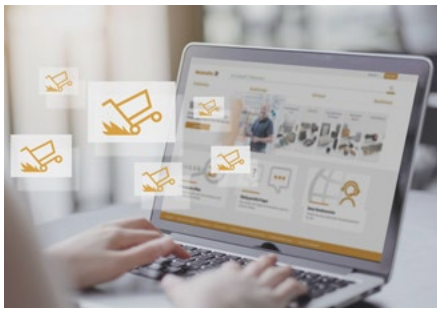

Order via the OCI interface

The Open Catalogue Interface (OCI) facilitates the exchange of data between your enterprise resource planning system and our eShop. This means that our eShop is integrated into your system via an OCI interface, so you have access to our complete product catalogue from your enterprise resource planning system. You can filter and select products, place them in your shopping basket and place direct orders without changing your software application. The open OCI standard is supported worldwide from a variety of software providers.

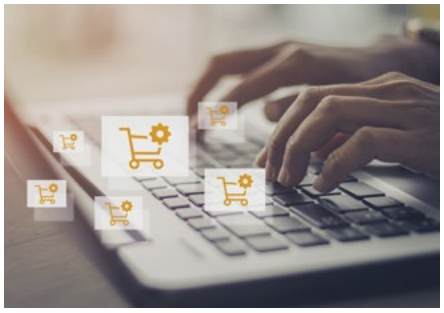

Order via the EDI interface

Our Electronic Data Interchange (EDI) also offers you the option of ordering our products directly from your enterprise resource planning system. All order data is transmitted automatically to our system and processed immediately. Orders, order confirmations, invoices, and delivery notices are transmitted lightning fast. This helps you make your purchasing processes even more efficient.

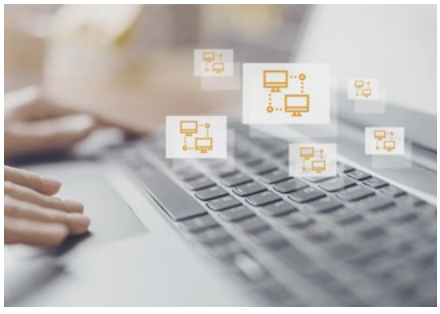

We will be glad to advise you on which solutions are suitable for you and how implementation is possible.
Get in touch with us
www.weidmueller.com/digital-order

Technical appendix

Technical appendix	Directive 1999/92/EC	W.2
	ATEX directive 2014/34/EU	W.5
	IECEx scheme	W.6
	Hazardous areas guide	W.7
	IP class of protection	W.10
	Guidelines for selecting cable glands	W.12
	Ratings plate of an empty enclosure	W.14
	Type label for enclosure assemblies	W.15

Directive 1999/92/EC

Article 137 of the European Community Formation Treaty set out the minimum standards in order to improve workers' health and safety, this can also be put at risk by explosive atmospheres. An explosive atmosphere is a mixture of air and flammable gasses, vapours, mists or dust under atmospheric conditions where, following successful ignition, the burning process will propagate throughout the whole unburned mixture.

The directive 1999/92/EC was transferred into national law. Compliance with the minimum standards contained in this directive does not guarantee that all relevant national laws are met. It is possible for local regulators to introduce more stringent requirements.

The employer is required, according to the directive 1999/92/EC, to take measures to ensure the health and safety of the employees. One measure is the division of the area into zones where explosive atmospheres could be present.

Unless the risk analysis conducted by the employer indicates otherwise, all areas where an explosive atmosphere may be present must be equipped with devices and protective systems that meet the relevant category of the ATEX directive 2014/34/EU.
In particular in these zones the following categories of equipment should be used, as long as they are suitable for use with gases, vapours, mists or dusts:

- In Zone 0 or Zone 20: category 1 devices
- In Zone 1 or Zone 21: category 1 or category 2 devices
- In Zone 2 or Zone 22: category 1, category 2 or category 3 devices

Zoning according to the directive 1999/92/EC
Explosion risk areas are classified into zones according to likelihood of explosive atmospheres occurring and their persistence.

Zone 0
An area which has a potentially explosive atmosphere that is a mixture of air and **flammable gases, vapours or mists**. The mixture is either permanently present or frequently present over long periods of time.

Zone 1
An area in which during normal operations a potentially explosive atmosphere of air and **flammable gases, vapours or mists** can occasionally form.

Zone 2
An area for which during normal operations there is at most only a short-term occurrence of a potentially explosive atmosphere of mixtures of air and **flammables gases, vapours or mists**.

Zone 20
An area where a potentially explosive atmosphere is present in the form of a **flammable dust** cloud in the air. This cloud is either permanently present or frequently present over long periods of time.

Zone 21
An area where, during normal operations, a potentially explosive atmosphere in the form of a **flammable dust** cloud in the air can occasionally form.

Zone 22
An area where, during normal operations, a potentially explosive atmosphere in the form of a **flammable dust** cloud in the air is not normally present or only present for a short time.

For the risk assessment and as well as the zoning concept described above, Ex devices themselves can be considered in an alternative process which uses the equipment protection level (EPL). These protective levels determine the internal ignition risk of a device where the sort of applied protection does not play a role.

The system of EPL classifications (Equipment Protection Level) is shown below.

Firedamp (methane) risk mines (Group I)

EPL Ma
Equipment for installation in mining applications, offering a „very high" level of protection and which do not constitute a source of ignition during normal operation, or in the event of rarely occurring faults.

EPL Mb
Equipment for installation in a mine with a high level of rotection. Has sufficient safety to ensure that there is no source of ignition in the period of time between the outbreak of gas and the time the equipment is switched off.

Gases (Group II)

EPL Ga
Equipment for explosive-risk gas atmospheres with a very high level of protection. No source of ignition is present during normal operation or when errors occur that cannot be necessarily expected on a regular basis.

EPL Gb
Equipment for explosive-risk gas atmospheres with a high level of protection. No source of ignition is present during normal operation or when errors occur that cannot be necessarily expected on a regular basis.

EPL Gc
Equipment for explosive-risk gas atmospheres with an elevated level of protection. No source of ignition is present during normal operation and it can have additional safeguards to ensure that none is present during faults which happen regularly (e. g. failure of a lamp).

Dust (Group III)

EPL Da
Equipment for combustible dust atmospheres with a very high level of protection. No source of ignition is present during normal operation or in very rare faults.

EPL Db
Equipment for combustible dust atmospheres with a high level of protection. No source of ignition is present during normal operation or when errors occur that cannot be necessarily expected on a regular basis.

EPL Dc
Equipment for combustible dust atmospheres with an elevated level of protection. No source of ignition is present during normal operation and it can have additional safeguards to ensure that none is present during faults which happen regularly (e. g. failure of a lamp).

Classification of explosive groups

Electrical devices for groups II and III are classified further as a function of the properties of the explosive atmosphere for which they are intended.

The danger of the atmosphere increases from IIA(IIIA) to IIC(IIIC) so that all equipment certified for use in IIC(IIIC) areas may also be used in IIA(IIIA) and IIB(IIIB) areas.

Classification of explosive groups

Group	Material, e.g.	Ignition energy	Group	Material
IIA	Propane	266 µJ	IIA	Flammable fluff
IIB	Ethylene	85 µJ	IIB	Non-conductive dust
IIC	Hydrogen	19 µJ	IIC	Conductive dust

Classification of zones and equipment categories

Combustible ingredients	Explosive atmospheres	Zone division	EPL safety level	Identification	
				Equipment group	Device category
Gas, mist, vapours/fumes (G / Gas)	permanent, long-term	Zone 0	Ga	II	1G
	occasionally	Zone 1	Gb	II	2G
	unlikely, short-term	Zone 2	Gc	II	3G
Dusts (D / Dust)	permanent, long-term	Zone 20	Da	II	1D
	occasionally	Zone 21	Db	II	2D
	unlikely, short-term	Zone 22	Dc	II	3D

ATEX directive 2014/34/EU

Article 96 of the Treaty on the Foundation of the European Union and Decision no. 768/2008/EU and Federal Gazette 96/309-356 govern the standardisation of legal regulations in the Member States. The ATEX directive 2014/34/EU sets out the basic requirements for health and safety protection as a directive following the new concept. It is aimed at manufacturers of equipment and components designed for used in potentially explosive atmosphere areas.

This directive had to be adopted without deviation into national law.
For Germany, this took the form of the passing of the Explosion Protection Ordinance (2015 ExVo 2015) of the Product Safety Act (ProdSG). It applies to all industrial potentially explosive areas, including mines, and also covers protection from dust-ignited explosions.

This directive sets out the requirements for the products depending on their equipment group and category. This is the category as set down by the directive 1999/92/EC applicable for each appropriate zone.

To prove conformity with the basic health and safety regulations, harmonised standards are used. If the requirements as laid out in the Official Journal of the EU are met, then it will be in compliance with the standard requirements for conformity (presumption of conformity). Various, mostly equivalent, protection types have been standardised harmoniously.

This conformity assessment process of the directives sets out different procedures. For device category 3, the manufacturer can perform the conformity assessment itself. For devices of categories 1 and 2, this conformity check must be carried out at a notified body in the form of a EC type-examination. In addition, quality assurance must be monitored for the devices of categories 1, 2 and 3.

Weidmüller has devices and components in its product range. Empty enclosures are components and are certified at the factory as such. Installing certified components does not create a certified equipment. To do this, additional tests must be carried out.

Weidmüller offers customer-specific devices available as certified solutions. The production of assembled enclosures is monitored by a notified body.

IECEx scheme

The IECEx scheme is an international certification scheme for products which meet the requirements of the international standards, e.g. the technical committee TC31's IEC standards.

The certificates awarded in this scheme are published on the IECEx website (www.iecex.com) as an electronic certificate. They can be viewed online and printed out.

A Certificate of Conformity (CoC) refers to a test report (Ex Test Report ExTR) and on an assessment of the quality assessment report from the manufacturer (QAR).

The standards used for the production of the test report correspond almost entirely to the harmonised standards in Europe. Recent EN standards were initially adopted as IEC standards.

Protection concepts

The zoning described above provides the basis for the selection of the type of ignition protection. So, as an example, in the ATEX applicable areas, only ignition protection devices meeting Ex ia for Zone 0 (highest probability of an explosive atmosphere being present) are allowed.

Increased safety Ex e
No sparks and a surface temperature limited to a safe level



Increased safety is for products where there are no sparks produced during normal operation or in case of a failure. The surface temperature of the relevant parts is limited to a value below the ignition temperature. Increased safety is achieved by reducing the current load and raising the isolation properties and by maintaining clearance and creepage distances above the value in an industrial application. The highest voltage permitted for this protection scheme is 11 kV (D.C. or A.C. rms).

This protection scheme is usually used for distribution cabinets..

Intrinsically safe Ex i
Limited to a safe level of ignition energy



Intrinsic safety is for products where electrical energy which flows into the product, or is stored in the product, is not sufficient to ignite the surrounding explosive atmosphere. This also applies in fault conditions. The methods that achieve intrinsic safety mean that it is important that not only the devices installed in direct contact with the explosive atmosphere are constructed correctly, but also the electrical devices to which they are connected.

Intrinsically safe equipment and intrinsically safe parts of the associated equipment are divided into protection levels: ia (for zones 0, 1, and 2), ib (for zones 1 and 2), and ic (only for zone 2).

A typical application area are control and display circuits with low voltage and current.

Pressure-resistant Ex d encapsulation
Limits the explosion to the inside of the enclosure



Pressure-resistant encapsulated enclosures are designed for devices where sparks are generated or which have hot surfaces which are a source of ignition during normal operation. Similarly, industrial components for use in potentially explosive atmospheres are often made suitable by encapsulating them in a pressure-resistant enclosure which otherwise could not be used.

The surrounding possibly explosive atmosphere can enter the enclosure and will produce an internal explosion during the equipment's lifespan.

The enclosure must therefore be stable enough to ensure that it is not deformed or destroyed by the pressure created. All connections of the enclosure are sized so that they cannot transmit an explosion from inside to the surrounding atmosphere. These connections are known as ignition gaps.

Area classification

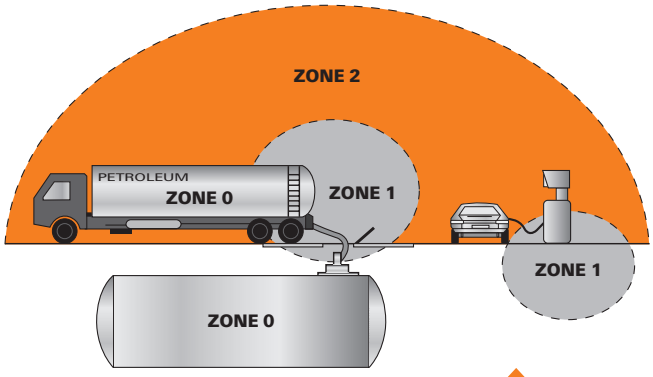

Gas groups

IIA	e.g. Propane
IIB	e.g. Etyhlene
IIC	e.g. Hydrogen

Equipment group acc. to directive 2014/34/EU		**Equipment category** acc. to directive 2014/34/EU		**Classification of hazardous areas** acc. to directive 1999/92/EG	**Group** acc. to IEC/EN 60079-0	**Combustible materials**	**Equipment protection level** (EPL acc. to IEC/EN 60079-0)
I	Mining	M1	very high level of protection; remain functional at occurrence of Ex-atmosphere		I	Methane, Carbon dust	Ma
I		M2	high level of protection; de-energized at occurrence of Ex-atmosphere		I		Mb
II	Other industries (except mining)	1	very high level of protection; save even in an event of rare incidents	0	II	Gases, Vapours, Mists (G)	Ga
II		2	high level of protection; save even in an event of predictable failures	1	II		Gb
II		3	normal level of protection; save during normal operation	2	II		Gc
II	Other industries (except mining)	1	very high level of protection; save even in an event of rare incidents	20	III	Dust (D)	Da
II		2	high level of protection; save even in an event of predictable failures	21	III		Db
II		3	normal level of protection; save during normal operation	22	III		Dc

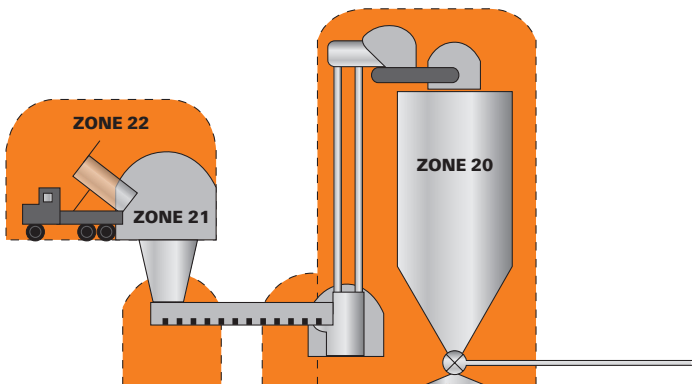

Dust groups

IIIA	Combustible flyings
IIIB	Non-conductive dust
IIIC	Conductive dust

Types of Protection

Types of protection for electrical equipment in explosive gas atmospheres

Type of protection	Symbol	Main application	Norm
increased safety	eb	junction boxes, control stations for installing Ex-components (with a different type of protection), squirrel-cage motors, light fittings	IEC 60079-7 EN 60079-7 ISA 60079-7
flameproof enclosures	db	switchgears, control stations, indicating equipment, control systems, motors, transformers, heating equipment, light fittings	IEC 60079-1 EN 60079-1 ISA 60079-1
pressurized enclosures	pxb pyb pzc	switchgear and control cabinets, analysers, large motors	IEC 60079-2 EN 60079-2 ISA 60079-2
intrinsic safety	ia ib ic	instrumentation technology, fieldbus technology, sensors, actuators [Ex ib] = associated electrical apparatus – installation in the safe area	IEC 60079-11 EN 60079-11 ISA 60079-11
		intrinsically safe systems	IEC 60079-25 EN 60079-25
		FISCO: fieldbus intrinsically-safe concept	IEC 60079-27 EN 60079-27 ISA 60079-27
oil immersion	ob	transformers, starting resistors	IEC 60079-6 EN 60079-6 ISA 60079-6
powder filling	qb	sensors, display units, electronic ballasts, transmitters	IEC 60079-5 EN 60079-5 ISA 60079-5
encapsu-lation	ma mb mc	switchgear with small capacity, control and signalling units, display units, sensors	IEC 60079-18 EN 60079-18 ISA 60079-18
type of protection "n"	nAc nCc nRc	all electrical equipment for Zone 2 nA = non-sparking device nC = sparking devices and components nL = energy limited apparatus nR = restricted breathing enclosures	IEC 60079-15 EN 60079-15 ISA 60079-15
optical radiation	op_a op_b op_c	op is = inherently safe optical radiation op pr = protected optical radiation op sh = optical radiation interlock	IEC 60079-28 EN 60079-28

Types of protection for electrical equipment in explosive dust atmospheres

Type of protection	Symbol	Main application	Norm
protection by enclosures	ta tb tc	switchgear, control stations, junction boxes, control boxes, motors, light fittings	IEC 60079-31 EN 60079-31 ISA 60079-31
pressuri-zation	pb pc	switchgear and control cabinets, motors	IEC 60079-2 EN 60079-2 ISA 60079-2
intrinsic safety	ia ib ic	instrumentation technology, fieldbus technology, sensors, actuators [Ex ib] = associated electrical apparatus – installation in the safe area	IEC 60079-11 EN 60079-11 ISA 60079-11
encapsu-lation	ma mb mc	switchgear with small capacity, control and signalling units, display units, sensors	IEC 60079-18 EN 60079-18 ISA 60079-18

Temperature class

Classification of the maximum surface temperatures into temperature classes for eletrical equipment of group II

Temperature class ATEX/IECEx	Temperature class NEC/UL (AEx)	Maximum surface temperature	
T1	T1	450 °C	842 °F
T2	T2	300 °C	572 °F
	T2A	280 °C	536 °F
	T2B	260 °C	500 °F
	T2C	230 °C	446 °F
	T2D	215 °C	419 °F
T3	T3	200 °C	392 °F
	T3A	180 °C	356 °F
	T3B	165 °C	329 °F
	T3C	160 °C	320 °F
T4	T4	135 °C	275 °F
	T4A	120 °C	248 °F
T5	T5	100 °C	212 °F
T6	T6	85 °C	185 °F
IEC/DIN EN 60079-0	NEC500ff	°C	°F

Certifications worldwide

IP class of protection to DIN EN 60529

The ingress protection class or IP rating is indicated by a code consisting of the two letters IP and two digits representing the class of protection.

Example: **I P 6 5**

2nd digit: protection from liquids

1st digit: protection from solid bodies

Protection against intrusion of external particle matter (1st digit)

Code digit		
0		No protection
1		Protection against ingress of large solid bodies with diameter > 50 mm. (Protection to prevent dangerous parts being touched with the back of the hand.)
2		Protection against ingress of large solid bodies with diameter > 12.5 mm. (Protection to prevent dangerous parts being touched with the fingers.)
3		Protection against ingress of large solid bodies with diameter > 2.5 mm. (Protection to prevent dangerous parts being touched with a tool.)
4		Protection against ingress of large solid bodies with diameter > 1 mm. (Protection to prevent dangerous parts being touched with a piece of wire.)
5		Protection against harmful deposits of dust, which cannot enter in an amount sufficient to interfere with satisfactory operation.
6		Complete protection against ingress of dust.

Protection against penetration of liquids (2nd digit)

Code digit		
0		No protection
1		Protection against drops of condensed water falling vertically.
2		Protection against drops of liquid falling at an angle of 15° with respect to the vertical.
3		Protection against drops of liquid falling at an angle of 60° with respect to the vertical.
4		Protection against liquids splashed from any direction.
5		Protection against water jets projected by a nozzle from any direction.
6		Protection against water from heavy sea on ships'decks.
7		Protection against immersion in water under defined conditions of pressure and time.
8		Protection against indefinite immersion in water under defined conditions of pressure (which must be agreed between manufacturer and user and must be more adverse than number 7).

Definition of the protection degrees according to NEMA, UL and CSA

Type	NEMA	UL	CSA
Designation	National Electrical Manufacturers Association NEMA 250-1991	Underwriters Laboratories Inc. UL 50 und UL 508	Canadian Standards Association CSA-C22.2 No. 94-M91
Type 1	Enclosure predominately for indoor use. Protection against penetration by solid foreign bodies.	Enclosure predominately for indoor use. Protection against penetration by solid foreign bodies.	Enclosure for general use. Protection against accidental contact with live components.
Type 2	Enclosure predominately for indoor use. Protection against penetration by solid foreign bodies and water.	Enclosure predominately for indoor use. Protection against penetration by solid foreign bodies and water.	Enclosure for indoor use. Protection against non-corrosive drops/splashes of liquid and foreign bodies.
Type 3	Enclosure predominately for indoor use. Protection against penetration by rainfall and dust as well as damage due to ice formation.	Enclosure predominately for indoor use. Protection against penetration by rainfall and dust as well as damage due to ice formation.	Enclosure for indoor or outdoor use. Protection against penetration by rainfall and snow as well as damage due to ice formation.
Type 3R	Enclosure predominately for indoor use. Protection against rain and snow as damage due to ice-formation.	Enclosure predominately for indoor use. Protection against rain and snow as damage due to ice-formation.	Enclosure for indoor or outdoor use. Protection against penetration by rainfall and snow as well as damage due to ice formation.
Type 3S	Enclosure predominately for indoor use. Protection against rain, snow and foreign bodies. External mechanisms can be operated despite ice accumulation.	Enclosure predominately for indoor use. Protection against rain, snow and foreign bodies. External mechanisms can be operated despite ice accumulation.	Enclosure for indoor or outdoor use. Protection against rain, snow and foreign bodies. External mechanisms can be operated despite ice accumulation.
Type 4	Enclosure for indoor or outdoor use. Protection against rain, foreign bodies, splashing water and hose water as well as damage due to ice-formation on the outside of the enclosure.	Enclosure for indoor or outdoor use. Protection against rain, foreign bodies, splashing water and hose water as well as damage due to ice-formation on the outside of the enclosure.	Enclosure for indoor or outdoor use. Protection against rain, snow, foreign bodies, splashing water and hose water as well as damage due to ice-formation on the outside of the enclosure.
Type 4X	Enclosure for indoor or outdoor use. Protection against corrosion, rain, foreign bodies, splashing water and hose water as well as damage due to ice-formation on the outside of the enclosure.	Enclosure for indoor or outdoor use. Protection against corrosion, rain, foreign bodies, splashing water and hose water as well as damage due to ice-formation on the outside of the enclosure.	Enclosure for indoor or outdoor use. Protection against rain, foreign bodies, splashing water and hose water as well as damage due to ice-formation on the outside of the enclosure.
Type 6	Enclosure for indoor or outdoor use. Protection against hose water as well as against penetration by water during immersion; protection damage due to ice formation on the outside of the enclosure.	Enclosure for indoor or outdoor use. Protection against hose water as well as against penetration by water during immersion; protection damage due to ice formation on the outside of the enclosure.	Enclosure for indoor or outdoor use. Protection against penetration by water during immersion; protection damage due to ice formation on the outside of the enclosure.
Type 12	Enclosure for indoor use. Protection against dust accumulation, foreign bodies and non-corrosive drops of liquids.	Enclosure for indoor use. Protection against dust accumulation, foreign bodies and non-corrosive drops of liquids.	Enclosure for indoor or outdoor use. Protection against a build-up of dust, fibres and foreign bodies as well as against non-corrosive liquid drips, without pre-formed openings.
Type 13	Enclosure for indoor use. Protection against dust build-up, splashing water, oil, and non-corrosive coolants.	Enclosure for indoor use. Protection against dust build-up, splashing water, oil, and non-corrosive coolants.	Enclosure for indoor or outdoor use. Protection against a build-up of dust, fibres and foreign bodies as well as against non-corrosive liquid sprays including oil and coolants.

Guidelines for selecting cable glands

The sizes quoted were based on stranded cables. Please note the clamping range for the cable gland you have selected.

Cross-section	No. of conductors	Cable ø approx. mm	Metric cable glands								PG							
0.5 mm²	2	5.7 - 8.7	12	16	20						9							
AWG 20	3	6.0 - 9.0	12	16	20						9							
	4	6.7 - 9.7	12	16	20						9	11						
	5	7.2 - 10.2		16	20						9	11	13.5	16				
	6	7.6 - 10.6		16	20						9	11	13.5	16				
	7	8.0 - 10.6		16	20						9	11	13.5	16				
	8	9.4 - 12.8		16	20	25					9	11	13.5	16				
	10	9.4 - 12.8		16	20	25					9	11	13.5	16				
	12	9.7 - 12.9		16	20	25					9	11	13.5	16				
	14	10.2 - 13.4			20	25						11	13.5	16				
	16	10.7 - 13.9			20	25						11	13.5	16				
	21	12.3 - 15.1			20	25							13.5	16	21			
	24	13.5 - 16.7				25	32						13.5	16	21			
	30	14.3 - 17.5				25	32							16	21			
	35	16.0 - 18.6				25	32								21			
	40	16.6 - 19.2				25	32	40							21			
	52	19.2 - 21.6					32	40							21	29		
	61	20.3 - 23.1					32	40							21	29		
	80	22.9 - 25.7					32	40								29	36	
	100	26.4 - 29.6						40	50							29	36	
0.75 mm²	2	6.8 - 9.8	12	16	20						9	11						
AWG 18	3	7.2 - 9.7	12	16	20						9	11						
	4	7.9 - 10.3	12	16	20						9	11						
	5	8.9 - 10.9		16	20						9	11	13.5	16				
	6	8.9 - 12.3		16	20	25					9	11	13.5	16				
	7	9.6 - 12.3		16	20	25					9	11	13.5	16				
	8	10.4 - 13.8			20	25						11	13.5	16				
	9	10.7 - 13.9			20	25						11	13.5	16				
	10	10.4 - 13.8			20	25						11	13.5	16				
	12	10.7 - 13.9			20	25						11	13.5	16				
	15	12.3 - 13.5			20	25							13.5	16				
	18	13.0 - 16.2				25	32						13.5	16	21			
	21	13.6 - 16.8				25	32						13.5	16	21			
	25	15.9 - 18.5				25	32								21	29		
	32	17.1 - 19.7				25	32								21	29		
	40	19.0 - 21.4					32	40							21	29		
	50	21.3 - 24.1					32	40							21	29		
	61	22.6 - 25.4						40							21	29	36	
	80	26.1 - 29.3						40	50							29	36	
	100	29.4 - 33.0						40	50								36	
1 mm²	2	7.1 - 10.1	12	16	20						9	11						
AWG 16-18	3	7.5 - 10.1	12	16	20						9	11						
	4	8.4 - 10.7		16	20						9	11	13.5					
	5	9.2 - 11.4		16	20	25					9	11	13.5	16				
	6	9.2 - 12.6		16	20	25					9	11	13.5	16				
	7	9.2 - 12.6		16	20	25					9	11	13.5	16				
	8	11.0 - 14.4			20	25						11	13.5	16	21			
	9	11.8 - 15.2			20	25	32					11	13.5	16	21			
	10	11.0 - 14.4			20	25	32					11	13.5	16	21			
	12	11.8 - 14.6			20	25	32					11	13.5	16	21			
	14	12.4 - 15.2			20	25	32						13.5	16	21			
	16	13.0 - 16.2				25	32						13.5	16	21			
	18	13.7 - 16.9				25	32						13.5	16	21			
	20	14.4 - 17.6				25	32	40						16	21			
	24	16.5 - 19.1				25	32	40							21	29		
	25	16.9 - 19.5				25	32	40							21	29		
	34	19.4 - 21.8					32	40							21	29		
	48	22.0 - 24.8						40							21	29		
	56	23.2 - 26.0						40	50						21	29	36	
	61	24.5 - 27.2						40	50							29	36	
	80	27.7 - 30.9						40	50								36	
	100	31.8 - 35.2						40	50	63							36	42

Cross-section	No. of conductors	Cable ø approx. mm	Metric cable glands								PG							
1.5 mm²	2	8.0 - 11.0	12	16	20						9	11	13.5	16				
AWG 16	3	8.7 - 11.0		16	20	25					9	11	13.5	16				
	4	9.7 - 11.8		16	20	25					9	11	13.5	16				
	5	10.8 - 13.0			20	25						11	13.5	16				
	6	10.8 - 14.2			20	25						11	13.5	16				
	7	10.8 - 14.2			20	25						11	13.5	16				
	8	13.2 - 16.6				25	32						13.5	16	21			
	11	13.6 - 16.8				25	32						13.5	16	21			
	12	17.6 - 16.8				25	32						13.5	16	21			
	14	14.4 - 17.6				25	32							16	21			
	16	15.8 - 18.4				25	32							16	21			
	18	16.6 - 19.2				25	32								21	29		
	20	17.4 - 20.0				25	32	40							21	29		
	25	20.2 - 23.0					32	40							21	29		
	32	23.8 - 24.5						40								29	36	
	34	22.6 - 25.4						40								29	36	
	42	25.8 - 29.0						40	50							29	36	
	50	27.0 - 30.2						40	50							29	36	
	56	27.8 - 31.0						40	50							29	36	
	61	28.6 - 31.8						40	50								36	
	80	33.0 - 36.4							50	63							36	42
	90	34.6 - 37.6							50	63							36	42
	100	37.8 - 41.4							50	63								42
2.5 mm²	2	9.8 - 12.8		16	20	25					9	11	13.5	16				
AWG 12-14	3	10.6 - 13.4			20	25						11	13.5	16				
	4	11.7 - 14.4			20	25						11	13.5	16				
	5	13.0 - 16.4			20	25	32						13.5	16	21			
	6	13.3 - 16.7				25	32						13.5	16	21			
	7	13.3 - 16.7				25	32						13.5	16	21			
	8	17.4 - 20.8				25	32	40							21	29		
	11	18.0 - 20.6				25	32	40							21	29		
	16	20.6 - 23.4					32	40							21	29		
	18	21.7 - 24.5						40								29	36	
	25	26.4 - 29.6						40	50							29	36	
	34	31.3 - 33.1						40	50								36	42
	50	37.0 - 39.4							50	63								42
	61	39.0 - 41.5							50	63								42
4 mm²	2	10.7 - 14.1			20	25						11	13.5	16	21			
AWG 10-12	4	13.0 - 16.4				25	32						13.5	16	21			
	5	14.3 - 17.7				25	32							16	21			
	7	16.2 - 19.6				25	32								21	29	36	
	11	ca. 24.5						40								29	36	

Note:
The values can differ between manufacturers. These figures should be considered as rough guidelines.

Ratings plate of an Ex-certified empty enclosure

1 Number of the notified body

2 Part No.

3 Part designation

4 Ex marking

5 Equipment group

6 Device category

7 • G Gas (gas)
• D flammable dust

8 Explosion protection type

9 IP ingress protection class (DIN EN 60529)

10 EC type-examination certificate

11 Year of manufacture

12 Name and address of manufacturer

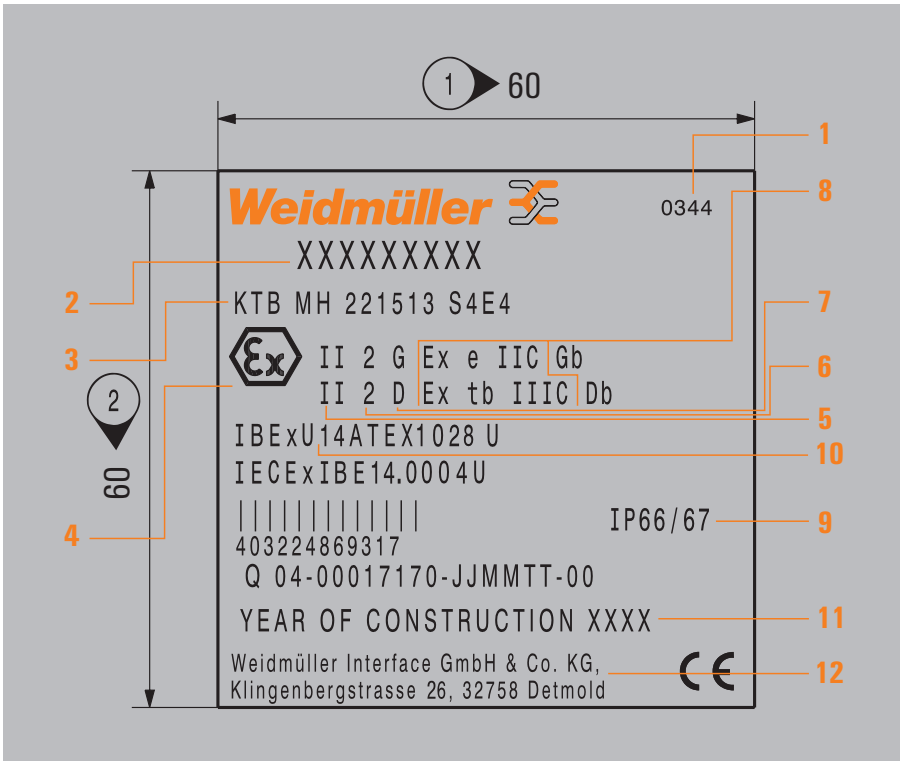

Type label for enclosure assemblies

1 Certification conditions and logo

2 Name and address of manufacturer

3 Approval number

4 Part designation

5 Part No.

6 Serial number

7 Year of Contruction

8 IP ingress protection class

9 Ambient temperature

10 Approval number

11 Ex marking
Example:

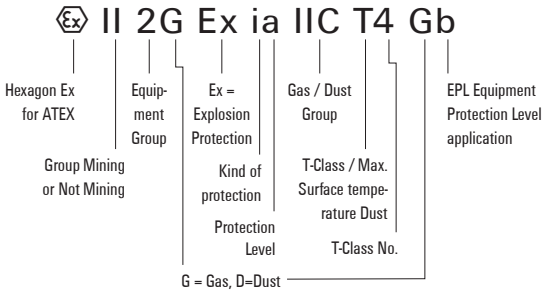

Weidmüller

Weidmüller Interface GmbH & Co. KG **2**
Klingenbergstr. 26 – D 32758 Detmold

c UL us **1**
LISTED
Juncition Box for HAZ. LOC.
E223792
3

4 Type: Klippon TB MH 303020
5 P/N: 9876543219
6 S/N: XA-DE-A-0000
7 Year of Construction: 2018

8 IP 66 NEMA TYPE: 4x

Rated voltage: 600 [V] Cable size: 4 [mm²]
Rated current: 21 [A] **9** T amb: - 20 °C ... + 55 °C

11 Class I Zone 1 AEx e IIC T4 Gb

W A R N I N G - DO NOT OPEN WHEN ENERGIZED

Weidmüller

Weidmüller Interface GmbH & Co. KG **2**
Klingenbergstr. 26 – D 32758 Detmold

CE **1**
0344

4 Type: Klippon TB MH 303020
5 P/N: 9876543219
6 S/N: XA-DE-A-0000
7 Year of Construction: 2018

8 IP 66

Rated voltage: 600 [V] Cable size: 4 [mm²]
Rated current: 21 [A] **9** T amb: - 20 °C ... + 55 °C

10 IBExU14ATEX1050
11 Ex II 2G Ex eb IIC T4 Gb

10 IECEx IBE 14.0013
11 Ex eb IIC T4 Gb

W A R N I N G - DO NOT OPEN WHEN ENERGIZED

Index

Index	Index Type	X.2
	Index Order No.	X.14
	Addresses worldwide	X.28

Type	Order No.	Page
A		
A2L/16/M16-WM	1186880000	D.18
A2L/16/NPT1/2-WM	1186990000	D.18
A2L/16/NPT3/4-WM	1187100000	D.18
A2L/20/M20-WM	1186900000	D.18
A2L/20/NPT1/2-WM	1187010000	D.18
A2L/20/NPT3/4-WM	1187120000	D.18
A2L/20S/M20-WM	1186890000	D.18
A2L/20S/NPT1/2-WM	1187000000	D.18
A2L/20S/NPT3/4-WM	1187110000	D.18
A2L/25/M25-WM	1186910000	D.18
A2L/25/NPT1-WM	1187130000	D.18
A2L/25/NPT3/4-WM	1187020000	D.18
A2L/32/M32-WM	1186920000	D.18
A2L/32/NPT1-1/4-WM	1187140000	D.18
A2L/32/NPT1-WM	1187030000	D.18
A2L/40/M40-WM	1186930000	D.18
A2L/40/NPT1-1/2-WM	1187150000	D.18
A2L/40/NPT1-1/4-WM	1187040000	D.18
A2L/50/M50-WM	1186950000	D.18
A2L/50/NPT2-WM	1187070000	D.18
A2L/50S/M50-WM	1186940000	D.18
A2L/50S/NPT1-1/2-WM	1187050000	D.18
A2L/50S/NPT2-WM	1187160000	D.18
A2L/63/M63-WM	1186980000	D.18
A2L/63/NPT2-1/2-WM	1187090000	D.18
A2L/63S/M63-WM	1186970000	D.18
A2L/63S/NPT2-1/2-WM	1187170000	D.18
A2L/63S/NPT2-WM	1187080000	D.18
A2LC/16/M16-M20F-WM	1205080000	D.24
A2LC/16/M16-NPT1/2F-WM	1205190000	D.24
A2LC/16/M16-NPT3/4F-WM	1205270000	D.24
A2LC/16/NPT1/2-M20F-WM	1205330000	D.25
A2LC/16/NPT1/2-NPT1/2F	1205640000	D.26
A2LC/16/NPT1/2-NPT3/4F	1206310000	D.26
A2LC/16/NPT3/4-M20F-WM	1205450000	D.25
A2LC/16/NPT3/4-NPT1/2F	1206680000	D.26
A2LC/16/NPT3/4-NPT3/4F	1206560000	D.26
A2LC/20/M20-M20F-WM	1205110000	D.24
A2LC/20/M20-NPT1/2F-WM	1205220000	D.24
A2LC/20/M20-NPT3/4F-WM	1205290000	D.24
A2LC/20/NPT1/2-M20F-WM	1205350000	D.25
A2LC/20/NPT1/2-NPT1/2F	1205670000	D.26
A2LC/20/NPT1/2-NPT3/4F	1206320000	D.26
A2LC/20/NPT3/4-M20F-WM	1205470000	D.25
A2LC/20/NPT3/4-NPT1/2F	1206660000	D.26
A2LC/20/NPT3/4-NPT3/4F	1206540000	D.26
A2LC/20S/M20-M20F-WM	1205090000	D.24
A2LC/20S/M20-NPT1/2F-WM	1205210000	D.24
A2LC/20S/M20-NPT3/4F-WM	1205280000	D.24
A2LC/20S/NPT1/2-M20F-WM	1205340000	D.25
A2LC/20S/NPT1/2-NPT1/2F	1205660000	D.26
A2LC/20S/NPT1/2-NPT3/4F	1205960000	D.26
A2LC/20S/NPT3/4-M20F-WM	1205460000	D.25
A2LC/20S/NPT3/4-NPT1/2F	1206670000	D.26
A2LC/20S/NPT3/4-NPT3/4F	1206550000	D.26
A2LC/25/M25-M25F-WM	1205120000	D.24
A2LC/25/M25-NPT1F-WM	1205310000	D.24
A2LC/25/M25-NPT3/4F-WM	1205230000	D.24
A2LC/25/NPT1-M25F-WM	1205480000	D.25
A2LC/25/NPT1-NPT1F-WM	1205520000	D.26
A2LC/25/NPT1-NPT3/4F-WM	1205510000	D.26
A2LC/25/NPT3/4-M25F-WM	1205360000	D.25
A2LC/25/NPT3/4-NPT1F-WM	1205440000	D.26
A2LC/25/NPT3/4-NPT3/4F	1205680000	D.26
A2LC/32/M32-M32F-WM	1205130000	D.24
A2LC/32/M32-NPT1-1/4F	1205580000	D.24
A2LC/32/M32-NPT1F-WM	1205240000	D.24
A2LC/32/NPT1-1/4-M32F	1206390000	D.25
A2LC/32/NPT1-1/4-NPT1-1	1206630000	D.26
A2LC/32/NPT1-1/4-NPT1F	1206620000	D.26
A2LC/32/NPT1-M32F-WM	1205370000	D.25
A2LC/32/NPT1-NPT1-1/4F	1206330000	D.26
A2LC/32/NPT1-NPT1F-WM	1205410000	D.26
A2LC/40/M40-M40F-WM	1205140000	D.24
A2LC/40/M40-NPT1-1/2F	1205070000	D.24
A2LC/40/M40-NPT1-1/4F	1205550000	D.24
A2LC/40/NPT1-1/2-M40F	1206710000	D.25
A2LC/40/NPT1-1/2-NPT1	1206590000	D.26
A2LC/40/NPT1-1/2-NPT1-1	1206640000	D.26
A2LC/40/NPT1-1/4-M40F	1205610000	D.25
A2LC/40/NPT1-1/4-NPT1	1206360000	D.26
A2LC/50/M50-M50F-WM	1205160000	D.24
A2LC/50/M50-NPT2F-WM	1205250000	D.24
A2LC/50/NPT2-M50F-WM	1205380000	D.25
A2LC/50/NPT2-NPT2F-WM	1205420000	D.26
A2LC/50S/M50-M50F-WM	1205150000	D.24
A2LC/50S/M50-NPT1-1/2F	1205560000	D.24
A2LC/50S/M50-NPT2F-WM	1205320000	D.24
A2LC/50S/NPT1-1/2-M50F	1205620000	D.25
A2LC/50S/NPT1-1/2-NPT1	1206280000	D.26
A2LC/50S/NPT1-1/2-NPT2F	1206380000	D.26
A2LC/50S/NPT2-M50F-WM	1205490000	D.25
A2LC/50S/NPT2-NPT1-1/2F	1206580000	D.26
A2LC/50S/NPT2-NPT2F-WM	1205530000	D.26
A2LC/63/M63-M63F-WM	1205180000	D.24
A2LC/63/M63-NPT2-1/2F	1205570000	D.24
A2LC/63/NPT2-1/2-M63F	1205630000	D.25
A2LC/63/NPT2-1/2-NPT2	1206290000	D.26
A2LC/63S/M63-M63F-WM	1205170000	D.24
A2LC/63S/M63-NPT2-1/2F	1205590000	D.24
A2LC/63S/M63-NPT2F-WM	1205260000	D.24
A2LC/63S/NPT2-1/2-M63F	1206690000	D.25
A2LC/63S/NPT2-1/2-NPT2	1206650000	D.26
A2LC/63S/NPT2-1/2-NPT2F	1206570000	D.26
A2LC/63S/NPT2-M63F-WM	1205390000	D.25
A2LC/63S/NPT2-NPT2-1/2F	1206370000	D.26
A2LC/63S/NPT2-NPT2F-WM	1205430000	D.26
A2LCS/16/M16-M20F-WM	1187180000	D.27
A2LCS/16/M16-NPT1/2F-WM	1187280000	D.27
A2LCS/16/M16-NPT3/4F-WM	1187380000	D.27
A2LCS/16/NPT1/2-M20F-WM	1187460000	D.28
A2LCS/16/NPT1/2-NPT1/2	1187560000	D.29
A2LCS/16/NPT1/2-NPT3/4F	1187660000	D.29
A2LCS/16/NPT3/4-M20F-WM	1187740000	D.28
A2LCS/16/NPT3/4-NPT1/2F	1187820000	D.29
A2LCS/16/NPT3/4-NPT3/4	1187900000	D.29
A2LCS/20/M20-M20F-WM	1187200000	D.27
A2LCS/20/M20-NPT1/2F-WM	1187300000	D.27
A2LCS/20/M20-NPT3/4F-WM	1187400000	D.27
A2LCS/20/NPT1/2-M20F-WM	1187480000	D.28
A2LCS/20/NPT1/2-NPT1/2	1187580000	D.29
A2LCS/20/NPT1/2-NPT3/4F	1187680000	D.29
A2LCS/20/NPT3/4-M20F-WM	1187760000	D.28
A2LCS/20/NPT3/4-NPT	1187840000	D.29
A2LCS/20/NPT3/4-NPT3/4F	1187920000	D.29
A2LCS/20S/M20-M20F-WM	1187190000	D.27
A2LCS/20S/M20-NPT1/2F	1187290000	D.27
A2LCS/20S/M20-NPT3/4F	1187390000	D.27
A2LCS/20S/NPT1/2-M20F	1187470000	D.28
A2LCS/20S/NPT1/2-NPT1/2	1187570000	D.29
A2LCS/20S/NPT1/2-NPT3/4	1187670000	D.29
A2LCS/20S/NPT3/4-M20F	1187750000	D.28
A2LCS/20S/NPT3/4-NPT1/2	1187830000	D.29
A2LCS/20S/NPT3/4-NPT3/4	1187910000	D.29
A2LCS/25/M25-M25F-WM	1187210000	D.27
A2LCS/25/M25-NPT1F-WM	1187410000	D.27
A2LCS/25/M25-NPT3/4F-WM	1187310000	D.27
A2LCS/25/NPT1-M25F-WM	1187770000	D.28
A2LCS/25/NPT1-NPT1F-WM	1187930000	D.29
A2LCS/25/NPT1-NPT3/4F	1187850000	D.29
A2LCS/25/NPT3/4-M25F-WM	1187490000	D.28
A2LCS/25/NPT3/4-NPT1F	1187690000	D.29
A2LCS/25/NPT3/4-NPT3/4	1187590000	D.29
A2LCS/32/M32-M32F-WM	1187220000	D.27
A2LCS/32/M32-NPT1-1/4F	1187420000	D.27
A2LCS/32/M32-NPT1F-WM	1187320000	D.27
A2LCS/32/NPT1-1/4-M32F	1187780000	D.28
A2LCS/32/NPT1-1/4-NPT1	1187940000	D.29
A2LCS/32/NPT1-M32F-WM	1187500000	D.28
A2LCS/32/NPT1-NPT1-1/4F	1187700000	D.29
A2LCS/32/NPT1-NPT1F-WM	1187600000	D.29
A2LCS/40/M40-M40F-WM	1187230000	D.27
A2LCS/40/M40-NPT1-1/2F	1187430000	D.27
A2LCS/40/M40-NPT1-1/4F	1187330000	D.27
A2LCS/40/NPT1-1/2-M40F	1187790000	D.28
A2LCS/40/NPT1-1/2-NPT1	1187950000	D.29
A2LCS/40/NPT1-1/4-M40F	1187510000	D.28
A2LCS/40/NPT1-1/4-NPT1	1187710000	D.29
A2LCS/50/M50-M50F-WM	1187250000	D.27
A2LCS/50/M50-NPT2F-WM	1187350000	D.27
A2LCS/50/NPT2-M50F-WM	1187530000	D.28
A2LCS/50/NPT2-NPT2F-WM	1187630000	D.29
A2LCS/50S/M50-M50F-WM	1187240000	D.27
A2LCS/50S/M50-NPT1-1/2F	1187340000	D.27
A2LCS/50S/M50-NPT2F-WM	1187440000	D.27
A2LCS/50S/NPT1-1/2-M50F	1187520000	D.28
A2LCS/50S/NPT1-1/2-NPT1	1187620000	D.29
A2LCS/50S/NPT1-1/2-NPT2	1187720000	D.29
A2LCS/50S/NPT2-M50F-WM	1187800000	D.28
A2LCS/50S/NPT2-NPT1-1/2	1187880000	D.29
A2LCS/50S/NPT2-NPT2F-WM	1187960000	D.29
A2LCS/63/M63-M63F-WM	1187270000	D.27
A2LCS/63/M63-NPT2-1/2F	1187370000	D.27
A2LCS/63/NPT2-1/2-M63	1187550000	D.28
A2LCS/63/NPT2-1/2-NPT2	1187650000	D.29
A2LCS/63S/M63-M63F-WM	1187260000	D.27
A2LCS/63S/M63-NPT2-1/2F	1187450000	D.27
A2LCS/63S/M63-NPT2F-WM	1187360000	D.27
A2LCS/63S/NPT2-1/2-M63F	1187810000	D.28
A2LCS/63S/NPT2-1/2-NPT	1187970000	D.29
A2LCS/63S/NPT2-1/2-NPT2	1187890000	D.29
A2LCS/63S/NPT2-M63F-WM	1187540000	D.28
A2LCS/63S/NPT2-NPT2-1/2	1187730000	D.29
A2LCS/63S/NPT2-NPT2F-WM	1187640000	D.29
A2LS/16/M16-WM	1185280000	D.19
A2LS/16/NPT1/2-WM	1185390000	D.19
A2LS/16/NPT3/4-WM	1185500000	D.19
A2LS/20/M20-WM	1185300000	D.19
A2LS/20/NPT1/2-WM	1185410000	D.19
A2LS/20/NPT3/4-WM	1185520000	D.19
A2LS/20S/M20-WM	1185290000	D.19
A2LS/20S/NPT1/2-WM	1185400000	D.19
A2LS/20S/NPT3/4-WM	1185510000	D.19
A2LS/25/M25-WM	1185310000	D.19
A2LS/25/NPT1-WM	1185530000	D.19
A2LS/25/NPT3/4-WM	1185420000	D.19
A2LS/32/M32-WM	1185320000	D.19
A2LS/32/NPT1-1/4-WM	1185540000	D.19
A2LS/32/NPT1-WM	1185430000	D.19
A2LS/40/M40-WM	1185330000	D.19
A2LS/40/NPT1-1/2-WM	1185550000	D.19
A2LS/40/NPT1-1/4-WM	1185440000	D.19
A2LS/50/M50-WM	1185350000	D.19
A2LS/50/NPT2-WM	1185470000	D.19
A2LS/50S/M50-WM	1185340000	D.19
A2LS/50S/NPT1-1/2-WM	1185450000	D.19
A2LS/50S/NPT2-WM	1185570000	D.19
A2LS/63/M63-WM	1185380000	D.19
A2LS/63/NPT2-1/2-WM	1185490000	D.19
A2LS/63S/M63-WM	1185370000	D.19
A2LS/63S/NPT2-1/2-WM	1185580000	D.19
A2LS/63S/NPT2-WM	1185480000	D.19
ADAP M16-M20-W	1262730000	D.55
ADAP M16-NPT1/2-W	1262840000	D.55
ADAP M16-NPT3/4-W	1262850000	D.55
ADAP M20-M16-W	1262740000	D.55
ADAP M20-M25-W	1262750000	D.55
ADAP M20-NPT1/2-W	1262860000	D.55
ADAP M20-NPT3/4-W	1262870000	D.55
ADAP M25-M20-W	1262760000	D.55
ADAP M25-M32-W	1262770000	D.55
ADAP M25-NPT1-W	1262900000	D.55
ADAP M25-NPT1/2-W	1262880000	D.55
ADAP M25-NPT3/4-W	1262890000	D.55
ADAP M32-M25-W	1262780000	D.55
ADAP M32-M40-W	1262790000	D.55
ADAP M32-NPT1-1/2-W	1262950000	D.55
ADAP M32-NPT1-1/4-W	1262940000	D.55
ADAP M32-NPT1-W	1262930000	D.55
ADAP M32-NPT3/4-W	1262910000	D.55
ADAP M40-M32-W	1262800000	D.55
ADAP M40-M50-W	1262810000	D.55
ADAP M40-NPT1-1/2-W	1262980000	D.55
ADAP M40-NPT1-1/4-W	1262970000	D.55
ADAP M40-NPT1-W	1262960000	D.55
ADAP M40-NPT2-W	1262990000	D.55
ADAP M50-M40-W	1262830000	D.55
ADAP M50-NPT1-1/2-W	1263010000	D.55
ADAP M50-NPT1-1/4-W	1263000000	D.55
ADAP M50-NPT2-W	1263030000	D.55
ADAP NPT1-1/2-M40-W	1263240000	D.54
ADAP NPT1-1/2-M50-W	1263250000	D.54
ADAP NPT1-1/2-NPT1-1/4	1262550000	D.54
ADAP NPT1-1/2-NPT2-W	1262560000	D.54
ADAP NPT1-1/4-M32-W	1263220000	D.54
ADAP NPT1-1/4-M40-W	1263230000	D.54
ADAP NPT1-1/4-NPT1-1/2	1262540000	D.54
ADAP NPT1-1/4-NPT1-W	1262530000	D.54
ADAP NPT1-M25-W	1263200000	D.54
ADAP NPT1-M32-W	1263210000	D.54
ADAP NPT1-NPT1-1/2-W	1424110000	D.54
ADAP NPT1-NPT1-1/4-W	1262520000	D.54
ADAP NPT1-NPT3/4-W	1262510000	D.54
ADAP NPT1/2-M16-W	1263150000	D.54
ADAP NPT1/2-M20-W	1263170000	D.54
ADAP NPT1/2-NPT3/4-W	1262470000	D.54
ADAP NPT2-M50-W	1263270000	D.54
ADAP NPT2-NPT1-1/2-W	1262570000	D.54
ADAP NPT3/4-M20-W	1263180000	D.54
ADAP NPT3/4-M25-W	1263190000	D.54
ADAP NPT3/4-NPT1-1/2-W	1424090000	D.54
ADAP NPT3/4-NPT1-W	1262490000	D.54
ADAP NPT3/4-NPT1/2-W	1262480000	D.54
ADAPS M16-M20-W	1261910000	D.57
ADAPS M16-NPT1/2-W	1262020000	D.57
ADAPS M16-NPT3/4-W	1262030000	D.57
ADAPS M20-M16-W	1261920000	D.57
ADAPS M20-M25-W	1261930000	D.57
ADAPS M20-NPT1/2-W	1262040000	D.57
ADAPS M20-NPT3/4-W	1262050000	D.57
ADAPS M25-M20-W	1261940000	D.57
ADAPS M25-M32-W	1261950000	D.57
ADAPS M25-NPT1-W	1262080000	D.57
ADAPS M25-NPT1/2-W	1262060000	D.57
ADAPS M25-NPT3/4-W	1262070000	D.57
ADAPS M32-M25-W	1261960000	D.57
ADAPS M32-M40-W	1261970000	D.57
ADAPS M32-NPT1-1/2-W	1262120000	D.57
ADAPS M32-NPT1-1/4-W	1262110000	D.57
ADAPS M32-NPT1-W	1262100000	D.57
ADAPS M32-NPT3/4-W	1262090000	D.57
ADAPS M40-M32-W	1261980000	D.57
ADAPS M40-M50-W	1261990000	D.57
ADAPS M40-NPT1-1/2-W	1262150000	D.57
ADAPS M40-NPT1-1/4-W	1262140000	D.57
ADAPS M40-NPT1-W	1262130000	D.57
ADAPS M40-NPT2-W	1262170000	D.57
ADAPS M50-M40-W	1262010000	D.57
ADAPS M50-NPT1-1/2-W	1262190000	D.57
ADAPS M50-NPT1-1/4-W	1262180000	D.57
ADAPS M50-NPT2-W	1262200000	D.57
ADAPS NPT1-1/2-M40-W	1262430000	D.56
ADAPS NPT1-1/2-M50-W	1262440000	D.56
ADAPS NPT1-1/2-NPT1-1/4	1265720000	D.56
ADAPS NPT1-1/2-NPT2-W	1265730000	D.56
ADAPS NPT1-1/4-M32-W	1262410000	D.56
ADAPS NPT1-1/4-M40-W	1262420000	D.56
ADAPS NPT1-1/4-NPT1-1/2	1265710000	D.56
ADAPS NPT1-1/4-NPT1-W	1265700000	D.56
ADAPS NPT1-M25-W	1262380000	D.56
ADAPS NPT1-M32-W	1262390000	D.56
ADAPS NPT1-NPT1-1/4-W	1265690000	D.56
ADAPS NPT1-NPT3/4-W	1265680000	D.56
ADAPS NPT1/2-M16-W	1262330000	D.56
ADAPS NPT1/2-M20-W	1262340000	D.56
ADAPS NPT1/2-NPT3/4-W	1265640000	D.56
ADAPS NPT2-M50-W	1262450000	D.56
ADAPS NPT2-NPT1-1/2-W	1265740000	D.56
ADAPS NPT3/4-M20-W	1262350000	D.56
ADAPS NPT3/4-M25-W	1262370000	D.56
ADAPS NPT3/4-NPT1-W	1265670000	D.56
ADAPS NPT3/4-NPT1/2-W	1265650000	D.56
AP SAKK4/10 KER/WS	9502630000	C.168
AP SAKK4/10 KER/WS	9502630000	C.169
AP SAKK4/10 KER/WS	9502630000	C.170
AP SAKK4/10 KER/WS	9502630000	C.171
AP SAKK4/10 KER/WS	9502630000	C.250
AP SAKK4/10 KER/WS	9502630000	C.251
AP SAKK4/10 KER/WS	9502630000	C.252
AP SAKK4/10 KER/WS	9502630000	C.253
B		
BK 4/E	7906080000	C.196
C		
CABTITE BP 10MM PA	2652380000	E.14
CABTITE BP 12MM PA	2652400000	E.14
CABTITE BP 13MM PA	2652410000	E.14
CABTITE BP 14MM PA	2652420000	E.14
CABTITE BP 17MM PA	2652430000	E.14
CABTITE BP 2MM PA	2652300000	E.14
CABTITE BP 3MM PA	2652310000	E.14
CABTITE BP 4MM PA	2652320000	E.14
CABTITE BP 5MM PA	2652330000	E.14
CABTITE BP 6MM PA	2652340000	E.14
CABTITE BP 7MM PA	2652350000	E.14
CABTITE BP 8MM PA	2652360000	E.14
CABTITE BP 9MM PA	2652370000	E.14
CABTITE BSE LRG BK	2583900000	E.8
CABTITE BSE LRG GY	2584520000	E.8
CABTITE BSE SML BK	2584790000	E.8
CABTITE BSE SML GY	2583350000	E.8
CABTITE CGS M20 BK	2584200000	E.13
CABTITE CGS M25 BK	2584180000	E.13
CABTITE CGS M32 BK	2584160000	E.13
CABTITE CGS M40 BK	2584150000	E.13
CABTITE CGS M50 BK	2584130000	E.13
CABTITE CGS M63 BK	2584120000	E.13
CABTITE CR 10/6 EMV	2583930000	E.14
CABTITE CR 16/8 EMV	2583910000	E.14
CABTITE CR 24/10 EMV	2583890000	E.14
CABTITE CR 4/1 EMV	2583950000	E.14
CABTITE CSE 2-11 SML BK	2583510000	E.8
CABTITE CSE 7-24 LRG BK	2583500000	E.8
CABTITE EP 24/13 GY	2779310000	E.18
CABTITE EP 24/14 GY	2779320000	E.18
CABTITE EP 24/16 GY	2779330000	E.18
CABTITE EP 24/16-1 GY	2779340000	E.18
CABTITE EP 24/17 GY	2779350000	E.18
CABTITE EP 24/20 GY	2779360000	E.18
CABTITE EP 24/21 GY	2779370000	E.18
CABTITE EP 24/32 GY	2779380000	E.18
CABTITE EP A 24/12 GY	2743540000	E.17
CABTITE EP A 24/14 GY	2743550000	E.17
CABTITE EP A 24/17 GY	2743560000	E.17
CABTITE EP A 24/18 GY	2743570000	E.17
CABTITE EP A 24/19 GY	2743580000	E.17
CABTITE EP A 24/26 GY	2743590000	E.17
CABTITE EP A 24/42 GY	2743600000	E.17
CABTITE EP A 24/48 GY	2743610000	E.17
CABTITE EP A 24/50 GY	2743620000	E.17
CABTITE EP B 24/12 GY	2743630000	E.17
CABTITE EP B 24/14 GY	2743640000	E.17
CABTITE EP B 24/17 GY	2743650000	E.17
CABTITE EP B 24/18 GY	2743660000	E.17
CABTITE EP B 24/19 GY	2743670000	E.17
CABTITE EP B 24/26 GY	2743680000	E.17
CABTITE EP B 24/42 GY	2743690000	E.17
CABTITE EP B 24/48 GY	2743700000	E.17
CABTITE EP B 24/50 GY	2743710000	E.17
CABTITE FR 10/6 BK	2583480000	E.9
CABTITE FR 10/6 BK SET	2583760000	E.9
CABTITE FR 16/8 BK	2583470000	E.10
CABTITE FR 16/8 BK SET	2583740000	E.10
CABTITE FR 24/10 BK	2583800000	E.10
CABTITE FR 24/10 BK SET	2583720000	E.10
CABTITE FR 4-1 BK	2583490000	E.9
CABTITE FR 4-1 BK SET	2583780000	E.9
CABTITE FRFT 10/6	2891480000	E.11
CABTITE FRFT 10/6 SET	2891500000	E.11
CABTITE FRFT 16/8	2891510000	E.12
CABTITE FRFT 16/8 SET	2891530000	E.12

Type	Order No.	Page
CABTITE FRFT 24/10	2891540000	E.12
CABTITE FRFT 24/10 SET	2891560000	E.12
CABTITE FRFT 4-1	2891450000	E.11
CABTITE FRFT 4-1 SET	2891470000	E.11
CABTITE FRL 10/6 BK	2584240000	E.9
CABTITE FRL 16/8 BK	2584220000	E.10
CABTITE FRL 24/10 BK	2584210000	E.10
CABTITE FRL 4-1 BK	2584260000	E.9
CABTITE GI H BK	2584270000	E.13
CABTITE GI I BK	2584320000	E.13
CABTITE GI T BK	2584300000	E.13
CABTITE GI X BK	2584290000	E.13
CABTITE LNS M20 BK	2584110000	E.13
CABTITE LNS M25 BK	2584090000	E.13
CABTITE LNS M32 BK	2584070000	E.13
CABTITE LNS M40 BK	2584050000	E.13
CABTITE LNS M50 BK	2584030000	E.13
CABTITE LNS M63 BK	2584010000	E.13
CABTITE OFRL BK	2907560000	E.11
CABTITE OFRL BK	2907560000	E.12
CABTITE SC M5X25 SET	2635120000	E.9
CABTITE SC M5X25 SET	2635120000	E.10
CABTITE SC M5X25 SET	2635120000	E.11
CABTITE SC M5X25 SET	2635120000	E.12
CABTITE SE 1.5-2 SML BK	2584780000	E.8
CABTITE SE 1.5-2 SML GY	2583360000	E.8
CABTITE SE 1/ASI SML BK	2583530000	E.8
CABTITE SE 1/ASI SML GY	2584810000	E.8
CABTITE SE 10-11 SML BK	2584060000	E.8
CABTITE SE 10-11 SML GY	2584610000	E.8
CABTITE SE 11-12 SML BK	2584040000	E.8
CABTITE SE 11-12 SML GY	2584600000	E.8
CABTITE SE 12-13 SML BK	2584020000	E.8
CABTITE SE 12-13 SML GY	2584590000	E.8
CABTITE SE 13-14 SML BK	2584000000	E.8
CABTITE SE 13-14 SML GY	2584570000	E.8
CABTITE SE 14-15 LRG BK	2583880000	E.8
CABTITE SE 14-15 LRG GY	2584510000	E.8
CABTITE SE 14-15 SML BK	2583980000	E.8
CABTITE SE 14-15 SML GY	2584560000	E.8
CABTITE SE 15-16 LRG BK	2583860000	E.8
CABTITE SE 15-16 LRG GY	2584500000	E.8
CABTITE SE 15-16 SML BK	2583960000	E.8
CABTITE SE 15-16 SML GY	2584550000	E.8
CABTITE SE 16-17 LRG BK	2583850000	E.8
CABTITE SE 16-17 LRG GY	2584490000	E.8
CABTITE SE 17-18 LRG BK	2583840000	E.8
CABTITE SE 17-18 LRG GY	2584480000	E.8
CABTITE SE 18-19 LRG BK	2583830000	E.8
CABTITE SE 18-19 LRG GY	2584470000	E.8
CABTITE SE 19-20 LRG BK	2583810000	E.8
CABTITE SE 19-20 LRG GY	2584460000	E.8
CABTITE SE 2-3 SML BK	2584760000	E.8
CABTITE SE 2-3 SML GY	2583380000	E.8
CABTITE SE 2/4-5 SML BK	2583620000	E.8
CABTITE SE 2/4-5 SML GY	2584900000	E.8
CABTITE SE 2/5-6 SML BK	2583610000	E.8
CABTITE SE 2/5-6 SML GY	2584890000	E.8
CABTITE SE 2/7 SML BK	2583550000	E.8
CABTITE SE 2/7 SML GY	2584830000	E.8
CABTITE SE 2/8 SML BK	2583540000	E.8
CABTITE SE 2/8 SML GY	2584820000	E.8
CABTITE SE 2/ASI SML BK	2583520000	E.8
CABTITE SE 2/ASI SML GY	2584800000	E.8
CABTITE SE 20-21 LRG BK	2583790000	E.8
CABTITE SE 20-21 LRG GY	2584450000	E.8
CABTITE SE 21-22 LRG BK	2583770000	E.8
CABTITE SE 21-22 LRG GY	2584440000	E.8
CABTITE SE 22-23 LRG BK	2583750000	E.8
CABTITE SE 22-23 LRG GY	2584430000	E.8
CABTITE SE 23-24 LRG BK	2583730000	E.8
CABTITE SE 23-24 LRG GY	2584420000	E.8
CABTITE SE 24-25 LRG BK	2583710000	E.8
CABTITE SE 24-25 LRG GY	2584410000	E.8
CABTITE SE 25-26 LRG BK	2583700000	E.8
CABTITE SE 25-26 LRG GY	2584400000	E.8
CABTITE SE 26-27 LRG BK	2583690000	E.8
CABTITE SE 26-27 LRG GY	2584390000	E.8
CABTITE SE 27-28 LRG BK	2583680000	E.8
CABTITE SE 27-28 LRG GY	2584370000	E.8
CABTITE SE 28-29 LRG BK	2583670000	E.8
CABTITE SE 28-29 LRG GY	2584350000	E.8
CABTITE SE 29-30 LRG BK	2583660000	E.8
CABTITE SE 29-30 LRG GY	2584380000	E.8
CABTITE SE 3-4 SML BK	2584730000	E.8
CABTITE SE 3-4 SML GY	2583400000	E.8
CABTITE SE 3/5-6 SML BK	2652280000	E.8
CABTITE SE 3/5-6 SML GY	2652290000	E.8
CABTITE SE 30-31 LRG BK	2583650000	E.8
CABTITE SE 30-31 LRG GY	2584360000	E.8
CABTITE SE 31-32 LRG BK	2583640000	E.8
CABTITE SE 31-32 LRG GY	2584340000	E.8
CABTITE SE 32-33 LRG BK	2583630000	E.8
CABTITE SE 32-33 LRG GY	2584920000	E.8
CABTITE SE 33-34 LRG BK	2595510000	E.8
CABTITE SE 33-34 LRG GY	2584910000	E.8
CABTITE SE 34-35 LRG BK	2595520000	E.8
CABTITE SE 34-35 LRG GY	2595530000	E.8
CABTITE SE 4-5 SML BK	2584680000	E.8
CABTITE SE 4-5 SML GY	2583440000	E.8
CABTITE SE 4/2-3 SML BK	2583590000	E.8
CABTITE SE 4/2-3 SML GY	2584870000	E.8
CABTITE SE 4/3-4 SML BK	2583580000	E.8
CABTITE SE 4/3-4 SML GY	2584860000	E.8
CABTITE SE 4/4-5 SML BK	2583560000	E.8
CABTITE SE 4/4-5 SML GY	2584840000	E.8
CABTITE SE 5-6 SML BK	2584710000	E.8
CABTITE SE 5-6 SML GY	2583450000	E.8
CABTITE SE 6-7 SML BK	2584690000	E.8
CABTITE SE 6-7 SML GY	2583460000	E.8
CABTITE SE 7-8 SML BK	2584670000	E.8
CABTITE SE 7-8 SML GY	2584660000	E.8
CABTITE SE 8-9 SML BK	2584330000	E.8
CABTITE SE 8-9 SML GY	2584650000	E.8
CABTITE SE 9-10 SML BK	2584080000	E.8
CABTITE SE 9-10 SML GY	2584630000	E.8
CABTITE TOOL ATSE PA	2637360000	E.9
CABTITE TOOL ATSE PA	2637360000	E.10
CABTITE TOOL ATSE PA	2637360000	E.11
CABTITE TOOL ATSE PA	2637360000	E.12

D

DAE M12 PA LONG	1868570000	C.142
DAE M12 PA LONG	1868570000	C.143
DAE M12 PA LONG	1868570000	C.144
DAE M12 PA LONG	1868570000	C.145
DAE M12 PA LONG	1868570000	C.146
DAE M12 PA LONG	1868570000	C.147
DAE M12 PA LONG	1868570000	C.148
DAE M12 PA LONG	1868570000	C.149
DAE M12 PA LONG	1868570000	C.176
DAE M12 PA LONG	1868570000	C.177
DAE M12 PA LONG	1868570000	C.178
DAE M12 PA LONG	1868570000	C.179
DAE M12 PA LONG	1868570000	C.180
DAE M12 PA LONG	1868570000	C.181
DAE M12 PA LONG	1868570000	C.182
DAE M12 PA LONG	1868570000	C.183
DAE M12 PA LONG	1868570000	C.184
DAE M12 PA LONG	1868570000	C.185
DAE M12 PA LONG	1868570000	C.186
DAE M12 PA LONG	1868570000	C.187
DAE M12 PA LONG	1868570000	C.188
DAE M12 PA LONG	1868570000	C.189
DAE M12 PA LONG	1868570000	C.190
DAE M12 PA LONG	1868570000	C.191
DAE M12 PA LONG	1868570000	C.192
DAE M12 PA LONG	1868570000	C.193
DAE M12 PA LONG	1868570000	C.194
DAE M12 PA LONG	1868570000	C.212
DAE M12 PA LONG	1868570000	C.213
DAE M12 PA LONG	1868570000	C.214
DAE M12 PA LONG	1868570000	C.215
DAE M12 PA LONG	1868570000	C.216
DAE M12 PA LONG	1868570000	C.217
DAE M12 PA LONG	1868570000	C.218
DAE M12 PA LONG	1868570000	C.219
DAE M12 PA LONG	1868570000	C.220
DAE M12 PA LONG	1868570000	C.221
DAE M12 PA LONG	1868570000	C.222
DAE M12 PA LONG	1868570000	C.223
DAE M12 PA LONG	1868570000	C.224
DAE M12 PA LONG	1868570000	C.225
DAE M12 PA LONG	1868570000	C.226
DAE M12 PA LONG	1868570000	C.227
DAE M12 PA LONG	1868570000	C.228
DAE M12 PA LONG	1868570000	C.256
DAE M12 PA LONG	1868570000	C.257
DAE M12 PA LONG	1868570000	C.258
DAE M12 PA LONG	1868570000	C.259
DAE M12 PA LONG	1868570000	C.260
DAE M12 PA LONG	1868570000	C.264
DAE M12 PA LONG	1868570000	C.265
DAE M12 PA LONG	1868570000	C.266
DAE M12 PA LONG	1868570000	C.267
DAE M12 PA LONG	1868570000	C.268
DAE M12 PA LONG	1868570000	C.269
DAE M12 PA LONG	1868570000	C.270
DAE M12 PA LONG	1868570000	C.271
DAE M12 PA LONG	1868570000	C.272
DAE M12 PA LONG	1868570000	C.276
DAE M12 PA LONG	1868570000	C.277
DAE M12 PA LONG	1868570000	C.278
DAE M12 PA LONG	1868570000	D.51
DAE M12 PA SHORT	1868560000	D.51
DAE M12 SS	1868550000	C.142
DAE M12 SS	1868550000	C.143
DAE M12 SS	1868550000	C.144
DAE M12 SS	1868550000	C.145
DAE M12 SS	1868550000	C.146
DAE M12 SS	1868550000	C.147
DAE M12 SS	1868550000	C.148
DAE M12 SS	1868550000	C.149
DAE M12 SS	1868550000	C.176
DAE M12 SS	1868550000	C.177
DAE M12 SS	1868550000	C.178
DAE M12 SS	1868550000	C.179
DAE M12 SS	1868550000	C.180
DAE M12 SS	1868550000	C.181
DAE M12 SS	1868550000	C.182
DAE M12 SS	1868550000	C.183
DAE M12 SS	1868550000	C.184
DAE M12 SS	1868550000	C.185
DAE M12 SS	1868550000	C.186
DAE M12 SS	1868550000	C.187
DAE M12 SS	1868550000	C.188
DAE M12 SS	1868550000	C.189
DAE M12 SS	1868550000	C.190
DAE M12 SS	1868550000	C.191
DAE M12 SS	1868550000	C.192
DAE M12 SS	1868550000	C.193
DAE M12 SS	1868550000	C.194
DAE M12 SS	1868550000	C.212
DAE M12 SS	1868550000	C.213
DAE M12 SS	1868550000	C.214
DAE M12 SS	1868550000	C.215
DAE M12 SS	1868550000	C.216
DAE M12 SS	1868550000	C.217
DAE M12 SS	1868550000	C.218
DAE M12 SS	1868550000	C.219
DAE M12 SS	1868550000	C.220
DAE M12 SS	1868550000	C.221
DAE M12 SS	1868550000	C.222
DAE M12 SS	1868550000	C.223
DAE M12 SS	1868550000	C.224
DAE M12 SS	1868550000	C.225
DAE M12 SS	1868550000	C.226
DAE M12 SS	1868550000	C.227
DAE M12 SS	1868550000	C.228
DAE M12 SS	1868550000	C.256
DAE M12 SS	1868550000	C.257
DAE M12 SS	1868550000	C.258
DAE M12 SS	1868550000	C.259
DAE M12 SS	1868550000	C.260
DAE M12 SS	1868550000	C.264
DAE M12 SS	1868550000	C.265
DAE M12 SS	1868550000	C.266
DAE M12 SS	1868550000	C.267
DAE M12 SS	1868550000	C.268
DAE M12 SS	1868550000	C.269
DAE M12 SS	1868550000	C.270
DAE M12 SS	1868550000	C.271
DAE M12 SS	1868550000	C.272
DAE M12 SS	1868550000	C.276
DAE M12 SS	1868550000	C.277
DAE M12 SS	1868550000	C.278
DAE M12 SS	1868550000	D.52
DESC M6X14 KTB SET	1253230000	C.20
DESC M6X14 KTB SET	1253230000	C.21
DESC M6X14 KTB SET	1253230000	C.22
DESC M6X14 KTB SET	1253230000	C.23
DESC M6X14 KTB SET	1253230000	C.24
DESC M6X14 KTB SET	1253230000	C.25
DESC M6X14 KTB SET	1253230000	C.26
DESC M6X14 KTB SET	1253230000	C.27
DESC M6X14 KTB SET	1253230000	C.28
DESC M6X14 KTB SET	1253230000	C.29
DESC M6X14 KTB SET	1253230000	C.31
DESC M6X14 KTB SET	1253230000	C.32
DESC M6X14 KTB SET	1253230000	C.33
DESC M6X14 KTB SET	1253230000	C.34
DESC M6X14 KTB SET	1253230000	C.35
DESC M6X14 KTB SET	1253230000	C.36
DESC M6X14 KTB SET	1253230000	C.38
DESC M6X14 KTB SET	1253230000	C.39
DESC M6X14 KTB SET	1253230000	C.40
DESC M6X14 KTB SET	1253230000	C.41
DESC M6X14 KTB SET	1253230000	C.43
DESC M6X14 KTB SET	1253230000	C.44
DESC M6X14 KTB SET	1253230000	C.45
DESC M6X14 KTB SET	1253230000	C.46
DESC M6X14 KTB SET	1253230000	C.47
DESC M6X14 KTB SET	1253230000	C.48
DESC M6X14 KTB SET	1253230000	C.49
DESC M6X14 KTB SET	1253230000	C.50
DESC M6X14 KTB SET	1253230000	C.51
DESC M6X14 KTB SET	1253230000	C.52
DESC M6X14 KTB SET	1253230000	C.53
DESC M6X14 KTB SET	1253230000	C.54
DESC M6X14 KTB SET	1253230000	C.55
DESC M6X14 KTB SET	1253230000	C.56
DESC M6X14 KTB SET	1253230000	C.57
DESC M6X14 KTB SET	1253230000	C.58
DESC M6X14 KTB SET	1253230000	C.59
DESC M6X14 KTB SET	1253230000	C.60
DESC M6X14 KTB SET	1253230000	C.70
DESC M6X14 KTB SET	1253230000	C.71
DESC M6X14 KTB SET	1253230000	C.72
DOHA KEB A4 S4B R	8000075809	C.102
DOHA KEB A4 S4B R	8000075809	C.103
DOHA KEB A4 S4B R	8000075809	C.104
DOHA KEB A4 S4B R	8000075809	C.105
DOHA KEB A4 S4B R	8000075809	C.106
DOHA KEB A4 S4B R	8000075809	C.107
DOHA KEB A4 S4B R	8000075809	C.108
DOHA KEB A4 S4B R	8000075809	C.115
DOHA KEB A4 S4B R	8000075809	C.116
DOHA KEB A4 S4B R	8000075809	C.117
DOHA KEB A4 S4B R	8000075809	C.118
DOHA KEB A4 S4B R	8000075809	C.119
DOHA KEB A4 S4B R	8000075809	C.120
DOHA KEB A4 S4B R	8000075809	C.121
DOHA KEB A4 S4B R	8000075809	C.128
DOHA KEB A4 S4B R	8000075809	C.129
DOHA KEB A4 S4B R	8000075809	C.136
DOHA KEB A4 S4B R	8000075809	C.137
DOHA KEB A5 S4B R	8000075808	C.102
DOHA KEB A5 S4B R	8000075808	C.103
DOHA KEB A5 S4B R	8000075808	C.104
DOHA KEB A5 S4B R	8000075808	C.105
DOHA KEB A5 S4B R	8000075808	C.106
DOHA KEB A5 S4B R	8000075808	C.107
DOHA KEB A5 S4B R	8000075808	C.108
DOHA KEB A5 S4B R	8000075808	C.115
DOHA KEB A5 S4B R	8000075808	C.116
DOHA KEB A5 S4B R	8000075808	C.117
DOHA KEB A5 S4B R	8000075808	C.118
DOHA KEB A5 S4B R	8000075808	C.119
DOHA KEB A5 S4B R	8000075808	C.120
DOHA KEB A5 S4B R	8000075808	C.121
DOHA KEB A5 S4B R	8000075808	C.128
DOHA KEB A5 S4B R	8000075808	C.129
DOHA KEB A5 S4B R	8000075808	C.136
DOHA KEB A5 S4B R	8000075808	C.137
DOHA KEB A6 S4B R	8000075807	C.99
DOHA KEB A6 S4B R	8000075807	C.100
DOHA KEB A6 S4B R	8000075807	C.101
DOHA KEB A6 S4B R	8000075807	C.102
DOHA KEB A6 S4B R	8000075807	C.103
DOHA KEB A6 S4B R	8000075807	C.104
DOHA KEB A6 S4B R	8000075807	C.105
DOHA KEB A6 S4B R	8000075807	C.106
DOHA KEB A6 S4B R	8000075807	C.107
DOHA KEB A6 S4B R	8000075807	C.108
DOHA KEB A6 S4B R	8000075807	C.113
DOHA KEB A6 S4B R	8000075807	C.114
DOHA KEB A6 S4B R	8000075807	C.115
DOHA KEB A6 S4B R	8000075807	C.116
DOHA KEB A6 S4B R	8000075807	C.117
DOHA KEB A6 S4B R	8000075807	C.118
DOHA KEB A6 S4B R	8000075807	C.119
DOHA KEB A6 S4B R	8000075807	C.120
DOHA KEB A6 S4B R	8000075807	C.121
DOHA KEB A6 S4B R	8000075807	C.125
DOHA KEB A6 S4B R	8000075807	C.126
DOHA KEB A6 S4B R	8000075807	C.127
DOHA KEB A6 S4B R	8000075807	C.128
DOHA KEB A6 S4B R	8000075807	C.129
DOHA KEB A6 S4B R	8000075807	C.133
DOHA KEB A6 S4B R	8000075807	C.134
DOHA KEB A6 S4B R	8000075807	C.135
DOHA KEB A6 S4B R	8000075807	C.136
DOHA KEB A6 S4B R	8000075807	C.137
DOHA KTB A4 S2 R	1252730000	C.28
DOHA KTB A4 S2 R	1252730000	C.29
DOHA KTB A4 S2 R	1252730000	C.30
DOHA KTB A4 S2 R	1252730000	C.33
DOHA KTB A4 S2 R	1252730000	C.34
DOHA KTB A4 S2 R	1252730000	C.37
DOHA KTB A4 S2 R	1252730000	C.38
DOHA KTB A4 S2 R	1252730000	C.39
DOHA KTB A4 S2 R	1252730000	C.40
DOHA KTB A4 S2 R	1252730000	C.41
DOHA KTB A4 S2 R	1252730000	C.42
DOHA KTB A4 S2 R	1252730000	C.43
DOHA KTB A4 S2 R	1252730000	C.44
DOHA KTB A4 S2 R	1252730000	C.45
DOHA KTB A4 S2 R	1252730000	C.46
DOHA KTB A4 S2 R	1252730000	C.47
DOHA KTB A4 S2 R	1252730000	C.48
DOHA KTB A4 S2 R	1252730000	C.49
DOHA KTB A4 S2 R	1252730000	C.50
DOHA KTB A4 S2 R	1252730000	C.51
DOHA KTB A4 S2 R	1252730000	C.52
DOHA KTB A4 S2 R	1252730000	C.53
DOHA KTB A4 S2 R	1252730000	C.54
DOHA KTB A4 S2 R	1252730000	C.55
DOHA KTB A4 S2 R	1252730000	C.56
DOHA KTB A4 S2 R	1252730000	C.57
DOHA KTB A4 S2 R	1252730000	C.58
DOHA KTB A4 S2 R	1252730000	C.59
DOHA KTB A4 S2 R	1252730000	C.60
DOHA KTB A4 S2 R	1252730000	C.72
DOHA KTB A5 S2 R	1252750000	C.28
DOHA KTB A5 S2 R	1252750000	C.29
DOHA KTB A5 S2 R	1252750000	C.30
DOHA KTB A5 S2 R	1252750000	C.33
DOHA KTB A5 S2 R	1252750000	C.34
DOHA KTB A5 S2 R	1252750000	C.35
DOHA KTB A5 S2 R	1252750000	C.36
DOHA KTB A5 S2 R	1252750000	C.37
DOHA KTB A5 S2 R	1252750000	C.38
DOHA KTB A5 S2 R	1252750000	C.39
DOHA KTB A5 S2 R	1252750000	C.40
DOHA KTB A5 S2 R	1252750000	C.41

Type	Order No.	Page
DOHA KTB A5 S2 R	1252750000	C.42
DOHA KTB A5 S2 R	1252750000	C.43
DOHA KTB A5 S2 R	1252750000	C.44
DOHA KTB A5 S2 R	1252750000	C.45
DOHA KTB A5 S2 R	1252750000	C.46
DOHA KTB A5 S2 R	1252750000	C.47
DOHA KTB A5 S2 R	1252750000	C.48
DOHA KTB A5 S2 R	1252750000	C.49
DOHA KTB A5 S2 R	1252750000	C.50
DOHA KTB A5 S2 R	1252750000	C.51
DOHA KTB A5 S2 R	1252750000	C.52
DOHA KTB A5 S2 R	1252750000	C.53
DOHA KTB A5 S2 R	1252750000	C.54
DOHA KTB A5 S2 R	1252750000	C.55
DOHA KTB A5 S2 R	1252750000	C.56
DOHA KTB A5 S2 R	1252750000	C.57
DOHA KTB A5 S2 R	1252750000	C.58
DOHA KTB A5 S2 R	1252750000	C.59
DOHA KTB A5 S2 R	1252750000	C.60
DOHA KTB A6 S2 R	1252780000	C.21
DOHA KTB A6 S2 R	1252780000	C.22
DOHA KTB A6 S2 R	1252780000	C.24
DOHA KTB A6 S2 R	1252780000	C.25
DOHA KTB A6 S2 R	1252780000	C.26
DOHA KTB A6 S2 R	1252780000	C.27
DOHA KTB A6 S2 R	1252780000	C.28
DOHA KTB A6 S2 R	1252780000	C.29
DOHA KTB A6 S2 R	1252780000	C.30
DOHA KTB A6 S2 R	1252780000	C.31
DOHA KTB A6 S2 R	1252780000	C.32
DOHA KTB A6 S2 R	1252780000	C.33
DOHA KTB A6 S2 R	1252780000	C.34
DOHA KTB A6 S2 R	1252780000	C.35
DOHA KTB A6 S2 R	1252780000	C.36
DOHA KTB A6 S2 R	1252780000	C.37
DOHA KTB A6 S2 R	1252780000	C.38
DOHA KTB A6 S2 R	1252780000	C.39
DOHA KTB A6 S2 R	1252780000	C.40
DOHA KTB A6 S2 R	1252780000	C.41
DOHA KTB A6 S2 R	1252780000	C.42
DOHA KTB A6 S2 R	1252780000	C.43
DOHA KTB A6 S2 R	1252780000	C.44
DOHA KTB A6 S2 R	1252780000	C.45
DOHA KTB A6 S2 R	1252780000	C.46
DOHA KTB A6 S2 R	1252780000	C.47
DOHA KTB A6 S2 R	1252780000	C.48
DOHA KTB A6 S2 R	1252780000	C.49
DOHA KTB A6 S2 R	1252780000	C.50
DOHA KTB A6 S2 R	1252780000	C.51
DOHA KTB A6 S2 R	1252780000	C.52
DOHA KTB A6 S2 R	1252780000	C.53
DOHA KTB A6 S2 R	1252780000	C.54
DOHA KTB A6 S2 R	1252780000	C.55
DOHA KTB A6 S2 R	1252780000	C.56
DOHA KTB A6 S2 R	1252780000	C.57
DOHA KTB A6 S2 R	1252780000	C.58
DOHA KTB A6 S2 R	1252780000	C.59
DOHA KTB A6 S2 R	1252780000	C.60
DOHA KTB A6 S2 R	1252780000	C.71
DOHA KTB A6 S2 R	1252780000	C.72

E

E1W/16/M16-WM	1184650000	D.20
E1W/16/NPT1/2-WM	1184770000	D.20
E1W/16/NPT3/4-WM	1184880000	D.20
E1W/20/M20-WM	1184680000	D.20
E1W/20/NPT1/2-WM	1184790000	D.20
E1W/20/NPT3/4-WM	1184900000	D.20
E1W/20S/M20-WM	1184670000	D.20
E1W/20S/NPT1/2-WM	1184780000	D.20
E1W/20S/NPT3/4-WM	1184890000	D.20
E1W/25/M25-WM	1184690000	D.20
E1W/25/NPT1-WM	1184910000	D.20
E1W/25/NPT3/4-WM	1184800000	D.20
E1W/32/M32-WM	1184700000	D.20
E1W/32/NPT1-1/4-WM	1184920000	D.20
E1W/32/NPT1-WM	1184810000	D.20
E1W/40/M40-WM	1184710000	D.20
E1W/40/NPT1-1/2-WM	1184930000	D.20
E1W/40/NPT1-1/4-WM	1184820000	D.20
E1W/50/M50-WM	1184730000	D.20
E1W/50/NPT2-WM	1184840000	D.20
E1W/50S/M50-WM	1184720000	D.20
E1W/50S/NPT1-1/2-WM	1184830000	D.20
E1W/50S/NPT2-WM	1184940000	D.20
E1W/63/M63-WM	1184750000	D.20
E1W/63/NPT2-1/2-WM	1184870000	D.20
E1W/63S/M63-WM	1184740000	D.20
E1W/63S/NPT2-1/2-WM	1184950000	D.20
E1W/63S/NPT2-WM	1184850000	D.20
E1WS/16/M16-WM	1188840000	D.21
E1WS/16/NPT1/2-WM	1188940000	D.21
E1WS/16/NPT3/4-WM	1189040000	D.21
E1WS/20/M20-WM	1188860000	D.21
E1WS/20/NPT1/2-WM	1188960000	D.21
E1WS/20/NPT3/4-WM	1189060000	D.21
E1WS/20S/M20-WM	1188850000	D.21
E1WS/20S/NPT1/2-WM	1188950000	D.21
E1WS/20S/NPT3/4-WM	1189050000	D.21
E1WS/25/M25-WM	1188870000	D.21
E1WS/25/NPT1-WM	1189070000	D.21
E1WS/25/NPT3/4-WM	1188970000	D.21
E1WS/32/M32-WM	1188880000	D.21
E1WS/32/NPT1-1/4-WM	1189080000	D.21
E1WS/32/NPT1-WM	1188980000	D.21
E1WS/40/M40-WM	1188890000	D.21
E1WS/40/NPT1-1/2-WM	1189090000	D.21
E1WS/40/NPT1-1/4-WM	1188990000	D.21
E1WS/50/M50-WM	1188910000	D.21
E1WS/50/NPT2-WM	1189010000	D.21
E1WS/50S/M50-WM	1188900000	D.21
E1WS/50S/NPT1-1/2-WM	1189000000	D.21
E1WS/50S/NPT2-WM	1189100000	D.21
E1WS/63/M63-WM	1188930000	D.21
E1WS/63/NPT2-1/2-WM	1189030000	D.21
E1WS/63S/M63-WM	1188920000	D.21
E1WS/63S/NPT2-1/2-WM	1189110000	D.21
E1WS/63S/NPT2-WM	1189020000	D.21
E1XZ/16/M16-WM	1184970000	D.22
E1XZ/16/NPT1/2-WM	1185080000	D.22
E1XZ/16/NPT3/4-WM	1185190000	D.22
E1XZ/20/M20-WM	1184990000	D.22
E1XZ/20/NPT1/2-WM	1185100000	D.22
E1XZ/20/NPT3/4-WM	1185210000	D.22
E1XZ/20S/M20-WM	1184980000	D.22
E1XZ/20S/NPT1/2-WM	1185090000	D.22
E1XZ/20S/NPT3/4-WM	1185200000	D.22
E1XZ/25/M25-WM	1185000000	D.22
E1XZ/25/NPT1-WM	1185220000	D.22
E1XZ/25/NPT3/4-WM	1185110000	D.22
E1XZ/32/M32-WM	1185010000	D.22
E1XZ/32/NPT1-1/4-WM	1185230000	D.22
E1XZ/32/NPT1-WM	1185120000	D.22
E1XZ/40/M40-WM	1185020000	D.22
E1XZ/40/NPT1-1/2-WM	1185240000	D.22
E1XZ/40/NPT1-1/4-WM	1185130000	D.22
E1XZ/50/M50-WM	1185040000	D.22
E1XZ/50/NPT2-WM	1185150000	D.22
E1XZ/50S/M50-WM	1185030000	D.22
E1XZ/50S/NPT1-1/2-WM	1185140000	D.22
E1XZ/50S/NPT2-WM	1185250000	D.22
E1XZ/63/M63-WM	1185070000	D.22
E1XZ/63/NPT2-1/2-WM	1185180000	D.22
E1XZ/63S/M63-WM	1185050000	D.22
E1XZ/63S/NPT2-1/2-WM	1185270000	D.22
E1XZ/63S/NPT2-WM	1185170000	D.22
E1XZS/16/M16-WM	1188020000	D.23
E1XZS/16/NPT1/2-WM	1188120000	D.23
E1XZS/16/NPT3/4-WM	1188230000	D.23
E1XZS/20/M20-WM	1188040000	D.23
E1XZS/20/NPT1/2-WM	1188150000	D.23
E1XZS/20/NPT3/4-WM	1188250000	D.23
E1XZS/20S/M20-WM	1188030000	D.23
E1XZS/20S/NPT1/2-WM	1188140000	D.23
E1XZS/20S/NPT3/4-WM	1188240000	D.23
E1XZS/25/M25-WM	1188050000	D.23
E1XZS/25/NPT1-WM	1188260000	D.23
E1XZS/25/NPT3/4-WM	1188160000	D.23
E1XZS/32/M32-WM	1188060000	D.23
E1XZS/32/NPT1-1/4-WM	1188270000	D.23
E1XZS/32/NPT1-WM	1188170000	D.23
E1XZS/40/M40-WM	1188070000	D.23
E1XZS/40/NPT1-1/2-WM	1188280000	D.23
E1XZS/40/NPT1-1/4-WM	1188180000	D.23
E1XZS/50/M50-WM	1188090000	D.23
E1XZS/50/NPT2-WM	1188200000	D.23
E1XZS/50S/M50-WM	1188080000	D.23
E1XZS/50S/NPT1-1/2-WM	1188190000	D.23
E1XZS/50S/NPT2-WM	1188290000	D.23
E1XZS/63/M63-WM	1188110000	D.23
E1XZS/63/NPT2-1/2-WM	1188220000	D.23
E1XZS/63S/M63-WM	1188100000	D.23
E1XZS/63S/NPT2-1/2-WM	1188300000	D.23
E1XZS/63S/NPT2-WM	1188210000	D.23
EA-RING MS/M 16	1736480000	D.43
EA-RING MS/M 20	1736490000	D.43
EA-RING MS/M 25	1736500000	D.43
EA-RING MS/M 32	1736510000	D.43
EA-RING MS/M 40	1736520000	D.43
EA-RING MS/M 50	1736530000	D.43
EA-RING MS/M 63	1736540000	D.43
EA-RING MS/M 75	1736550000	D.43
EA-RING MS/M16 SC	0930710001	D.43
EA-RING MS/M20 SC	0930710002	D.43
EA-RING MS/M25 SC	0930710003	D.43
EA-RING MS/M32 SC	0930710004	D.43
EA-RING MS/M40 SC	0930710005	D.43
EA-RING MS/M50 SC	0930710006	D.43
EA-RING MS/M63 SC	0930710007	D.43
EA-RING MS/M75 SC	0930710008	D.43

F

FKSC M4X6 D8/SW2	1567480000	C.256
FKSC M4X6 D8/SW2	1567480000	C.257
FKSC M4X6 D8/SW2	1567480000	C.258
FKSC M4X6 D8/SW2	1567480000	C.259
FKSC M4X6 D8/SW2	1567480000	C.260
FKSC M4X6 D8/SW2	1567480000	C.264
FKSC M4X6 D8/SW2	1567480000	C.265
FKSC M4X6 D8/SW2	1567480000	C.266
FKSC M4X6 D8/SW2	1567480000	C.267
FKSC M4X6 D8/SW2	1567480000	C.268
FKSC M4X6 D8/SW2	1567480000	C.269
FKSC M4X6 D8/SW2	1567480000	C.270
FKSC M4X6 D8/SW2	1567480000	C.271
FKSC M4X6 D8/SW2	1567480000	C.272
FKSC M4X6 D8/SW2	1567480000	C.276
FKSC M4X6 D8/SW2	1567480000	C.277
FKSC M4X6 D8/SW2	1567480000	C.278
FKSC M6X8 D9/SW3	0642600000	C.20
FKSC M6X8 D9/SW3	0642600000	C.21
FKSC M6X8 D9/SW3	0642600000	C.22
FKSC M6X8 D9/SW3	0642600000	C.23
FKSC M6X8 D9/SW3	0642600000	C.24
FKSC M6X8 D9/SW3	0642600000	C.25
FKSC M6X8 D9/SW3	0642600000	C.26
FKSC M6X8 D9/SW3	0642600000	C.27
FKSC M6X8 D9/SW3	0642600000	C.28
FKSC M6X8 D9/SW3	0642600000	C.29
FKSC M6X8 D9/SW3	0642600000	C.31
FKSC M6X8 D9/SW3	0642600000	C.32
FKSC M6X8 D9/SW3	0642600000	C.33
FKSC M6X8 D9/SW3	0642600000	C.34
FKSC M6X8 D9/SW3	0642600000	C.35
FKSC M6X8 D9/SW3	0642600000	C.36
FKSC M6X8 D9/SW3	0642600000	C.38
FKSC M6X8 D9/SW3	0642600000	C.39
FKSC M6X8 D9/SW3	0642600000	C.40
FKSC M6X8 D9/SW3	0642600000	C.41
FKSC M6X8 D9/SW3	0642600000	C.43
FKSC M6X8 D9/SW3	0642600000	C.44
FKSC M6X8 D9/SW3	0642600000	C.45
FKSC M6X8 D9/SW3	0642600000	C.46
FKSC M6X8 D9/SW3	0642600000	C.47
FKSC M6X8 D9/SW3	0642600000	C.48
FKSC M6X8 D9/SW3	0642600000	C.49
FKSC M6X8 D9/SW3	0642600000	C.50
FKSC M6X8 D9/SW3	0642600000	C.51
FKSC M6X8 D9/SW3	0642600000	C.52
FKSC M6X8 D9/SW3	0642600000	C.53
FKSC M6X8 D9/SW3	0642600000	C.54
FKSC M6X8 D9/SW3	0642600000	C.55
FKSC M6X8 D9/SW3	0642600000	C.56
FKSC M6X8 D9/SW3	0642600000	C.57
FKSC M6X8 D9/SW3	0642600000	C.58
FKSC M6X8 D9/SW3	0642600000	C.59
FKSC M6X8 D9/SW3	0642600000	C.60
FKSC M6X8 D9/SW3	0642600000	C.70
FKSC M6X8 D9/SW3	0642600000	C.71
FKSC M6X8 D9/SW3	0642600000	C.72
FKSC M6X8 D9/SW3	0642600000	C.212
FKSC M6X8 D9/SW3	0642600000	C.213
FKSC M6X8 D9/SW3	0642600000	C.214
FKSC M6X8 D9/SW3	0642600000	C.215
FKSC M6X8 D9/SW3	0642600000	C.216
FKSC M6X8 D9/SW3	0642600000	C.217
FKSC M6X8 D9/SW3	0642600000	C.218
FKSC M6X8 D9/SW3	0642600000	C.219
FKSC M6X8 D9/SW3	0642600000	C.220
FKSC M6X8 D9/SW3	0642600000	C.221
FKSC M6X8 D9/SW3	0642600000	C.222
FKSC M6X8 D9/SW3	0642600000	C.223
FKSC M6X8 D9/SW3	0642600000	C.224
FKSC M6X8 D9/SW3	0642600000	C.225
FKSC M6X8 D9/SW3	0642600000	C.226
FKSC M6X8 D9/SW3	0642600000	C.227
FKSC M6X8 D9/SW3	0642600000	C.228
FPC 20/20/13 7035	9535690000	C.274
FPC 20/20/13 7035	9535690000	C.276
FPC 20/20/13 TRSP	9535680000	C.274
FPC 20/20/13 TRSP	9535680000	C.276
FPC 20/30/13 7035	9535710000	C.274
FPC 20/30/13 7035	9535710000	C.276
FPC 20/30/13 TRSP	9535700000	C.274
FPC 20/30/13 TRSP	9535700000	C.276
FPC 20/40/13 7035	9535730000	C.274
FPC 20/40/13 7035	9535730000	C.277
FPC 20/40/13 TRSP	9535720000	C.274
FPC 20/40/13 TRSP	9535720000	C.277
FPC 30/30/13 7035	9535750000	C.274
FPC 30/30/13 7035	9535750000	C.277
FPC 30/30/13 TRSP	9535740000	C.274
FPC 30/30/13 TRSP	9535740000	C.277
FPC 30/40/13 7035	9535770000	C.274
FPC 30/40/13 7035	9535770000	C.278
FPC 30/40/13 TRSP	9535760000	C.274
FPC 30/40/13 TRSP	9535760000	C.278
FPC 40/60/13 7035	9535810000	C.274
FPC 40/60/13 7035	9535810000	C.278
FPC 40/60/13 TRSP	9535820000	C.274
FPC 40/60/13 TRSP	9535820000	C.278

G

GFSC M5X10 TX20 SET	1274150000	C.20
GFSC M5X10 TX20 SET	1274150000	C.21
GFSC M5X10 TX20 SET	1274150000	C.22
GFSC M5X10 TX20 SET	1274150000	C.23
GFSC M5X10 TX20 SET	1274150000	C.24
GFSC M5X10 TX20 SET	1274150000	C.25
GFSC M5X10 TX20 SET	1274150000	C.26
GFSC M5X10 TX20 SET	1274150000	C.27
GFSC M5X10 TX20 SET	1274150000	C.28
GFSC M5X10 TX20 SET	1274150000	C.29
GFSC M5X10 TX20 SET	1274150000	C.30
GFSC M5X10 TX20 SET	1274150000	C.31
GFSC M5X10 TX20 SET	1274150000	C.32
GFSC M5X10 TX20 SET	1274150000	C.33
GFSC M5X10 TX20 SET	1274150000	C.34
GFSC M5X10 TX20 SET	1274150000	C.35
GFSC M5X10 TX20 SET	1274150000	C.36
GFSC M5X10 TX20 SET	1274150000	C.37
GFSC M5X10 TX20 SET	1274150000	C.38
GFSC M5X10 TX20 SET	1274150000	C.39
GFSC M5X10 TX20 SET	1274150000	C.40
GFSC M5X10 TX20 SET	1274150000	C.41
GFSC M5X10 TX20 SET	1274150000	C.42
GFSC M5X10 TX20 SET	1274150000	C.43
GFSC M5X10 TX20 SET	1274150000	C.44
GFSC M5X10 TX20 SET	1274150000	C.45
GFSC M5X10 TX20 SET	1274150000	C.46
GFSC M5X10 TX20 SET	1274150000	C.47
GFSC M5X10 TX20 SET	1274150000	C.48
GFSC M5X10 TX20 SET	1274150000	C.49
GFSC M5X10 TX20 SET	1274150000	C.50
GFSC M5X10 TX20 SET	1274150000	C.51
GFSC M5X10 TX20 SET	1274150000	C.52
GFSC M5X10 TX20 SET	1274150000	C.53
GFSC M5X10 TX20 SET	1274150000	C.54
GFSC M5X10 TX20 SET	1274150000	C.55
GFSC M5X10 TX20 SET	1274150000	C.56
GFSC M5X10 TX20 SET	1274150000	C.57
GFSC M5X10 TX20 SET	1274150000	C.58
GFSC M5X10 TX20 SET	1274150000	C.59
GFSC M5X10 TX20 SET	1274150000	C.60
GFSC M5X10 TX20 SET	1274150000	C.98
GFSC M5X10 TX20 SET	1274150000	C.99
GFSC M5X10 TX20 SET	1274150000	C.100
GFSC M5X10 TX20 SET	1274150000	C.101
GFSC M5X10 TX20 SET	1274150000	C.102
GFSC M5X10 TX20 SET	1274150000	C.103
GFSC M5X10 TX20 SET	1274150000	C.104
GFSC M5X10 TX20 SET	1274150000	C.105
GFSC M5X10 TX20 SET	1274150000	C.106
GFSC M5X10 TX20 SET	1274150000	C.107
GFSC M5X10 TX20 SET	1274150000	C.108
GFSC M5X10 TX20 SET	1274150000	C.112
GFSC M5X10 TX20 SET	1274150000	C.113
GFSC M5X10 TX20 SET	1274150000	C.114
GFSC M5X10 TX20 SET	1274150000	C.115
GFSC M5X10 TX20 SET	1274150000	C.116
GFSC M5X10 TX20 SET	1274150000	C.117
GFSC M5X10 TX20 SET	1274150000	C.118
GFSC M5X10 TX20 SET	1274150000	C.119
GFSC M5X10 TX20 SET	1274150000	C.120
GFSC M5X10 TX20 SET	1274150000	C.121
GFSC M5X10 TX20 SET	1274150000	C.124
GFSC M5X10 TX20 SET	1274150000	C.125
GFSC M5X10 TX20 SET	1274150000	C.126
GFSC M5X10 TX20 SET	1274150000	C.127
GFSC M5X10 TX20 SET	1274150000	C.128
GFSC M5X10 TX20 SET	1274150000	C.129
GFSC M5X10 TX20 SET	1274150000	C.132
GFSC M5X10 TX20 SET	1274150000	C.133
GFSC M5X10 TX20 SET	1274150000	C.134
GFSC M5X10 TX20 SET	1274150000	C.135
GFSC M5X10 TX20 SET	1274150000	C.136
GFSC M5X10 TX20 SET	1274150000	C.137
GWDR M12-NP	1913320000	D.41
GWDR M12-PO	1777920000	D.40
GWDR M16-NP	1736230000	D.41
GWDR M16-PO	1777930000	D.40
GWDR M16-W	1185600000	D.42
GWDR M20-NP	1736240000	D.41
GWDR M20-PO	1777940000	D.40
GWDR M20-W	1185610000	D.42
GWDR M25-NP	1736250000	C.168
GWDR M25-NP	1736250000	C.170
GWDR M25-NP	1736250000	C.250
GWDR M25-NP	1736250000	C.252
GWDR M25-NP	1736250000	D.41
GWDR M25-PO	1777950000	D.40
GWDR M25-W	1185620000	D.42
GWDR M32-NP	1736260000	C.169
GWDR M32-NP	1736260000	C.171
GWDR M32-NP	1736260000	C.251
GWDR M32-NP	1736260000	C.253
GWDR M32-NP	1736260000	D.41
GWDR M32-PO	1777960000	D.40
GWDR M32-W	1185630000	D.42
GWDR M40-NP	1736270000	D.41
GWDR M40-PO	1777970000	D.40
GWDR M40-W	1185640000	D.42
GWDR M50-NP	1736280000	D.41

Type	Order No.	Page
GWDR M50-PO	1777980000	D.40
GWDR M50-W	1185650000	D.42
GWDR M63-NP	1736290000	D.41
GWDR M63-PO	1777990000	D.40
GWDR M63-W	1185670000	D.42
GWDR PG11-NP	1719560000	D.41
GWDR PG11-PO	1719460000	D.40
GWDR PG13,5-NP	1719570000	D.41
GWDR PG13,5-PO	1719470000	D.40
GWDR PG16-NP	1719580000	D.41
GWDR PG16-PO	1719480000	D.40
GWDR PG21-NP	1719590000	D.41
GWDR PG21-PO	1719490000	D.40
GWDR PG29-NP	1719600000	D.41
GWDR PG29-PO	1719500000	D.40
GWDR PG36-NP	1719610000	D.41
GWDR PG36-PO	1719510000	D.40
GWDR PG42-NP	1719620000	D.41
GWDR PG42-PO	1719520000	D.40
GWDR PG48-NP	1719630000	D.41
GWDR PG48-PO	1719530000	D.40
GWDR PG7-NP	1719540000	D.41
GWDR PG7-PO	1719440000	D.40
GWDR PG9-NP	1719550000	D.41
GWDR PG9-PO	1719450000	D.40

H

HG FPC	9535990000	C.276
HG FPC	9535990000	C.277
HG FPC	9535990000	C.278
HG K+POK	1580360000	C.180
HG K+POK	1580360000	C.182
HG K+POK	1580360000	C.184
HG K+POK	1580360000	C.186
HG K+POK	1580360000	C.187
HG K+POK	1580360000	C.188
HG K+POK	1580360000	C.189
HG K+POK	1580360000	C.190
HG K+POK	1580360000	C.191
HG K+POK	1580360000	C.192
HG K+POK	1580360000	C.193
HG K+POK	1580360000	C.194
HG MPC	9535590000	C.264
HG MPC	9535590000	C.265
HG MPC	9535590000	C.266
HG MPC	9535590000	C.267
HG MPC	9535590000	C.268
HG MPC	9535590000	C.269
HG MPC	9535590000	C.270
HG MPC	9535590000	C.271
HG MPC	9535590000	C.272

K

KEB MOFT SMALL S4 SET	2660200318	C.98
KEB MOFT SMALL S4 SET	2660200318	C.99
KEB MOFT SMALL S4 SET	2660200318	C.100
KEB MOFT SMALL S4 SET	2660200318	C.101
KEB MOFT SMALL S4 SET	2660200318	C.102
KEB MOFT SMALL S4 SET	2660200318	C.103
KEB MOFT SMALL S4 SET	2660200318	C.104
KEB MOFT SMALL S4 SET	2660200318	C.105
KEB MOFT SMALL S4 SET	2660200318	C.106
KEB MOFT SMALL S4 SET	2660200318	C.107
KEB MOFT SMALL S4 SET	2660200318	C.108
KEB MOFT SMALL S4 SET	2660200318	C.112
KEB MOFT SMALL S4 SET	2660200318	C.113
KEB MOFT SMALL S4 SET	2660200318	C.114
KEB MOFT SMALL S4 SET	2660200318	C.115
KEB MOFT SMALL S4 SET	2660200318	C.116
KEB MOFT SMALL S4 SET	2660200318	C.117
KEB MOFT SMALL S4 SET	2660200318	C.118
KEB MOFT SMALL S4 SET	2660200318	C.119
KEB MOFT SMALL S4 SET	2660200318	C.120
KEB MOFT SMALL S4 SET	2660200318	C.121
KEB MOFT SMALL S4 SET	2660200318	C.124
KEB MOFT SMALL S4 SET	2660200318	C.125
KEB MOFT SMALL S4 SET	2660200318	C.126
KEB MOFT SMALL S4 SET	2660200318	C.127
KEB MOFT SMALL S4 SET	2660200318	C.128
KEB MOFT SMALL S4 SET	2660200318	C.129
KEB MOFT SMALL S4 SET	2660200318	C.132
KEB MOFT SMALL S4 SET	2660200318	C.133
KEB MOFT SMALL S4 SET	2660200318	C.134
KEB MOFT SMALL S4 SET	2660200318	C.135
KEB MOFT SMALL S4 SET	2660200318	C.136
KEB MOFT SMALL S4 SET	2660200318	C.137
KEB MOPL 2020 MSZN	8000074117	C.98
KEB MOPL 2020 MSZN	8000074117	C.112
KEB MOPL 2020 MSZN	8000074117	C.124
KEB MOPL 2020 MSZN	8000074117	C.132
KEB MOPL 2020 S2N H	8000074314	C.98
KEB MOPL 2020 S2N H	8000074314	C.112
KEB MOPL 2020 S2N H	8000074314	C.124
KEB MOPL 2020 S2N H	8000074314	C.132
KEB MOPL 3030 MSZN	8000074171	C.99
KEB MOPL 3030 MSZN	8000074171	C.100
KEB MOPL 3030 MSZN	8000074171	C.113
KEB MOPL 3030 MSZN	8000074171	C.125
KEB MOPL 3030 MSZN	8000074171	C.126
KEB MOPL 3030 MSZN	8000074171	C.133
KEB MOPL 3030 MSZN	8000074171	C.134
KEB MOPL 3030 S2N H	8000074316	C.99
KEB MOPL 3030 S2N H	8000074316	C.100
KEB MOPL 3030 S2N H	8000074316	C.113
KEB MOPL 3030 S2N H	8000074316	C.125
KEB MOPL 3030 S2N H	8000074316	C.126
KEB MOPL 3030 S2N H	8000074316	C.133
KEB MOPL 3030 S2N H	8000074316	C.134
KEB MOPL 4030 MSZN	8000074172	C.101
KEB MOPL 4030 MSZN	8000074172	C.114
KEB MOPL 4030 MSZN	8000074172	C.127
KEB MOPL 4030 MSZN	8000074172	C.135
KEB MOPL 4030 S2N H	8000074318	C.101
KEB MOPL 4030 S2N H	8000074318	C.114
KEB MOPL 4030 S2N H	8000074318	C.127
KEB MOPL 4030 S2N H	8000074318	C.135
KEB MOPL 4040 MSZN	8000074173	C.102
KEB MOPL 4040 MSZN	8000074173	C.115
KEB MOPL 4040 MSZN	8000074173	C.128
KEB MOPL 4040 MSZN	8000074173	C.136
KEB MOPL 4040 S2N H	8000074319	C.102
KEB MOPL 4040 S2N H	8000074319	C.115
KEB MOPL 4040 S2N H	8000074319	C.128
KEB MOPL 4040 S2N H	8000074319	C.136
KEB MOPL 4060 MSZN	8000074174	C.103
KEB MOPL 4060 MSZN	8000074174	C.116
KEB MOPL 4060 S2N H	8000074320	C.103
KEB MOPL 4060 S2N H	8000074320	C.116
KEB MOPL 5040 MSZN	8000074175	C.104
KEB MOPL 5040 MSZN	8000074175	C.117
KEB MOPL 5040 MSZN	8000074175	C.129
KEB MOPL 5040 MSZN	8000074175	C.137
KEB MOPL 5040 S2N H	8000074321	C.104
KEB MOPL 5040 S2N H	8000074321	C.117
KEB MOPL 5040 S2N H	8000074321	C.129
KEB MOPL 5040 S2N H	8000074321	C.137
KEB MOPL 5050 MSZN	8000074176	C.105
KEB MOPL 5050 MSZN	8000074176	C.118
KEB MOPL 5050 S2N H	8000074322	C.105
KEB MOPL 5050 S2N H	8000074322	C.118
KEB MOPL 5060 MSZN	8000074177	C.106
KEB MOPL 5060 MSZN	8000074177	C.119
KEB MOPL 5060 S2N H	8000074323	C.106
KEB MOPL 5060 S2N H	8000074323	C.119
KEB MOPL 6040 MSZN	8000074178	C.107
KEB MOPL 6040 MSZN	8000074178	C.120
KEB MOPL 6040 S2N H	8000074324	C.107
KEB MOPL 6040 S2N H	8000074324	C.120
KEB MOPL 8060 MSZN	8000074179	C.108
KEB MOPL 8060 MSZN	8000074179	C.121
KEB MOPL 8060 S2N H	8000074325	C.108
KEB MOPL 8060 S2N H	8000074325	C.121
KEBIHS202015S2N0 AL	8000090342	C.130
KEBIHS202015S2N0 AL	8000090342	C.132
KEBIHS202015S2N1 AL	8000090348	C.130
KEBIHS202015S2N1 AL	8000090348	C.132
KEBIHS303015S2N0 AL	8000090343	C.130
KEBIHS303015S2N0 AL	8000090343	C.133
KEBIHS303015S2N1 AL	8000090349	C.130
KEBIHS303015S2N1 AL	8000090349	C.133
KEBIHS303020S2N0 AL	8000090344	C.130
KEBIHS303020S2N0 AL	8000090344	C.134
KEBIHS303020S2N1 AL	8000090351	C.130
KEBIHS303020S2N1 AL	8000090351	C.134
KEBIHS403020S2N0 AL	8000090345	C.130
KEBIHS403020S2N0 AL	8000090345	C.135
KEBIHS403020S2N1 AL	8000090352	C.130
KEBIHS403020S2N1 AL	8000090352	C.135
KEBIHS404020S2N0 AL	8000090346	C.130
KEBIHS404020S2N0 AL	8000090346	C.136
KEBIHS404020S2N1 AL	8000090354	C.130
KEBIHS404020S2N1 AL	8000090354	C.136
KEBIHS504020S2N0 AL	8000090347	C.130
KEBIHS504020S2N0 AL	8000090347	C.137
KEBIHS504020S2N1 AL	8000090355	C.130
KEBIHS504020S2N1 AL	8000090355	C.137
KEBIQL202015S2N0 AL	8000090356	C.122
KEBIQL202015S2N0 AL	8000090356	C.124
KEBIQL202015S2N1 AL	8000090362	C.122
KEBIQL202015S2N1 AL	8000090362	C.124
KEBIQL303015S2N0 AL	8000090357	C.122
KEBIQL303015S2N0 AL	8000090357	C.125
KEBIQL303015S2N1 AL	8000090363	C.122
KEBIQL303015S2N1 AL	8000090363	C.125
KEBIQL303020S2N0 AL	8000090358	C.122
KEBIQL303020S2N0 AL	8000090358	C.126
KEBIQL303020S2N1 AL	8000090364	C.122
KEBIQL303020S2N1 AL	8000090364	C.126
KEBIQL403020S2N0 AL	8000090359	C.122
KEBIQL403020S2N0 AL	8000090359	C.127
KEBIQL403020S2N1 AL	8000090365	C.122
KEBIQL403020S2N1 AL	8000090365	C.127
KEBIQL404020S2N0 AL	8000090360	C.122
KEBIQL404020S2N0 AL	8000090360	C.128
KEBIQL404020S2N1 AL	8000090366	C.122
KEBIQL404020S2N1 AL	8000090366	C.128
KEBIQL504020S2N0 AL	8000090361	C.122
KEBIQL504020S2N0 AL	8000090361	C.129
KEBIQL504020S2N1 AL	8000090367	C.122
KEBIQL504020S2N1 AL	8000090367	C.129
KEBXHS202015S4B1 AK	8000071017	C.96
KEBXHS202015S4B1 AK	8000071017	C.98
KEBXHS303015S4B1 AK	8000071018	C.96
KEBXHS303015S4B1 AK	8000071018	C.99
KEBXHS303020S4B1 AK	8000071019	C.96
KEBXHS303020S4B1 AK	8000071019	C.100
KEBXHS403020S4B1 AK	8000071020	C.96
KEBXHS403020S4B1 AK	8000071020	C.101
KEBXHS404020S4B1 AK	8000071021	C.96
KEBXHS404020S4B1 AK	8000071021	C.102
KEBXHS406020S4B1 AK	8000071022	C.96
KEBXHS406020S4B1 AK	8000071022	C.103
KEBXHS504020S4B1 AK	8000071023	C.96
KEBXHS504020S4B1 AK	8000071023	C.104
KEBXHS505020S4B1 AK	8000071024	C.96
KEBXHS505020S4B1 AK	8000071024	C.105
KEBXHS506020S4B1 AK	8000071026	C.96
KEBXHS506020S4B1 AK	8000071026	C.106
KEBXHS604020S4B1 AK	8000071029	C.96
KEBXHS604020S4B1 AK	8000071029	C.107
KEBXHS806020S4B1 AK	8000071030	C.96
KEBXHS806020S4B1 AK	8000071030	C.108
KEBXQL202020S4B1 AK	8000071033	C.110
KEBXQL202020S4B1 AK	8000071033	C.112
KEBXQL303020S4B1 AK	8000071034	C.110
KEBXQL303020S4B1 AK	8000071034	C.113
KEBXQL403030S4B1 AK	8000071035	C.110
KEBXQL403030S4B1 AK	8000071035	C.114
KEBXQL404030S4B1 AK	8000071036	C.110
KEBXQL404030S4B1 AK	8000071036	C.115
KEBXQL406030S4B1 AK	8000071037	C.110
KEBXQL406030S4B1 AK	8000071037	C.116
KEBXQL504030S4B1 AK	8000071038	C.110
KEBXQL504030S4B1 AK	8000071038	C.117
KEBXQL505030S4B1 AK	8000071039	C.110
KEBXQL505030S4B1 AK	8000071039	C.118
KEBXQL506030S4B1 AK	8000071040	C.110
KEBXQL506030S4B1 AK	8000071040	C.119
KEBXQL604030S4B1 AK	8000071042	C.110
KEBXQL604030S4B1 AK	8000071042	C.120
KEBXQL806030S4B1 AK	8000071043	C.110
KEBXQL806030S4B1 AK	8000071043	C.121
KISC M3X20.5/10 EK4	0303000000	C.168
KISC M3X20.5/10 EK4	0303000000	C.169
KISC M3X20.5/10 EK4	0303000000	C.170
KISC M3X20.5/10 EK4	0303000000	C.171
KISC M3X20.5/10 EK4	0303000000	C.250
KISC M3X20.5/10 EK4	0303000000	C.251
KISC M3X20.5/10 EK4	0303000000	C.252
KISC M3X20.5/10 EK4	0303000000	C.253
KL SET 13A4 S	8000004134	C.196
KL SET 14Z2.5 S	8000004133	C.196
KL SET 18A4 S	8000004146	C.230
KL SET 18A4 S	8000004146	C.234
KL SET 24Z2.5 S	8000004136	C.196
KL SET 32W4 S	8000004142	C.196
KL SET 32W4 S	8000004142	C.230
KL SET 32W4 S	8000004142	C.236
KL SET 38Z2.5 S	8000004143	C.196
KL SET 38Z2.5 S	8000004143	C.230
KL SET 38Z2.5 S	8000004143	C.236
KL SET 4Z4 S	8000004139	C.196
KL SET 5Z2.5 S	8000004130	C.196
KL SET 6A4 S	8000004144	C.230
KL SET 6A4 S	8000004144	C.232
KL SET KLIPPON POK1 BK4	8000004365	C.230
KL SET KLIPPON POK1 BK4	8000004365	C.232
KL SET KLIPPON POK2 BK6	8000004366	C.230
KL SET KLIPPON POK2 BK6	8000004366	C.233
KL SET KLIPPON POK3BK12	8000004367	C.230
KL SET KLIPPON POK3BK12	8000004367	C.234
KLIPPON BDX M20 B	2519520000	C.70
KLIPPON BDX M20 B	2519520000	C.71
KLIPPON BDX M20 B	2519520000	C.72
KLIPPON BDX M20 B	2519520000	C.152
KLIPPON BDX M20 B	2519520000	C.153
KLIPPON BDX M20 B	2519520000	C.154
KLIPPON BDX M20 B	2519520000	D.53
KLIPPON BDX M20 S	2519550000	C.70
KLIPPON BDX M20 S	2519550000	C.71
KLIPPON BDX M20 S	2519550000	C.72
KLIPPON BDX M20 S	2519550000	C.142
KLIPPON BDX M20 S	2519550000	C.143
KLIPPON BDX M20 S	2519550000	C.144
KLIPPON BDX M20 S	2519550000	C.145
KLIPPON BDX M20 S	2519550000	C.146
KLIPPON BDX M20 S	2519550000	C.147
KLIPPON BDX M20 S	2519550000	C.148
KLIPPON BDX M20 S	2519550000	C.149
KLIPPON BDX M20 S	2519550000	C.152
KLIPPON BDX M20 S	2519550000	C.153
KLIPPON BDX M20 S	2519550000	C.154
KLIPPON BDX M20 S	2519550000	D.53
KLIPPON BDX M20X15 S	2519570000	C.212
KLIPPON BDX M20X15 S	2519570000	C.213
KLIPPON BDX M20X15 S	2519570000	C.214
KLIPPON BDX M20X15 S	2519570000	C.215
KLIPPON BDX M20X15 S	2519570000	C.216
KLIPPON BDX M20X15 S	2519570000	C.217
KLIPPON BDX M20X15 S	2519570000	C.218
KLIPPON BDX M20X15 S	2519570000	C.219
KLIPPON BDX M20X15 S	2519570000	C.220
KLIPPON BDX M20X15 S	2519570000	C.221
KLIPPON BDX M20X15 S	2519570000	C.222
KLIPPON BDX M20X15 S	2519570000	C.223
KLIPPON BDX M20X15 S	2519570000	C.224
KLIPPON BDX M20X15 S	2519570000	C.225
KLIPPON BDX M20X15 S	2519570000	C.226
KLIPPON BDX M20X15 S	2519570000	C.227
KLIPPON BDX M20X15 S	2519570000	C.228
KLIPPON BDX M20X15 S	2519570000	D.53
KLIPPON BDX M25 S	2519590000	D.53
KLIPPON COPL 080806	1390910000	C.212
KLIPPON COPL 081106	1390920000	C.213
KLIPPON COPL 081606	1390930000	C.214
KLIPPON COPL 081906	1390940000	C.215
KLIPPON COPL 082306	1390950000	C.216
KLIPPON COPL 121209	1390970000	C.217
KLIPPON COPL 122209	1390980000	C.218
KLIPPON COPL 161609	1390990000	C.219
KLIPPON COPL 162609	1391000000	C.220
KLIPPON COPL 163609	1391010000	C.221
KLIPPON COPL 165609	1391020000	C.222
KLIPPON COPL 252512/16	1391030000	C.223
KLIPPON COPL 252512/16	1391030000	C.224
KLIPPON COPL 254012/16	1391040000	C.225
KLIPPON COPL 254012/16	1391040000	C.226
KLIPPON COPL 256012	1391050000	C.227
KLIPPON COPL 404012	1391070000	C.228
KLIPPON CS K41-1	1537470000	C.202
KLIPPON CS K41-1	1537480000	C.202
KLIPPON CS K41-1	1537490000	C.203
KLIPPON CS K41-1	1537500000	C.203
KLIPPON CS K41-4	1537510000	C.203
KLIPPON CS K41-4	1537520000	C.204
KLIPPON CS K41-4	1537530000	C.204
KLIPPON CS K51-2	1537540000	C.205
KLIPPON CS K51-2	1537550000	C.205
KLIPPON CS K51-2	1537570000	C.205
KLIPPON CS K51-4	1537580000	C.206
KLIPPON CS POK 121209-2	1537070000	C.242
KLIPPON CS POK 121209-2	1537080000	C.242
KLIPPON CS POK 121209-2	1537090000	C.243
KLIPPON CS POK 121209-2	1537100000	C.243
KLIPPON CS POK 121209-4	1537110000	C.243
KLIPPON CS POK 121209-4	1537120000	C.244
KLIPPON CS POK 121209-4	1537130000	C.244
KLIPPON CS POK 122209-2	1537140000	C.245
KLIPPON CS POK 122209-2	1537150000	C.245
KLIPPON CS POK 122209-2	1537170000	C.245
KLIPPON CS POK 122209-4	1537180000	C.246
KLIPPON CS STB 1-1	1537200000	C.160
KLIPPON CS STB 1-1	1537210000	C.160
KLIPPON CS STB 1-1	1537220000	C.161
KLIPPON CS STB 1-1	1537230000	C.161
KLIPPON CS STB 1-2	1537240000	C.161
KLIPPON CS STB 1-2	1537250000	C.162
KLIPPON CS STB 1-2	1537280000	C.162
KLIPPON CS STB 1-2	1537290000	C.163
KLIPPON CS STB 2.1-2	1537300000	C.163
KLIPPON CS STB 2.1-2	1537310000	C.163
KLIPPON CS STB 2.1-2	1537320000	C.164
KLIPPON CS STB 2.1-6	1537330000	C.164
KLIPPON CS STB 2.1-7	1537340000	C.165
KLIPPON CS STB 2.1-7	1537370000	C.165
KLIPPON K MF KIT 16	9529080000	C.188
KLIPPON K MF KIT 16	9529080000	C.191
KLIPPON K MF KIT 16	9529080000	C.193
KLIPPON K MF KIT 25	9527590000	C.187
KLIPPON K MF KIT 25	9527590000	C.189
KLIPPON K MF KIT 25	9527590000	C.190
KLIPPON K MF KIT 25	9527590000	C.192
KLIPPON K MF KIT 25	9527590000	C.194
KLIPPON K0	0573200000	C.150
KLIPPON K0	0573200000	C.176
KLIPPON K0 RAL7001	9529090000	C.150
KLIPPON K0 RAL7001	9529090000	C.176
KLIPPON K0 VMQ	1939760000	C.150
KLIPPON K0 VMQ	1939760000	C.176
KLIPPON K0 VMQ RAL7001	1937920000	C.150
KLIPPON K0 VMQ RAL7001	1937920000	C.176
KLIPPON K01	1565240000	C.150
KLIPPON K01	1565240000	C.177
KLIPPON K01	1565240000	C.196
KLIPPON K01 1M16AB CSS	8000004184	C.196
KLIPPON K01 RAL7001	9529100000	C.150
KLIPPON K01 RAL7001	9529100000	C.177
KLIPPON K01 VMQ	1939540000	C.150
KLIPPON K01 VMQ	1939540000	C.177
KLIPPON K01 VMQ RAL7001	1937850000	C.150
KLIPPON K01 VMQ RAL7001	1937850000	C.177
KLIPPON K02	1565250000	C.150
KLIPPON K02	1565250000	C.178
KLIPPON K02 RAL7001	9529110000	C.150

Type	Order No.	Page
KLIPPON K02 RAL7001	9529110000	C.178
KLIPPON K02 VMQ	1939550000	C.150
KLIPPON K02 VMQ	1939550000	C.178
KLIPPON K02 VMQ RAL7001	1937840000	C.150
KLIPPON K02 VMQ RAL7001	1937840000	C.178
KLIPPON K1	0342000000	C.150
KLIPPON K1	0342000000	C.179
KLIPPON K1	0342000000	C.196
KLIPPON K1 1,5M16AB CSS	8000004147	C.196
KLIPPON K1 1M20AB CSS	8000004148	C.196
KLIPPON K1 EX	9526840000	C.150
KLIPPON K1 EX RAL7001	1329630000	C.150
KLIPPON K1 M16BCSS EX	8000004202	C.196
KLIPPON K1 M20BCSS EX	8000004203	C.196
KLIPPON K1 RAL7001	9529120000	C.150
KLIPPON K1 RAL7001	9529120000	C.179
KLIPPON K1 VMQ	1939560000	C.150
KLIPPON K1 VMQ	1939560000	C.179
KLIPPON K1 VMQ RAL7001	1937630000	C.150
KLIPPON K1 VMQ RAL7001	1937630000	C.179
KLIPPON K11	0573300000	C.150
KLIPPON K11	0573300000	C.180
KLIPPON K11	0573300000	C.196
KLIPPON K11 2M16AB CSS	8000004149	C.196
KLIPPON K11 2M20AB CSS	8000004150	C.196
KLIPPON K11 EX	9526850000	C.150
KLIPPON K11 EX RAL7001	1329640000	C.150
KLIPPON K11 M16ACSS EX	8000004207	C.196
KLIPPON K11 M16ZCSS EX	8000004204	C.196
KLIPPON K11 M20ACSS EX	8000004209	C.196
KLIPPON K11 M20ZCSS EX	8000004208	C.196
KLIPPON K11 RAL7001	9529130000	C.150
KLIPPON K11 RAL7001	9529130000	C.180
KLIPPON K11 VMQ	1939570000	C.150
KLIPPON K11 VMQ	1939570000	C.180
KLIPPON K11 VMQ RAL7001	1937910000	C.150
KLIPPON K11 VMQ RAL7001	1937910000	C.180
KLIPPON K2	0342100000	C.150
KLIPPON K2	0342100000	C.181
KLIPPON K2	0342100000	C.196
KLIPPON K2 2M20AB CSS	8000004151	C.196
KLIPPON K2 EX	9526860000	C.150
KLIPPON K2 EX RAL7001	1329650000	C.150
KLIPPON K2 M20BCSS EX	8000004210	C.196
KLIPPON K2 RAL7001	9529140000	C.150
KLIPPON K2 RAL7001	9529140000	C.181
KLIPPON K2 VMQ	1939580000	C.150
KLIPPON K2 VMQ	1939580000	C.181
KLIPPON K2 VMQ RAL7001	1937930000	C.150
KLIPPON K2 VMQ RAL7001	1937930000	C.181
KLIPPON K21	0573400000	C.150
KLIPPON K21	0573400000	C.182
KLIPPON K21	0573400000	C.196
KLIPPON K21 3M16AB CSS	8000004152	C.196
KLIPPON K21 EX	9526870000	C.150
KLIPPON K21 EX RAL7001	1328120000	C.150
KLIPPON K21 M16ACSS EX	8000004212	C.196
KLIPPON K21 M16ZCSS EX	8000004211	C.196
KLIPPON K21 RAL7001	9529150000	C.150
KLIPPON K21 RAL7001	9529150000	C.182
KLIPPON K21 VMQ	1939590000	C.150
KLIPPON K21 VMQ	1939590000	C.182
KLIPPON K21 VMQ RAL7001	1937830000	C.150
KLIPPON K21 VMQ RAL7001	1937830000	C.182
KLIPPON K3	0342200000	C.150
KLIPPON K3	0342200000	C.183
KLIPPON K3	0342200000	C.196
KLIPPON K3 4M20AB CSS	8000004153	C.196
KLIPPON K3 EX	9526880000	C.150
KLIPPON K3 EX RAL7001	1329670000	C.150
KLIPPON K3 RAL7001	9529160000	C.150
KLIPPON K3 RAL7001	9529160000	C.183
KLIPPON K3 VMQ	1939600000	C.150
KLIPPON K3 VMQ	1939600000	C.183
KLIPPON K3 VMQ RAL7001	1937900000	C.150
KLIPPON K3 VMQ RAL7001	1937900000	C.183
KLIPPON K31	0573500000	C.150
KLIPPON K31	0573500000	C.184
KLIPPON K31	0573500000	C.196
KLIPPON K31 4M20AB CSS	8000004154	C.196
KLIPPON K31 EX	9526890000	C.150
KLIPPON K31 EX RAL7001	1329680000	C.150
KLIPPON K31 M20ZCSS EX	8000004214	C.196
KLIPPON K31 RAL7001	9529170000	C.150
KLIPPON K31 RAL7001	9529170000	C.184
KLIPPON K31 VMQ	1939610000	C.150
KLIPPON K31 VMQ	1939610000	C.184
KLIPPON K31 VMQ RAL7001	1937820000	C.150
KLIPPON K31 VMQ RAL7001	1937820000	C.184
KLIPPON K32	1565260000	C.150
KLIPPON K32	1565260000	C.185
KLIPPON K32 EX	9526900000	C.150
KLIPPON K32 EX RAL7001	1329690000	C.150
KLIPPON K32 RAL7001	9529180000	C.150
KLIPPON K32 RAL7001	9529180000	C.185
KLIPPON K32 VMQ	1939620000	C.150
KLIPPON K32 VMQ	1939620000	C.185
KLIPPON K32 VMQ RAL7001	1937810000	C.150
KLIPPON K32 VMQ RAL7001	1937810000	C.185

Type	Order No.	Page
KLIPPON K4	0342300000	C.150
KLIPPON K4	0342300000	C.186
KLIPPON K4	0342300000	C.196
KLIPPON K4 2M20AB CSS	8000004155	C.196
KLIPPON K4 EX	9526910000	C.150
KLIPPON K4 EX RAL7001	1329700000	C.150
KLIPPON K4 RAL7001	9529190000	C.150
KLIPPON K4 RAL7001	9529190000	C.186
KLIPPON K4 VMQ	1939630000	C.150
KLIPPON K4 VMQ	1939630000	C.186
KLIPPON K4 VMQ RAL7001	1937890000	C.150
KLIPPON K4 VMQ RAL7001	1937890000	C.186
KLIPPON K41	1565270000	C.150
KLIPPON K41	1565270000	C.187
KLIPPON K41	1565270000	C.196
KLIPPON K41 2M25AB CSS	8000003446	C.196
KLIPPON K41 3M20AB CSS	8000003447	C.196
KLIPPON K41 EX	9526920000	C.150
KLIPPON K41 EX RAL7001	1329710000	C.150
KLIPPON K41 M20WCSS EX	8000003591	C.196
KLIPPON K41 M25WCSS EX	8000003589	C.196
KLIPPON K41 RAL7001	9529200000	C.150
KLIPPON K41 RAL7001	9529200000	C.187
KLIPPON K41 VMQ	1939640000	C.150
KLIPPON K41 VMQ	1939640000	C.187
KLIPPON K41 VMQ RAL7001	1937800000	C.150
KLIPPON K41 VMQ RAL7001	1937800000	C.187
KLIPPON K5	0342400000	C.150
KLIPPON K5	0342400000	C.188
KLIPPON K5	0342400000	C.196
KLIPPON K5 4M20AB CSS	8000004158	C.196
KLIPPON K5 4M20WCSS EX	8000004218	C.196
KLIPPON K5 4M20ZCSS EX	8000004219	C.196
KLIPPON K5 EX	9526930000	C.150
KLIPPON K5 EX RAL7001	1329720000	C.150
KLIPPON K5 RAL7001	9529210000	C.150
KLIPPON K5 RAL7001	9529210000	C.188
KLIPPON K5 VMQ	1939650000	C.150
KLIPPON K5 VMQ	1939650000	C.188
KLIPPON K5 VMQ RAL7001	1937860000	C.150
KLIPPON K5 VMQ RAL7001	1937860000	C.188
KLIPPON K51	1565280000	C.150
KLIPPON K51	1565280000	C.189
KLIPPON K51 EX	9526940000	C.150
KLIPPON K51 EX RAL7001	1328130000	C.150
KLIPPON K51 RAL7001	9529220000	C.150
KLIPPON K51 RAL7001	9529220000	C.189
KLIPPON K51 VMQ	1939660000	C.150
KLIPPON K51 VMQ	1939660000	C.189
KLIPPON K51 VMQ RAL7001	1937750000	C.150
KLIPPON K51 VMQ RAL7001	1937750000	C.189
KLIPPON K52	1565290000	C.150
KLIPPON K52	1565290000	C.190
KLIPPON K52	1565290000	C.196
KLIPPON K52 EX	9526950000	C.150
KLIPPON K52 EX RAL7001	1329730000	C.150
KLIPPON K52 M20WCSS EX	8000004220	C.196
KLIPPON K52 M20ZCSS EX	8000004221	C.196
KLIPPON K52 RAL7001	9529230000	C.150
KLIPPON K52 RAL7001	9529230000	C.190
KLIPPON K52 VMQ	1939670000	C.150
KLIPPON K52 VMQ	1939670000	C.190
KLIPPON K52 VMQ RAL7001	1937740000	C.150
KLIPPON K52 VMQ RAL7001	1937740000	C.190
KLIPPON K6	0342500000	C.150
KLIPPON K6	0342500000	C.191
KLIPPON K6 EX	9526960000	C.150
KLIPPON K6 EX RAL7001	1329740000	C.150
KLIPPON K6 RAL7001	9529240000	C.150
KLIPPON K6 RAL7001	9529240000	C.191
KLIPPON K6 VMQ	1939690000	C.150
KLIPPON K6 VMQ	1939690000	C.191
KLIPPON K6 VMQ RAL7001	1937870000	C.150
KLIPPON K6 VMQ RAL7001	1937870000	C.191
KLIPPON K61	0573600000	C.150
KLIPPON K61	0573600000	C.192
KLIPPON K61 EX	9526970000	C.150
KLIPPON K61 EX RAL7001	1328140000	C.150
KLIPPON K61 RAL7001	9529250000	C.150
KLIPPON K61 RAL7001	9529250000	C.192
KLIPPON K61 VMQ	1939700000	C.150
KLIPPON K61 VMQ	1939700000	C.192
KLIPPON K61 VMQ RAL7001	1937730000	C.150
KLIPPON K61 VMQ RAL7001	1937730000	C.192
KLIPPON K7	0342600000	C.150
KLIPPON K7	0342600000	C.193
KLIPPON K7 EX	9526980000	C.150
KLIPPON K7 EX RAL7001	1329750000	C.150
KLIPPON K7 RAL7001	9529260000	C.150
KLIPPON K7 RAL7001	9529260000	C.193
KLIPPON K7 VMQ	1939710000	C.150
KLIPPON K7 VMQ	1939710000	C.193
KLIPPON K7 VMQ RAL7001	1937880000	C.150
KLIPPON K7 VMQ RAL7001	1937880000	C.193
KLIPPON K71	0573700000	C.150
KLIPPON K71	0573700000	C.194
KLIPPON K71 EX	9526990000	C.150
KLIPPON K71 EX RAL7001	1329770000	C.150
KLIPPON K71 RAL7001	9529270000	C.150

Type	Order No.	Page
KLIPPON K71 RAL7001	9529270000	C.194
KLIPPON K71 VMQ	1939730000	C.150
KLIPPON K71 VMQ	1939730000	C.194
KLIPPON K71 VMQ RAL7001	1937720000	C.150
KLIPPON K71 VMQ RAL7001	1937720000	C.194
KLIPPON POK 080806	1305810000	C.210
KLIPPON POK 080806	1305810000	C.212
KLIPPON POK 080806	1305810000	C.230
KLIPPON POK 080806 EX	1306000000	C.210
KLIPPON POK 080806 EX	1306000000	C.212
KLIPPON POK 081106	1305820000	C.210
KLIPPON POK 081106	1305820000	C.213
KLIPPON POK 081106	1305820000	C.230
KLIPPON POK 081106 EX	1306010000	C.210
KLIPPON POK 081106 EX	1306010000	C.213
KLIPPON POK 081606	1305830000	C.210
KLIPPON POK 081606	1305830000	C.214
KLIPPON POK 081606	1305830000	C.230
KLIPPON POK 081606 EX	1306020000	C.210
KLIPPON POK 081606 EX	1306020000	C.214
KLIPPON POK 081906	1305840000	C.210
KLIPPON POK 081906	1305840000	C.215
KLIPPON POK 081906 EX	1306030000	C.210
KLIPPON POK 081906 EX	1306030000	C.215
KLIPPON POK 082306	1305850000	C.210
KLIPPON POK 082306	1305850000	C.216
KLIPPON POK 082306 EX	1306040000	C.210
KLIPPON POK 082306 EX	1306040000	C.216
KLIPPON POK 121209	1305870000	C.210
KLIPPON POK 121209	1305870000	C.217
KLIPPON POK 121209	1305870000	C.230
KLIPPON POK 121209 EX	1306050000	C.210
KLIPPON POK 121209 EX	1306050000	C.217
KLIPPON POK 122209	1305880000	C.210
KLIPPON POK 122209	1305880000	C.218
KLIPPON POK 122209 EX	1306070000	C.210
KLIPPON POK 122209 EX	1306070000	C.218
KLIPPON POK 161609	1305890000	C.210
KLIPPON POK 161609	1305890000	C.219
KLIPPON POK 161609	1305890000	C.230
KLIPPON POK 161609 EX	1306080000	C.210
KLIPPON POK 161609 EX	1306080000	C.219
KLIPPON POK 162609	1305900000	C.210
KLIPPON POK 162609	1305900000	C.220
KLIPPON POK 162609 EX	1306090000	C.210
KLIPPON POK 162609 EX	1306090000	C.220
KLIPPON POK 163609	1305910000	C.210
KLIPPON POK 163609	1305910000	C.221
KLIPPON POK 163609 EX	1306100000	C.210
KLIPPON POK 163609 EX	1306100000	C.221
KLIPPON POK 165609	1305920000	C.210
KLIPPON POK 165609	1305920000	C.222
KLIPPON POK 165609 EX	1306110000	C.210
KLIPPON POK 165609 EX	1306110000	C.222
KLIPPON POK 252512	1305930000	C.210
KLIPPON POK 252512	1305930000	C.223
KLIPPON POK 252512	1305930000	C.250
KLIPPON POK 252512	1305930000	C.251
KLIPPON POK 252512	1305930000	C.252
KLIPPON POK 252512	1305930000	C.253
KLIPPON POK 252512 EX	1306120000	C.210
KLIPPON POK 252512 EX	1306120000	C.223
KLIPPON POK 252512 FH M25 E60	8000052636	C.249
KLIPPON POK 252512 FH M25 E60	8000052636	C.250
KLIPPON POK 252512 FH M32 E60	8000054731	C.249
KLIPPON POK 252512 FH M32 E60	8000054731	C.251
KLIPPON POK 252512 M25 E60	8000052518	C.249
KLIPPON POK 252512 M25 E60	8000052518	C.252
KLIPPON POK 252512 M32 E60	8000054730	C.249
KLIPPON POK 252512 M32 E60	8000054730	C.253
KLIPPON POK 252516	1305980000	C.210
KLIPPON POK 252516	1305980000	C.224
KLIPPON POK 252516 EX	1306170000	C.210
KLIPPON POK 252516 EX	1306170000	C.224
KLIPPON POK 254012	1305940000	C.210
KLIPPON POK 254012	1305940000	C.225
KLIPPON POK 254012 EX	1306130000	C.210
KLIPPON POK 254012 EX	1306130000	C.225
KLIPPON POK 254016	1305990000	C.210
KLIPPON POK 254016	1305990000	C.226
KLIPPON POK 254016 EX	1306180000	C.210
KLIPPON POK 254016 EX	1306180000	C.226
KLIPPON POK 256012	1305950000	C.210
KLIPPON POK 256012	1305950000	C.227
KLIPPON POK 256012 EX	1306140000	C.210
KLIPPON POK 256012 EX	1306140000	C.227
KLIPPON POK 404012	1305970000	C.210
KLIPPON POK 404012	1305970000	C.228
KLIPPON POK 404012 EX	1306150000	C.210
KLIPPON POK 404012 EX	1306150000	C.228
KLIPPON POK1 2M16AB CSS	8000004160	C.230
KLIPPON POK1 2M16AB CSS	8000004160	C.232
KLIPPON POK1 M16ACSS EX	8000004223	C.230
KLIPPON POK1 M16ACSS EX	8000004223	C.232
KLIPPON POK1 M16BCSS EX	8000004222	C.230
KLIPPON POK1 M16BCSS EX	8000004222	C.232
KLIPPON POK2 2M20AB CSS	8000004161	C.230
KLIPPON POK2 2M20AB CSS	8000004161	C.233
KLIPPON POK2 M20ACSS EX	8000004225	C.230

Type	Order No.	Page
KLIPPON POK2 M20ACSS EX	8000004225	C.233
KLIPPON POK2 M20BCSS EX	8000004224	C.230
KLIPPON POK2 M20BCSS EX	8000004224	C.233
KLIPPON POK3 4M20AB CSS	8000004162	C.230
KLIPPON POK3 4M20AB CSS	8000004162	C.234
KLIPPON POK3 M20ACSS EX	8000004228	C.230
KLIPPON POK3 M20ACSS EX	8000004228	C.234
KLIPPON POK3 M20BCSS EX	8000004226	C.230
KLIPPON POK3 M20BCSS EX	8000004226	C.234
KLIPPON POK4 3M20AB CSS	8000003448	C.230
KLIPPON POK4 3M20AB CSS	8000003448	C.235
KLIPPON POK4 M20WCSS EX	8000003593	C.230
KLIPPON POK4 M20WCSS EX	8000003593	C.235
KLIPPON POK4 M20ZCSS EX	8000003594	C.230
KLIPPON POK4 M20ZCSS EX	8000003594	C.235
KLIPPON POK51 4M20ABCSS	8000004164	C.230
KLIPPON POK51 4M20ABCSS	8000004164	C.236
KLIPPON POK51 M20WCSS E	8000004229	C.230
KLIPPON POK51 M20WCSS E	8000004229	C.236
KLIPPON POK51 M20ZCSS E	8000004230	C.230
KLIPPON POK51 M20ZCSS E	8000004230	C.236
KLIPPON QL KEY	2473930000	C.112
KLIPPON QL KEY	2473930000	C.113
KLIPPON QL KEY	2473930000	C.114
KLIPPON QL KEY	2473930000	C.115
KLIPPON QL KEY	2473930000	C.116
KLIPPON QL KEY	2473930000	C.117
KLIPPON QL KEY	2473930000	C.118
KLIPPON QL KEY	2473930000	C.119
KLIPPON QL KEY	2473930000	C.120
KLIPPON QL KEY	2473930000	C.121
KLIPPON QL KEY	2473930000	C.124
KLIPPON QL KEY	2473930000	C.125
KLIPPON QL KEY	2473930000	C.126
KLIPPON QL KEY	2473930000	C.127
KLIPPON QL KEY	2473930000	C.128
KLIPPON QL KEY	2473930000	C.129
KLIPPON STB 1 MS HT	1024970000	C.140
KLIPPON STB 1 MS HT	1024970000	C.142
KLIPPON STB 1 SS	1002690000	C.140
KLIPPON STB 1 SS	1002690000	C.142
KLIPPON STB 1 SS E	1058810000	C.140
KLIPPON STB 1 SS E	1058810000	C.142
KLIPPON STB 1.1 MS HT	1024980000	C.140
KLIPPON STB 1.1 MS HT	1024980000	C.143
KLIPPON STB 1.1 SS	1002750000	C.140
KLIPPON STB 1.1 SS	1002750000	C.143
KLIPPON STB 1.1 SS E	1058820000	C.140
KLIPPON STB 1.1 SS E	1058820000	C.143
KLIPPON STB 2 MS HT	1024990000	C.140
KLIPPON STB 2 MS HT	1024990000	C.144
KLIPPON STB 2 SS	1002740000	C.140
KLIPPON STB 2 SS	1002740000	C.144
KLIPPON STB 2 SS	1002740000	C.152
KLIPPON STB 2 SS E	1058830000	C.140
KLIPPON STB 2 SS E	1058830000	C.144
KLIPPON STB 2.1 MS HT	1025010000	C.140
KLIPPON STB 2.1 MS HT	1025010000	C.145
KLIPPON STB 2.1 SS	1002730000	C.140
KLIPPON STB 2.1 SS	1002730000	C.145
KLIPPON STB 2.1 SS E	1058840000	C.140
KLIPPON STB 2.1 SS E	1058840000	C.145
KLIPPON STB 3 MS HT	1025020000	C.140
KLIPPON STB 3 MS HT	1025020000	C.146
KLIPPON STB 3 SS	1002720000	C.140
KLIPPON STB 3 SS	1002720000	C.146
KLIPPON STB 3 SS	1002720000	C.153
KLIPPON STB 3 SS E	1058850000	C.140
KLIPPON STB 3 SS E	1058850000	C.146
KLIPPON STB 4 MS FH M25 E90	8000052592	C.167
KLIPPON STB 4 MS FH M25 E90	8000052592	C.168
KLIPPON STB 4 MS FH M32 E90	8000054773	C.167
KLIPPON STB 4 MS FH M32 E90	8000054773	C.169
KLIPPON STB 4 MS HT	1025030000	C.140
KLIPPON STB 4 MS HT	1025030000	C.147
KLIPPON STB 4 MS HT	1025030000	C.168
KLIPPON STB 4 MS HT	1025030000	C.169
KLIPPON STB 4 MS HT	1025030000	C.170
KLIPPON STB 4 MS HT	1025030000	C.171
KLIPPON STB 4 MS M25 E90	8000052519	C.167
KLIPPON STB 4 MS M25 E90	8000052519	C.170
KLIPPON STB 4 MS M32 E90	8000054772	C.167
KLIPPON STB 4 MS M32 E90	8000054772	C.171
KLIPPON STB 4 SS	1002710000	C.140
KLIPPON STB 4 SS	1002710000	C.147
KLIPPON STB 4 SS	1002710000	C.154
KLIPPON STB 4 SS E	1058860000	C.140
KLIPPON STB 4 SS E	1058860000	C.147
KLIPPON STB 5 MS HT	1025040000	C.140
KLIPPON STB 5 MS HT	1025040000	C.148
KLIPPON STB 5 SS	1002700000	C.140
KLIPPON STB 5 SS	1002700000	C.148
KLIPPON STB 5 SS E	1058880000	C.140
KLIPPON STB 5 SS E	1058880000	C.148
KLIPPON STB 6 MS HT	1025050000	C.140
KLIPPON STB 6 MS HT	1025050000	C.149
KLIPPON STB 6 SS	1002760000	C.140
KLIPPON STB 6 SS	1002760000	C.149
KLIPPON STB 6 SS E	1058870000	C.140

Type	Order No.	Page
KLIPPON STB 6 SS E	1058870000	C.149
KTB FS 221513 S2B2 TUBEBOX	8000080476	C.74
KTB FS 221513 S2B2 TUBEBOX	8000080476	C.77
KTB FS 221513 S4E0	1195650000	C.66
KTB FS 221513 S4E1	1195660000	C.66
KTB FS 221513 S4E2	1195670000	C.66
KTB FS 221513 S4E3	1195680000	C.66
KTB FS 221513 S4E4	1195690000	C.66
KTB FS 262615 S2B1 TRACKBOX SMALL	8000080480	C.74
KTB FS 262615 S2B1 TRACKBOX SMALL	8000080480	C.82
KTB FS 262615 S2B2 TUBEBOX SAKK 10	8000080477	C.74
KTB FS 262615 S2B2 TUBEBOX SAKK 10	8000080477	C.78
KTB FS 262615 S2N2 TRAINBOX SMALL	8000080478	C.74
KTB FS 262615 S2N2 TRAINBOX SMALL	8000080478	C.79
KTB FS 262615 S4E0	1195700000	C.66
KTB FS 262615 S4E1	1195710000	C.66
KTB FS 262615 S4E2	1195720000	C.66
KTB FS 262615 S4E3	1195730000	C.66
KTB FS 262615 S4E4	1195740000	C.66
KTB FS 262620 S4E0	1195750000	C.66
KTB FS 262620 S4E1	1195760000	C.66
KTB FS 262620 S4E2	1195770000	C.66
KTB FS 262620 S4E3	1195780000	C.66
KTB FS 262620 S4E4	1195790000	C.66
KTB FS 302915 S2N2 ANGLEDBOX EDGE HV	8000092462	C.74
KTB FS 302915 S2N2 ANGLEDBOX EDGE HV	8000092462	C.85
KTB FS 303015 S4E0	1195800000	C.66
KTB FS 303015 S4E1	1195810000	C.66
KTB FS 303015 S4E2	1195820000	C.66
KTB FS 303015 S4E3	1195830000	C.66
KTB FS 303015 S4E4	1195840000	C.66
KTB FS 303020 S4E0	1195850000	C.66
KTB FS 303020 S4E1	1195860000	C.66
KTB FS 303020 S4E2	1195870000	C.66
KTB FS 303020 S4E3	1195880000	C.66
KTB FS 303020 S4E4	1195890000	C.66
KTB FS 352615 S2P2 TRAINBOX HV	8000080479	C.74
KTB FS 352615 S2P2 TRAINBOX HV	8000080479	C.80
KTB FS 352615 S4E0	1195900000	C.66
KTB FS 352615 S4E1	1195910000	C.66
KTB FS 352615 S4E2	1195920000	C.66
KTB FS 352615 S4E3	1195930000	C.66
KTB FS 352615 S4E4	1195940000	C.66
KTB FS 352620 S4E0	1195950000	C.66
KTB FS 352620 S4E1	1195960000	C.66
KTB FS 352620 S4E2	1195970000	C.66
KTB FS 352620 S4E3	1195980000	C.66
KTB FS 352620 S4E4	1195990000	C.66
KTB FS 403015 S4E0	1196000000	C.66
KTB FS 403015 S4E1	1196010000	C.66
KTB FS 403015 S4E2	1196020000	C.66
KTB FS 403015 S4E3	1196030000	C.66
KTB FS 403015 S4E4	1196040000	C.66
KTB FS 403020 S4E0	1196050000	C.66
KTB FS 403020 S4E1	1196060000	C.66
KTB FS 403020 S4E2	1196070000	C.66
KTB FS 403020 S4E3	1196080000	C.66
KTB FS 403020 S4E4	1196090000	C.66
KTB FS 453815 S2N2 TRAINBOX BIG	8000080863	C.74
KTB FS 453815 S2N2 TRAINBOX BIG	8000080863	C.81
KTB FS 453815 S4E0	1196100000	C.66
KTB FS 453815 S4E1	1196110000	C.66
KTB FS 453815 S4E2	1196120000	C.66
KTB FS 453815 S4E3	1196130000	C.66
KTB FS 453815 S4E4	1196140000	C.66
KTB FS 453820 S4E0	1196150000	C.66
KTB FS 453820 S4E1	1196160000	C.66
KTB FS 453820 S4E2	1196170000	C.66
KTB FS 453820 S4E3	1196180000	C.66
KTB FS 453820 S4E4	1196190000	C.66
KTB FS 484815 S4E0	1196200000	C.66
KTB FS 484815 S4E1	1196210000	C.66
KTB FS 484815 S4E2	1196220000	C.66
KTB FS 484815 S4E3	1196230000	C.66
KTB FS 484815 S4E4	1196240000	C.66
KTB FS 484820 S4E0	1196250000	C.66
KTB FS 484820 S4E1	1196260000	C.66
KTB FS 484820 S4E2	1196270000	C.66
KTB FS 484820 S4E3	1196280000	C.66
KTB FS 484820 S4E4	1196290000	C.66
KTB FS 553515 S4E0	1196300000	C.66
KTB FS 553515 S4E1	1196310000	C.66
KTB FS 553515 S4E2	1196320000	C.66
KTB FS 553515 S4E3	1196330000	C.66
KTB FS 553515 S4E4	1196340000	C.66
KTB FS 553518 S2B1 TRACKBOX EQP	8000080481	C.74
KTB FS 553518 S2B1 TRACKBOX EQP	8000080481	C.83
KTB FS 553520 S4E0	1196350000	C.66
KTB FS 553520 S4E1	1196360000	C.66
KTB FS 553520 S4E2	1196370000	C.66
KTB FS 553520 S4E3	1196380000	C.66
KTB FS 553520 S4E4	1196390000	C.66
KTB FS 624515 S2B1 TRACKBOX BIG	8000080482	C.74
KTB FS 624515 S2B1 TRACKBOX BIG	8000080482	C.84
KTB FS 624515 S4E0	1196400000	C.66
KTB FS 624515 S4E1	1196410000	C.66
KTB FS 624515 S4E2	1196420000	C.66
KTB FS 624515 S4E3	1196430000	C.66
KTB FS 624515 S4E4	1196440000	C.66

Type	Order No.	Page
KTB FS 624520 S4E0	1196450000	C.66
KTB FS 624520 S4E1	1196460000	C.66
KTB FS 624520 S4E2	1196470000	C.66
KTB FS 624520 S4E3	1196480000	C.66
KTB FS 624520 S4E4	1196490000	C.66
KTB FS 765015 S4E0	1196500000	C.66
KTB FS 765015 S4E1	1196510000	C.66
KTB FS 765015 S4E2	1196520000	C.66
KTB FS 765015 S4E3	1196530000	C.66
KTB FS 765015 S4E4	1196540000	C.66
KTB FS 765020 S4E0	1196550000	C.66
KTB FS 765020 S4E1	1196560000	C.66
KTB FS 765020 S4E2	1196570000	C.66
KTB FS 765020 S4E3	1196580000	C.66
KTB FS 765020 S4E4	1196590000	C.66
KTB FS 916115 S4E0	1196600000	C.66
KTB FS 916115 S4E1	1196610000	C.66
KTB FS 916115 S4E2	1196620000	C.66
KTB FS 916115 S4E3	1196630000	C.66
KTB FS 916115 S4E4	1196640000	C.66
KTB FS 916120 S4E0	1196650000	C.66
KTB FS 916120 S4E1	1196660000	C.66
KTB FS 916120 S4E2	1196670000	C.66
KTB FS 916120 S4E3	1196680000	C.66
KTB FS 916120 S4E4	1196690000	C.66
KTB FS 987420 S4E0	1196700000	C.66
KTB FS 987420 S4E1	1196710000	C.66
KTB FS 987420 S4E2	1196720000	C.66
KTB FS 987420 S4E3	1196730000	C.66
KTB FS 987420 S4E4	1196740000	C.66
KTB GP 22XX13 CD S4 6MM	1256280000	C.20
KTB GP 22XX13 CD S4 PE	2022900000	C.20
KTB GP 262615 AB S4	1280910000	C.71
KTB GP 262615 AB S4 6MM	1256290000	C.21
KTB GP 262615 AB S4 6MM	1256290000	C.71
KTB GP 262615 AB S4 PE	2022930000	C.21
KTB GP 26XX15 CD S4 6MM	1256310000	C.21
KTB GP 26XX15 CD S4 PE	2023090000	C.21
KTB GP 26XX20 CD S4 6MM	1256330000	C.22
KTB GP 26XX20 CD S4 PE	2023110000	C.22
KTB GP 303015 CD S4 6MM	1256350000	C.24
KTB GP 303015 CD S4 PE	2023130000	C.24
KTB GP 303020 AB S4 6MM	1256360000	C.25
KTB GP 303020 AB S4 PE	2023140000	C.25
KTB GP 30XX15 CD S4 6MM	8000114149	C.23
KTB GP 30XX15 CD S4 PE	8000114898	C.23
KTB GP 30XX20 CD S4 6MM	1256370000	C.25
KTB GP 30XX20 CD S4 PE	2023150000	C.25
KTB GP 352615 CD S4 6MM	1256390000	C.26
KTB GP 352615 CD S4 PE	2023210000	C.26
KTB GP 352620 AB S4 6MM	1256410000	C.27
KTB GP 352620 AB S4 PE	2023230000	C.27
KTB GP 352620 CD S4 6MM	1256420000	C.27
KTB GP 352620 CD S4 PE	2023280000	C.27
KTB GP 35XX15 CD S4 6MM	8000114155	C.28
KTB GP 35XX15 CD S4 PE	8000114901	C.28
KTB GP 35XX20 CD S4 6MM	8000114132	C.29
KTB GP 35XX20 CD S4 PE	8000114906	C.29
KTB GP 403015 AB S4 6MM	1256430000	C.31
KTB GP 403015 AB S4 PE	2023320000	C.31
KTB GP 403015 CD S4 6MM	1256440000	C.31
KTB GP 403015 CD S4 PE	2023330000	C.31
KTB GP 403020 CD S4 6MM	1256470000	C.32
KTB GP 403020 CD S4 PE	2023480000	C.32
KTB GP 40XX15 CD S4 6MM	8000114136	C.33
KTB GP 40XX15 CD S4 PE	8000114909	C.33
KTB GP 40XX20 CD S4 6MM	8000114138	C.34
KTB GP 40XX20 CD S4 PE	8000114888	C.34
KTB GP 45XX15 CD S4 6MM	1256490000	C.35
KTB GP 45XX15 CD S4 PE	2023500000	C.35
KTB GP 45XX20 CD S4 6MM	1256520000	C.36
KTB GP 45XX20 CD S4 PE	2023520000	C.36
KTB GP 48XX15 CD S4 6MM	1256540000	C.38
KTB GP 48XX15 CD S4 PE	2023540000	C.38
KTB GP 48XX20 CD S4 6MM	1256560000	C.39
KTB GP 48XX20 CD S4 PE	2023620000	C.39
KTB GP 50XX15 CD S4 6MM	8000114139	C.40
KTB GP 50XX15 CD S4 PE	8000114889	C.40
KTB GP 50XX20 CD S4 6MM	8000114140	C.41
KTB GP 50XX20 CD S4 PE	8000114890	C.41
KTB GP 553515 AB S4 6MM	1256570000	C.43
KTB GP 553515 AB S4 PE	2023660000	C.43
KTB GP 553520 AB S4 6MM	1256590000	C.44
KTB GP 553520 AB S4 PE	2023740000	C.44
KTB GP 55XX15 CD S4 6MM	1256580000	C.43
KTB GP 55XX15 CD S4 PE	2023670000	C.43
KTB GP 55XX20 CD S4 6MM	1256610000	C.44
KTB GP 55XX20 CD S4 PE	2023790000	C.44
KTB GP 624515 CD S4 6MM	1256630000	C.46
KTB GP 624515 CD S4 PE	2023870000	C.46
KTB GP 624520 CD S4 6MM	1256650000	C.47
KTB GP 624520 CD S4 PE	2023930000	C.47
KTB GP 62XX15 CD S4 6MM	8000114144	C.48
KTB GP 62XX15 CD S4 6MM	8000114144	C.50
KTB GP 62XX15 CD S4 PE	8000114893	C.48
KTB GP 62XX15 CD S4 PE	8000114893	C.50
KTB GP 62XX20 CD S4 6MM	8000114141	C.45
KTB GP 62XX20 CD S4 6MM	8000114141	C.49
KTB GP 62XX20 CD S4 6MM	8000114141	C.51

Type	Order No.	Page
KTB GP 62XX20 CD S4 PE	8000114891	C.45
KTB GP 62XX20 CD S4 PE	8000114891	C.49
KTB GP 62XX20 CD S4 PE	8000114891	C.51
KTB GP 765015 AB S4 6MM	1256660000	C.52
KTB GP 765015 AB S4 PE	2024040000	C.52
KTB GP 765015 CD S4 6MM	1256670000	C.52
KTB GP 765015 CD S4 PE	2024090000	C.52
KTB GP 765020 AB S4 6MM	1256680000	C.53
KTB GP 765020 AB S4 PE	2024100000	C.53
KTB GP 765020 CD S4 6MM	1256690000	C.53
KTB GP 765020 CD S4 PE	2024140000	C.53
KTB GP 76XX15 CD S4 6MM	8000114151	C.54
KTB GP 76XX15 CD S4 PE	8000114902	C.54
KTB GP 76XX20 CD S4 6MM	8000114152	C.55
KTB GP 76XX20 CD S4 PE	8000114903	C.55
KTB GP 916115 AB S4 PE	2024150000	C.56
KTB GP 916115 CD S4 PE	2024300000	C.56
KTB GP 916120 CD S4 6MM	1256740000	C.57
KTB GP 916120 CD S4 PE	2024490000	C.57
KTB GP 91XX15 CD S4 6MM	1256720000	C.56
KTB GP 91XX20 CD S4 6MM	8000114148	C.58
KTB GP 91XX20 CD S4 6MM	8000114148	C.59
KTB GP 91XX20 CD S4 PE	8000114897	C.58
KTB GP 91XX20 CD S4 PE	8000114897	C.59
KTB GP 987420 AB S4 PE	2024560000	C.60
KTB GP 98XX20 CD S4 6MM	1256760000	C.60
KTB GP 98XX20 CD S4 PE	2024590000	C.60
KTB GP XX1513 AB S4 3MM	1280890000	C.70
KTB GP XX1513 AB S4 6MM	1256270000	C.20
KTB GP XX1513 AB S4 6MM	1256270000	C.70
KTB GP XX1513 AB S4 PE	2022770000	C.20
KTB GP XX2015 AB S4 6MM	8000114143	C.23
KTB GP XX2015 AB S4 PE	8000114887	C.23
KTB GP XX2615 AB S4 6MM	1256380000	C.26
KTB GP XX2615 AB S4 PE	2023160000	C.26
KTB GP XX2620 AB S4 6MM	1256320000	C.22
KTB GP XX2620 AB S4 PE	2023100000	C.22
KTB GP XX3015 AB S4 6MM	1256340000	C.24
KTB GP XX3015 AB S4 PE	2023120000	C.24
KTB GP XX3020 AB S4 6MM	1256450000	C.32
KTB GP XX3020 AB S4 PE	2023450000	C.32
KTB GP XX3515 AB S4 6MM	8000114154	C.28
KTB GP XX3515 AB S4 PE	8000114900	C.28
KTB GP XX3520 AB S4 6MM	8000114130	C.29
KTB GP XX3520 AB S4 PE	8000114905	C.29
KTB GP XX3815 AB S4 6MM	1256480000	C.35
KTB GP XX3815 AB S4 PE	2023490000	C.35
KTB GP XX3820 AB S4 6MM	1256510000	C.36
KTB GP XX3820 AB S4 PE	2023510000	C.36
KTB GP XX4015 AB S4 6MM	8000114135	C.33
KTB GP XX4015 AB S4 6MM	8000114135	C.40
KTB GP XX4015 AB S4 PE	8000114907	C.33
KTB GP XX4015 AB S4 PE	8000114907	C.40
KTB GP XX4020 AB S4 6MM	8000114137	C.34
KTB GP XX4020 AB S4 6MM	8000114137	C.41
KTB GP XX4020 AB S4 6MM	8000114137	C.45
KTB GP XX4020 AB S4 PE	8000114910	C.34
KTB GP XX4020 AB S4 PE	8000114910	C.41
KTB GP XX4020 AB S4 PE	8000114910	C.45
KTB GP XX4515 AB S4 6MM	1256620000	C.46
KTB GP XX4515 AB S4 PE	2023820000	C.46
KTB GP XX4520 AB S4 6MM	1256640000	C.47
KTB GP XX4520 AB S4 PE	2023880000	C.47
KTB GP XX4815 AB S4 6MM	1256530000	C.38
KTB GP XX4815 AB S4 PE	2023530000	C.38
KTB GP XX4820 AB S4 3MM	1281130000	C.72
KTB GP XX4820 AB S4 6MM	1256550000	C.39
KTB GP XX4820 AB S4 6MM	1256550000	C.72
KTB GP XX4820 AB S4 PE	2023580000	C.39
KTB GP XX5015 AB S4 6MM	8000114142	C.48
KTB GP XX5015 AB S4 PE	8000114892	C.48
KTB GP XX5020 AB S4 6MM	8000114145	C.49
KTB GP XX5020 AB S4 PE	8000114894	C.49
KTB GP XX6115 AB S4 6MM	1256710000	C.56
KTB GP XX6120 AB S4 6MM	1256730000	C.57
KTB GP XX6120 AB S4 PE	2024470000	C.57
KTB GP XX6215 AB S4 6MM	8000114146	C.50
KTB GP XX6215 AB S4 6MM	8000114146	C.54
KTB GP XX6215 AB S4 PE	8000114895	C.50
KTB GP XX6215 AB S4 PE	8000114895	C.54
KTB GP XX6220 AB S4 6MM	8000114147	C.51
KTB GP XX6220 AB S4 6MM	8000114147	C.55
KTB GP XX6220 AB S4 PE	8000114896	C.51
KTB GP XX6220 AB S4 PE	8000114896	C.55
KTB GP XX7420 AB S4 6MM	1256750000	C.60
KTB GP XX7620 AB S4 6MM	8000114153	C.58
KTB GP XX7620 AB S4 PE	8000114904	C.58
KTB GP XX9120 AB S4 6MM	8000114150	C.59
KTB GP XX9120 AB S4 PE	8000114899	C.59
KTB MH 221513 EXIA	8000028398	C.68
KTB MH 221513 EXIA	8000028398	C.70
KTB MH 221513 S4E0	1194550000	C.15
KTB MH 221513 S4E0	1194550000	C.20
KTB MH 221513 S4E1	1194560000	C.15
KTB MH 221513 S4E1	1194560000	C.20
KTB MH 221513 S4E1	1194560000	C.70
KTB MH 221513 S4E2	1194570000	C.15
KTB MH 221513 S4E3	1194580000	C.15
KTB MH 221513 S4E3	1194580000	C.20

Type	Order No.	Page
KTB MH 221513 S4E4	1194590000	C.15
KTB MH 262615 EXIA	8000028399	C.68
KTB MH 262615 EXIA	8000028399	C.71
KTB MH 262615 S4E0	1194600000	C.15
KTB MH 262615 S4E0	1194600000	C.21
KTB MH 262615 S4E1	1194610000	C.15
KTB MH 262615 S4E1	1194610000	C.21
KTB MH 262615 S4E1	1194610000	C.71
KTB MH 262615 S4E2	1194620000	C.15
KTB MH 262615 S4E3	1194630000	C.15
KTB MH 262615 S4E3	1194630000	C.21
KTB MH 262615 S4E4	1194640000	C.15
KTB MH 262620 S4E0	1194650000	C.15
KTB MH 262620 S4E0	1194650000	C.22
KTB MH 262620 S4E1	1194660000	C.15
KTB MH 262620 S4E1	1194660000	C.22
KTB MH 262620 S4E2	1194670000	C.15
KTB MH 262620 S4E3	1194680000	C.15
KTB MH 262620 S4E3	1194680000	C.22
KTB MH 262620 S4E4	1194690000	C.15
KTB MH 302015 S4E0	8000108831	C.15
KTB MH 302015 S4E0	8000108831	C.23
KTB MH 302015 S4E1	8000108832	C.15
KTB MH 302015 S4E1	8000108832	C.23
KTB MH 302015 S4E3	8000108833	C.15
KTB MH 302015 S4E3	8000108833	C.23
KTB MH 303015 S4E0	1194700000	C.15
KTB MH 303015 S4E0	1194700000	C.24
KTB MH 303015 S4E1	1194710000	C.15
KTB MH 303015 S4E1	1194710000	C.24
KTB MH 303015 S4E2	1194720000	C.15
KTB MH 303015 S4E3	1194730000	C.15
KTB MH 303015 S4E3	1194730000	C.24
KTB MH 303015 S4E4	1194740000	C.15
KTB MH 303020 S4E0	1194750000	C.15
KTB MH 303020 S4E0	1194750000	C.25
KTB MH 303020 S4E1	1194760000	C.15
KTB MH 303020 S4E1	1194760000	C.25
KTB MH 303020 S4E2	1194770000	C.15
KTB MH 303020 S4E3	1194780000	C.15
KTB MH 303020 S4E3	1194780000	C.25
KTB MH 303020 S4E4	1194790000	C.15
KTB MH 352615 S4E0	1194800000	C.15
KTB MH 352615 S4E0	1194800000	C.26
KTB MH 352615 S4E1	1194810000	C.15
KTB MH 352615 S4E1	1194810000	C.26
KTB MH 352615 S4E2	1194820000	C.15
KTB MH 352615 S4E3	1194830000	C.15
KTB MH 352615 S4E3	1194830000	C.26
KTB MH 352615 S4E4	1194840000	C.15
KTB MH 352620 S4E0	1194850000	C.15
KTB MH 352620 S4E0	1194850000	C.27
KTB MH 352620 S4E1	1194860000	C.15
KTB MH 352620 S4E1	1194860000	C.27
KTB MH 352620 S4E2	1194870000	C.15
KTB MH 352620 S4E3	1194880000	C.15
KTB MH 352620 S4E3	1194880000	C.27
KTB MH 352620 S4E4	1194890000	C.15
KTB MH 353515 S4E0	8000108834	C.15
KTB MH 353515 S4E0	8000108834	C.28
KTB MH 353515 S4E1	8000108835	C.15
KTB MH 353515 S4E1	8000108835	C.28
KTB MH 353515 S4E3	8000108836	C.15
KTB MH 353515 S4E3	8000108836	C.28
KTB MH 353520 S4E0	8000108837	C.15
KTB MH 353520 S4E0	8000108837	C.29
KTB MH 353520 S4E1	8000108838	C.15
KTB MH 353520 S4E1	8000108838	C.29
KTB MH 353520 S4E3	8000108839	C.15
KTB MH 353520 S4E3	8000108839	C.29
KTB MH 355520 S4E0	2698040000	C.15
KTB MH 355520 S4E0	2698040000	C.30
KTB MH 355520 S4E1	2698050000	C.15
KTB MH 355520 S4E1	2698050000	C.30
KTB MH 403015 S4E0	1194900000	C.15
KTB MH 403015 S4E0	1194900000	C.31
KTB MH 403015 S4E1	1194910000	C.15
KTB MH 403015 S4E1	1194910000	C.31
KTB MH 403015 S4E2	1194920000	C.15
KTB MH 403015 S4E3	1194930000	C.15
KTB MH 403015 S4E3	1194930000	C.31
KTB MH 403015 S4E4	1194940000	C.15
KTB MH 403020 S4E0	1194950000	C.15
KTB MH 403020 S4E0	1194950000	C.32
KTB MH 403020 S4E1	1194960000	C.15
KTB MH 403020 S4E1	1194960000	C.32
KTB MH 403020 S4E2	1194970000	C.15
KTB MH 403020 S4E3	1194980000	C.15
KTB MH 403020 S4E3	1194980000	C.32
KTB MH 403020 S4E4	1194990000	C.15
KTB MH 404015 S4E0	8000108840	C.15
KTB MH 404015 S4E0	8000108840	C.33
KTB MH 404015 S4E1	8000108841	C.15
KTB MH 404015 S4E1	8000108841	C.33
KTB MH 404015 S4E3	8000108842	C.15
KTB MH 404015 S4E3	8000108842	C.33
KTB MH 404020 S4E0	8000108843	C.15
KTB MH 404020 S4E0	8000108843	C.34
KTB MH 404020 S4E1	8000108844	C.15

Type	Order No.	Page
KTB MH 404020 S4E1	8000108844	C.34
KTB MH 404020 S4E3	8000108845	C.15
KTB MH 404020 S4E3	8000108845	C.34
KTB MH 453815 S4E0	1195000000	C.15
KTB MH 453815 S4E0	1195000000	C.35
KTB MH 453815 S4E1	1195010000	C.15
KTB MH 453815 S4E1	1195010000	C.35
KTB MH 453815 S4E2	1195020000	C.15
KTB MH 453815 S4E3	1195030000	C.15
KTB MH 453815 S4E3	1195030000	C.35
KTB MH 453815 S4E4	1195040000	C.15
KTB MH 453820 S4E0	1195050000	C.15
KTB MH 453820 S4E0	1195050000	C.36
KTB MH 453820 S4E1	1195060000	C.15
KTB MH 453820 S4E1	1195060000	C.36
KTB MH 453820 S4E2	1195070000	C.15
KTB MH 453820 S4E3	1195080000	C.15
KTB MH 453820 S4E3	1195080000	C.36
KTB MH 453820 S4E4	1195090000	C.15
KTB MH 456220 S4E0	2698060000	C.15
KTB MH 456220 S4E0	2698060000	C.37
KTB MH 456220 S4E1	2698070000	C.15
KTB MH 456220 S4E1	2698070000	C.37
KTB MH 484815 S4E0	1195100000	C.15
KTB MH 484815 S4E0	1195100000	C.38
KTB MH 484815 S4E1	1195110000	C.15
KTB MH 484815 S4E1	1195110000	C.38
KTB MH 484815 S4E2	1195120000	C.15
KTB MH 484815 S4E3	1195130000	C.15
KTB MH 484815 S4E3	1195130000	C.38
KTB MH 484815 S4E4	1195140000	C.15
KTB MH 484820 S4E0	1195150000	C.15
KTB MH 484820 S4E0	1195150000	C.39
KTB MH 484820 S4E1	1195160000	C.15
KTB MH 484820 S4E1	1195160000	C.39
KTB MH 484820 S4E2	1195170000	C.15
KTB MH 484820 S4E3	1195180000	C.15
KTB MH 484820 S4E3	1195180000	C.39
KTB MH 484820 S4E4	1195190000	C.15
KTB MH 504015 S4E0	8000108846	C.15
KTB MH 504015 S4E0	8000108846	C.40
KTB MH 504015 S4E1	8000108847	C.15
KTB MH 504015 S4E1	8000108847	C.40
KTB MH 504015 S4E3	8000108848	C.15
KTB MH 504015 S4E3	8000108848	C.40
KTB MH 504020 S4E0	8000108849	C.15
KTB MH 504020 S4E0	8000108849	C.41
KTB MH 504020 S4E1	8000108850	C.15
KTB MH 504020 S4E1	8000108850	C.41
KTB MH 504020 S4E3	8000108851	C.15
KTB MH 504020 S4E3	8000108851	C.41
KTB MH 507620 S4E0	2698080000	C.15
KTB MH 507620 S4E0	2698080000	C.42
KTB MH 507620 S4E1	2698090000	C.15
KTB MH 507620 S4E1	2698090000	C.42
KTB MH 553515 S4E0	1195200000	C.15
KTB MH 553515 S4E0	1195200000	C.43
KTB MH 553515 S4E1	1195210000	C.15
KTB MH 553515 S4E1	1195210000	C.43
KTB MH 553515 S4E2	1195220000	C.15
KTB MH 553515 S4E3	1195230000	C.15
KTB MH 553515 S4E3	1195230000	C.43
KTB MH 553515 S4E4	1195240000	C.15
KTB MH 553520 S4E0	1195250000	C.15
KTB MH 553520 S4E0	1195250000	C.44
KTB MH 553520 S4E1	1195260000	C.15
KTB MH 553520 S4E1	1195260000	C.44
KTB MH 553520 S4E2	1195270000	C.15
KTB MH 553520 S4E3	1195280000	C.15
KTB MH 553520 S4E3	1195280000	C.44
KTB MH 553520 S4E4	1195290000	C.15
KTB MH 624020 S4E0	8000108852	C.15
KTB MH 624020 S4E0	8000108852	C.45
KTB MH 624020 S4E1	8000108853	C.15
KTB MH 624020 S4E1	8000108853	C.45
KTB MH 624020 S4E3	8000108854	C.15
KTB MH 624020 S4E3	8000108854	C.45
KTB MH 624515 S4E0	1195300000	C.15
KTB MH 624515 S4E0	1195300000	C.46
KTB MH 624515 S4E1	1195310000	C.15
KTB MH 624515 S4E1	1195310000	C.46
KTB MH 624515 S4E2	1195320000	C.15
KTB MH 624515 S4E3	1195330000	C.15
KTB MH 624515 S4E3	1195330000	C.46
KTB MH 624515 S4E4	1195340000	C.15
KTB MH 624520 S4E0	1195350000	C.15
KTB MH 624520 S4E0	1195350000	C.47
KTB MH 624520 S4E1	1195360000	C.15
KTB MH 624520 S4E1	1195360000	C.47
KTB MH 624520 S4E2	1195370000	C.15
KTB MH 624520 S4E3	1195380000	C.15
KTB MH 624520 S4E3	1195380000	C.47
KTB MH 624520 S4E4	1195390000	C.15
KTB MH 625015 S4E0	8000108855	C.15
KTB MH 625015 S4E0	8000108855	C.48
KTB MH 625015 S4E1	8000108856	C.15
KTB MH 625015 S4E1	8000108856	C.48
KTB MH 625015 S4E3	8000108857	C.15
KTB MH 625015 S4E3	8000108857	C.48

Type	Order No.	Page
KTB MH 625020 S4E0	8000108858	C.15
KTB MH 625020 S4E0	8000108858	C.49
KTB MH 625020 S4E1	8000108859	C.15
KTB MH 625020 S4E1	8000108859	C.49
KTB MH 625020 S4E3	8000108860	C.15
KTB MH 625020 S4E3	8000108860	C.49
KTB MH 626215 S4E0	8000108861	C.15
KTB MH 626215 S4E0	8000108861	C.50
KTB MH 626215 S4E1	8000108862	C.15
KTB MH 626215 S4E1	8000108862	C.50
KTB MH 626215 S4E3	8000108863	C.15
KTB MH 626215 S4E3	8000108863	C.50
KTB MH 626220 S4E0	8000108864	C.15
KTB MH 626220 S4E0	8000108864	C.51
KTB MH 626220 S4E1	8000108865	C.15
KTB MH 626220 S4E1	8000108865	C.51
KTB MH 626220 S4E3	8000108866	C.15
KTB MH 626220 S4E3	8000108866	C.51
KTB MH 765015 S4E0	1195400000	C.15
KTB MH 765015 S4E0	1195400000	C.52
KTB MH 765015 S4E1	1195410000	C.15
KTB MH 765015 S4E1	1195410000	C.52
KTB MH 765015 S4E2	1195420000	C.15
KTB MH 765015 S4E3	1195430000	C.15
KTB MH 765015 S4E3	1195430000	C.52
KTB MH 765015 S4E4	1195440000	C.15
KTB MH 765020 S4E0	1195450000	C.15
KTB MH 765020 S4E0	1195450000	C.53
KTB MH 765020 S4E1	1195460000	C.15
KTB MH 765020 S4E1	1195460000	C.53
KTB MH 765020 S4E2	1195470000	C.15
KTB MH 765020 S4E3	1195480000	C.15
KTB MH 765020 S4E3	1195480000	C.53
KTB MH 765020 S4E4	1195490000	C.15
KTB MH 766215 S4E0	8000108867	C.15
KTB MH 766215 S4E0	8000108867	C.54
KTB MH 766215 S4E1	8000108868	C.15
KTB MH 766215 S4E1	8000108868	C.54
KTB MH 766215 S4E3	8000108869	C.15
KTB MH 766215 S4E3	8000108869	C.54
KTB MH 766220 S4E0	8000108870	C.15
KTB MH 766220 S4E0	8000108870	C.55
KTB MH 766220 S4E1	8000108872	C.15
KTB MH 766220 S4E1	8000108872	C.55
KTB MH 766220 S4E3	8000108873	C.15
KTB MH 766220 S4E3	8000108873	C.55
KTB MH 916115 S4E0	1195500000	C.15
KTB MH 916115 S4E0	1195500000	C.56
KTB MH 916115 S4E1	1195510000	C.15
KTB MH 916115 S4E1	1195510000	C.56
KTB MH 916115 S4E2	1195520000	C.15
KTB MH 916115 S4E3	1195530000	C.15
KTB MH 916115 S4E3	1195530000	C.56
KTB MH 916115 S4E4	1195540000	C.15
KTB MH 916120 S4E0	1195550000	C.15
KTB MH 916120 S4E0	1195550000	C.57
KTB MH 916120 S4E1	1195560000	C.15
KTB MH 916120 S4E1	1195560000	C.57
KTB MH 916120 S4E2	1195570000	C.15
KTB MH 916120 S4E3	1195580000	C.15
KTB MH 916120 S4E3	1195580000	C.57
KTB MH 916120 S4E4	1195590000	C.15
KTB MH 917620 S4E0	8000108875	C.15
KTB MH 917620 S4E0	8000108875	C.58
KTB MH 917620 S4E1	8000108877	C.15
KTB MH 917620 S4E1	8000108877	C.58
KTB MH 917620 S4E3	8000108879	C.15
KTB MH 917620 S4E3	8000108879	C.58
KTB MH 919120 S4E0	8000108880	C.15
KTB MH 919120 S4E0	8000108880	C.59
KTB MH 919120 S4E1	8000108882	C.15
KTB MH 919120 S4E1	8000108882	C.59
KTB MH 919120 S4E3	8000108884	C.15
KTB MH 919120 S4E3	8000108884	C.59
KTB MH 987420 S4E0	1195600000	C.15
KTB MH 987420 S4E0	1195600000	C.60
KTB MH 987420 S4E1	1195610000	C.15
KTB MH 987420 S4E1	1195610000	C.60
KTB MH 987420 S4E2	1195620000	C.15
KTB MH 987420 S4E3	1195630000	C.15
KTB MH 987420 S4E3	1195630000	C.60
KTB MH 987420 S4E4	1195640000	C.15
KTB MOPL 2215 MSZN	1193930000	C.20
KTB MOPL 2215 MSZN H	2022050000	C.20
KTB MOPL 2215 S2N	1193810000	C.20
KTB MOPL 2215 S2N	1193810000	C.70
KTB MOPL 2215 S2N H	1257650000	C.20
KTB MOPL 2626 MSZN	1193950000	C.21
KTB MOPL 2626 MSZN	1193950000	C.22
KTB MOPL 2626 MSZN H	2022060000	C.21
KTB MOPL 2626 MSZN H	2022060000	C.22
KTB MOPL 2626 S2N	1193820000	C.21
KTB MOPL 2626 S2N	1193820000	C.22
KTB MOPL 2626 S2N	1193820000	C.71
KTB MOPL 2626 S2N H	1257660000	C.21
KTB MOPL 2626 S2N H	1257660000	C.22
KTB MOPL 3020 MSZN	8000110193	C.23
KTB MOPL 3020 MSZN H	8000115913	C.23
KTB MOPL 3020 S2 H	8000115902	C.23

Type	Order No.	Page
KTB MOPL 3020 S2N	8000115923	C.23
KTB MOPL 3030 MSZN	1193960000	C.24
KTB MOPL 3030 MSZN	1193960000	C.25
KTB MOPL 3030 MSZN H	2022190000	C.24
KTB MOPL 3030 MSZN H	2022190000	C.25
KTB MOPL 3030 S2N	1193830000	C.24
KTB MOPL 3030 S2N	1193830000	C.25
KTB MOPL 3030 S2N H	1257670000	C.24
KTB MOPL 3030 S2N H	1257670000	C.25
KTB MOPL 3526 MSZN	1193970000	C.26
KTB MOPL 3526 MSZN	1193970000	C.27
KTB MOPL 3526 MSZN H	2022310000	C.26
KTB MOPL 3526 MSZN H	2022310000	C.27
KTB MOPL 3526 S2N	1193840000	C.26
KTB MOPL 3526 S2N	1193840000	C.27
KTB MOPL 3526 S2N H	1257680000	C.26
KTB MOPL 3526 S2N H	1257680000	C.27
KTB MOPL 3535 MSZN	8000110194	C.28
KTB MOPL 3535 MSZN	8000110194	C.29
KTB MOPL 3535 MSZN H	8000115914	C.28
KTB MOPL 3535 MSZN H	8000115914	C.29
KTB MOPL 3535 S2N	8000115924	C.28
KTB MOPL 3535 S2N	8000115924	C.29
KTB MOPL 3535 S2N H	8000115903	C.28
KTB MOPL 3535 S2N H	8000115903	C.29
KTB MOPL 3555 MSZN	2715560000	C.30
KTB MOPL 3555 MSZN H	2716090000	C.30
KTB MOPL 4030 MSZN	1193980000	C.31
KTB MOPL 4030 MSZN	1193980000	C.32
KTB MOPL 4030 MSZN H	2022420000	C.31
KTB MOPL 4030 MSZN H	2022420000	C.32
KTB MOPL 4030 S2N	1193850000	C.31
KTB MOPL 4030 S2N	1193850000	C.32
KTB MOPL 4030 S2N H	1257690000	C.31
KTB MOPL 4030 S2N H	1257690000	C.32
KTB MOPL 4040 MSZN	8000110195	C.33
KTB MOPL 4040 MSZN	8000110195	C.34
KTB MOPL 4040 MSZN H	8000115915	C.33
KTB MOPL 4040 MSZN H	8000115915	C.34
KTB MOPL 4040 S2N	8000115925	C.33
KTB MOPL 4040 S2N	8000115925	C.34
KTB MOPL 4040 S2N H	8000115904	C.33
KTB MOPL 4040 S2N H	8000115904	C.34
KTB MOPL 4538 MSZN	1193990000	C.35
KTB MOPL 4538 MSZN	1193990000	C.36
KTB MOPL 4538 MSZN H	2022590000	C.35
KTB MOPL 4538 MSZN H	2022590000	C.36
KTB MOPL 4538 S2N	1193860000	C.35
KTB MOPL 4538 S2N	1193860000	C.36
KTB MOPL 4538 S2N H	1257700000	C.35
KTB MOPL 4538 S2N H	1257700000	C.36
KTB MOPL 4562 MSZN	2716100000	C.37
KTB MOPL 4562 MSZN H	2716110000	C.37
KTB MOPL 4848 MSZN	1194000000	C.38
KTB MOPL 4848 MSZN	1194000000	C.39
KTB MOPL 4848 MSZN H	2022610000	C.38
KTB MOPL 4848 MSZN H	2022610000	C.39
KTB MOPL 4848 S2N	1193870000	C.38
KTB MOPL 4848 S2N	1193870000	C.39
KTB MOPL 4848 S2N	1193870000	C.72
KTB MOPL 4848 S2N H	1257710000	C.38
KTB MOPL 4848 S2N H	1257710000	C.39
KTB MOPL 5040 MSZN	8000110196	C.40
KTB MOPL 5040 MSZN	8000110196	C.41
KTB MOPL 5040 MSZN H	8000115916	C.40
KTB MOPL 5040 MSZN H	8000115916	C.41
KTB MOPL 5040 S2N H	8000115905	C.40
KTB MOPL 5040 S2N H	8000115905	C.41
KTB MOPL 5076 MSZN	2716120000	C.42
KTB MOPL 5076 MSZN H	2716130000	C.42
KTB MOPL 5535 MSZN	1194010000	C.43
KTB MOPL 5535 MSZN	1194010000	C.44
KTB MOPL 5535 MSZN H	2022650000	C.43
KTB MOPL 5535 MSZN H	2022650000	C.44
KTB MOPL 5535 S2N	1193880000	C.43
KTB MOPL 5535 S2N	1193880000	C.44
KTB MOPL 5535 S2N H	1257720000	C.43
KTB MOPL 5535 S2N H	1257720000	C.44
KTB MOPL 6240 MSZN	8000110198	C.45
KTB MOPL 6240 MSZN H	8000115917	C.45
KTB MOPL 6240 S2N H	8000115906	C.45
KTB MOPL 6245 MSZN	1194020000	C.46
KTB MOPL 6245 MSZN	1194020000	C.47
KTB MOPL 6245 MSZN H	2022670000	C.46
KTB MOPL 6245 MSZN H	2022670000	C.47
KTB MOPL 6245 S2N	1193890000	C.46
KTB MOPL 6245 S2N	1193890000	C.47
KTB MOPL 6245 S2N H	1257740000	C.46
KTB MOPL 6245 S2N H	1257740000	C.47
KTB MOPL 6250 MSZN	8000110199	C.48
KTB MOPL 6250 MSZN	8000110199	C.49
KTB MOPL 6250 MSZN H	8000115918	C.48
KTB MOPL 6250 MSZN H	8000115918	C.49
KTB MOPL 6250 S2N H	8000115907	C.48
KTB MOPL 6250 S2N H	8000115907	C.49
KTB MOPL 6262 MSZN	8000110200	C.50
KTB MOPL 6262 MSZN	8000110200	C.51
KTB MOPL 6262 MSZN H	8000115919	C.50
KTB MOPL 6262 MSZN H	8000115919	C.51

Type	Order No.	Page
KTB MOPL 6262 S2N H	8000115908	C.50
KTB MOPL 6262 S2N H	8000115908	C.51
KTB MOPL 7650 MSZN	1194030000	C.52
KTB MOPL 7650 MSZN	1194030000	C.53
KTB MOPL 7650 MSZN H	2022680000	C.52
KTB MOPL 7650 MSZN H	2022680000	C.53
KTB MOPL 7650 S2N	1193900000	C.52
KTB MOPL 7650 S2N	1193900000	C.53
KTB MOPL 7650 S2N H	1257750000	C.52
KTB MOPL 7650 S2N H	1257750000	C.53
KTB MOPL 7662 MSZN	8000110201	C.54
KTB MOPL 7662 MSZN	8000110201	C.55
KTB MOPL 7662 MSZN H	8000115920	C.54
KTB MOPL 7662 MSZN H	8000115920	C.55
KTB MOPL 7662 S2N H	8000115909	C.54
KTB MOPL 7662 S2N H	8000115909	C.55
KTB MOPL 9161 MSZN	1194040000	C.56
KTB MOPL 9161 MSZN	1194040000	C.57
KTB MOPL 9161 MSZN H	2022740000	C.56
KTB MOPL 9161 MSZN H	2022740000	C.57
KTB MOPL 9161 S2N	1193910000	C.56
KTB MOPL 9161 S2N	1193910000	C.57
KTB MOPL 9161 S2N H	1257760000	C.56
KTB MOPL 9161 S2N H	1257760000	C.57
KTB MOPL 9176 MSZN	8000116040	C.58
KTB MOPL 9176 MSZN H	8000115921	C.58
KTB MOPL 9176 S2N	8000115931	C.58
KTB MOPL 9176 S2N H	8000115910	C.58
KTB MOPL 9191 MSZN	8000116041	C.59
KTB MOPL 9191 MSZN H	8000115922	C.59
KTB MOPL 9191 S2N	8000115932	C.59
KTB MOPL 9191 S2N H	8000115911	C.59
KTB MOPL 9874 MSZN	1194050000	C.60
KTB MOPL 9874 MSZN H	2022760000	C.60
KTB MOPL 9874 S2N	1193920000	C.60
KTB MOPL 9874 S2N H	1257770000	C.60
KTB QL 221513 S4E0	1199850000	C.63
KTB QL 221513 S4E1	1199860000	C.63
KTB QL 221513 S4E2	1199870000	C.63
KTB QL 221513 S4E3	1199880000	C.63
KTB QL 221513 S4E4	1199890000	C.63
KTB QL 262615 S4E0	1199900000	C.63
KTB QL 262615 S4E1	1199910000	C.63
KTB QL 262615 S4E2	1199920000	C.63
KTB QL 262615 S4E3	1199930000	C.63
KTB QL 262615 S4E4	1199940000	C.63
KTB QL 262620 S4E0	1199950000	C.63
KTB QL 262620 S4E1	1199960000	C.63
KTB QL 262620 S4E2	1199970000	C.63
KTB QL 262620 S4E3	1199980000	C.63
KTB QL 262620 S4E4	1199990000	C.63
KTB QL 302015 S4E0	8000109883	C.63
KTB QL 302015 S4E1	8000109885	C.63
KTB QL 302015 S4E3	8000109886	C.63
KTB QL 303015 S4E0	1200010000	C.63
KTB QL 303015 S4E1	1200020000	C.63
KTB QL 303015 S4E2	1200030000	C.63
KTB QL 303015 S4E3	1200040000	C.63
KTB QL 303015 S4E4	1200050000	C.63
KTB QL 303020 S4E0	1200060000	C.63
KTB QL 303020 S4E1	1200070000	C.63
KTB QL 303020 S4E2	1200080000	C.63
KTB QL 303020 S4E3	1200090000	C.63
KTB QL 303020 S4E4	1200100000	C.63
KTB QL 352615 S4E0	1200110000	C.63
KTB QL 352615 S4E1	1200120000	C.63
KTB QL 352615 S4E2	1200130000	C.63
KTB QL 352615 S4E3	1200140000	C.63
KTB QL 352615 S4E4	1200150000	C.63
KTB QL 352620 S4E0	1200160000	C.63
KTB QL 352620 S4E1	1200170000	C.63
KTB QL 352620 S4E2	1200180000	C.63
KTB QL 352620 S4E3	1200190000	C.63
KTB QL 352620 S4E4	1200210000	C.63
KTB QL 353515 S4E0	8000109887	C.63
KTB QL 353515 S4E1	8000109888	C.63
KTB QL 353515 S4E3	8000109889	C.63
KTB QL 353520 S4E0	8000109890	C.63
KTB QL 353520 S4E1	8000109891	C.63
KTB QL 353520 S4E3	8000109892	C.63
KTB QL 403015 S4E0	1200220000	C.63
KTB QL 403015 S4E1	1200230000	C.63
KTB QL 403015 S4E2	1200240000	C.63
KTB QL 403015 S4E3	1200250000	C.63
KTB QL 403015 S4E4	1200260000	C.63
KTB QL 403020 S4E0	1200270000	C.63
KTB QL 403020 S4E1	1200280000	C.63
KTB QL 403020 S4E2	1200290000	C.63
KTB QL 403020 S4E3	1200310000	C.63
KTB QL 403020 S4E4	1200320000	C.63
KTB QL 404015 S4E0	8000109893	C.63
KTB QL 404015 S4E1	8000109894	C.63
KTB QL 404015 S4E3	8000109895	C.63
KTB QL 404020 S4E0	8000109896	C.63
KTB QL 404020 S4E1	8000109897	C.63
KTB QL 404020 S4E3	8000109898	C.63
KTB QL 453815 S4E0	1200330000	C.63
KTB QL 453815 S4E1	1200340000	C.63
KTB QL 453815 S4E2	1200350000	C.63

Type	Order No.	Page
KTB QL 453815 S4E3	1200360000	C.63
KTB QL 453815 S4E4	1200370000	C.63
KTB QL 453820 S4E0	1200380000	C.63
KTB QL 453820 S4E1	1200390000	C.63
KTB QL 453820 S4E2	1200410000	C.63
KTB QL 453820 S4E3	1200420000	C.63
KTB QL 453820 S4E4	1200430000	C.63
KTB QL 484815 S4E0	1200440000	C.63
KTB QL 484815 S4E1	1200450000	C.63
KTB QL 484815 S4E2	1200460000	C.63
KTB QL 484815 S4E3	1200470000	C.63
KTB QL 484815 S4E4	1200480000	C.63
KTB QL 484820 EXE	8000028401	C.68
KTB QL 484820 EXE	8000028401	C.72
KTB QL 484820 S4E0	1200490000	C.63
KTB QL 484820 S4E1	1200510000	C.63
KTB QL 484820 S4E1	1200510000	C.72
KTB QL 484820 S4E2	1200520000	C.63
KTB QL 484820 S4E3	1200530000	C.63
KTB QL 484820 S4E4	1200540000	C.63
KTB QL 504015 S4E0	8000109899	C.63
KTB QL 504015 S4E1	8000109900	C.63
KTB QL 504015 S4E3	8000109901	C.63
KTB QL 504020 S4E0	8000109902	C.63
KTB QL 504020 S4E1	8000109903	C.63
KTB QL 504020 S4E3	8000109904	C.63
KTB QL 553515 S4E0	1200550000	C.63
KTB QL 553515 S4E1	1200560000	C.63
KTB QL 553515 S4E2	1200570000	C.63
KTB QL 553515 S4E3	1200580000	C.63
KTB QL 553515 S4E4	1200590000	C.63
KTB QL 553520 S4E0	1200610000	C.63
KTB QL 553520 S4E1	1200620000	C.63
KTB QL 553520 S4E2	1200630000	C.63
KTB QL 553520 S4E3	1200640000	C.63
KTB QL 553520 S4E4	1200650000	C.63
KTB QL 624020 S4E0	8000109905	C.63
KTB QL 624020 S4E1	8000109906	C.63
KTB QL 624020 S4E3	8000109907	C.63
KTB QL 624515 S4E0	1200660000	C.63
KTB QL 624515 S4E1	1200670000	C.63
KTB QL 624515 S4E2	1200680000	C.63
KTB QL 624515 S4E3	1200690000	C.63
KTB QL 624515 S4E4	1200710000	C.63
KTB QL 624520 S4E0	1200720000	C.63
KTB QL 624520 S4E1	1200730000	C.63
KTB QL 624520 S4E2	1200740000	C.63
KTB QL 624520 S4E3	1200750000	C.63
KTB QL 624520 S4E4	1200760000	C.63
KTB QL 625015 S4E0	8000109908	C.63
KTB QL 625015 S4E1	8000109909	C.63
KTB QL 625015 S4E3	8000109910	C.63
KTB QL 625020 S4E0	8000109911	C.63
KTB QL 625020 S4E1	8000109912	C.63
KTB QL 625020 S4E3	8000109913	C.63
KTB QL 626215 S4E0	8000109914	C.63
KTB QL 626215 S4E1	8000109915	C.63
KTB QL 626215 S4E3	8000109916	C.63
KTB QL 626220 S4E0	8000109917	C.63
KTB QL 626220 S4E1	8000109918	C.63
KTB QL 626220 S4E3	8000109919	C.63
KTB QL 765015 S4E0	1200770000	C.63
KTB QL 765015 S4E1	1200780000	C.63
KTB QL 765015 S4E2	1200790000	C.63
KTB QL 765015 S4E3	1200810000	C.63
KTB QL 765015 S4E4	1200820000	C.63
KTB QL 765020 S4E0	1200830000	C.63
KTB QL 765020 S4E1	1200840000	C.63
KTB QL 765020 S4E2	1200850000	C.63
KTB QL 765020 S4E3	1200860000	C.63
KTB QL 765020 S4E4	1200870000	C.63
KTB QL 766215 S4E0	8000109920	C.63
KTB QL 766215 S4E1	8000109921	C.63
KTB QL 766215 S4E3	8000109922	C.63
KTB QL 766220 S4E0	8000109923	C.63
KTB QL 766220 S4E1	8000109924	C.63
KTB QL 766220 S4E3	8000109925	C.63
KTB QL 916115 S4E0	1200880000	C.63
KTB QL 916115 S4E1	1200890000	C.63
KTB QL 916115 S4E2	1200910000	C.63
KTB QL 916115 S4E3	1200920000	C.63
KTB QL 916115 S4E4	1200930000	C.63
KTB QL 916120 S4E0	1200940000	C.63
KTB QL 916120 S4E1	1200950000	C.63
KTB QL 916120 S4E2	1200960000	C.63
KTB QL 916120 S4E3	1200970000	C.63
KTB QL 916120 S4E4	1200980000	C.63
KTB QL 917620 S4E0	8000109926	C.63
KTB QL 917620 S4E1	8000109927	C.63
KTB QL 917620 S4E3	8000109928	C.63
KTB QL 919120 S4E0	8000109929	C.63
KTB QL 919120 S4E1	8000109930	C.63
KTB QL 919120 S4E3	8000109931	C.63
KTB QL 987420 S4E0	1200990000	C.63
KTB QL 987420 S4E1	1201010000	C.63
KTB QL 987420 S4E2	1201020000	C.63
KTB QL 987420 S4E3	1201030000	C.63
KTB QL 987420 S4E4	1201040000	C.63
KTB RNHD 221513 R	1281360000	C.20
KTB RNHD 221513 R	1281360000	C.70
KTB RNHD 262615 R	1281370000	C.21
KTB RNHD 262615 R	1281370000	C.71
KTB RNHD 262615 S4E R	1314100000	C.21
KTB RNHD 262620 R	1281380000	C.22
KTB RNHD 262620 S4E R	1314110000	C.22
KTB RNHD 303015 R	1281390000	C.24
KTB RNHD 303015 S4E R	1314120000	C.24
KTB RNHD 303020 R	1281400000	C.25
KTB RNHD 303020 S4E R	1314130000	C.25
KTB RNHD 352615 R	1281410000	C.26
KTB RNHD 352620 R	1281420000	C.27
KTB RNHD 403015 R	1281430000	C.31
KTB RNHD 403020 R	1281440000	C.32
KTB RNHD 453815 R	1281450000	C.35
KTB RNHD 453820 R	1281460000	C.36
KTB RNHD 484815 R	1281470000	C.38
KTB RNHD 484820 R	1281480000	C.39
KTB RNHD 484820 R	1281480000	C.72
KTB RNHD 553515 R	1281490000	C.43
KTB RNHD 553515 S4E R	1314240000	C.43
KTB RNHD 553520 R	1281500000	C.44
KTB RNHD 553520 S4E R	1314250000	C.44
KTB RNHD 624515 R	1281510000	C.46
KTB RNHD 624520 R	1281520000	C.47
KTB RNHD 765015 R	1281530000	C.52
KTB RNHD 765015 S4E R	1314290000	C.52
KTB RNHD 765020 R	1281540000	C.53
KTB RNHD 765020 S4E R	1314300000	C.53
KTB RNHD 916115 R	1281550000	C.56
KTB RNHD 916120 R	1281570000	C.57
KTB RNHD 987420 R	1281580000	C.60
KTB RNHD XX1513 S4E R	1314090000	C.20
KTB RNHD XX2015 S2 R	8000115041	C.23
KTB RNHD XX2015 S4E R	8000115024	C.23
KTB RNHD XX2615 S4E R	1314140000	C.26
KTB RNHD XX2620 S4E R	1314150000	C.27
KTB RNHD XX3015 S4E R	1314170000	C.31
KTB RNHD XX3020 S4E R	1314180000	C.32
KTB RNHD XX3515 S2 R	8000115042	C.28
KTB RNHD XX3515 S4E R	8000115025	C.28
KTB RNHD XX3520 S2 R	8000115043	C.29
KTB RNHD XX3520 S4E R	8000115026	C.29
KTB RNHD XX3815 S4E R	1314190000	C.35
KTB RNHD XX3820 S4E R	1314200000	C.36
KTB RNHD XX4015 S2 R	8000115044	C.33
KTB RNHD XX4015 S2 R	8000115044	C.40
KTB RNHD XX4015 S2 R	8000115044	C.41
KTB RNHD XX4015 S4E R	8000115028	C.33
KTB RNHD XX4015 S4E R	8000115028	C.40
KTB RNHD XX4015 S4E R	8000115028	C.41
KTB RNHD XX4020 S2 R	8000115045	C.34
KTB RNHD XX4020 S2 R	8000115045	C.45
KTB RNHD XX4020 S4E R	8000115029	C.34
KTB RNHD XX4020 S4E R	8000115029	C.45
KTB RNHD XX4515 S4E R	1314270000	C.46
KTB RNHD XX4520 S4E R	1314280000	C.47
KTB RNHD XX4815 S4E R	1314220000	C.38
KTB RNHD XX4820 S4E R	1314230000	C.39
KTB RNHD XX5015 S2 R	8000115046	C.48
KTB RNHD XX5015 S4E R	8000115030	C.48
KTB RNHD XX5020 S2 R	8000115047	C.49
KTB RNHD XX5020 S4E R	8000115032	C.49
KTB RNHD XX6115 S4E R	1314320000	C.56
KTB RNHD XX6120 S4E R	1314330000	C.57
KTB RNHD XX6215 S2 R	8000115048	C.50
KTB RNHD XX6215 S2 R	8000115048	C.54
KTB RNHD XX6215 S4E R	8000115033	C.50
KTB RNHD XX6215 S4E R	8000115033	C.54
KTB RNHD XX6220 S2 R	8000115049	C.51
KTB RNHD XX6220 S2 R	8000115049	C.55
KTB RNHD XX6220 S4E R	8000115034	C.51
KTB RNHD XX6220 S4E R	8000115034	C.55
KTB RNHD XX7420 S4E R	1314340000	C.60
KTB RNHD XX7620 S2 R	8000115050	C.58
KTB RNHD XX7620 S4E R	8000115036	C.58
KTB RNHD XX9120 S2 R	8000115051	C.59
KTB RNHD XX9120 S4E R	8000115037	C.59
KTBLQL1005030S4B1 LL1	2698400000	C.86
KTBLQL1005030S4B1 LL1	2698400000	C.88
KTBLQL1258040S4B1 LL1	2698420000	C.86
KTBLQL1258040S4B1 LL1	2698420000	C.88
KTBLQL15010050S4B1 LL1	2698430000	C.86
KTBLQL15010050S4B1 LL1	2698430000	C.89
KTBLRNHD10050S4B LL1	2698540000	C.89
KTBLRNHD5030S4B LL1	2698520000	C.88
KTBLRNHD8040S4B LL1	2698530000	C.88
KV 11-M	1656390000	D.10
KV 13-M	1656400000	D.10
KV 16-M	1656410000	D.10
KV 21-M	1656420000	D.10
KV 29-M	1656430000	D.10
LKSC M6X8 A2 TX30	2704960000	C.98
LKSC M6X8 A2 TX30	2704960000	C.99
LKSC M6X8 A2 TX30	2704960000	C.100
LKSC M6X8 A2 TX30	2704960000	C.101
LKSC M6X8 A2 TX30	2704960000	C.102
LKSC M6X8 A2 TX30	2704960000	C.103
LKSC M6X8 A2 TX30	2704960000	C.104
LKSC M6X8 A2 TX30	2704960000	C.105
LKSC M6X8 A2 TX30	2704960000	C.106
LKSC M6X8 A2 TX30	2704960000	C.107
LKSC M6X8 A2 TX30	2704960000	C.108
LKSC M6X8 A2 TX30	2704960000	C.112
LKSC M6X8 A2 TX30	2704960000	C.113
LKSC M6X8 A2 TX30	2704960000	C.114
LKSC M6X8 A2 TX30	2704960000	C.115
LKSC M6X8 A2 TX30	2704960000	C.116
LKSC M6X8 A2 TX30	2704960000	C.117
LKSC M6X8 A2 TX30	2704960000	C.118
LKSC M6X8 A2 TX30	2704960000	C.119
LKSC M6X8 A2 TX30	2704960000	C.120
LKSC M6X8 A2 TX30	2704960000	C.121
LKSC M6X8 A2 TX30	2704960000	C.124
LKSC M6X8 A2 TX30	2704960000	C.125
LKSC M6X8 A2 TX30	2704960000	C.126
LKSC M6X8 A2 TX30	2704960000	C.127
LKSC M6X8 A2 TX30	2704960000	C.128
LKSC M6X8 A2 TX30	2704960000	C.129
LKSC M6X8 A2 TX30	2704960000	C.132
LKSC M6X8 A2 TX30	2704960000	C.133
LKSC M6X8 A2 TX30	2704960000	C.134
LKSC M6X8 A2 TX30	2704960000	C.135
LKSC M6X8 A2 TX30	2704960000	C.136
LKSC M6X8 A2 TX30	2704960000	C.137
MEW 1/32	0445600000	C.168
MEW 1/32	0445600000	C.169
MEW 1/32	0445600000	C.170
MEW 1/32	0445600000	C.171
MEW 1/32	0445600000	C.250
MEW 1/32	0445600000	C.251
MEW 1/32	0445600000	C.252
MEW 1/32	0445600000	C.253
MF FPC	9536040000	C.276
MF FPC	9536040000	C.277
MF FPC	9536040000	C.278
MF MPC	9535600000	C.264
MF MPC	9535600000	C.265
MF MPC	9535600000	C.266
MF MPC	9535600000	C.267
MF MPC	9535600000	C.268
MF MPC	9535600000	C.269
MF MPC	9535600000	C.270
MF MPC	9535600000	C.271
MF MPC	9535600000	C.272
MF POK BIG	9510910000	C.217
MF POK BIG	9510910000	C.218
MF POK BIG	9510910000	C.219
MF POK BIG	9510910000	C.220
MF POK BIG	9510910000	C.221
MF POK BIG	9510910000	C.222
MF POK BIG	9510910000	C.223
MF POK BIG	9510910000	C.224
MF POK BIG	9510910000	C.225
MF POK BIG	9510910000	C.226
MF POK BIG	9510910000	C.227
MF POK BIG	9510910000	C.228
MF POK SMALL	9510900000	C.212
MF POK SMALL	9510900000	C.213
MF POK SMALL	9510900000	C.214
MF POK SMALL	9510900000	C.215
MF POK SMALL	9510900000	C.216
MF TBF	0360800000	C.256
MF TBF	0360800000	C.257
MF TBF	0360800000	C.258
MF TBF	0360800000	C.259
MF TBF	0360800000	C.260
MOPL K1 N FE	1905280000	C.179
MOPL K11 STAHL	3073000000	C.180
MOPL K2 N FE	1905270000	C.181
MOPL K21 STAHL	3073020000	C.182
MOPL K3 N FE	1898210000	C.183
MOPL K31 STAHL	3073040000	C.184
MOPL K32 STAHL	3073050000	C.185
MOPL K4 STAHL	3073060000	C.186
MOPL K41 STAHL	3073070000	C.187
MOPL K5 STAHL	3073080000	C.188
MOPL K51 STAHL	3073090000	C.189
MOPL K52 STAHL	3073100000	C.190
MOPL K6 STAHL	3073110000	C.191
MOPL K61 STAHL	3073120000	C.192
MOPL K7 STAHL	3073130000	C.193
MOPL K71 STAHL	3073140000	C.194
MOPL SET BK12 S	8000004135	C.196
MOPL SET BK4 S	8000004129	C.196
MOPL SET BK6 S	8000004132	C.196
MP FPC 20/20	9535920000	C.276
MP FPC 20/30	9535930000	C.276
MP FPC 20/40	9535940000	C.277
MP FPC 30/30	9535950000	C.277
MP FPC 30/40	9535960000	C.278
MP FPC 40/60	9535980000	C.278
MP MPC 07/12	9535540000	C.264
MP MPC 07/12	9535540000	C.265
MP MPC 12/12	9535550000	C.265
MP MPC 12/12	9535550000	C.266
MP MPC 12/17	9535560000	C.267
MP MPC 12/17	9535560000	C.268
MP MPC 17/17	9535570000	C.269
MP MPC 17/17	9535570000	C.270
MP MPC 17/25	9535580000	C.271
MP MPC 17/25	9535580000	C.272
MP TBF 19/15	9502720000	C.256
MP TBF 30/19	3018950000	C.256
MP TBF 30/30	9502730000	C.257
MP TBF 37/30	9502740000	C.257
MP TBF 49/30	9500960000	C.258
MP TBF 56/30	9500950000	C.258
MP TBF 60/30	9502750000	C.259
MP TBF 60/37	9502910000	C.260
MP TBF 60/60	9502920000	C.260
MPC 07/12/07 7035	9535170000	C.262
MPC 07/12/07 7035	9535170000	C.264
MPC 07/12/07 TRSP	9535180000	C.262
MPC 07/12/07 TRSP	9535180000	C.264
MPC 07/12/10 7035	9535190000	C.262
MPC 07/12/10 7035	9535190000	C.264
MPC 07/12/10 TRSP	9535200000	C.262
MPC 07/12/10 TRSP	9535200000	C.264
MPC 07/12/12 7035	9535210000	C.262
MPC 07/12/12 7035	9535210000	C.265
MPC 07/12/12 TRSP	9535220000	C.262
MPC 07/12/12 TRSP	9535220000	C.265
MPC 12/12/07 7035	9535230000	C.262
MPC 12/12/07 7035	9535230000	C.265
MPC 12/12/07 TRSP	9535240000	C.262
MPC 12/12/07 TRSP	9535240000	C.265
MPC 12/12/10 7035	9535250000	C.262
MPC 12/12/10 7035	9535250000	C.266
MPC 12/12/10 TRSP	9535260000	C.262
MPC 12/12/10 TRSP	9535260000	C.266
MPC 12/12/12 7035	9535270000	C.262
MPC 12/12/12 7035	9535270000	C.266
MPC 12/12/12 TRSP	9535280000	C.262
MPC 12/12/12 TRSP	9535280000	C.266
MPC 12/17/07 7035	9535290000	C.262
MPC 12/17/07 7035	9535290000	C.267
MPC 12/17/07 TRSP	9535300000	C.262
MPC 12/17/07 TRSP	9535300000	C.267
MPC 12/17/10 7035	9535310000	C.262
MPC 12/17/10 7035	9535310000	C.267
MPC 12/17/10 TRSP	9535320000	C.262
MPC 12/17/10 TRSP	9535320000	C.267
MPC 12/17/12 7035	9535330000	C.262
MPC 12/17/12 7035	9535330000	C.268
MPC 12/17/12 TRSP	9535340000	C.262
MPC 12/17/12 TRSP	9535340000	C.268
MPC 12/17/15 7035	9535350000	C.262
MPC 12/17/15 7035	9535350000	C.268
MPC 12/17/15 TRSP	9535360000	C.262
MPC 12/17/15 TRSP	9535360000	C.268
MPC 17/17/07 7035	9535370000	C.262
MPC 17/17/07 7035	9535370000	C.269
MPC 17/17/07 TRSP	9535380000	C.262
MPC 17/17/07 TRSP	9535380000	C.269
MPC 17/17/10 7035	9535390000	C.262
MPC 17/17/10 7035	9535390000	C.269
MPC 17/17/10 TRSP	9535400000	C.262
MPC 17/17/10 TRSP	9535400000	C.269
MPC 17/17/12 7035	9535410000	C.262
MPC 17/17/12 7035	9535410000	C.270
MPC 17/17/15 7035	9535430000	C.262
MPC 17/17/15 7035	9535430000	C.270
MPC 17/17/15 TRSP	9535440000	C.262
MPC 17/17/15 TRSP	9535440000	C.270
MPC 17/25/07 7035	9535450000	C.262
MPC 17/25/07 7035	9535450000	C.271
MPC 17/25/10 7035	9535470000	C.262
MPC 17/25/10 7035	9535470000	C.271
MPC 17/25/10 TRSP	9535480000	C.262
MPC 17/25/10 TRSP	9535480000	C.271
MPC 17/25/15 7035	9535490000	C.262
MPC 17/25/15 7035	9535490000	C.272
MPC 17/25/15 TRSP	9535500000	C.262
MPC 17/25/15 TRSP	9535500000	C.272
PEBZ M10 BR SET	1277220000	C.186
PEBZ M10 BR SET	1277220000	C.187
PEBZ M10 BR SET	1277220000	C.188
PEBZ M10 BR SET	1277220000	C.189
PEBZ M10 BR SET	1277220000	C.190
PEBZ M10 BR SET	1277220000	C.191
PEBZ M10 BR SET	1277220000	C.192
PEBZ M10 BR SET	1277220000	C.193
PEBZ M10 BR SET	1277220000	C.194
PEBZ M10 BR SET	1277220000	C.212
PEBZ M10 BR SET	1277220000	C.213
PEBZ M10 BR SET	1277220000	C.214
PEBZ M10 BR SET	1277220000	C.215

Type	Order No.	Page
PEBZ M10 BR SET	1277220000	C.216
PEBZ M10 BR SET	1277220000	C.217
PEBZ M10 BR SET	1277220000	C.218
PEBZ M10 BR SET	1277220000	C.219
PEBZ M10 BR SET	1277220000	C.220
PEBZ M10 BR SET	1277220000	C.221
PEBZ M10 BR SET	1277220000	C.222
PEBZ M10 BR SET	1277220000	C.223
PEBZ M10 BR SET	1277220000	C.224
PEBZ M10 BR SET	1277220000	C.225
PEBZ M10 BR SET	1277220000	C.226
PEBZ M10 BR SET	1277220000	C.227
PEBZ M10 BR SET	1277220000	C.228
PEBZ M10 BR SET	1277220000	C.256
PEBZ M10 BR SET	1277220000	C.257
PEBZ M10 BR SET	1277220000	C.258
PEBZ M10 BR SET	1277220000	C.259
PEBZ M10 BR SET	1277220000	C.260
PEBZ M10 BR SET	1277220000	C.264
PEBZ M10 BR SET	1277220000	C.265
PEBZ M10 BR SET	1277220000	C.266
PEBZ M10 BR SET	1277220000	C.267
PEBZ M10 BR SET	1277220000	C.268
PEBZ M10 BR SET	1277220000	C.269
PEBZ M10 BR SET	1277220000	C.270
PEBZ M10 BR SET	1277220000	C.271
PEBZ M10 BR SET	1277220000	C.272
PEBZ M10 BR SET	1277220000	C.276
PEBZ M10 BR SET	1277220000	C.277
PEBZ M10 BR SET	1277220000	C.278
PEBZ M10 KTB BR SET	1192680000	C.55
PEBZ M10 KTB S4 SET	1192690000	C.20
PEBZ M10 KTB S4 SET	1192690000	C.21
PEBZ M10 KTB S4 SET	1192690000	C.22
PEBZ M10 KTB S4 SET	1192690000	C.23
PEBZ M10 KTB S4 SET	1192690000	C.24
PEBZ M10 KTB S4 SET	1192690000	C.25
PEBZ M10 KTB S4 SET	1192690000	C.26
PEBZ M10 KTB S4 SET	1192690000	C.27
PEBZ M10 KTB S4 SET	1192690000	C.28
PEBZ M10 KTB S4 SET	1192690000	C.29
PEBZ M10 KTB S4 SET	1192690000	C.30
PEBZ M10 KTB S4 SET	1192690000	C.31
PEBZ M10 KTB S4 SET	1192690000	C.32
PEBZ M10 KTB S4 SET	1192690000	C.33
PEBZ M10 KTB S4 SET	1192690000	C.34
PEBZ M10 KTB S4 SET	1192690000	C.35
PEBZ M10 KTB S4 SET	1192690000	C.36
PEBZ M10 KTB S4 SET	1192690000	C.37
PEBZ M10 KTB S4 SET	1192690000	C.38
PEBZ M10 KTB S4 SET	1192690000	C.39
PEBZ M10 KTB S4 SET	1192690000	C.40
PEBZ M10 KTB S4 SET	1192690000	C.41
PEBZ M10 KTB S4 SET	1192690000	C.42
PEBZ M10 KTB S4 SET	1192690000	C.43
PEBZ M10 KTB S4 SET	1192690000	C.44
PEBZ M10 KTB S4 SET	1192690000	C.45
PEBZ M10 KTB S4 SET	1192690000	C.46
PEBZ M10 KTB S4 SET	1192690000	C.47
PEBZ M10 KTB S4 SET	1192690000	C.48
PEBZ M10 KTB S4 SET	1192690000	C.49
PEBZ M10 KTB S4 SET	1192690000	C.50
PEBZ M10 KTB S4 SET	1192690000	C.51
PEBZ M10 KTB S4 SET	1192690000	C.52
PEBZ M10 KTB S4 SET	1192690000	C.53
PEBZ M10 KTB S4 SET	1192690000	C.54
PEBZ M10 KTB S4 SET	1192690000	C.55
PEBZ M10 KTB S4 SET	1192690000	C.56
PEBZ M10 KTB S4 SET	1192690000	C.57
PEBZ M10 KTB S4 SET	1192690000	C.58
PEBZ M10 KTB S4 SET	1192690000	C.59
PEBZ M10 KTB S4 SET	1192690000	C.60
PEBZ M10 KTB S4 SET	1192690000	C.70
PEBZ M10 KTB S4 SET	1192690000	C.71
PEBZ M10 KTB S4 SET	1192690000	C.72
PEBZ M10 S4 SET	1283440000	C.186
PEBZ M10 S4 SET	1283440000	C.187
PEBZ M10 S4 SET	1283440000	C.188
PEBZ M10 S4 SET	1283440000	C.189
PEBZ M10 S4 SET	1283440000	C.190
PEBZ M10 S4 SET	1283440000	C.191
PEBZ M10 S4 SET	1283440000	C.192
PEBZ M10 S4 SET	1283440000	C.193
PEBZ M10 S4 SET	1283440000	C.194
PEBZ M10 S4 SET	1283440000	C.212
PEBZ M10 S4 SET	1283440000	C.213
PEBZ M10 S4 SET	1283440000	C.214
PEBZ M10 S4 SET	1283440000	C.215
PEBZ M10 S4 SET	1283440000	C.216
PEBZ M10 S4 SET	1283440000	C.217
PEBZ M10 S4 SET	1283440000	C.218
PEBZ M10 S4 SET	1283440000	C.219
PEBZ M10 S4 SET	1283440000	C.220
PEBZ M10 S4 SET	1283440000	C.221
PEBZ M10 S4 SET	1283440000	C.222
PEBZ M10 S4 SET	1283440000	C.223
PEBZ M10 S4 SET	1283440000	C.224
PEBZ M10 S4 SET	1283440000	C.225
PEBZ M10 S4 SET	1283440000	C.226

Type	Order No.	Page
PEBZ M10 S4 SET	1283440000	C.227
PEBZ M10 S4 SET	1283440000	C.228
PEBZ M10 S4 SET	1283440000	C.256
PEBZ M10 S4 SET	1283440000	C.257
PEBZ M10 S4 SET	1283440000	C.258
PEBZ M10 S4 SET	1283440000	C.259
PEBZ M10 S4 SET	1283440000	C.260
PEBZ M10 S4 SET	1283440000	C.264
PEBZ M10 S4 SET	1283440000	C.265
PEBZ M10 S4 SET	1283440000	C.266
PEBZ M10 S4 SET	1283440000	C.267
PEBZ M10 S4 SET	1283440000	C.268
PEBZ M10 S4 SET	1283440000	C.269
PEBZ M10 S4 SET	1283440000	C.270
PEBZ M10 S4 SET	1283440000	C.271
PEBZ M10 S4 SET	1283440000	C.272
PEBZ M10 S4 SET	1283440000	C.276
PEBZ M10 S4 SET	1283440000	C.277
PEBZ M10 S4 SET	1283440000	C.278
PEBZ M6 BR SET	1277250000	C.179
PEBZ M6 BR SET	1277250000	C.180
PEBZ M6 BR SET	1277250000	C.181
PEBZ M6 BR SET	1277250000	C.182
PEBZ M6 BR SET	1277250000	C.183
PEBZ M6 BR SET	1277250000	C.184
PEBZ M6 BR SET	1277250000	C.185
PEBZ M6 BR SET	1277250000	C.186
PEBZ M6 BR SET	1277250000	C.187
PEBZ M6 BR SET	1277250000	C.188
PEBZ M6 BR SET	1277250000	C.189
PEBZ M6 BR SET	1277250000	C.190
PEBZ M6 BR SET	1277250000	C.191
PEBZ M6 BR SET	1277250000	C.192
PEBZ M6 BR SET	1277250000	C.193
PEBZ M6 BR SET	1277250000	C.194
PEBZ M6 BR SET	1277250000	C.212
PEBZ M6 BR SET	1277250000	C.213
PEBZ M6 BR SET	1277250000	C.214
PEBZ M6 BR SET	1277250000	C.215
PEBZ M6 BR SET	1277250000	C.216
PEBZ M6 BR SET	1277250000	C.217
PEBZ M6 BR SET	1277250000	C.218
PEBZ M6 BR SET	1277250000	C.219
PEBZ M6 BR SET	1277250000	C.220
PEBZ M6 BR SET	1277250000	C.221
PEBZ M6 BR SET	1277250000	C.222
PEBZ M6 BR SET	1277250000	C.223
PEBZ M6 BR SET	1277250000	C.224
PEBZ M6 BR SET	1277250000	C.225
PEBZ M6 BR SET	1277250000	C.226
PEBZ M6 BR SET	1277250000	C.227
PEBZ M6 BR SET	1277250000	C.228
PEBZ M6 BR SET	1277250000	C.256
PEBZ M6 BR SET	1277250000	C.257
PEBZ M6 BR SET	1277250000	C.258
PEBZ M6 BR SET	1277250000	C.259
PEBZ M6 BR SET	1277250000	C.260
PEBZ M6 BR SET	1277250000	C.264
PEBZ M6 BR SET	1277250000	C.265
PEBZ M6 BR SET	1277250000	C.266
PEBZ M6 BR SET	1277250000	C.267
PEBZ M6 BR SET	1277250000	C.268
PEBZ M6 BR SET	1277250000	C.269
PEBZ M6 BR SET	1277250000	C.270
PEBZ M6 BR SET	1277250000	C.271
PEBZ M6 BR SET	1277250000	C.272
PEBZ M6 BR SET	1277250000	C.276
PEBZ M6 BR SET	1277250000	C.277
PEBZ M6 S4 SET	1283430000	C.179
PEBZ M6 S4 SET	1283430000	C.180
PEBZ M6 S4 SET	1283430000	C.181
PEBZ M6 S4 SET	1283430000	C.182
PEBZ M6 S4 SET	1283430000	C.183
PEBZ M6 S4 SET	1283430000	C.184
PEBZ M6 S4 SET	1283430000	C.185
PEBZ M6 S4 SET	1283430000	C.186
PEBZ M6 S4 SET	1283430000	C.187
PEBZ M6 S4 SET	1283430000	C.188
PEBZ M6 S4 SET	1283430000	C.189
PEBZ M6 S4 SET	1283430000	C.190
PEBZ M6 S4 SET	1283430000	C.191
PEBZ M6 S4 SET	1283430000	C.192
PEBZ M6 S4 SET	1283430000	C.193
PEBZ M6 S4 SET	1283430000	C.194
PEBZ M6 S4 SET	1283430000	C.212
PEBZ M6 S4 SET	1283430000	C.213
PEBZ M6 S4 SET	1283430000	C.214
PEBZ M6 S4 SET	1283430000	C.215
PEBZ M6 S4 SET	1283430000	C.216
PEBZ M6 S4 SET	1283430000	C.217
PEBZ M6 S4 SET	1283430000	C.218
PEBZ M6 S4 SET	1283430000	C.219
PEBZ M6 S4 SET	1283430000	C.220
PEBZ M6 S4 SET	1283430000	C.221
PEBZ M6 S4 SET	1283430000	C.222
PEBZ M6 S4 SET	1283430000	C.223
PEBZ M6 S4 SET	1283430000	C.224
PEBZ M6 S4 SET	1283430000	C.225

Type	Order No.	Page
PEBZ M6 S4 SET	1283430000	C.226
PEBZ M6 S4 SET	1283430000	C.227
PEBZ M6 S4 SET	1283430000	C.228
PEBZ M6 S4 SET	1283430000	C.256
PEBZ M6 S4 SET	1283430000	C.257
PEBZ M6 S4 SET	1283430000	C.258
PEBZ M6 S4 SET	1283430000	C.259
PEBZ M6 S4 SET	1283430000	C.260
PEBZ M6 S4 SET	1283430000	C.264
PEBZ M6 S4 SET	1283430000	C.265
PEBZ M6 S4 SET	1283430000	C.266
PEBZ M6 S4 SET	1283430000	C.267
PEBZ M6 S4 SET	1283430000	C.268
PEBZ M6 S4 SET	1283430000	C.269
PEBZ M6 S4 SET	1283430000	C.270
PEBZ M6 S4 SET	1283430000	C.271
PEBZ M6 S4 SET	1283430000	C.272
PEBZ M6 S4 SET	1283430000	C.276
PEBZ M6 S4 SET	1283430000	C.277
PEBZ M6 S4 SET	1283430000	C.278
POK MOPL 0808	9510570000	C.212
POK MOPL 0808 MINI	1534280000	C.212
POK MOPL 0811	9510580000	C.213
POK MOPL 0811 MINI	1534290000	C.213
POK MOPL 0816	9510680000	C.214
POK MOPL 0816 MINI	1534310000	C.214
POK MOPL 0819	9510690000	C.215
POK MOPL 0819 MINI	1534320000	C.215
POK MOPL 0823 MINI	1534330000	C.216
POK MOPL 1212	9510590000	C.217
POK MOPL 1212 MINI	1534340000	C.217
POK MOPL 1222	9510600000	C.218
POK MOPL 1222 MINI	1534350000	C.218
POK MOPL 1616	9510610000	C.219
POK MOPL 1616 MINI	1534360000	C.219
POK MOPL 1626	9510620000	C.220
POK MOPL 1626 MINI	1534370000	C.220
POK MOPL 1636	9510630000	C.221
POK MOPL 1636 MINI	1534380000	C.221
POK MOPL 1656	9510710000	C.222
POK MOPL 1656 MINI	1534390000	C.222
POK MOPL 2525	9510640000	C.223
POK MOPL 2525	9510640000	C.224
POK MOPL 2525 MINI	1534410000	C.223
POK MOPL 2525 MINI	1534410000	C.224
POK MOPL 2540	9510650000	C.225
POK MOPL 2540	9510650000	C.226
POK MOPL 2540 MINI	1534420000	C.225
POK MOPL 2540 MINI	1534420000	C.226
POK MOPL 2560	9510660000	C.227
POK MOPL 2560 MINI	1534430000	C.227
POK MOPL 4040	9510670000	C.228
POK MOPL 4040 MINI	1534440000	C.228

Q

QL 2 SAKK10	9502650000	C.168
QL 2 SAKK10	9502650000	C.169
QL 2 SAKK10	9502650000	C.170
QL 2 SAKK10	9502650000	C.171
QL 2 SAKK10	9502650000	C.250
QL 2 SAKK10	9502650000	C.251
QL 2 SAKK10	9502650000	C.252
QL 2 SAKK10	9502650000	C.253

S

SAKK 10	9502610000	C.168
SAKK 10	9502610000	C.169
SAKK 10	9502610000	C.170
SAKK 10	9502610000	C.171
SAKK 10	9502610000	C.250
SAKK 10	9502610000	C.251
SAKK 10	9502610000	C.252
SAKK 10	9502610000	C.253
SC MPC	9535640000	C.264
SC MPC	9535640000	C.266
SC MPC	9535640000	C.268
SC MPC	9535640000	C.269
SC MPC	9535640000	C.270
SD FIXING SET	1285200000	C.20
SD FIXING SET	1285200000	C.21
SD FIXING SET	1285200000	C.22
SD FIXING SET	1285200000	C.23
SD FIXING SET	1285200000	C.24
SD FIXING SET	1285200000	C.25
SD FIXING SET	1285200000	C.26
SD FIXING SET	1285200000	C.27
SD FIXING SET	1285200000	C.28
SD FIXING SET	1285200000	C.29
SD FIXING SET	1285200000	C.30
SD FIXING SET	1285200000	C.31
SD FIXING SET	1285200000	C.32
SD FIXING SET	1285200000	C.33
SD FIXING SET	1285200000	C.34
SD FIXING SET	1285200000	C.35
SD FIXING SET	1285200000	C.36
SD FIXING SET	1285200000	C.37
SD FIXING SET	1285200000	C.38

Type	Order No.	Page
SD FIXING SET	1285200000	C.39
SD FIXING SET	1285200000	C.40
SD FIXING SET	1285200000	C.41
SD FIXING SET	1285200000	C.42
SD FIXING SET	1285200000	C.43
SD FIXING SET	1285200000	C.44
SD FIXING SET	1285200000	C.45
SD FIXING SET	1285200000	C.46
SD FIXING SET	1285200000	C.47
SD FIXING SET	1285200000	C.48
SD FIXING SET	1285200000	C.49
SD FIXING SET	1285200000	C.50
SD FIXING SET	1285200000	C.51
SD FIXING SET	1285200000	C.52
SD FIXING SET	1285200000	C.53
SD FIXING SET	1285200000	C.54
SD FIXING SET	1285200000	C.55
SD FIXING SET	1285200000	C.56
SD FIXING SET	1285200000	C.57
SD FIXING SET	1285200000	C.58
SD FIXING SET	1285200000	C.59
SD FIXING SET	1285200000	C.60
SD T20 TR X 100	2749520000	C.176
SD T20 TR X 100	2749520000	C.177
SD T20 TR X 100	2749520000	C.178
SD T20 TR X 100	2749520000	C.179
SD T20 TR X 100	2749520000	C.180
SD T20 TR X 100	2749520000	C.181
SD T20 TR X 100	2749520000	C.182
SD T20 TR X 100	2749520000	C.183
SD T20 TR X 100	2749520000	C.184
SD T20 TR X 100	2749520000	C.185
SD T20 TR X 100	2749520000	C.186
SD T20 TR X 100	2749520000	C.187
SD T20 TR X 100	2749520000	C.188
SD T20 TR X 100	2749520000	C.189
SD T20 TR X 100	2749520000	C.190
SD T20 TR X 100	2749520000	C.191
SD T20 TR X 100	2749520000	C.192
SD T20 TR X 100	2749520000	C.193
SD T20 TR X 100	2749520000	C.194
SDIS SLIM 1.2X6.5X150	2749640000	C.98
SDIS SLIM 1.2X6.5X150	2749640000	C.99
SDIS SLIM 1.2X6.5X150	2749640000	C.100
SDIS SLIM 1.2X6.5X150	2749640000	C.101
SDIS SLIM 1.2X6.5X150	2749640000	C.102
SDIS SLIM 1.2X6.5X150	2749640000	C.103
SDIS SLIM 1.2X6.5X150	2749640000	C.104
SDIS SLIM 1.2X6.5X150	2749640000	C.105
SDIS SLIM 1.2X6.5X150	2749640000	C.106
SDIS SLIM 1.2X6.5X150	2749640000	C.107
SDIS SLIM 1.2X6.5X150	2749640000	C.108
SDIS SLIM 1.2X6.5X150	2749640000	C.132
SDIS SLIM 1.2X6.5X150	2749640000	C.133
SDIS SLIM 1.2X6.5X150	2749640000	C.134
SDIS SLIM 1.2X6.5X150	2749640000	C.135
SDIS SLIM 1.2X6.5X150	2749640000	C.136
SDIS SLIM 1.2X6.5X150	2749640000	C.137
SFNS5 VKMU M5 SW15	0433500000	C.142
SFNS5 VKMU M5 SW15	0433500000	C.143
SFNS5 VKMU M5 SW15	0433500000	C.144
SFNS5 VKMU M5 SW15	0433500000	C.145
SFNS5 VKMU M5 SW15	0433500000	C.146
SFNS5 VKMU M5 SW15	0433500000	C.147
SFNS5 VKMU M5 SW15	0433500000	C.148
SFNS5 VKMU M5 SW15	0433500000	C.149
SFNS5 VKMU M5 SW15	0433500000	C.168
SFNS5 VKMU M5 SW15	0433500000	C.169
SKMU EMV M12	1777610000	D.38
SKMU EMV M16	1777620000	D.38
SKMU EMV M20	1777630000	D.38
SKMU EMV M25	1777640000	D.38
SKMU EMV M32	1777650000	D.38
SKMU EMV M40	1777660000	D.38
SKMU EMV M50	1777670000	D.38
SKMU EMV M63	1777680000	D.38
SKMU EMV PG 36	1777710000	D.38
SKMU EMV PG11	1718920000	D.38
SKMU EMV PG13,5	1718930000	D.38
SKMU EMV PG16	1718940000	D.38
SKMU EMV PG21	1718950000	D.38
SKMU EMV PG29	1718960000	D.38
SKMU EMV PG7	1718900000	D.38
SKMU EMV PG9	1718910000	D.38
SKMU M12 - K GR	1772440000	D.34
SKMU M12 K SW	1806540000	D.35
SKMU M12 MS	1772360000	D.36
SKMU M16 - K GR	1772450000	D.34
SKMU M16 K SW	1736920000	D.35
SKMU M16 MS	1736990000	C.70
SKMU M16 MS	1736990000	D.36
SKMU M16 MS SC	0930640001	D.37
SKMU M20 - K GR	1772460000	D.34
SKMU M20 K SW	1736930000	D.35
SKMU M20 MS	1737000000	C.70
SKMU M20 MS	1737000000	C.71
SKMU M20 MS	1737000000	C.72
SKMU M20 MS	1737000000	C.152
SKMU M20 MS	1737000000	C.153

Type	Order No.	Page
SKMU M20 MS	1737000000	D.36
SKMU M20 MS SC	0930640002	D.37
SKMU M25 - K GR	1772470000	C.168
SKMU M25 - K GR	1772470000	C.170
SKMU M25 - K GR	1772470000	C.250
SKMU M25 - K GR	1772470000	C.252
SKMU M25 - K GR	1772470000	D.34
SKMU M25 K SW	1736940000	D.35
SKMU M25 MS	1737010000	C.72
SKMU M25 MS	1737010000	C.154
SKMU M25 MS	1737010000	D.36
SKMU M25 MS SC	0930640003	D.37
SKMU M32 - K GR	1772480000	C.169
SKMU M32 - K GR	1772480000	C.171
SKMU M32 - K GR	1772480000	C.251
SKMU M32 - K GR	1772480000	C.253
SKMU M32 - K GR	1772480000	D.34
SKMU M32 K SW	1736950000	D.35
SKMU M32 MS	1737020000	C.71
SKMU M32 MS	1737020000	D.36
SKMU M32 MS SC	0930640004	D.37
SKMU M40 - K GR	1772490000	D.34
SKMU M40 K SW	1736960000	D.35
SKMU M40 MS	1737030000	C.72
SKMU M40 MS	1737030000	D.36
SKMU M40 MS SC	0930640005	D.37
SKMU M50 - K GR	1772500000	D.34
SKMU M50 K SW	1736970000	D.35
SKMU M50 MS	1737040000	D.36
SKMU M50 MS SC	0930640006	D.37
SKMU M63 - K GR	1772510000	D.34
SKMU M63 K SW	1736980000	D.35
SKMU M63 MS	1737050000	D.36
SKMU M63 MS SC	0930640007	D.37
SKMU M75 MS	1737060000	D.36
SKMU M75 MS SC	0930640008	D.37
SKMU PG 13,5-K GR	1697470000	D.34
SKMU PG11-K GR	1697460000	D.34
SKMU PG11-K SW	1719120000	D.35
SKMU PG11-MS	1694090000	D.36
SKMU PG13,5-K SW	1719130000	D.35
SKMU PG13,5-MS	1694100000	D.36
SKMU PG16-K GR	1697480000	D.34
SKMU PG16-K SW	1719140000	D.35
SKMU PG16-MS	1694110000	D.36
SKMU PG21-K GR	1698220000	D.34
SKMU PG21-K SW	1719150000	D.35
SKMU PG21-MS	1719200000	D.36
SKMU PG29-K GR	1698230000	D.34
SKMU PG29-K SW	1719160000	D.35
SKMU PG29-MS	1719210000	D.36
SKMU PG36-K GR	1698240000	D.34
SKMU PG36-K SW	1719170000	D.35
SKMU PG36-MS	1719220000	D.36
SKMU PG42-K GR	1698250000	D.34
SKMU PG42-K SW	1719180000	D.35
SKMU PG42-MS	1719230000	D.36
SKMU PG48-K GR	1719090000	D.34
SKMU PG48-K SW	1719190000	D.35
SKMU PG48-MS	1719240000	D.36
SKMU PG7-K GR	1697440000	D.34
SKMU PG7-K SW	1719100000	D.35
SKMU PG7-MS	1694070000	D.36
SKMU PG9-K GR	1697450000	D.34
SKMU PG9-K SW	1719110000	D.35
SKMU PG9-MS	1694080000	D.36
SKMUS M16-W	1185680000	D.39
SKMUS M20-W	1185690000	D.39
SKMUS M25-W	1185700000	D.39
SKMUS M32-W	1185710000	D.39
SKMUS M40-W	1185720000	D.39
SKMUS M50-W	1185730000	D.39
SKMUS M63-W	1185740000	D.39
SP M6 10 S2	0935110000	C.20
SP M6 10 S2	0935110000	C.21
SP M6 10 S2	0935110000	C.22
SP M6 10 S2	0935110000	C.23
SP M6 10 S2	0935110000	C.24
SP M6 10 S2	0935110000	C.25
SP M6 10 S2	0935110000	C.26
SP M6 10 S2	0935110000	C.27
SP M6 10 S2	0935110000	C.28
SP M6 10 S2	0935110000	C.29
SP M6 10 S2	0935110000	C.31
SP M6 10 S2	0935110000	C.32
SP M6 10 S2	0935110000	C.33
SP M6 10 S2	0935110000	C.34
SP M6 10 S2	0935110000	C.35
SP M6 10 S2	0935110000	C.36
SP M6 10 S2	0935110000	C.38
SP M6 10 S2	0935110000	C.39
SP M6 10 S2	0935110000	C.40
SP M6 10 S2	0935110000	C.41
SP M6 10 S2	0935110000	C.43
SP M6 10 S2	0935110000	C.44
SP M6 10 S2	0935110000	C.45
SP M6 10 S2	0935110000	C.46
SP M6 10 S2	0935110000	C.47
SP M6 10 S2	0935110000	C.48

Type	Order No.	Page
SP M6 10 S2	0935110000	C.49
SP M6 10 S2	0935110000	C.50
SP M6 10 S2	0935110000	C.51
SP M6 10 S2	0935110000	C.52
SP M6 10 S2	0935110000	C.53
SP M6 10 S2	0935110000	C.54
SP M6 10 S2	0935110000	C.55
SP M6 10 S2	0935110000	C.56
SP M6 10 S2	0935110000	C.57
SP M6 10 S2	0935110000	C.58
SP M6 10 S2	0935110000	C.59
SP M6 10 S2	0935110000	C.60
SP M6 15 MSZN	3896100000	C.98
SP M6 15 MSZN	3896100000	C.99
SP M6 15 MSZN	3896100000	C.100
SP M6 15 MSZN	3896100000	C.101
SP M6 15 MSZN	3896100000	C.102
SP M6 15 MSZN	3896100000	C.103
SP M6 15 MSZN	3896100000	C.104
SP M6 15 MSZN	3896100000	C.105
SP M6 15 MSZN	3896100000	C.106
SP M6 15 MSZN	3896100000	C.107
SP M6 15 MSZN	3896100000	C.108
SP M6 15 MSZN	3896100000	C.112
SP M6 15 MSZN	3896100000	C.113
SP M6 15 MSZN	3896100000	C.114
SP M6 15 MSZN	3896100000	C.115
SP M6 15 MSZN	3896100000	C.116
SP M6 15 MSZN	3896100000	C.117
SP M6 15 MSZN	3896100000	C.118
SP M6 15 MSZN	3896100000	C.119
SP M6 15 MSZN	3896100000	C.120
SP M6 15 MSZN	3896100000	C.121
SP M6 15 MSZN	3896100000	C.124
SP M6 15 MSZN	3896100000	C.125
SP M6 15 MSZN	3896100000	C.126
SP M6 15 MSZN	3896100000	C.127
SP M6 15 MSZN	3896100000	C.128
SP M6 15 MSZN	3896100000	C.129
SP M6 15 MSZN	3896100000	C.132
SP M6 15 MSZN	3896100000	C.133
SP M6 15 MSZN	3896100000	C.134
SP M6 15 MSZN	3896100000	C.135
SP M6 15 MSZN	3896100000	C.136
SP M6 15 MSZN	3896100000	C.137
SP M6 15 S2	0935120000	C.20
SP M6 15 S2	0935120000	C.21
SP M6 15 S2	0935120000	C.22
SP M6 15 S2	0935120000	C.23
SP M6 15 S2	0935120000	C.24
SP M6 15 S2	0935120000	C.25
SP M6 15 S2	0935120000	C.26
SP M6 15 S2	0935120000	C.27
SP M6 15 S2	0935120000	C.28
SP M6 15 S2	0935120000	C.29
SP M6 15 S2	0935120000	C.31
SP M6 15 S2	0935120000	C.32
SP M6 15 S2	0935120000	C.33
SP M6 15 S2	0935120000	C.34
SP M6 15 S2	0935120000	C.35
SP M6 15 S2	0935120000	C.36
SP M6 15 S2	0935120000	C.38
SP M6 15 S2	0935120000	C.39
SP M6 15 S2	0935120000	C.40
SP M6 15 S2	0935120000	C.41
SP M6 15 S2	0935120000	C.43
SP M6 15 S2	0935120000	C.44
SP M6 15 S2	0935120000	C.45
SP M6 15 S2	0935120000	C.46
SP M6 15 S2	0935120000	C.47
SP M6 15 S2	0935120000	C.48
SP M6 15 S2	0935120000	C.49
SP M6 15 S2	0935120000	C.50
SP M6 15 S2	0935120000	C.51
SP M6 15 S2	0935120000	C.52
SP M6 15 S2	0935120000	C.53
SP M6 15 S2	0935120000	C.54
SP M6 15 S2	0935120000	C.55
SP M6 15 S2	0935120000	C.56
SP M6 15 S2	0935120000	C.57
SP M6 15 S2	0935120000	C.58
SP M6 15 S2	0935120000	C.59
SP M6 15 S2	0935120000	C.60
SP M6 20 MSZN	3896200000	C.98
SP M6 20 MSZN	3896200000	C.99
SP M6 20 MSZN	3896200000	C.100
SP M6 20 MSZN	3896200000	C.101
SP M6 20 MSZN	3896200000	C.102
SP M6 20 MSZN	3896200000	C.103
SP M6 20 MSZN	3896200000	C.104
SP M6 20 MSZN	3896200000	C.105
SP M6 20 MSZN	3896200000	C.106
SP M6 20 MSZN	3896200000	C.107
SP M6 20 MSZN	3896200000	C.108
SP M6 20 MSZN	3896200000	C.112
SP M6 20 MSZN	3896200000	C.113
SP M6 20 MSZN	3896200000	C.114
SP M6 20 MSZN	3896200000	C.115
SP M6 20 MSZN	3896200000	C.116

Type	Order No.	Page
SP M6 20 MSZN	3896200000	C.117
SP M6 20 MSZN	3896200000	C.118
SP M6 20 MSZN	3896200000	C.119
SP M6 20 MSZN	3896200000	C.120
SP M6 20 MSZN	3896200000	C.121
SP M6 20 MSZN	3896200000	C.124
SP M6 20 MSZN	3896200000	C.125
SP M6 20 MSZN	3896200000	C.126
SP M6 20 MSZN	3896200000	C.127
SP M6 20 MSZN	3896200000	C.128
SP M6 20 MSZN	3896200000	C.129
SP M6 20 MSZN	3896200000	C.132
SP M6 20 MSZN	3896200000	C.133
SP M6 20 MSZN	3896200000	C.134
SP M6 20 MSZN	3896200000	C.135
SP M6 20 MSZN	3896200000	C.136
SP M6 20 MSZN	3896200000	C.137
SP M6 20 S2	0935130000	C.20
SP M6 20 S2	0935130000	C.21
SP M6 20 S2	0935130000	C.22
SP M6 20 S2	0935130000	C.23
SP M6 20 S2	0935130000	C.24
SP M6 20 S2	0935130000	C.25
SP M6 20 S2	0935130000	C.26
SP M6 20 S2	0935130000	C.27
SP M6 20 S2	0935130000	C.28
SP M6 20 S2	0935130000	C.29
SP M6 20 S2	0935130000	C.31
SP M6 20 S2	0935130000	C.32
SP M6 20 S2	0935130000	C.33
SP M6 20 S2	0935130000	C.34
SP M6 20 S2	0935130000	C.35
SP M6 20 S2	0935130000	C.36
SP M6 20 S2	0935130000	C.38
SP M6 20 S2	0935130000	C.39
SP M6 20 S2	0935130000	C.40
SP M6 20 S2	0935130000	C.41
SP M6 20 S2	0935130000	C.43
SP M6 20 S2	0935130000	C.44
SP M6 20 S2	0935130000	C.45
SP M6 20 S2	0935130000	C.46
SP M6 20 S2	0935130000	C.47
SP M6 20 S2	0935130000	C.48
SP M6 20 S2	0935130000	C.49
SP M6 20 S2	0935130000	C.50
SP M6 20 S2	0935130000	C.51
SP M6 20 S2	0935130000	C.52
SP M6 20 S2	0935130000	C.53
SP M6 20 S2	0935130000	C.54
SP M6 20 S2	0935130000	C.55
SP M6 20 S2	0935130000	C.56
SP M6 20 S2	0935130000	C.57
SP M6 20 S2	0935130000	C.58
SP M6 20 S2	0935130000	C.59
SP M6 20 S2	0935130000	C.60
SP M6 30 MSZN	3896300000	C.98
SP M6 30 MSZN	3896300000	C.99
SP M6 30 MSZN	3896300000	C.100
SP M6 30 MSZN	3896300000	C.101
SP M6 30 MSZN	3896300000	C.102
SP M6 30 MSZN	3896300000	C.103
SP M6 30 MSZN	3896300000	C.104
SP M6 30 MSZN	3896300000	C.105
SP M6 30 MSZN	3896300000	C.106
SP M6 30 MSZN	3896300000	C.107
SP M6 30 MSZN	3896300000	C.108
SP M6 30 MSZN	3896300000	C.112
SP M6 30 MSZN	3896300000	C.113
SP M6 30 MSZN	3896300000	C.114
SP M6 30 MSZN	3896300000	C.115
SP M6 30 MSZN	3896300000	C.116
SP M6 30 MSZN	3896300000	C.117
SP M6 30 MSZN	3896300000	C.118
SP M6 30 MSZN	3896300000	C.119
SP M6 30 MSZN	3896300000	C.120
SP M6 30 MSZN	3896300000	C.121
SP M6 30 MSZN	3896300000	C.124
SP M6 30 MSZN	3896300000	C.125
SP M6 30 MSZN	3896300000	C.126
SP M6 30 MSZN	3896300000	C.127
SP M6 30 MSZN	3896300000	C.128
SP M6 30 MSZN	3896300000	C.129
SP M6 30 MSZN	3896300000	C.132
SP M6 30 MSZN	3896300000	C.133
SP M6 30 MSZN	3896300000	C.134
SP M6 30 MSZN	3896300000	C.135
SP M6 30 MSZN	3896300000	C.136
SP M6 30 MSZN	3896300000	C.137
SP M6 30 S2	0935140000	C.20
SP M6 30 S2	0935140000	C.21
SP M6 30 S2	0935140000	C.22
SP M6 30 S2	0935140000	C.23
SP M6 30 S2	0935140000	C.24
SP M6 30 S2	0935140000	C.25
SP M6 30 S2	0935140000	C.26
SP M6 30 S2	0935140000	C.27
SP M6 30 S2	0935140000	C.28
SP M6 30 S2	0935140000	C.29
SP M6 30 S2	0935140000	C.31

Type	Order No.	Page
SP M6 30 S2	0935140000	C.32
SP M6 30 S2	0935140000	C.33
SP M6 30 S2	0935140000	C.34
SP M6 30 S2	0935140000	C.35
SP M6 30 S2	0935140000	C.36
SP M6 30 S2	0935140000	C.38
SP M6 30 S2	0935140000	C.39
SP M6 30 S2	0935140000	C.40
SP M6 30 S2	0935140000	C.41
SP M6 30 S2	0935140000	C.43
SP M6 30 S2	0935140000	C.44
SP M6 30 S2	0935140000	C.45
SP M6 30 S2	0935140000	C.46
SP M6 30 S2	0935140000	C.47
SP M6 30 S2	0935140000	C.48
SP M6 30 S2	0935140000	C.49
SP M6 30 S2	0935140000	C.50
SP M6 30 S2	0935140000	C.51
SP M6 30 S2	0935140000	C.52
SP M6 30 S2	0935140000	C.53
SP M6 30 S2	0935140000	C.54
SP M6 30 S2	0935140000	C.55
SP M6 30 S2	0935140000	C.56
SP M6 30 S2	0935140000	C.57
SP M6 30 S2	0935140000	C.58
SP M6 30 S2	0935140000	C.59
SP M6 30 S2	0935140000	C.60
STB 2 EXE	8000028395	C.150
STB 2 EXE	8000028395	C.152
STB 3 EXE	8000028396	C.150
STB 3 EXE	8000028396	C.153
STB 4 EXE	8000028397	C.150
STB 4 EXE	8000028397	C.154
SZS M16	1736300000	D.44
SZS M20	1736310000	D.44
SZS M25	1736320000	D.44
SZS M32	1736330000	D.44
SZS M40	1736340000	D.44
SZS M50	1736350000	D.44
SZS M63	1736360000	D.44

T

TBF 19/15/14 7035	0360100000	C.254
TBF 19/15/14 7035	0360100000	C.256
TBF 30/19/18 7035	0360200000	C.254
TBF 30/19/18 7035	0360200000	C.256
TBF 30/19/18 TRSP	0500600000	C.254
TBF 30/19/18 TRSP	0500600000	C.256
TBF 30/30/18 7035	0360300000	C.254
TBF 30/30/18 7035	0360300000	C.257
TBF 30/30/18 TRSP	0500700000	C.254
TBF 30/30/18 TRSP	0500700000	C.257
TBF 37/30/18 7035	0360400000	C.254
TBF 37/30/18 7035	0360400000	C.257
TBF 37/30/18 TRSP	0500800000	C.254
TBF 37/30/18 TRSP	0500800000	C.257
TBF 49/30/18 7035	9502800000	C.254
TBF 49/30/18 7035	9502800000	C.258
TBF 49/30/21 TRSP	9502840000	C.254
TBF 49/30/21 TRSP	9502840000	C.258
TBF 56/30/18 7035	9502810000	C.254
TBF 56/30/18 7035	9502810000	C.258
TBF 56/30/21 TRSP	9502850000	C.254
TBF 56/30/21 TRSP	9502850000	C.258
TBF 60/30/18 7035	0360500000	C.254
TBF 60/30/18 7035	0360500000	C.259
TBF 60/30/21 TRSP	0500900000	C.254
TBF 60/30/21 TRSP	0500900000	C.259
TBF 60/37/18 7035	9502820000	C.254
TBF 60/37/18 7035	9502820000	C.260
TBF 60/37/21 TRSP	9502860000	C.254
TBF 60/37/21 TRSP	9502860000	C.260
TBF 60/60/18 7035	9502830000	C.254
TBF 60/60/18 7035	9502830000	C.260
TBF 60/60/21 TRSP	9502870000	C.254
TBF 60/60/21 TRSP	9502870000	C.260
TPSD FIXING SET KTB	1252190000	C.20
TPSD FIXING SET KTB	1252190000	C.21
TPSD FIXING SET KTB	1252190000	C.22
TPSD FIXING SET KTB	1252190000	C.23
TPSD FIXING SET KTB	1252190000	C.24
TPSD FIXING SET KTB	1252190000	C.25
TPSD FIXING SET KTB	1252190000	C.26
TPSD FIXING SET KTB	1252190000	C.27
TPSD FIXING SET KTB	1252190000	C.28
TPSD FIXING SET KTB	1252190000	C.29
TPSD FIXING SET KTB	1252190000	C.30
TPSD FIXING SET KTB	1252190000	C.31
TPSD FIXING SET KTB	1252190000	C.32
TPSD FIXING SET KTB	1252190000	C.33
TPSD FIXING SET KTB	1252190000	C.34
TPSD FIXING SET KTB	1252190000	C.35
TPSD FIXING SET KTB	1252190000	C.36
TPSD FIXING SET KTB	1252190000	C.37
TPSD FIXING SET KTB	1252190000	C.38
TPSD FIXING SET KTB	1252190000	C.39
TPSD FIXING SET KTB	1252190000	C.40
TPSD FIXING SET KTB	1252190000	C.41

Type	Order No.	Page
TPSD FIXING SET KTB	1252190000	C.42
TPSD FIXING SET KTB	1252190000	C.43
TPSD FIXING SET KTB	1252190000	C.44
TPSD FIXING SET KTB	1252190000	C.45
TPSD FIXING SET KTB	1252190000	C.46
TPSD FIXING SET KTB	1252190000	C.47
TPSD FIXING SET KTB	1252190000	C.48
TPSD FIXING SET KTB	1252190000	C.49
TPSD FIXING SET KTB	1252190000	C.50
TPSD FIXING SET KTB	1252190000	C.51
TPSD FIXING SET KTB	1252190000	C.52
TPSD FIXING SET KTB	1252190000	C.53
TPSD FIXING SET KTB	1252190000	C.54
TPSD FIXING SET KTB	1252190000	C.55
TPSD FIXING SET KTB	1252190000	C.56
TPSD FIXING SET KTB	1252190000	C.57
TPSD FIXING SET KTB	1252190000	C.58
TPSD FIXING SET KTB	1252190000	C.59
TPSD FIXING SET KTB	1252190000	C.60
TPSDHA KEB 100X25 S4B R	8000075818	C.98
TPSDHA KEB 100X25 S4B R	8000075818	C.99
TPSDHA KEB 100X25 S4B R	8000075818	C.100
TPSDHA KEB 100X25 S4B R	8000075818	C.101
TPSDHA KEB 100X25 S4B R	8000075818	C.102
TPSDHA KEB 100X25 S4B R	8000075818	C.103
TPSDHA KEB 100X25 S4B R	8000075818	C.104
TPSDHA KEB 100X25 S4B R	8000075818	C.105
TPSDHA KEB 100X25 S4B R	8000075818	C.106
TPSDHA KEB 100X25 S4B R	8000075818	C.107
TPSDHA KEB 100X25 S4B R	8000075818	C.108
TPSDHA KEB 100X25 S4B R	8000075818	C.112
TPSDHA KEB 100X25 S4B R	8000075818	C.113
TPSDHA KEB 100X25 S4B R	8000075818	C.114
TPSDHA KEB 100X25 S4B R	8000075818	C.115
TPSDHA KEB 100X25 S4B R	8000075818	C.116
TPSDHA KEB 100X25 S4B R	8000075818	C.117
TPSDHA KEB 100X25 S4B R	8000075818	C.118
TPSDHA KEB 100X25 S4B R	8000075818	C.119
TPSDHA KEB 100X25 S4B R	8000075818	C.120
TPSDHA KEB 100X25 S4B R	8000075818	C.121
TPSDHA KEB 100X25 S4B R	8000075818	C.124
TPSDHA KEB 100X25 S4B R	8000075818	C.125
TPSDHA KEB 100X25 S4B R	8000075818	C.126
TPSDHA KEB 100X25 S4B R	8000075818	C.127
TPSDHA KEB 100X25 S4B R	8000075818	C.128
TPSDHA KEB 100X25 S4B R	8000075818	C.129
TPSDHA KEB 100X25 S4B R	8000075818	C.132
TPSDHA KEB 100X25 S4B R	8000075818	C.133
TPSDHA KEB 100X25 S4B R	8000075818	C.134
TPSDHA KEB 100X25 S4B R	8000075818	C.135
TPSDHA KEB 100X25 S4B R	8000075818	C.136
TPSDHA KEB 100X25 S4B R	8000075818	C.137
TPSDHA KEB 130X50 S4B R	8000075816	C.98
TPSDHA KEB 130X50 S4B R	8000075816	C.99
TPSDHA KEB 130X50 S4B R	8000075816	C.100
TPSDHA KEB 130X50 S4B R	8000075816	C.101
TPSDHA KEB 130X50 S4B R	8000075816	C.102
TPSDHA KEB 130X50 S4B R	8000075816	C.103
TPSDHA KEB 130X50 S4B R	8000075816	C.104
TPSDHA KEB 130X50 S4B R	8000075816	C.105
TPSDHA KEB 130X50 S4B R	8000075816	C.106
TPSDHA KEB 130X50 S4B R	8000075816	C.107
TPSDHA KEB 130X50 S4B R	8000075816	C.108
TPSDHA KEB 130X50 S4B R	8000075816	C.112
TPSDHA KEB 130X50 S4B R	8000075816	C.113
TPSDHA KEB 130X50 S4B R	8000075816	C.114
TPSDHA KEB 130X50 S4B R	8000075816	C.115
TPSDHA KEB 130X50 S4B R	8000075816	C.116
TPSDHA KEB 130X50 S4B R	8000075816	C.117
TPSDHA KEB 130X50 S4B R	8000075816	C.118
TPSDHA KEB 130X50 S4B R	8000075816	C.119
TPSDHA KEB 130X50 S4B R	8000075816	C.120
TPSDHA KEB 130X50 S4B R	8000075816	C.121
TPSDHA KEB 130X50 S4B R	8000075816	C.124
TPSDHA KEB 130X50 S4B R	8000075816	C.125
TPSDHA KEB 130X50 S4B R	8000075816	C.126
TPSDHA KEB 130X50 S4B R	8000075816	C.127
TPSDHA KEB 130X50 S4B R	8000075816	C.128
TPSDHA KEB 130X50 S4B R	8000075816	C.129
TPSDHA KEB 130X50 S4B R	8000075816	C.132
TPSDHA KEB 130X50 S4B R	8000075816	C.133
TPSDHA KEB 130X50 S4B R	8000075816	C.134
TPSDHA KEB 130X50 S4B R	8000075816	C.135
TPSDHA KEB 130X50 S4B R	8000075816	C.136
TPSDHA KEB 130X50 S4B R	8000075816	C.137
TPSDHA KTB 100X25 S2 2R	1257640000	C.21
TPSDHA KTB 100X25 S2 2R	1257640000	C.22
TPSDHA KTB 100X25 S2 2R	1257640000	C.24
TPSDHA KTB 100X25 S2 2R	1257640000	C.25
TPSDHA KTB 100X25 S2 2R	1257640000	C.26
TPSDHA KTB 100X25 S2 2R	1257640000	C.27
TPSDHA KTB 100X25 S2 2R	1257640000	C.30
TPSDHA KTB 100X25 S2 2R	1257640000	C.31
TPSDHA KTB 100X25 S2 2R	1257640000	C.38
TPSDHA KTB 100X25 S2 2R	1257640000	C.39

Type	Order No.	Page
TPSDHA KTB 100X25 S2 2R	1257640000	C.42
TPSDHA KTB 100X25 S2 2R	1257640000	C.43
TPSDHA KTB 100X25 S2 2R	1257640000	C.44
TPSDHA KTB 100X25 S2 2R	1257640000	C.46
TPSDHA KTB 100X25 S2 2R	1257640000	C.47
TPSDHA KTB 100X25 S2 2R	1257640000	C.52
TPSDHA KTB 100X25 S2 2R	1257640000	C.53
TPSDHA KTB 100X25 S2 2R	1257640000	C.56
TPSDHA KTB 100X25 S2 2R	1257640000	C.57
TPSDHA KTB 100X25 S2 2R	1257640000	C.60
TPSDHA KTB 100X25 S2 2R	1257640000	C.71
TPSDHA KTB 100X25 S2 2R	1257640000	C.72
TPSDHA KTB 130X50 S2 R	1283450000	C.21
TPSDHA KTB 130X50 S2 R	1283450000	C.22
TPSDHA KTB 130X50 S2 R	1283450000	C.24
TPSDHA KTB 130X50 S2 R	1283450000	C.25
TPSDHA KTB 130X50 S2 R	1283450000	C.26
TPSDHA KTB 130X50 S2 R	1283450000	C.27
TPSDHA KTB 130X50 S2 R	1283450000	C.30
TPSDHA KTB 130X50 S2 R	1283450000	C.31
TPSDHA KTB 130X50 S2 R	1283450000	C.32
TPSDHA KTB 130X50 S2 R	1283450000	C.35
TPSDHA KTB 130X50 S2 R	1283450000	C.36
TPSDHA KTB 130X50 S2 R	1283450000	C.37
TPSDHA KTB 130X50 S2 R	1283450000	C.38
TPSDHA KTB 130X50 S2 R	1283450000	C.39
TPSDHA KTB 130X50 S2 R	1283450000	C.42
TPSDHA KTB 130X50 S2 R	1283450000	C.43
TPSDHA KTB 130X50 S2 R	1283450000	C.44
TPSDHA KTB 130X50 S2 R	1283450000	C.46
TPSDHA KTB 130X50 S2 R	1283450000	C.47
TPSDHA KTB 130X50 S2 R	1283450000	C.52
TPSDHA KTB 130X50 S2 R	1283450000	C.53
TPSDHA KTB 130X50 S2 R	1283450000	C.56
TPSDHA KTB 130X50 S2 R	1283450000	C.57
TPSDHA KTB 130X50 S2 R	1283450000	C.60
TPSDHA KTB 130X50 S2 R	1283450000	C.71
TPSDHA KTB 130X50 S2 R	1283450000	C.72
TPSDHA KTB 70X70M3 S2 R	1279320000	C.20
TPSDHA KTB 70X70M3 S2 R	1279320000	C.21
TPSDHA KTB 70X70M3 S2 R	1279320000	C.22
TPSDHA KTB 70X70M3 S2 R	1279320000	C.23
TPSDHA KTB 70X70M3 S2 R	1279320000	C.24
TPSDHA KTB 70X70M3 S2 R	1279320000	C.25
TPSDHA KTB 70X70M3 S2 R	1279320000	C.26
TPSDHA KTB 70X70M3 S2 R	1279320000	C.27
TPSDHA KTB 70X70M3 S2 R	1279320000	C.28
TPSDHA KTB 70X70M3 S2 R	1279320000	C.29
TPSDHA KTB 70X70M3 S2 R	1279320000	C.30
TPSDHA KTB 70X70M3 S2 R	1279320000	C.31
TPSDHA KTB 70X70M3 S2 R	1279320000	C.32
TPSDHA KTB 70X70M3 S2 R	1279320000	C.33
TPSDHA KTB 70X70M3 S2 R	1279320000	C.34
TPSDHA KTB 70X70M3 S2 R	1279320000	C.35
TPSDHA KTB 70X70M3 S2 R	1279320000	C.36
TPSDHA KTB 70X70M3 S2 R	1279320000	C.37
TPSDHA KTB 70X70M3 S2 R	1279320000	C.38
TPSDHA KTB 70X70M3 S2 R	1279320000	C.39
TPSDHA KTB 70X70M3 S2 R	1279320000	C.40
TPSDHA KTB 70X70M3 S2 R	1279320000	C.41
TPSDHA KTB 70X70M3 S2 R	1279320000	C.42
TPSDHA KTB 70X70M3 S2 R	1279320000	C.43
TPSDHA KTB 70X70M3 S2 R	1279320000	C.44
TPSDHA KTB 70X70M3 S2 R	1279320000	C.45
TPSDHA KTB 70X70M3 S2 R	1279320000	C.46
TPSDHA KTB 70X70M3 S2 R	1279320000	C.47
TPSDHA KTB 70X70M3 S2 R	1279320000	C.48
TPSDHA KTB 70X70M3 S2 R	1279320000	C.49
TPSDHA KTB 70X70M3 S2 R	1279320000	C.50
TPSDHA KTB 70X70M3 S2 R	1279320000	C.51
TPSDHA KTB 70X70M3 S2 R	1279320000	C.52
TPSDHA KTB 70X70M3 S2 R	1279320000	C.53
TPSDHA KTB 70X70M3 S2 R	1279320000	C.54
TPSDHA KTB 70X70M3 S2 R	1279320000	C.55
TPSDHA KTB 70X70M3 S2 R	1279320000	C.56
TPSDHA KTB 70X70M3 S2 R	1279320000	C.57
TPSDHA KTB 70X70M3 S2 R	1279320000	C.58
TPSDHA KTB 70X70M3 S2 R	1279320000	C.59
TPSDHA KTB 70X70M3 S2 R	1279320000	C.60
TPSDHA KTB 70X70M3 S2 R	1279320000	C.70
TPSDHA KTB 70X70M3 S2 R	1279320000	C.71
TPSDHA KTB 70X70M3 S2 R	1279320000	C.72
TS 32X15 2M/ST/ZN	0122800000	C.168
TS 32X15 2M/ST/ZN	0122800000	C.169
TS 32X15 2M/ST/ZN	0122800000	C.170
TS 32X15 2M/ST/ZN	0122800000	C.171
TS 32X15 2M/ST/ZN	0122800000	C.250
TS 32X15 2M/ST/ZN	0122800000	C.251
TS 32X15 2M/ST/ZN	0122800000	C.252
TS 32X15 2M/ST/ZN	0122800000	C.253
TS 35X105_MPC_12	8000037603	C.264
TS 35X105_MPC_12	8000037603	C.265
TS 35X105_MPC_12	8000037603	C.267
TS 35X105_MPC_12	8000037603	C.269
TS 35X15 2M/ST/ZN	0236400000	C.168
TS 35X15 2M/ST/ZN	0236400000	C.169
TS 35X15 2M/ST/ZN	0236400000	C.250
TS 35X15 2M/ST/ZN	0236400000	C.251
TS15 114 KLIPPON K21 CSS	1910020000	C.182

Type	Order No.	Page
TS15 114 KLIPPON K21 CSS	1910020000	C.196
TS15 147 KLIPPON POK3 CSS	1928080000	C.230
TS15 147 KLIPPON POK3 CSS	1928080000	C.234
TS15 155 KLIPPON K3 CSS	1910030000	C.183
TS15 155 KLIPPON K3 CSS	1910030000	C.196
TS15 164 KLIPPON K31 CSS	1910040000	C.184
TS15 164 KLIPPON K31 CSS	1910040000	C.196
TS15 64 KLIPPON K11	1909990000	C.180
TS15 64 KLIPPON K11	1909990000	C.196
TS15 68 KLIPPON POK1 CSS	1928060000	C.230
TS15 68 KLIPPON POK1 CSS	1928060000	C.232
TS15 90 KLIPPON K2 CSS	1910010000	C.181
TS15 90 KLIPPON K2 CSS	1910010000	C.196
TS15 98 KLIPPON POK2 CSS	1928070000	C.230
TS15 98 KLIPPON POK2 CSS	1928070000	C.233
TS15X5 ST FPC 20 VER	8000037604	C.276
TS15X5 ST FPC 20 VER	8000037604	C.277
TS15X5 ST MPC0712 VER	8000037599	C.264
TS15X5 ST MPC0712 VER	8000037599	C.265
TS15X5 ST MPC1217 VER	8000037598	C.264
TS15X5 ST MPC1217 VER	8000037598	C.265
TS15X5 ST MPC1217 VER	8000037598	C.266
TS15X5 ST MPC1217 VER	8000037598	C.267
TS15X5 ST MPC1217 VER	8000037598	C.268
TS15X5 ST POK 0808	8000003889	C.212
TS15X5 ST POK 0811	8000003890	C.213
TS15X5 ST POK 0811	8000003890	C.217
TS15X5 ST POK 0816	8000003891	C.214
TS15X5 ST POK 0819	8000003892	C.215
TS15X5 ST POK 0823	8000032382	C.216
TS35 105 KLIPPON K41/POK4	1910070000	C.187
TS35 105 KLIPPON K41/POK4	1910070000	C.196
TS35 105 KLIPPON K41/POK4	1910070000	C.230
TS35 105 KLIPPON K41/POK4	1910070000	C.235
TS35 64 KLIPPON K4K11	1910060000	C.186
TS35 64 KLIPPON K4K11	1910060000	C.196
TS35 MPC 1717 VER	8000037605	C.265
TS35 MPC 1717 VER	8000037605	C.267
TS35 MPC 1717 VER	8000037605	C.268
TS35 MPC 1717 VER	8000037605	C.269
TS35/140 KLIPPON K52 POK51	1910100000	C.190
TS35/140 KLIPPON K52 POK51	1910100000	C.196
TS35/140 KLIPPON K52 POK51	1910100000	C.230
TS35/140 KLIPPON K52 POK51	1910100000	C.236
TS35/148 KLIPPON K5 CSS	1910080000	C.188
TS35/148 KLIPPON K5 CSS	1910080000	C.196
TS35/172 KLIPPON K6 CSS	1910110000	C.191
TS35/203 KLIPPON K51POK5	1910090000	C.189
TS35/243 KLIPPON K61POK6	1910120000	C.192
TS35/260 KLIPPON K71 CSS	1910140000	C.194
TS35/324 KLIPPON K7 CSS	1910130000	C.193
TS35X7.5 ST FPC 20 HOR	8000037557	C.276
TS35X7.5 ST FPC 20 VER	8000037558	C.276
TS35X7.5 ST FPC 20 VER	8000037558	C.277
TS35X7.5 ST FPC 30 HOR	8000037559	C.276
TS35X7.5 ST FPC 30 VER	8000037561	C.278
TS35X7.5 ST FPC 40 HOR	8000037560	C.277
TS35X7.5 ST FPC 40 HOR	8000037560	C.278
TS35X7.5 ST FPC 40 VER	8000037562	C.278
TS35X7.5 ST FPC 60 HOR	8000037563	C.278
TS35X7.5 ST K52	8000003908	C.219
TS35X7.5 ST KTB2215 HOR	8000006720	C.20
TS35X7.5 ST KTB2215 VER	8000006708	C.20
TS35X7.5 ST KTB2626 VER	8000006709	C.21
TS35X7.5 ST KTB2626 VER	8000006709	C.22
TS35X7.5 ST KTB3020 HOR	8000116109	C.23
TS35X7.5 ST KTB3020 VER	8000116099	C.23
TS35X7.5 ST KTB3030 HOR	8000006722	C.24
TS35X7.5 ST KTB3030 HOR	8000006722	C.25
TS35X7.5 ST KTB3030 VER	8000006710	C.24
TS35X7.5 ST KTB3030 VER	8000006710	C.25
TS35X7.5 ST KTB3526 HOR	8000006721	C.21
TS35X7.5 ST KTB3526 HOR	8000006721	C.22
TS35X7.5 ST KTB3526 HOR	8000006721	C.26
TS35X7.5 ST KTB3526 HOR	8000006721	C.27
TS35X7.5 ST KTB3526 VER	8000006711	C.26
TS35X7.5 ST KTB3526 VER	8000006711	C.27
TS35X7.5 ST KTB3535 HOR	8000116110	C.28
TS35X7.5 ST KTB3535 HOR	8000116110	C.29
TS35X7.5 ST KTB3535 VER	8000116100	C.28
TS35X7.5 ST KTB3535 VER	8000116100	C.29
TS35X7.5 ST KTB3555 HOR	8000073447	C.30
TS35X7.5 ST KTB4030 HOR	8000006723	C.31
TS35X7.5 ST KTB4030 HOR	8000006723	C.32
TS35X7.5 ST KTB4030 VER	8000006712	C.31
TS35X7.5 ST KTB4030 VER	8000006712	C.32
TS35X7.5 ST KTB4040 HOR	8000116111	C.33
TS35X7.5 ST KTB4040 HOR	8000116111	C.34
TS35X7.5 ST KTB4040 VER	8000116101	C.33
TS35X7.5 ST KTB4040 VER	8000116101	C.34
TS35X7.5 ST KTB4538 HOR	8000006724	C.35
TS35X7.5 ST KTB4538 HOR	8000006724	C.36
TS35X7.5 ST KTB4538 VER	8000006713	C.35
TS35X7.5 ST KTB4538 VER	8000006713	C.36
TS35X7.5 ST KTB4848 HOR	8000006725	C.38
TS35X7.5 ST KTB4848 HOR	8000006725	C.39
TS35X7.5 ST KTB4848 VER	8000006714	C.38
TS35X7.5 ST KTB4848 VER	8000006714	C.39
TS35X7.5 ST KTB5040 HOR	8000116112	C.40

Type	Order No.	Page
TS35X7.5 ST KTB5040 HOR	8000116112	C.41
TS35X7.5 ST KTB5040 VER	8000116102	C.40
TS35X7.5 ST KTB5040 VER	8000116102	C.41
TS35X7.5 ST KTB5076 VER-C	8000073449	C.42
TS35X7.5 ST KTB5535 HOR	8000006726	C.43
TS35X7.5 ST KTB5535 HOR	8000006726	C.44
TS35X7.5 ST KTB5535 VER	8000006715	C.43
TS35X7.5 ST KTB5535 VER	8000006715	C.44
TS35X7.5 ST KTB6240 HOR	8000116113	C.45
TS35X7.5 ST KTB6240 VER	8000116103	C.45
TS35X7.5 ST KTB6245 HOR	8000006727	C.46
TS35X7.5 ST KTB6245 HOR	8000006727	C.47
TS35X7.5 ST KTB6245 VER	8000006716	C.46
TS35X7.5 ST KTB6245 VER	8000006716	C.47
TS35X7.5 ST KTB6250 HOR	8000116114	C.48
TS35X7.5 ST KTB6250 HOR	8000116114	C.49
TS35X7.5 ST KTB6250 VER	8000116104	C.48
TS35X7.5 ST KTB6250 VER	8000116104	C.49
TS35X7.5 ST KTB6262 HOR	8000116115	C.50
TS35X7.5 ST KTB6262 HOR	8000116115	C.51
TS35X7.5 ST KTB6262 VER	8000116105	C.50
TS35X7.5 ST KTB6262 VER	8000116105	C.51
TS35X7.5 ST KTB7650 HOR	8000006728	C.52
TS35X7.5 ST KTB7650 HOR	8000006728	C.53
TS35X7.5 ST KTB7650 VER	8000006717	C.52
TS35X7.5 ST KTB7650 VER	8000006717	C.53
TS35X7.5 ST KTB7662 HOR	8000116116	C.54
TS35X7.5 ST KTB7662 HOR	8000116116	C.55
TS35X7.5 ST KTB7662 VER	8000116106	C.54
TS35X7.5 ST KTB7662 VER	8000116106	C.55
TS35X7.5 ST KTB9161 HOR	8000006729	C.56
TS35X7.5 ST KTB9161 HOR	8000006729	C.57
TS35X7.5 ST KTB9161 VER	8000006718	C.56
TS35X7.5 ST KTB9161 VER	8000006718	C.57
TS35X7.5 ST KTB9176 HOR	8000116117	C.58
TS35X7.5 ST KTB9176 VER	8000116107	C.58
TS35X7.5 ST KTB9191 HOR	8000116118	C.59
TS35X7.5 ST KTB9191 VER	8000116108	C.59
TS35X7.5 ST KTB9874 HOR	8000006730	C.60
TS35X7.5 ST KTB9874 VER	8000006719	C.60
TS35X7.5 ST MPC1725 HOR	8000037601	C.271
TS35X7.5 ST MPC1725 HOR	8000037601	C.272
TS35X7.5 ST MPC1725 VER	8000037600	C.268
TS35X7.5 ST MPC1725 VER	8000037600	C.269
TS35X7.5 ST MPC1725 VER	8000037600	C.270
TS35X7.5 ST MPC1725 VER	8000037600	C.271
TS35X7.5 ST MPC1725 VER	8000037600	C.272
TS35X7.5 ST POK 1222	8000037568	C.218
TS35X7.5 ST POK 1626	8000003909	C.220
TS35X7.5 ST POK 1636	8000003910	C.221
TS35X7.5 ST POK 1656	8000003911	C.222
TS35X7.5 ST POK 2525	8000003912	C.223
TS35X7.5 ST POK 2525	8000003912	C.224
TS35X7.5 ST POK 2560	8000003914	C.227
TS35X7.5 ST POK 4040	8000003913	C.225
TS35X7.5 ST POK 4040	8000003913	C.226
TS35X7.5 ST POK 4040	8000003913	C.228
TS35X7.5 ST STB 1.1 STB 2	8683740000	C.142
TS35X7.5 ST STB 1.1 STB 2	8683740000	C.143
TS35X7.5 ST STB 1.1 STB 2	8683740000	C.144
TS35X7.5 ST STB 2.1 STB 3	1567660000	C.145
TS35X7.5 ST STB 2.1 STB 3	1567660000	C.146
TS35X7.5 ST STB 4 STB 6	8563410000	C.147
TS35X7.5 ST STB 4 STB 6	8563410000	C.148
TS35X7.5 ST STB 4 STB 6	8563410000	C.149
TS35X7.5 ST STB 5	8803610000	C.147
TS35X7.5 ST STB 5	8803610000	C.148
TS35X7.5 ST STB 5	8803610000	C.149

V

VG 11-K68	1568990000	D.6
VG 11-K68 SKS	1720490000	D.7
VG 11-MS68	1569080000	D.8
VG 11-SS 68 KB 5-10	1009760000	D.13
VG 13,5-MS68	1569090000	D.8
VG 13.5-K68	1569000000	D.6
VG 13.5-K68 SKS	1720500000	D.7
VG 16 HQ K68 11.5-15.5	1016080000	D.15
VG 16 HQ K68 4-6.5	2715990000	D.15
VG 16 HQ K68 6.5-9.5	1273890000	D.15
VG 16 HQ K68 9-13	1016070000	D.15
VG 16-K68	1569010000	D.6
VG 16-K68 SKS	1720510000	D.7
VG 16-MS68	1569100000	D.8
VG 16-SS 68 KB 10-14	1009780000	D.13
VG 21 HQ EMV68 11-15.5	1016120000	D.15
VG 21 HQ EMV68 14-18	1016130000	D.15
VG 21 HQ MS68 11.5-15.5	1016100000	D.15
VG 21 HQ MS68 14-18	1016110000	D.15
VG 21 HQ MS68 9-13	1016090000	D.15
VG 21-K68	1569020000	D.6
VG 21-K68 SKS	1720520000	D.7
VG 21-MS68	1569110000	D.8
VG 21-SS 68 KB 13-18	1009790000	D.13
VG 29-K68	1569030000	D.6
VG 29-MS68	1569120000	D.8
VG 29-SS 68 KB 18-25	1009800000	D.13
VG 36-K68	1569040000	D.6

Type	Order No.	Page
VG 36-MS68	1569130000	D.8
VG 36-SS 68 KB 22-32	1009810000	D.13
VG 42-K68	1569050000	D.6
VG 42-MS68	1569140000	D.8
VG 48-K68	1718770000	D.6
VG 48-MS68	1718790000	D.8
VG 7-K68	1568970000	D.6
VG 7-K68 SKS	1720470000	D.7
VG 7-MS68	1569060000	D.8
VG 7-SS 68 KB 3-6.5	1009740000	D.13
VG 9-K68	1568980000	D.6
VG 9-K68 SKS	1720480000	D.7
VG 9-MS68	1569070000	D.8
VG 9-SS 68 KB 4-8	1009750000	D.13
VG H M20 MS	1921720000	D.10
VG H M25 MS	1921740000	D.10
VG H M32 MS	1921760000	D.10
VG H M40 MS	1921770000	D.10
VG M12 - MS 68	1772200000	D.8
VG M12 EMV-4 MS 3-6.5	2435070000	D.11
VG M12 EXE 4-6.5 CR7J G4	2721930000	D.32
VG M12 EXE 4-6.5 SI7J G4	2722070000	D.33
VG M12 EXI 4-6.5 CR7J G4	2722210000	D.32
VG M12 EXI 4-6.5 SI7J G4	2722350000	D.33
VG M12-1/K68	1772280000	D.6
VG M12-K68 SKS	1776700000	D.7
VG M16 - K 68	1772290000	D.6
VG M16 - MS 68	1772210000	D.8
VG M16 EMV-4 MS 5-10	2435140000	D.11
VG M16 EXE 5-8 CR7J G4	2721940000	D.32
VG M16 EXE 5-8 SI7J G4	2722080000	C.232
VG M16 EXE 5-8 SI7J G4	2722080000	D.33
VG M16 EXE 6-10 CR7J G4	2721950000	D.32
VG M16 EXE 6-10 SI7J G4	2722090000	C.232
VG M16 EXE 6-10 SI7J G4	2722090000	D.33
VG M16 EXE MS	1460040000	C.70
VG M16 EXI 5-8 CR7J G4	2722220000	D.32
VG M16 EXI 5-8 SI7J G4	2722360000	D.33
VG M16 EXI 6-10 CR7J G4	2722230000	D.32
VG M16 EXI 6-10 SI7J G4	2722370000	D.33
VG M16-1/K68	1909860000	D.6
VG M16-1/MS68	1909910000	D.8
VG M16-K68 SKS	1776710000	D.7
VG M20 - MS 68	1772220000	D.8
VG M20 EMV-4 MS 6-12	2435150000	D.11
VG M20 EMV-4 MS 8-14	2435160000	D.11
VG M20 EXE 11-14 CR7J G4	2721980000	D.32
VG M20 EXE 11-14 SI7J G4	2722120000	C.233
VG M20 EXE 11-14 SI7J G4	2722120000	C.234
VG M20 EXE 11-14 SI7J G4	2722120000	C.235
VG M20 EXE 11-14 SI7J G4	2722120000	C.236
VG M20 EXE 11-14 SI7J G4	2722120000	D.33
VG M20 EXE 7-12 CR7J G4	2721960000	D.32
VG M20 EXE 7-12 SI7J G4	2722100000	D.33
VG M20 EXE 7-13 CR7J G4	2721970000	D.32
VG M20 EXE 7-13 SI7J G4	2722110000	C.233
VG M20 EXE 7-13 SI7J G4	2722110000	C.234
VG M20 EXE 7-13 SI7J G4	2722110000	C.235
VG M20 EXE 7-13 SI7J G4	2722110000	C.236
VG M20 EXE 7-13 SI7J G4	2722110000	D.33
VG M20 EXE MS	1460050000	C.70
VG M20 EXE MS	1460050000	C.71
VG M20 EXE MS	1460050000	C.72
VG M20 EXE MS	1460050000	C.152
VG M20 EXE MS	1460050000	C.153
VG M20 EXI 11-14 CR7J G4	2722260000	D.32
VG M20 EXI 11-14 SI7J G4	2722400000	D.33
VG M20 EXI 7-12 CR7J G4	2722240000	D.32
VG M20 EXI 7-12 SI7J G4	2722380000	D.33
VG M20 EXI 7-13 CR7J G4	2722250000	D.32
VG M20 EXI 7-13 SI7J G4	2722390000	D.33
VG M20-1/K68	1772300000	D.6
VG M20-K68 SKS 10-14	1776720000	D.7
VG M20-K68 SKS 6-12	1778860000	D.7
VG M25 - K 68	1772310000	D.6
VG M25 - MS 68	1772230000	D.8
VG M25 EMV-4 MS 10-18	2435170000	D.11
VG M25 EXE 12-17 CR7J G4	2721990000	D.32
VG M25 EXE 12-17 SI7J G4	2722130000	D.33
VG M25 EXE 14-18 CR7J G4	2722000000	D.32
VG M25 EXE 14-18 SI7J G4	2722140000	D.33
VG M25 EXE MS	1460070000	C.72
VG M25 EXE MS	1460070000	C.154
VG M25 EXI 12-17 CR7J G4	2722270000	D.32
VG M25 EXI 12-17 SI7J G4	2722410000	D.33
VG M25 EXI 14-18 CR7J G4	2722280000	D.32
VG M25 EXI 14-18 SI7J G4	2722420000	D.33
VG M25-1/K68	1909870000	D.6
VG M25-1/MS68	1909920000	D.8
VG M25-K67	1909710000	C.168
VG M25-K67	1909710000	C.170
VG M25-K67	1909710000	C.250
VG M25-K67	1909710000	C.252
VG M25-K68 SKS	1776730000	D.7
VG M32 - K 68	1772320000	D.6
VG M32 - MS 68	1772240000	D.8
VG M32 EMV-4 MS 16-25	2435180000	D.11
VG M32 EXE 16-21 CR7J G4	2722010000	D.32
VG M32 EXE 16-21 SI7J G4	2722150000	D.33
VG M32 EXE 19-25 CR7J G4	2722020000	D.32
VG M32 EXE 19-25 SI7J G4	2722160000	D.33
VG M32 EXE MS	1460080000	C.71
VG M32 EXI 16-21 CR7J G4	2722290000	D.32
VG M32 EXI 16-21 SI7J G4	2722430000	D.33
VG M32 EXI 19-25 CR7J G4	2722300000	D.32
VG M32 EXI 19-25 SI7J G4	2722440000	D.33
VG M32-1/K68	1909880000	D.6
VG M32-1/MS68	1909930000	D.8
VG M32-K67	1909720000	C.169
VG M32-K67	1909720000	C.171
VG M32-K67	1909720000	C.251
VG M32-K67	1909720000	C.253
VG M40 - K 68	1772330000	D.6
VG M40 - MS 68	1772250000	D.8
VG M40 EMV-4 MS 22-32	2435190000	D.11
VG M40 EXE 20-28 CR7J G4	2722030000	D.32
VG M40 EXE 20-28 SI7J G4	2722170000	D.33
VG M40 EXE 23-32 CR7J G4	2722040000	D.32
VG M40 EXE 23-32 SI7J G4	2722180000	D.33
VG M40 EXE MS	1460090000	C.72
VG M40 EXI 20-28 CR7J G4	2722310000	D.32
VG M40 EXI 20-28 SI7J G4	2722450000	D.33
VG M40 EXI 23-32 CR7J G4	2722320000	D.32
VG M40 EXI 23-32 SI7J G4	2722460000	D.33
VG M40-1/K68	1909890000	D.6
VG M40-1/MS68	1909940000	D.8
VG M50 - K 68	1772340000	D.6
VG M50 - MS 68	1772260000	D.8
VG M50 EMV-4 MS 30-38	2435200000	D.11
VG M50-1/MS68	1909950000	D.8
VG M63 - MS 68	1772270000	D.8
VG M63 EMV-4 MS 34-44	2435210000	D.11
VG M63 EXE 35-44 CR7J G4	2722060000	D.32
VG M63 EXI 35-44 SI7J G4	2722480000	D.33
VG M63-1/K68	1772350000	D.6
VG16 HQ K68 11,5-15,5SH	1045540000	D.15
VG16 HQ K68 9-12SH	1045530000	D.15
VGM12-SS 68 KB 3-6.5	1009840000	D.13
VGM16-SS 68 KB 4-8	1009850000	D.13
VGM20-SS 68 KB 6-12	1009860000	D.13
VGM25-MS68 11-20 BG	1193600000	D.9
VGM25-MS68 EMC 11-20SET	1463720000	D.12
VGM25-SS 68 KB 10-14	1009870000	D.13
VGM25-SS68 11-20 BG	1193570000	D.14
VGM32-MS68 15-25 BG	1193610000	D.9
VGM32-MS68 EMC 15-25SET	1463730000	D.12
VGM32-SS 68 KB 13-18	1009880000	D.13
VGM32-SS68 15-25 BG	1193580000	D.14
VGM40-MS68 20-32 BG	1193620000	D.9
VGM40-SS 68 KB 18-25	1009890000	D.13
VGM40-SS68 20-32 BG	1193590000	D.14
VGM40/1-MS68 20-32 BG	1205890000	D.9
VGM40/1-SS68 20-32 BG	1205920000	D.14
VGM50-SS 68 KB 22-32	1009900000	D.13
VGM63-SS 68 KB 34-44	1009910000	D.13
VH 12.5 SAKK10	9509510000	C.168
VH 12.5 SAKK10	9509510000	C.169
VH 12.5 SAKK10	9509510000	C.170
VH 12.5 SAKK10	9509510000	C.171
VH 12.5 SAKK10	9509510000	C.250
VH 12.5 SAKK10	9509510000	C.251
VH 12.5 SAKK10	9509510000	C.252
VH 12.5 SAKK10	9509510000	C.253
VP 11-K54	0294860000	D.45
VP 11-MS65	0294800000	D.46
VP 13,5-K54	0294960000	D.45
VP 13,5-MS65	0294900000	D.46
VP 16-K54	0295060000	D.45
VP 16-MS65	0295000000	D.46
VP 21-K54	0295160000	D.45
VP 21-MS65	0295100000	D.46
VP 29-K54	0501160000	D.45
VP 29-MS65	0501100000	D.46
VP 36-K54	0501260000	D.45
VP 36-MS65	0501200000	D.46
VP 42-K54	0501360000	D.45
VP 42-MS65	0501300000	D.46
VP 48-K54	1719260000	D.45
VP 48-MS65	1719270000	D.46
VP 7-K54	1719250000	D.45
VP 7-MS65	0521600000	D.46
VP 9-K54	0294760000	D.45
VP 9-MS65	0294700000	D.46
VP M12 EX SI 7J	2066710000	D.49
VP M12 K54	1776930000	D.45
VP M12-MS65	1777720000	D.46
VP M12/10 EX CR 7J BK	2978890000	D.50
VP M16 EX SI 7J	2066720000	C.232
VP M16 EX SI 7J	2066720000	D.49
VP M16 K54	1776920000	D.45
VP M16-EX W	1188470000	D.48
VP M16-MS65	1777730000	D.46
VP M16/15 EX CR 7J BK	2978900000	D.50
VP M20 EX SI 7J	2066730000	C.233
VP M20 EX SI 7J	2066730000	C.234
VP M20 EX SI 7J	2066730000	C.235
VP M20 EX SI 7J	2066730000	C.236
VP M20 EX SI 7J	2066730000	D.49
VP M20 K54	1776910000	D.45
VP M20-EX W	1188480000	D.48
VP M20-MS65	1777740000	D.46
VP M20/15 EX CR 7J BK	2978910000	D.50
VP M25 EX SI 7J	2066740000	D.49
VP M25 K54	1776900000	D.45
VP M25-EX W	1188490000	D.48
VP M25-MS65	1777750000	D.46
VP M25/15 EX CR 7J BK	2978920000	D.50
VP M32 EX SI 7J	2066750000	D.49
VP M32 K54	1776940000	D.45
VP M32-EX W	1188500000	D.48
VP M32-MS65	1777760000	D.46
VP M32/15 EX CR 7J BK	2978890000	D.50
VP M40 EX SI 7J	2066760000	D.49
VP M40 K54	1776950000	D.45
VP M40-EX W	1188510000	D.48
VP M40-MS65	1777770000	D.46
VP M40/18 EX CR 7J BK	2978930000	D.50
VP M50 EX SI 7J	2066770000	D.49
VP M50 K54	1776960000	D.45
VP M50-EX W	1188520000	D.48
VP M50-MS65	1777780000	D.46
VP M50/18 EX CR 7J BK	2978940000	D.50
VP M63 EX SI 7J	2066940000	D.49
VP M63 K54	1776970000	D.45
VP M63-EX W	1188530000	D.48
VP M63-MS65	1777790000	D.46
VP M63/18 EX CR 7J BK	2978950000	D.50
VP NPT 1 EX 7J BK	2978980000	D.50
VP NPT 1/2 EX 7J BK	2978960000	D.50
VP NPT 3/4 EX 7J BK	2978970000	D.50
VP NPT1-1/2-EX W	1188580000	D.48
VP NPT1-1/4-EX W	1188570000	D.48
VP NPT1-EX W	1188560000	D.48
VP NPT1/2-EX W	1188540000	D.48
VP NPT2-1/2-EX W	1188600000	D.48
VP NPT2-EX W	1188590000	D.48
VP NPT3/4-EX W	1188550000	D.48
VP-HEX M16-EX W	1218940000	C.70
VP-HEX M16-EX W	1218940000	D.47
VP-HEX M20-EX W	1218950000	C.70
VP-HEX M20-EX W	1218950000	C.71
VP-HEX M20-EX W	1218950000	C.72
VP-HEX M20-EX W	1218950000	C.152
VP-HEX M20-EX W	1218950000	C.153
VP-HEX M20-EX W	1218950000	D.47
VP-HEX M25-EX W	1218960000	C.72
VP-HEX M25-EX W	1218960000	C.154
VP-HEX M25-EX W	1218960000	D.47
VP-HEX M32-EX W	1218970000	C.71
VP-HEX M32-EX W	1218970000	D.47
VP-HEX M40-EX W	1218980000	C.72
VP-HEX M40-EX W	1218980000	D.47
VP-HEX M50-EX W	1218990000	D.47
VP-HEX M63-EX W	1219010000	D.47
VPS M16-EX W	1188690000	D.48
VPS M20-EX W	1188700000	D.48
VPS M25-EX W	1188710000	D.48
VPS M32-EX W	1188720000	D.48
VPS M40-EX W	1188730000	D.48
VPS M50-EX W	1188740000	D.48
VPS M63-EX W	1188750000	D.48
VPS NPT1-1/2-EX W	1188800000	D.48
VPS NPT1-1/4-EX W	1188790000	D.48
VPS NPT1-EX W	1188780000	D.48
VPS NPT1/2-EX W	1188760000	D.48
VPS NPT2-1/2-EX W	1188820000	D.48
VPS NPT2-EX W	1188810000	D.48
VPS NPT3/4-EX W	1188770000	D.48
VPS-HEX M16-EX W	1219020000	D.47
VPS-HEX M20-EX W	1219030000	D.47
VPS-HEX M25-EX W	1219040000	D.47
VPS-HEX M32-EX W	1219050000	D.47
VPS-HEX M40-EX W	1219060000	D.47
VPS-HEX M50-EX W	1219070000	D.47
VPS-HEX M63-EX W	1219080000	D.47

W

WDU 4	1020100000	C.72
WDU 4	1020100000	C.152
WDU 4	1020100000	C.153
WDU 4	1020100000	C.154
WDU 4 BL	1020180000	C.70
WDU 4 BL	1020180000	C.71
WPE 4	1010100000	C.72
WPE 4	1010100000	C.153
WPE 4	1010100000	C.154
WS 8/8 MM WS	2007170000	C.168
WS 8/8 MM WS	2007170000	C.169
WS 8/8 MM WS	2007170000	C.170
WS 8/8 MM WS	2007170000	C.171
WS 8/8 MM WS	2007170000	C.250
WS 8/8 MM WS	2007170000	C.251
WS 8/8 MM WS	2007170000	C.252
WS 8/8 MM WS	2007170000	C.253

Order No.	Type	Page
0120000000		
0122800000	TS 32X15 2M/ST/ZN	C.168
0122800000	TS 32X15 2M/ST/ZN	C.169
0122800000	TS 32X15 2M/ST/ZN	C.170
0122800000	TS 32X15 2M/ST/ZN	C.171
0122800000	TS 32X15 2M/ST/ZN	C.250
0122800000	TS 32X15 2M/ST/ZN	C.251
0122800000	TS 32X15 2M/ST/ZN	C.252
0122800000	TS 32X15 2M/ST/ZN	C.253
0230000000		
0236400000	TS 35X15 2M/ST/ZN	C.168
0236400000	TS 35X15 2M/ST/ZN	C.169
0236400000	TS 35X15 2M/ST/ZN	C.250
0236400000	TS 35X15 2M/ST/ZN	C.251
0290000000		
0294700000	VP 9-MS65	D.46
0294760000	VP 9-K54	D.45
0294800000	VP 11-MS65	D.46
0294860000	VP 11-K54	D.45
0294900000	VP 13,5-MS65	D.46
0294960000	VP 13,5-K54	D.45
0295000000	VP 16-MS65	D.46
0295060000	VP 16-K54	D.45
0295100000	VP 21-MS65	D.46
0295160000	VP 21-K54	D.45
0300000000		
0303000000	KISC M3X20.5/10 EK4	C.168
0303000000	KISC M3X20.5/10 EK4	C.169
0303000000	KISC M3X20.5/10 EK4	C.170
0303000000	KISC M3X20.5/10 EK4	C.171
0303000000	KISC M3X20.5/10 EK4	C.250
0303000000	KISC M3X20.5/10 EK4	C.251
0303000000	KISC M3X20.5/10 EK4	C.252
0303000000	KISC M3X20.5/10 EK4	C.253
0340000000		
0342000000	KLIPPON K1	C.150
0342000000	KLIPPON K1	C.179
0342000000	KLIPPON K1	C.196
0342100000	KLIPPON K2	C.150
0342100000	KLIPPON K2	C.181
0342100000	KLIPPON K2	C.196
0342200000	KLIPPON K3	C.150
0342200000	KLIPPON K3	C.183
0342200000	KLIPPON K3	C.196
0342300000	KLIPPON K4	C.150
0342300000	KLIPPON K4	C.186
0342300000	KLIPPON K4	C.196
0342400000	KLIPPON K5	C.150
0342400000	KLIPPON K5	C.188
0342400000	KLIPPON K5	C.196
0342500000	KLIPPON K6	C.150
0342500000	KLIPPON K6	C.191
0342600000	KLIPPON K7	C.150
0342600000	KLIPPON K7	C.193
0360000000		
0360100000	TBF 19/15/14 7035	C.254
0360100000	TBF 19/15/14 7035	C.256
0360200000	TBF 30/19/18 7035	C.254
0360200000	TBF 30/19/18 7035	C.256
0360300000	TBF 30/30/18 7035	C.254
0360300000	TBF 30/30/18 7035	C.257
0360400000	TBF 37/30/18 7035	C.254
0360400000	TBF 37/30/18 7035	C.257
0360500000	TBF 60/30/18 7035	C.254
0360500000	TBF 60/30/18 7035	C.259
0360800000	MF TBF	C.256
0360800000	MF TBF	C.257
0360800000	MF TBF	C.258
0360800000	MF TBF	C.259
0360800000	MF TBF	C.260
0430000000		
0433500000	SFNS5 VKMU M5 SW15	C.142
0433500000	SFNS5 VKMU M5 SW15	C.143
0433500000	SFNS5 VKMU M5 SW15	C.144
0433500000	SFNS5 VKMU M5 SW15	C.145
0433500000	SFNS5 VKMU M5 SW15	C.146
0433500000	SFNS5 VKMU M5 SW15	C.147
0433500000	SFNS5 VKMU M5 SW15	C.148
0433500000	SFNS5 VKMU M5 SW15	C.149
0433500000	SFNS5 VKMU M5 SW15	C.168
0433500000	SFNS5 VKMU M5 SW15	C.169
0440000000		
0445600000	MEW 1/32	C.168
0445600000	MEW 1/32	C.169
0445600000	MEW 1/32	C.170
0445600000	MEW 1/32	C.171
0445600000	MEW 1/32	C.250
0445600000	MEW 1/32	C.251
0445600000	MEW 1/32	C.252
0445600000	MEW 1/32	C.253
0500000000		
0500600000	TBF 30/19/18 TRSP	C.254
0500600000	TBF 30/19/18 TRSP	C.256
0500700000	TBF 30/30/18 TRSP	C.254
0500700000	TBF 30/30/18 TRSP	C.257
0500800000	TBF 37/30/18 TRSP	C.254
0500800000	TBF 37/30/18 TRSP	C.257
0500900000	TBF 60/30/21 TRSP	C.254
0500900000	TBF 60/30/21 TRSP	C.259
0501100000	VP 29-MS65	D.46
0501160000	VP 29-K54	D.45
0501200000	VP 36-MS65	D.46
0501260000	VP 36-K54	D.45
0501300000	VP 42-MS65	D.46
0501360000	VP 42-K54	D.45
0520000000		
0521600000	VP 7-MS65	D.46
0570000000		
0573200000	KLIPPON K0	C.150
0573200000	KLIPPON K0	C.176
0573300000	KLIPPON K11	C.150
0573300000	KLIPPON K11	C.180
0573300000	KLIPPON K11	C.196
0573400000	KLIPPON K21	C.150
0573400000	KLIPPON K21	C.182
0573400000	KLIPPON K21	C.196
0573500000	KLIPPON K31	C.150
0573500000	KLIPPON K31	C.184
0573500000	KLIPPON K31	C.196
0573600000	KLIPPON K61	C.150
0573600000	KLIPPON K61	C.192
0573700000	KLIPPON K71	C.150
0573700000	KLIPPON K71	C.194
0640000000		
0642600000	FKSC M6X8 D9/SW3	C.20
0642600000	FKSC M6X8 D9/SW3	C.21
0642600000	FKSC M6X8 D9/SW3	C.22
0642600000	FKSC M6X8 D9/SW3	C.23
0642600000	FKSC M6X8 D9/SW3	C.24
0642600000	FKSC M6X8 D9/SW3	C.25
0642600000	FKSC M6X8 D9/SW3	C.26
0642600000	FKSC M6X8 D9/SW3	C.27
0642600000	FKSC M6X8 D9/SW3	C.28
0642600000	FKSC M6X8 D9/SW3	C.29
0642600000	FKSC M6X8 D9/SW3	C.31
0642600000	FKSC M6X8 D9/SW3	C.32
0642600000	FKSC M6X8 D9/SW3	C.33
0642600000	FKSC M6X8 D9/SW3	C.34
0642600000	FKSC M6X8 D9/SW3	C.35
0642600000	FKSC M6X8 D9/SW3	C.36
0642600000	FKSC M6X8 D9/SW3	C.38
0642600000	FKSC M6X8 D9/SW3	C.39
0642600000	FKSC M6X8 D9/SW3	C.40
0642600000	FKSC M6X8 D9/SW3	C.41
0642600000	FKSC M6X8 D9/SW3	C.43
0642600000	FKSC M6X8 D9/SW3	C.44
0642600000	FKSC M6X8 D9/SW3	C.45
0642600000	FKSC M6X8 D9/SW3	C.46
0642600000	FKSC M6X8 D9/SW3	C.47
0642600000	FKSC M6X8 D9/SW3	C.48
0642600000	FKSC M6X8 D9/SW3	C.49
0642600000	FKSC M6X8 D9/SW3	C.50
0642600000	FKSC M6X8 D9/SW3	C.51
0642600000	FKSC M6X8 D9/SW3	C.52
0642600000	FKSC M6X8 D9/SW3	C.53
0642600000	FKSC M6X8 D9/SW3	C.54
0642600000	FKSC M6X8 D9/SW3	C.55
0642600000	FKSC M6X8 D9/SW3	C.56
0642600000	FKSC M6X8 D9/SW3	C.57
0642600000	FKSC M6X8 D9/SW3	C.58
0642600000	FKSC M6X8 D9/SW3	C.59
0642600000	FKSC M6X8 D9/SW3	C.60
0642600000	FKSC M6X8 D9/SW3	C.212
0642600000	FKSC M6X8 D9/SW3	C.213
0642600000	FKSC M6X8 D9/SW3	C.214
0642600000	FKSC M6X8 D9/SW3	C.215
0642600000	FKSC M6X8 D9/SW3	C.216
0642600000	FKSC M6X8 D9/SW3	C.217
0642600000	FKSC M6X8 D9/SW3	C.218
0642600000	FKSC M6X8 D9/SW3	C.219
0642600000	FKSC M6X8 D9/SW3	C.220
0642600000	FKSC M6X8 D9/SW3	C.221
0642600000	FKSC M6X8 D9/SW3	C.222
0642600000	FKSC M6X8 D9/SW3	C.223
0642600000	FKSC M6X8 D9/SW3	C.224
0642600000	FKSC M6X8 D9/SW3	C.225
0642600000	FKSC M6X8 D9/SW3	C.226
0642600000	FKSC M6X8 D9/SW3	C.227
0642600000	FKSC M6X8 D9/SW3	C.228
0930000000		
0930640001	SKMU M16 MS SC	D.37
0930640002	SKMU M20 MS SC	D.37
0930640003	SKMU M25 MS SC	D.37
0930640004	SKMU M32 MS SC	D.37
0930640005	SKMU M40 MS SC	D.37
0930640006	SKMU M50 MS SC	D.37
0930640007	SKMU M63 MS SC	D.37
0930640008	SKMU M75 MS SC	D.37
0930710001	EA-RING MS/M16 SC	D.43
0930710002	EA-RING MS/M20 SC	D.43
0930710003	EA-RING MS/M25 SC	D.43
0930710004	EA-RING MS/M32 SC	D.43
0930710005	EA-RING MS/M40 SC	D.43
0930710006	EA-RING MS/M50 SC	D.43
0930710007	EA-RING MS/M63 SC	D.43
0930710008	EA-RING MS/M75 SC	D.43
0935110000	SP M6 10 S2	C.20
0935110000	SP M6 10 S2	C.21
0935110000	SP M6 10 S2	C.22
0935110000	SP M6 10 S2	C.23
0935110000	SP M6 10 S2	C.24
0935110000	SP M6 10 S2	C.25
0935110000	SP M6 10 S2	C.26
0935110000	SP M6 10 S2	C.27
0935110000	SP M6 10 S2	C.28
0935110000	SP M6 10 S2	C.29
0935110000	SP M6 10 S2	C.31
0935110000	SP M6 10 S2	C.32
0935110000	SP M6 10 S2	C.33
0935110000	SP M6 10 S2	C.34
0935110000	SP M6 10 S2	C.35
0935110000	SP M6 10 S2	C.36
0935110000	SP M6 10 S2	C.38
0935110000	SP M6 10 S2	C.39
0935110000	SP M6 10 S2	C.40
0935110000	SP M6 10 S2	C.41
0935110000	SP M6 10 S2	C.43
0935110000	SP M6 10 S2	C.44
0935110000	SP M6 10 S2	C.45
0935110000	SP M6 10 S2	C.46
0935110000	SP M6 10 S2	C.47
0935110000	SP M6 10 S2	C.48
0935110000	SP M6 10 S2	C.49
0935110000	SP M6 10 S2	C.50
0935110000	SP M6 10 S2	C.51
0935110000	SP M6 10 S2	C.52
0935110000	SP M6 10 S2	C.53
0935110000	SP M6 10 S2	C.54
0935110000	SP M6 10 S2	C.55
0935110000	SP M6 10 S2	C.56
0935110000	SP M6 10 S2	C.57
0935110000	SP M6 10 S2	C.58
0935110000	SP M6 10 S2	C.59
0935110000	SP M6 10 S2	C.60
0935120000	SP M6 15 S2	C.20
0935120000	SP M6 15 S2	C.21
0935120000	SP M6 15 S2	C.22
0935120000	SP M6 15 S2	C.23
0935120000	SP M6 15 S2	C.24
0935120000	SP M6 15 S2	C.25
0935120000	SP M6 15 S2	C.26
0935120000	SP M6 15 S2	C.27
0935120000	SP M6 15 S2	C.28
0935120000	SP M6 15 S2	C.29
0935120000	SP M6 15 S2	C.31
0935120000	SP M6 15 S2	C.32
0935120000	SP M6 15 S2	C.33
0935120000	SP M6 15 S2	C.34
0935120000	SP M6 15 S2	C.35
0935120000	SP M6 15 S2	C.36
0935120000	SP M6 15 S2	C.38
0935120000	SP M6 15 S2	C.39
0935120000	SP M6 15 S2	C.40
0935120000	SP M6 15 S2	C.41
0935120000	SP M6 15 S2	C.43
0935120000	SP M6 15 S2	C.44
0935120000	SP M6 15 S2	C.45
0935120000	SP M6 15 S2	C.46
0935120000	SP M6 15 S2	C.47
0935120000	SP M6 15 S2	C.48
0935120000	SP M6 15 S2	C.49
0935120000	SP M6 15 S2	C.50
0935120000	SP M6 15 S2	C.51
0935120000	SP M6 15 S2	C.52
0935120000	SP M6 15 S2	C.53
0935120000	SP M6 15 S2	C.54
0935120000	SP M6 15 S2	C.56
0935120000	SP M6 15 S2	C.57
0935120000	SP M6 15 S2	C.58
0935120000	SP M6 15 S2	C.59
0935120000	SP M6 15 S2	C.60
0935130000	SP M6 20 S2	C.20
0935130000	SP M6 20 S2	C.21
0935130000	SP M6 20 S2	C.22
0935130000	SP M6 20 S2	C.23
0935130000	SP M6 20 S2	C.24
0935130000	SP M6 20 S2	C.25
0935130000	SP M6 20 S2	C.26
0935130000	SP M6 20 S2	C.27
0935130000	SP M6 20 S2	C.28
0935130000	SP M6 20 S2	C.29
0935130000	SP M6 20 S2	C.31
0935130000	SP M6 20 S2	C.32
0935130000	SP M6 20 S2	C.33
0935130000	SP M6 20 S2	C.34
0935130000	SP M6 20 S2	C.35
0935130000	SP M6 20 S2	C.36
0935130000	SP M6 20 S2	C.38
0935130000	SP M6 20 S2	C.39
0935130000	SP M6 20 S2	C.40
0935130000	SP M6 20 S2	C.41
0935130000	SP M6 20 S2	C.43
0935130000	SP M6 20 S2	C.44
0935130000	SP M6 20 S2	C.45
0935130000	SP M6 20 S2	C.46
0935130000	SP M6 20 S2	C.47
0935130000	SP M6 20 S2	C.48
0935130000	SP M6 20 S2	C.49
0935130000	SP M6 20 S2	C.50
0935130000	SP M6 20 S2	C.51
0935130000	SP M6 20 S2	C.52
0935130000	SP M6 20 S2	C.53
0935130000	SP M6 20 S2	C.54
0935130000	SP M6 20 S2	C.55
0935130000	SP M6 20 S2	C.56
0935130000	SP M6 20 S2	C.57
0935130000	SP M6 20 S2	C.58
0935130000	SP M6 20 S2	C.59
0935130000	SP M6 20 S2	C.60
0935140000	SP M6 30 S2	C.20
0935140000	SP M6 30 S2	C.21
0935140000	SP M6 30 S2	C.22
0935140000	SP M6 30 S2	C.23
0935140000	SP M6 30 S2	C.24
0935140000	SP M6 30 S2	C.25
0935140000	SP M6 30 S2	C.26
0935140000	SP M6 30 S2	C.27
0935140000	SP M6 30 S2	C.28
0935140000	SP M6 30 S2	C.29
0935140000	SP M6 30 S2	C.31
0935140000	SP M6 30 S2	C.32
0935140000	SP M6 30 S2	C.33
0935140000	SP M6 30 S2	C.34
0935140000	SP M6 30 S2	C.35
0935140000	SP M6 30 S2	C.36
0935140000	SP M6 30 S2	C.38
0935140000	SP M6 30 S2	C.39
0935140000	SP M6 30 S2	C.40
0935140000	SP M6 30 S2	C.41
0935140000	SP M6 30 S2	C.43
0935140000	SP M6 30 S2	C.44
0935140000	SP M6 30 S2	C.45
0935140000	SP M6 30 S2	C.46
0935140000	SP M6 30 S2	C.47
0935140000	SP M6 30 S2	C.48
0935140000	SP M6 30 S2	C.49
0935140000	SP M6 30 S2	C.50
0935140000	SP M6 30 S2	C.51
0935140000	SP M6 30 S2	C.52
0935140000	SP M6 30 S2	C.53
0935140000	SP M6 30 S2	C.54
0935140000	SP M6 30 S2	C.55
0935140000	SP M6 30 S2	C.56
0935140000	SP M6 30 S2	C.57
0935140000	SP M6 30 S2	C.58
0935140000	SP M6 30 S2	C.59
0935140000	SP M6 30 S2	C.60
1000000000		
1002690000	KLIPPON STB 1 SS	C.140
1002690000	KLIPPON STB 1 SS	C.142
1002700000	KLIPPON STB 5 SS	C.140
1002700000	KLIPPON STB 5 SS	C.148
1002710000	KLIPPON STB 4 SS	C.140
1002710000	KLIPPON STB 4 SS	C.147
1002710000	KLIPPON STB 4 SS	C.154
1002720000	KLIPPON STB 3 SS	C.140
1002720000	KLIPPON STB 3 SS	C.146
1002720000	KLIPPON STB 3 SS	C.153
1002730000	KLIPPON STB 2.1 SS	C.140
1002730000	KLIPPON STB 2.1 SS	C.145
1002740000	KLIPPON STB 2 SS	C.140
1002740000	KLIPPON STB 2 SS	C.144
1002740000	KLIPPON STB 2 SS	C.152
1002750000	KLIPPON STB 1.1 SS	C.140
1002750000	KLIPPON STB 1.1 SS	C.143

Order No.	Type	Page
1002760000	KLIPPON STB 6 SS	C.140
1002760000	KLIPPON STB 6 SS	C.149
1009740000	VG 7-SS 68 KB 3-6.5	D.13
1009750000	VG 9-SS 68 KB 4-8	D.13
1009760000	VG 11-SS 68 KB 5-10	D.13
1009780000	VG 16-SS 68 KB 10-14	D.13
1009790000	VG 21-SS 68 KB 13-18	D.13
1009800000	VG 29-SS 68 KB 18-25	D.13
1009810000	VG 36-SS 68 KB 22-32	D.13
1009840000	VGM12-SS 68 KB 3-6.5	D.13
1009850000	VGM16-SS 68 KB 4-8	D.13
1009860000	VGM20-SS 68 KB 6-12	D.13
1009870000	VGM25-SS 68 KB 10-14	D.13
1009880000	VGM32-SS 68 KB 13-18	D.13
1009890000	VGM40-SS 68 KB 18-25	D.13
1009900000	VGM50-SS 68 KB 22-32	D.13
1009910000	VGM63-SS 68 KB 34-44	D.13

1010000000

1010100000	WPE 4	C.72
1010100000	WPE 4	C.153
1010100000	WPE 4	C.154
1016070000	VG 16 HQ K68 9-13	D.15
1016080000	VG 16 HQ K68 11.5-15.5	D.15
1016090000	VG 21 HQ MS68 9-13	D.15
1016100000	VG 21 HQ MS68 11.5-15.5	D.15
1016110000	VG 21 HQ MS68 14-18	D.15
1016120000	VG 21 HQ EMV68 11-15.5	D.15
1016130000	VG 21 HQ EMV68 14-18	D.15

1020000000

1020100000	WDU 4	C.72
1020100000	WDU 4	C.152
1020100000	WDU 4	C.153
1020100000	WDU 4	C.154
1020180000	WDU 4 BL	C.70
1020180000	WDU 4 BL	C.71
1024970000	KLIPPON STB 1 MS HT	C.140
1024970000	KLIPPON STB 1 MS HT	C.142
1024980000	KLIPPON STB 1.1 MS HT	C.140
1024980000	KLIPPON STB 1.1 MS HT	C.143
1024990000	KLIPPON STB 2 MS HT	C.140
1024990000	KLIPPON STB 2 MS HT	C.144
1025010000	KLIPPON STB 2.1 MS HT	C.140
1025010000	KLIPPON STB 2.1 MS HT	C.145
1025020000	KLIPPON STB 3 MS HT	C.140
1025020000	KLIPPON STB 3 MS HT	C.146
1025030000	KLIPPON STB 4 MS HT	C.140
1025030000	KLIPPON STB 4 MS HT	C.147
1025030000	KLIPPON STB 4 MS HT	C.168
1025030000	KLIPPON STB 4 MS HT	C.169
1025030000	KLIPPON STB 4 MS HT	C.170
1025030000	KLIPPON STB 4 MS HT	C.171
1025040000	KLIPPON STB 5 MS HT	C.140
1025040000	KLIPPON STB 5 MS HT	C.148
1025050000	KLIPPON STB 6 MS HT	C.140
1025050000	KLIPPON STB 6 MS HT	C.149

1040000000

1045530000	VG16 HQ K68 9-12SH	D.15
1045540000	VG16 HQ K68 11,5-15,5SH	D.15

1050000000

1058810000	KLIPPON STB 1 SS E	C.140
1058810000	KLIPPON STB 1 SS E	C.142
1058820000	KLIPPON STB 1.1 SS E	C.140
1058820000	KLIPPON STB 1.1 SS E	C.143
1058830000	KLIPPON STB 2 SS E	C.140
1058830000	KLIPPON STB 2 SS E	C.144
1058840000	KLIPPON STB 2.1 SS E	C.140
1058840000	KLIPPON STB 2.1 SS E	C.145
1058850000	KLIPPON STB 3 SS E	C.140
1058850000	KLIPPON STB 3 SS E	C.146
1058860000	KLIPPON STB 4 SS E	C.140
1058860000	KLIPPON STB 4 SS E	C.147
1058870000	KLIPPON STB 6 SS E	C.140
1058870000	KLIPPON STB 6 SS E	C.149
1058880000	KLIPPON STB 5 SS E	C.140
1058880000	KLIPPON STB 5 SS E	C.148

1180000000

1184650000	E1W/16/M16-WM	D.20
1184670000	E1W/20S/M20-WM	D.20
1184680000	E1W/20/M20-WM	D.20
1184690000	E1W/25/M25-WM	D.20
1184700000	E1W/32/M32-WM	D.20
1184710000	E1W/40/M40-WM	D.20
1184720000	E1W/50S/M50-WM	D.20
1184730000	E1W/50/M50-WM	D.20
1184740000	E1W/63S/M63-WM	D.20
1184750000	E1W/63/M63-WM	D.20
1184770000	E1W/16/NPT1/2-WM	D.20
1184780000	E1W/20S/NPT1/2-WM	D.20
1184790000	E1W/20/NPT1/2-WM	D.20
1184800000	E1W/25/NPT3/4-WM	D.20
1184810000	E1W/32/NPT1-WM	D.20
1184820000	E1W/40/NPT1-1/4-WM	D.20
1184830000	E1W/50S/NPT1-1/2-WM	D.20
1184840000	E1W/50/NPT2-WM	D.20
1184850000	E1W/63S/NPT2-WM	D.20
1184870000	E1W/63/NPT2-1/2-WM	D.20
1184880000	E1W/16/NPT3/4-WM	D.20
1184890000	E1W/20S/NPT3/4-WM	D.20
1184900000	E1W/20/NPT3/4-WM	D.20
1184910000	E1W/25/NPT1-WM	D.20
1184920000	E1W/32/NPT1-1/4-WM	D.20
1184930000	E1W/40/NPT1-1/2-WM	D.20
1184940000	E1W/50S/NPT2-WM	D.20
1184950000	E1W/63S/NPT2-1/2-WM	D.20
1184970000	E1XZ/16/M16-WM	D.22
1184980000	E1XZ/20S/M20-WM	D.22
1184990000	E1XZ/20/M20-WM	D.22
1185000000	E1XZ/25/M25-WM	D.22
1185010000	E1XZ/32/M32-WM	D.22
1185020000	E1XZ/40/M40-WM	D.22
1185030000	E1XZ/50S/M50-WM	D.22
1185040000	E1XZ/50/M50-WM	D.22
1185050000	E1XZ/63S/M63-WM	D.22
1185070000	E1XZ/63/M63-WM	D.22
1185080000	E1XZ/16/NPT1/2-WM	D.22
1185090000	E1XZ/20S/NPT1/2-WM	D.22
1185100000	E1XZ/20/NPT1/2-WM	D.22
1185110000	E1XZ/25/NPT3/4-WM	D.22
1185120000	E1XZ/32/NPT1-WM	D.22
1185130000	E1XZ/40/NPT1-1/4-WM	D.22
1185140000	E1XZ/50S/NPT1-1/2-WM	D.22
1185150000	E1XZ/50/NPT2-WM	D.22
1185170000	E1XZ/63S/NPT2-WM	D.22
1185180000	E1XZ/63/NPT2-1/2-WM	D.22
1185190000	E1XZ/16/NPT3/4-WM	D.22
1185200000	E1XZ/20S/NPT3/4-WM	D.22
1185210000	E1XZ/20/NPT3/4-WM	D.22
1185220000	E1XZ/25/NPT1-WM	D.22
1185230000	E1XZ/32/NPT1-1/4-WM	D.22
1185240000	E1XZ/40/NPT1-1/2-WM	D.22
1185250000	E1XZ/50S/NPT2-WM	D.22
1185270000	E1XZ/63S/NPT2-1/2-WM	D.22
1185280000	A2LS/16/M16-WM	D.19
1185290000	A2LS/20S/M20-WM	D.19
1185300000	A2LS/20/M20-WM	D.19
1185310000	A2LS/25/M25-WM	D.19
1185320000	A2LS/32/M32-WM	D.19
1185330000	A2LS/40/M40-WM	D.19
1185340000	A2LS/50S/M50-WM	D.19
1185350000	A2LS/50/M50-WM	D.19
1185370000	A2LS/63S/M63-WM	D.19
1185380000	A2LS/63/M63-WM	D.19
1185390000	A2LS/16/NPT1/2-WM	D.19
1185400000	A2LS/20S/NPT1/2-WM	D.19
1185410000	A2LS/20/NPT1/2-WM	D.19
1185420000	A2LS/25/NPT3/4-WM	D.19
1185430000	A2LS/32/NPT1-WM	D.19
1185440000	A2LS/40/NPT1-1/4-WM	D.19
1185450000	A2LS/50S/NPT1-1/2-WM	D.19
1185470000	A2LS/50/NPT2-WM	D.19
1185480000	A2LS/63S/NPT2-WM	D.19
1185490000	A2LS/63/NPT2-1/2-WM	D.19
1185500000	A2LS/16/NPT3/4-WM	D.19
1185510000	A2LS/20S/NPT3/4-WM	D.19
1185520000	A2LS/20/NPT3/4-WM	D.19
1185530000	A2LS/25/NPT1-WM	D.19
1185540000	A2LS/32/NPT1-1/4-WM	D.19
1185550000	A2LS/40/NPT1-1/2-WM	D.19
1185570000	A2LS/50S/NPT2-WM	D.19
1185580000	A2LS/63S/NPT2-1/2-WM	D.19
1185600000	GWDR M16-W	D.42
1185610000	GWDR M20-W	D.42
1185620000	GWDR M25-W	D.42
1185630000	GWDR M32-W	D.42
1185640000	GWDR M40-W	D.42
1185650000	GWDR M50-W	D.42
1185670000	GWDR M63-W	D.42
1185680000	SKMUS M16-W	D.39
1185690000	SKMUS M20-W	D.39
1185700000	SKMUS M25-W	D.39
1185710000	SKMUS M32-W	D.39
1185720000	SKMUS M40-W	D.39
1185730000	SKMUS M50-W	D.39
1185740000	SKMUS M63-W	D.39
1186880000	A2L/16/M16-WM	D.18
1186890000	A2L/20S/M20-WM	D.18
1186900000	A2L/20/M20-WM	D.18
1186910000	A2L/25/M25-WM	D.18
1186920000	A2L/32/M32-WM	D.18
1186930000	A2L/40/M40-WM	D.18
1186940000	A2L/50S/M50-WM	D.18
1186950000	A2L/50/M50-WM	D.18
1186970000	A2L/63S/M63-WM	D.18
1186980000	A2L/63/M63-WM	D.18
1186990000	A2L/16/NPT1/2-WM	D.18
1187000000	A2L/20S/NPT1/2-WM	D.18
1187010000	A2L/20/NPT1/2-WM	D.18
1187020000	A2L/25/NPT3/4-WM	D.18
1187030000	A2L/32/NPT1-WM	D.18
1187040000	A2L/40/NPT1-1/4-WM	D.18
1187050000	A2L/50S/NPT1-1/2-WM	D.18
1187070000	A2L/50/NPT2-WM	D.18
1187080000	A2L/63S/NPT2-WM	D.18
1187090000	A2L/63/NPT2-1/2-WM	D.18
1187100000	A2L/16/NPT3/4-WM	D.18
1187110000	A2L/20S/NPT3/4-WM	D.18
1187120000	A2L/20/NPT3/4-WM	D.18
1187130000	A2L/25/NPT1-WM	D.18
1187140000	A2L/32/NPT1-1/4-WM	D.18
1187150000	A2L/40/NPT1-1/2-WM	D.18
1187160000	A2L/50S/NPT2-WM	D.18
1187170000	A2L/63S/NPT2-1/2-WM	D.18
1187180000	A2LCS/16/M16-M20F-WM	D.27
1187190000	A2LCS/20S/M20-M20F-WM	D.27
1187200000	A2LCS/20/M20-M20F-WM	D.27
1187210000	A2LCS/25/M25-M25F-WM	D.27
1187220000	A2LCS/32/M32-M32F-WM	D.27
1187230000	A2LCS/40/M40-M40F-WM	D.27
1187240000	A2LCS/50S/M50-M50F-WM	D.27
1187250000	A2LCS/50/M50-M50F-WM	D.27
1187260000	A2LCS/63S/M63-M63F-WM	D.27
1187270000	A2LCS/63/M63-M63F-WM	D.27
1187280000	A2LCS/16/M16-NPT1/2F-WM	D.27
1187290000	A2LCS/20S/M20-NPT1/2F	D.27
1187300000	A2LCS/20/M20-NPT1/2F-WM	D.27
1187310000	A2LCS/25/M25-NPT3/4F-WM	D.27
1187320000	A2LCS/32/M32-NPT1F-WM	D.27
1187330000	A2LCS/40/M40-NPT1-1/4F	D.27
1187340000	A2LCS/50S/M50-NPT1-1/2F	D.27
1187350000	A2LCS/50/M50-NPT2F-WM	D.27
1187360000	A2LCS/63S/M63-NPT2F-WM	D.27
1187370000	A2LCS/63/M63-NPT2-1/2F	D.27
1187380000	A2LCS/16/M16-NPT3/4F-WM	D.27
1187390000	A2LCS/20S/M20-NPT3/4F	D.27
1187400000	A2LCS/20/M20-NPT3/4F-WM	D.27
1187410000	A2LCS/25/M25-NPT1F-WM	D.27
1187420000	A2LCS/32/M32-NPT1-1/4F	D.27
1187430000	A2LCS/40/M40-NPT1-1/2F	D.27
1187440000	A2LCS/50S/M50-NPT2F-WM	D.27
1187450000	A2LCS/63S/M63-NPT2-1/2F	D.27
1187460000	A2LCS/16/NPT1/2-M20F-WM	D.28
1187470000	A2LCS/20S/NPT1/2-M20F	D.28
1187480000	A2LCS/20/NPT1/2-M20F-WM	D.28
1187490000	A2LCS/25/NPT3/4-M25F-WM	D.28
1187500000	A2LCS/32/NPT1-M32F-WM	D.28
1187510000	A2LCS/40/NPT1-1/4-M40F	D.28
1187520000	A2LCS/50S/NPT1-1/2-M50F	D.28
1187530000	A2LCS/50/NPT2-M50F-WM	D.28
1187540000	A2LCS/63S/NPT2-M63F-WM	D.28
1187550000	A2LCS/63/NPT2-1/2-M63	D.28
1187560000	A2LCS/16/NPT1/2-NPT1/2	D.29
1187570000	A2LCS/20S/NPT1/2-NPT1/2	D.29
1187580000	A2LCS/20/NPT1/2-NPT1/2	D.29
1187590000	A2LCS/25/NPT3/4-NPT3/4	D.29
1187600000	A2LCS/32/NPT1-NPT1F-WM	D.29
1187620000	A2LCS/50S/NPT1-1/2-NPT1	D.29
1187630000	A2LCS/50/NPT2-NPT2F-WM	D.29
1187640000	A2LCS/63S/NPT2-NPT2F-WM	D.29
1187650000	A2LCS/63/NPT2-1/2-NPT2	D.29
1187660000	A2LCS/16/NPT1/2-NPT3/4F	D.29
1187670000	A2LCS/20S/NPT1/2-NPT3/4	D.29
1187680000	A2LCS/20/NPT1/2-NPT3/4F	D.29
1187690000	A2LCS/25/NPT3/4-NPT1F	D.29
1187700000	A2LCS/32/NPT1-NPT1-1/4F	D.29
1187710000	A2LCS/40/NPT1-1/4-NPT1	D.29
1187720000	A2LCS/50S/NPT1-1/2-NPT2	D.29
1187730000	A2LCS/63S/NPT2-NPT2-1/2	D.29
1187740000	A2LCS/16/NPT3/4-M20F-WM	D.28
1187750000	A2LCS/20S/NPT3/4-M20F	D.28
1187760000	A2LCS/20/NPT3/4-M20F-WM	D.28
1187770000	A2LCS/25/NPT1-M25F-WM	D.28
1187780000	A2LCS/32/NPT1-1/4-M32F	D.28
1187790000	A2LCS/40/NPT1-1/2-M40F	D.28
1187800000	A2LCS/50S/NPT2-M50F-WM	D.28
1187810000	A2LCS/63S/NPT2-1/2-M63F	D.28
1187820000	A2LCS/16/NPT3/4-NPT1/2F	D.29
1187830000	A2LCS/20S/NPT3/4-NPT1/2	D.29
1187840000	A2LCS/20/NPT3/4-NPT	D.29
1187850000	A2LCS/25/NPT1-NPT3/4F	D.29
1187880000	A2LCS/50S/NPT2-NPT1-1/2	D.29
1187890000	A2LCS/63S/NPT2-1/2-NPT2	D.29
1187900000	A2LCS/16/NPT3/4-NPT3/4	D.29
1187910000	A2LCS/20S/NPT3/4-NPT3/4	D.29
1187920000	A2LCS/20/NPT3/4-NPT3/4F	D.29
1187930000	A2LCS/25/NPT1-NPT1F-WM	D.29
1187940000	A2LCS/32/NPT1-1/4-NPT1	D.29
1187950000	A2LCS/40/NPT1-1/2-NPT1	D.29
1187960000	A2LCS/50S/NPT2-NPT2F-WM	D.29
1187970000	A2LCS/63S/NPT2-1/2-NPT	D.29
1188020000	E1XZS/16/M16-WM	D.23
1188030000	E1XZS/20S/M20-WM	D.23
1188040000	E1XZS/20/M20-WM	D.23
1188050000	E1XZS/25/M25-WM	D.23
1188060000	E1XZS/32/M32-WM	D.23
1188070000	E1XZS/40/M40-WM	D.23
1188080000	E1XZS/50S/M50-WM	D.23
1188090000	E1XZS/50/M50-WM	D.23
1188100000	E1XZS/63S/M63-WM	D.23
1188110000	E1XZS/63/M63-WM	D.23
1188120000	E1XZS/16/NPT1/2-WM	D.23
1188140000	E1XZS/20S/NPT1/2-WM	D.23
1188150000	E1XZS/20/NPT1/2-WM	D.23
1188160000	E1XZS/25/NPT3/4-WM	D.23
1188170000	E1XZS/32/NPT1-WM	D.23
1188180000	E1XZS/40/NPT1-1/4-WM	D.23
1188190000	E1XZS/50S/NPT1-1/2-WM	D.23
1188200000	E1XZS/50/NPT2-WM	D.23
1188210000	E1XZS/63S/NPT2-WM	D.23
1188220000	E1XZS/63/NPT2-1/2-WM	D.23
1188230000	E1XZS/16/NPT3/4-WM	D.23
1188240000	E1XZS/20S/NPT3/4-WM	D.23
1188250000	E1XZS/20/NPT3/4-WM	D.23
1188260000	E1XZS/25/NPT1-WM	D.23
1188270000	E1XZS/32/NPT1-1/4-WM	D.23
1188280000	E1XZS/40/NPT1-1/2-WM	D.23
1188290000	E1XZS/50S/NPT2-WM	D.23
1188300000	E1XZS/63S/NPT2-1/2-WM	D.23
1188470000	VP M16-EX W	D.48
1188480000	VP M20-EX W	D.48
1188490000	VP M25-EX W	D.48
1188500000	VP M32-EX W	D.48
1188510000	VP M40-EX W	D.48
1188520000	VP M50-EX W	D.48
1188530000	VP M63-EX W	D.48
1188540000	VP NPT1/2-EX W	D.48
1188550000	VP NPT3/4-EX W	D.48
1188560000	VP NPT1-EX W	D.48
1188570000	VP NPT1-1/4-EX W	D.48
1188580000	VP NPT1-1/2-EX W	D.48
1188590000	VP NPT2-EX W	D.48
1188600000	VP NPT2-1/2-EX W	D.48
1188690000	VPS M16-EX W	D.48
1188700000	VPS M20-EX W	D.48
1188710000	VPS M25-EX W	D.48
1188720000	VPS M32-EX W	D.48
1188730000	VPS M40-EX W	D.48
1188740000	VPS M50-EX W	D.48
1188750000	VPS M63-EX W	D.48
1188760000	VPS NPT1/2-EX W	D.48
1188770000	VPS NPT3/4-EX W	D.48
1188780000	VPS NPT1-EX W	D.48
1188790000	VPS NPT1-1/4-EX W	D.48
1188800000	VPS NPT1-1/2-EX W	D.48
1188810000	VPS NPT2-EX W	D.48
1188820000	VPS NPT2-1/2-EX W	D.48
1188840000	E1WS/16/M16-WM	D.21
1188850000	E1WS/20S/M20-WM	D.21
1188860000	E1WS/20/M20-WM	D.21
1188870000	E1WS/25/M25-WM	D.21
1188880000	E1WS/32/M32-WM	D.21
1188890000	E1WS/40/M40-WM	D.21
1188900000	E1WS/50S/M50-WM	D.21
1188910000	E1WS/50/M50-WM	D.21
1188920000	E1WS/63S/M63-WM	D.21
1188930000	E1WS/63/M63-WM	D.21
1188940000	E1WS/16/NPT1/2-WM	D.21
1188950000	E1WS/20S/NPT1/2-WM	D.21
1188960000	E1WS/20/NPT1/2-WM	D.21
1188970000	E1WS/25/NPT3/4-WM	D.21
1188980000	E1WS/32/NPT1-WM	D.21
1188990000	E1WS/40/NPT1-1/4-WM	D.21
1189000000	E1WS/50S/NPT1-1/2-WM	D.21
1189010000	E1WS/50/NPT2-WM	D.21
1189020000	E1WS/63S/NPT2-WM	D.21
1189030000	E1WS/63/NPT2-1/2-WM	D.21
1189040000	E1WS/16/NPT3/4-WM	D.21
1189050000	E1WS/20S/NPT3/4-WM	D.21
1189060000	E1WS/20/NPT3/4-WM	D.21
1189070000	E1WS/25/NPT1-WM	D.21
1189080000	E1WS/32/NPT1-1/4-WM	D.21
1189090000	E1WS/40/NPT1-1/2-WM	D.21
1189100000	E1WS/50S/NPT2-WM	D.21
1189110000	E1WS/63S/NPT2-1/2-WM	D.21

1190000000

1192680000	PEBZ M10 KTB BR SET	C.55
1192690000	PEBZ M10 KTB S4 SET	C.20
1192690000	PEBZ M10 KTB S4 SET	C.21
1192690000	PEBZ M10 KTB S4 SET	C.22
1192690000	PEBZ M10 KTB S4 SET	C.23
1192690000	PEBZ M10 KTB S4 SET	C.24
1192690000	PEBZ M10 KTB S4 SET	C.25
1192690000	PEBZ M10 KTB S4 SET	C.26
1192690000	PEBZ M10 KTB S4 SET	C.27
1192690000	PEBZ M10 KTB S4 SET	C.28
1192690000	PEBZ M10 KTB S4 SET	C.29
1192690000	PEBZ M10 KTB S4 SET	C.30
1192690000	PEBZ M10 KTB S4 SET	C.31
1192690000	PEBZ M10 KTB S4 SET	C.32
1192690000	PEBZ M10 KTB S4 SET	C.33
1192690000	PEBZ M10 KTB S4 SET	C.34
1192690000	PEBZ M10 KTB S4 SET	C.35
1192690000	PEBZ M10 KTB S4 SET	C.36
1192690000	PEBZ M10 KTB S4 SET	C.37
1192690000	PEBZ M10 KTB S4 SET	C.38

Order No.	Type	Page
1192690000	PEBZ M10 KTB S4 SET	C.39
1192690000	PEBZ M10 KTB S4 SET	C.40
1192690000	PEBZ M10 KTB S4 SET	C.41
1192690000	PEBZ M10 KTB S4 SET	C.42
1192690000	PEBZ M10 KTB S4 SET	C.43
1192690000	PEBZ M10 KTB S4 SET	C.44
1192690000	PEBZ M10 KTB S4 SET	C.45
1192690000	PEBZ M10 KTB S4 SET	C.46
1192690000	PEBZ M10 KTB S4 SET	C.47
1192690000	PEBZ M10 KTB S4 SET	C.48
1192690000	PEBZ M10 KTB S4 SET	C.49
1192690000	PEBZ M10 KTB S4 SET	C.50
1192690000	PEBZ M10 KTB S4 SET	C.51
1192690000	PEBZ M10 KTB S4 SET	C.52
1192690000	PEBZ M10 KTB S4 SET	C.53
1192690000	PEBZ M10 KTB S4 SET	C.54
1192690000	PEBZ M10 KTB S4 SET	C.55
1192690000	PEBZ M10 KTB S4 SET	C.56
1192690000	PEBZ M10 KTB S4 SET	C.57
1192690000	PEBZ M10 KTB S4 SET	C.58
1192690000	PEBZ M10 KTB S4 SET	C.59
1192690000	PEBZ M10 KTB S4 SET	C.60
1192690000	PEBZ M10 KTB S4 SET	C.70
1192690000	PEBZ M10 KTB S4 SET	C.71
1192690000	PEBZ M10 KTB S4 SET	C.72
1193570000	VGM25-SS68 11-20 BG	D.14
1193580000	VGM32-SS68 15-25 BG	D.14
1193590000	VGM40-SS68 20-32 BG	D.14
1193600000	VGM25-MS68 11-20 BG	D.9
1193610000	VGM32-MS68 15-25 BG	D.9
1193620000	VGM40-MS68 20-32 BG	D.9
1193810000	KTB MOPL 2215 S2N	C.20
1193810000	KTB MOPL 2215 S2N	C.70
1193820000	KTB MOPL 2626 S2N	C.21
1193820000	KTB MOPL 2626 S2N	C.22
1193820000	KTB MOPL 2626 S2N	C.71
1193830000	KTB MOPL 3030 S2N	C.24
1193830000	KTB MOPL 3030 S2N	C.25
1193840000	KTB MOPL 3526 S2N	C.26
1193840000	KTB MOPL 3526 S2N	C.27
1193850000	KTB MOPL 4030 S2N	C.31
1193850000	KTB MOPL 4030 S2N	C.32
1193860000	KTB MOPL 4538 S2N	C.35
1193860000	KTB MOPL 4538 S2N	C.36
1193870000	KTB MOPL 4848 S2N	C.38
1193870000	KTB MOPL 4848 S2N	C.39
1193870000	KTB MOPL 4848 S2N	C.72
1193880000	KTB MOPL 5535 S2N	C.43
1193880000	KTB MOPL 5535 S2N	C.44
1193890000	KTB MOPL 6245 S2N	C.46
1193890000	KTB MOPL 6245 S2N	C.47
1193900000	KTB MOPL 7650 S2N	C.52
1193900000	KTB MOPL 7650 S2N	C.53
1193910000	KTB MOPL 9161 S2N	C.56
1193910000	KTB MOPL 9161 S2N	C.57
1193920000	KTB MOPL 9874 S2N	C.60
1193930000	KTB MOPL 2215 MSZN	C.20
1193950000	KTB MOPL 2626 MSZN	C.21
1193950000	KTB MOPL 2626 MSZN	C.22
1193960000	KTB MOPL 3030 MSZN	C.24
1193960000	KTB MOPL 3030 MSZN	C.25
1193970000	KTB MOPL 3526 MSZN	C.26
1193970000	KTB MOPL 3526 MSZN	C.27
1193980000	KTB MOPL 4030 MSZN	C.31
1193980000	KTB MOPL 4030 MSZN	C.32
1193990000	KTB MOPL 4538 MSZN	C.35
1193990000	KTB MOPL 4538 MSZN	C.36
1194000000	KTB MOPL 4848 MSZN	C.38
1194000000	KTB MOPL 4848 MSZN	C.39
1194010000	KTB MOPL 5535 MSZN	C.43
1194010000	KTB MOPL 5535 MSZN	C.44
1194020000	KTB MOPL 6245 MSZN	C.46
1194020000	KTB MOPL 6245 MSZN	C.47
1194030000	KTB MOPL 7650 MSZN	C.52
1194030000	KTB MOPL 7650 MSZN	C.53
1194040000	KTB MOPL 9161 MSZN	C.56
1194040000	KTB MOPL 9161 MSZN	C.57
1194050000	KTB MOPL 9874 MSZN	C.60
1194550000	KTB MH 221513 S4E0	C.15
1194550000	KTB MH 221513 S4E0	C.20
1194560000	KTB MH 221513 S4E1	C.15
1194560000	KTB MH 221513 S4E1	C.20
1194560000	KTB MH 221513 S4E1	C.70
1194570000	KTB MH 221513 S4E2	C.15
1194580000	KTB MH 221513 S4E3	C.15
1194580000	KTB MH 221513 S4E3	C.20
1194590000	KTB MH 221513 S4E4	C.15
1194600000	KTB MH 262615 S4E0	C.15
1194600000	KTB MH 262615 S4E0	C.21
1194610000	KTB MH 262615 S4E1	C.15
1194610000	KTB MH 262615 S4E1	C.21
1194610000	KTB MH 262615 S4E1	C.71
1194620000	KTB MH 262615 S4E2	C.15
1194630000	KTB MH 262615 S4E3	C.15
1194630000	KTB MH 262615 S4E3	C.21
1194640000	KTB MH 262615 S4E4	C.15
1194650000	KTB MH 262620 S4E0	C.15
1194650000	KTB MH 262620 S4E0	C.22
1194660000	KTB MH 262620 S4E1	C.15

Order No.	Type	Page
1194660000	KTB MH 262620 S4E1	C.22
1194670000	KTB MH 262620 S4E2	C.15
1194680000	KTB MH 262620 S4E3	C.15
1194680000	KTB MH 262620 S4E3	C.22
1194690000	KTB MH 262620 S4E4	C.15
1194700000	KTB MH 303015 S4E0	C.15
1194700000	KTB MH 303015 S4E0	C.24
1194710000	KTB MH 303015 S4E1	C.15
1194710000	KTB MH 303015 S4E1	C.24
1194720000	KTB MH 303015 S4E2	C.15
1194730000	KTB MH 303015 S4E3	C.15
1194730000	KTB MH 303015 S4E3	C.24
1194740000	KTB MH 303015 S4E4	C.15
1194750000	KTB MH 303020 S4E0	C.15
1194750000	KTB MH 303020 S4E0	C.25
1194760000	KTB MH 303020 S4E1	C.15
1194760000	KTB MH 303020 S4E1	C.25
1194770000	KTB MH 303020 S4E2	C.15
1194780000	KTB MH 303020 S4E3	C.15
1194780000	KTB MH 303020 S4E3	C.25
1194790000	KTB MH 303020 S4E4	C.15
1194800000	KTB MH 352615 S4E0	C.15
1194800000	KTB MH 352615 S4E0	C.26
1194810000	KTB MH 352615 S4E1	C.15
1194810000	KTB MH 352615 S4E1	C.26
1194820000	KTB MH 352615 S4E2	C.15
1194830000	KTB MH 352615 S4E3	C.15
1194830000	KTB MH 352615 S4E3	C.26
1194840000	KTB MH 352615 S4E4	C.15
1194850000	KTB MH 352620 S4E0	C.15
1194850000	KTB MH 352620 S4E0	C.27
1194860000	KTB MH 352620 S4E1	C.15
1194860000	KTB MH 352620 S4E1	C.27
1194870000	KTB MH 352620 S4E2	C.15
1194880000	KTB MH 352620 S4E3	C.15
1194880000	KTB MH 352620 S4E3	C.27
1194890000	KTB MH 352620 S4E4	C.15
1194900000	KTB MH 403015 S4E0	C.15
1194900000	KTB MH 403015 S4E0	C.31
1194910000	KTB MH 403015 S4E1	C.15
1194910000	KTB MH 403015 S4E1	C.31
1194920000	KTB MH 403015 S4E2	C.15
1194930000	KTB MH 403015 S4E3	C.15
1194930000	KTB MH 403015 S4E3	C.31
1194940000	KTB MH 403015 S4E4	C.15
1194950000	KTB MH 403020 S4E0	C.15
1194950000	KTB MH 403020 S4E0	C.32
1194960000	KTB MH 403020 S4E1	C.15
1194960000	KTB MH 403020 S4E1	C.32
1194970000	KTB MH 403020 S4E2	C.15
1194980000	KTB MH 403020 S4E3	C.15
1194980000	KTB MH 403020 S4E3	C.32
1194990000	KTB MH 403020 S4E4	C.15
1195000000	KTB MH 453815 S4E0	C.15
1195000000	KTB MH 453815 S4E0	C.35
1195010000	KTB MH 453815 S4E1	C.15
1195010000	KTB MH 453815 S4E1	C.35
1195020000	KTB MH 453815 S4E2	C.15
1195030000	KTB MH 453815 S4E3	C.15
1195030000	KTB MH 453815 S4E3	C.35
1195040000	KTB MH 453815 S4E4	C.15
1195050000	KTB MH 453820 S4E0	C.15
1195050000	KTB MH 453820 S4E0	C.36
1195060000	KTB MH 453820 S4E1	C.15
1195060000	KTB MH 453820 S4E1	C.36
1195070000	KTB MH 453820 S4E2	C.15
1195080000	KTB MH 453820 S4E3	C.15
1195080000	KTB MH 453820 S4E3	C.36
1195090000	KTB MH 453820 S4E4	C.15
1195100000	KTB MH 484815 S4E0	C.15
1195100000	KTB MH 484815 S4E0	C.38
1195110000	KTB MH 484815 S4E1	C.15
1195110000	KTB MH 484815 S4E1	C.38
1195120000	KTB MH 484815 S4E2	C.15
1195130000	KTB MH 484815 S4E3	C.15
1195130000	KTB MH 484815 S4E3	C.38
1195140000	KTB MH 484815 S4E4	C.15
1195150000	KTB MH 484820 S4E0	C.15
1195150000	KTB MH 484820 S4E0	C.39
1195160000	KTB MH 484820 S4E1	C.15
1195160000	KTB MH 484820 S4E1	C.39
1195170000	KTB MH 484820 S4E2	C.15
1195180000	KTB MH 484820 S4E3	C.15
1195180000	KTB MH 484820 S4E3	C.39
1195190000	KTB MH 484820 S4E4	C.15
1195200000	KTB MH 553515 S4E0	C.15
1195200000	KTB MH 553515 S4E0	C.43
1195210000	KTB MH 553515 S4E1	C.15
1195210000	KTB MH 553515 S4E1	C.43
1195220000	KTB MH 553515 S4E2	C.15
1195230000	KTB MH 553515 S4E3	C.15
1195230000	KTB MH 553515 S4E3	C.43
1195240000	KTB MH 553515 S4E4	C.15
1195250000	KTB MH 553520 S4E0	C.15
1195250000	KTB MH 553520 S4E0	C.44
1195260000	KTB MH 553520 S4E1	C.15
1195260000	KTB MH 553520 S4E1	C.44
1195270000	KTB MH 553520 S4E2	C.15
1195280000	KTB MH 553520 S4E3	C.15

Order No.	Type	Page
1195280000	KTB MH 553520 S4E3	C.44
1195290000	KTB MH 553520 S4E4	C.15
1195300000	KTB MH 624515 S4E0	C.15
1195300000	KTB MH 624515 S4E0	C.46
1195310000	KTB MH 624515 S4E1	C.15
1195310000	KTB MH 624515 S4E1	C.46
1195320000	KTB MH 624515 S4E2	C.15
1195330000	KTB MH 624515 S4E3	C.15
1195330000	KTB MH 624515 S4E3	C.46
1195340000	KTB MH 624515 S4E4	C.15
1195350000	KTB MH 624520 S4E0	C.15
1195350000	KTB MH 624520 S4E0	C.47
1195360000	KTB MH 624520 S4E1	C.15
1195360000	KTB MH 624520 S4E1	C.47
1195370000	KTB MH 624520 S4E2	C.15
1195380000	KTB MH 624520 S4E3	C.15
1195380000	KTB MH 624520 S4E3	C.47
1195390000	KTB MH 624520 S4E4	C.15
1195400000	KTB MH 765015 S4E0	C.15
1195400000	KTB MH 765015 S4E0	C.52
1195410000	KTB MH 765015 S4E1	C.15
1195410000	KTB MH 765015 S4E1	C.52
1195420000	KTB MH 765015 S4E2	C.15
1195430000	KTB MH 765015 S4E3	C.15
1195430000	KTB MH 765015 S4E3	C.52
1195440000	KTB MH 765015 S4E4	C.15
1195450000	KTB MH 765020 S4E0	C.15
1195450000	KTB MH 765020 S4E0	C.53
1195460000	KTB MH 765020 S4E1	C.15
1195460000	KTB MH 765020 S4E1	C.53
1195470000	KTB MH 765020 S4E2	C.15
1195480000	KTB MH 765020 S4E3	C.15
1195480000	KTB MH 765020 S4E3	C.53
1195490000	KTB MH 765020 S4E4	C.15
1195500000	KTB MH 916115 S4E0	C.15
1195500000	KTB MH 916115 S4E0	C.56
1195510000	KTB MH 916115 S4E1	C.15
1195510000	KTB MH 916115 S4E1	C.56
1195520000	KTB MH 916115 S4E2	C.15
1195530000	KTB MH 916115 S4E3	C.15
1195530000	KTB MH 916115 S4E3	C.56
1195540000	KTB MH 916115 S4E4	C.15
1195550000	KTB MH 916120 S4E0	C.15
1195550000	KTB MH 916120 S4E0	C.57
1195560000	KTB MH 916120 S4E1	C.15
1195560000	KTB MH 916120 S4E1	C.57
1195570000	KTB MH 916120 S4E2	C.15
1195580000	KTB MH 916120 S4E3	C.15
1195580000	KTB MH 916120 S4E3	C.57
1195590000	KTB MH 916120 S4E4	C.15
1195600000	KTB MH 987420 S4E0	C.15
1195600000	KTB MH 987420 S4E0	C.60
1195610000	KTB MH 987420 S4E1	C.15
1195610000	KTB MH 987420 S4E1	C.60
1195620000	KTB MH 987420 S4E2	C.15
1195630000	KTB MH 987420 S4E3	C.15
1195630000	KTB MH 987420 S4E3	C.60
1195640000	KTB MH 987420 S4E4	C.15
1195650000	KTB FS 221513 S4E0	C.66
1195660000	KTB FS 221513 S4E1	C.66
1195670000	KTB FS 221513 S4E2	C.66
1195680000	KTB FS 221513 S4E3	C.66
1195690000	KTB FS 221513 S4E4	C.66
1195700000	KTB FS 262615 S4E0	C.66
1195710000	KTB FS 262615 S4E1	C.66
1195720000	KTB FS 262615 S4E2	C.66
1195730000	KTB FS 262615 S4E3	C.66
1195740000	KTB FS 262615 S4E4	C.66
1195750000	KTB FS 262620 S4E0	C.66
1195760000	KTB FS 262620 S4E1	C.66
1195770000	KTB FS 262620 S4E2	C.66
1195780000	KTB FS 262620 S4E3	C.66
1195790000	KTB FS 262620 S4E4	C.66
1195800000	KTB FS 303015 S4E0	C.66
1195810000	KTB FS 303015 S4E1	C.66
1195820000	KTB FS 303015 S4E2	C.66
1195830000	KTB FS 303015 S4E3	C.66
1195840000	KTB FS 303015 S4E4	C.66
1195850000	KTB FS 303020 S4E0	C.66
1195860000	KTB FS 303020 S4E1	C.66
1195870000	KTB FS 303020 S4E2	C.66
1195880000	KTB FS 303020 S4E3	C.66
1195890000	KTB FS 303020 S4E4	C.66
1195900000	KTB FS 352615 S4E0	C.66
1195910000	KTB FS 352615 S4E1	C.66
1195920000	KTB FS 352615 S4E2	C.66
1195930000	KTB FS 352615 S4E3	C.66
1195940000	KTB FS 352615 S4E4	C.66
1195950000	KTB FS 352620 S4E0	C.66
1195960000	KTB FS 352620 S4E1	C.66
1195970000	KTB FS 352620 S4E2	C.66
1195980000	KTB FS 352620 S4E3	C.66
1195990000	KTB FS 352620 S4E4	C.66
1196000000	KTB FS 403015 S4E0	C.66
1196010000	KTB FS 403015 S4E1	C.66
1196020000	KTB FS 403015 S4E2	C.66
1196030000	KTB FS 403015 S4E3	C.66
1196040000	KTB FS 403015 S4E4	C.66
1196050000	KTB FS 403020 S4E0	C.66

Order No.	Type	Page
1196060000	KTB FS 403020 S4E1	C.66
1196070000	KTB FS 403020 S4E2	C.66
1196080000	KTB FS 403020 S4E3	C.66
1196090000	KTB FS 403020 S4E4	C.66
1196100000	KTB FS 453815 S4E0	C.66
1196110000	KTB FS 453815 S4E1	C.66
1196120000	KTB FS 453815 S4E2	C.66
1196130000	KTB FS 453815 S4E3	C.66
1196140000	KTB FS 453815 S4E4	C.66
1196150000	KTB FS 453820 S4E0	C.66
1196160000	KTB FS 453820 S4E1	C.66
1196170000	KTB FS 453820 S4E2	C.66
1196180000	KTB FS 453820 S4E3	C.66
1196190000	KTB FS 453820 S4E4	C.66
1196200000	KTB FS 484815 S4E0	C.66
1196210000	KTB FS 484815 S4E1	C.66
1196220000	KTB FS 484815 S4E2	C.66
1196230000	KTB FS 484815 S4E3	C.66
1196240000	KTB FS 484815 S4E4	C.66
1196250000	KTB FS 484820 S4E0	C.66
1196260000	KTB FS 484820 S4E1	C.66
1196270000	KTB FS 484820 S4E2	C.66
1196280000	KTB FS 484820 S4E3	C.66
1196290000	KTB FS 484820 S4E4	C.66
1196300000	KTB FS 553515 S4E0	C.66
1196310000	KTB FS 553515 S4E1	C.66
1196320000	KTB FS 553515 S4E2	C.66
1196330000	KTB FS 553515 S4E3	C.66
1196340000	KTB FS 553515 S4E4	C.66
1196350000	KTB FS 553520 S4E0	C.66
1196360000	KTB FS 553520 S4E1	C.66
1196370000	KTB FS 553520 S4E2	C.66
1196380000	KTB FS 553520 S4E3	C.66
1196390000	KTB FS 553520 S4E4	C.66
1196400000	KTB FS 624515 S4E0	C.66
1196410000	KTB FS 624515 S4E1	C.66
1196420000	KTB FS 624515 S4E2	C.66
1196430000	KTB FS 624515 S4E3	C.66
1196440000	KTB FS 624515 S4E4	C.66
1196450000	KTB FS 624520 S4E0	C.66
1196460000	KTB FS 624520 S4E1	C.66
1196470000	KTB FS 624520 S4E2	C.66
1196480000	KTB FS 624520 S4E3	C.66
1196490000	KTB FS 624520 S4E4	C.66
1196500000	KTB FS 765015 S4E0	C.66
1196510000	KTB FS 765015 S4E1	C.66
1196520000	KTB FS 765015 S4E2	C.66
1196530000	KTB FS 765015 S4E3	C.66
1196540000	KTB FS 765015 S4E4	C.66
1196550000	KTB FS 765020 S4E0	C.66
1196560000	KTB FS 765020 S4E1	C.66
1196570000	KTB FS 765020 S4E2	C.66
1196580000	KTB FS 765020 S4E3	C.66
1196590000	KTB FS 765020 S4E4	C.66
1196600000	KTB FS 916115 S4E0	C.66
1196610000	KTB FS 916115 S4E1	C.66
1196620000	KTB FS 916115 S4E2	C.66
1196630000	KTB FS 916115 S4E3	C.66
1196640000	KTB FS 916115 S4E4	C.66
1196650000	KTB FS 916120 S4E0	C.66
1196660000	KTB FS 916120 S4E1	C.66
1196670000	KTB FS 916120 S4E2	C.66
1196680000	KTB FS 916120 S4E3	C.66
1196690000	KTB FS 916120 S4E4	C.66
1196700000	KTB FS 987420 S4E0	C.66
1196710000	KTB FS 987420 S4E1	C.66
1196720000	KTB FS 987420 S4E2	C.66
1196730000	KTB FS 987420 S4E3	C.66
1196740000	KTB FS 987420 S4E4	C.66
1199850000	KTB QL 221513 S4E0	C.63
1199860000	KTB QL 221513 S4E1	C.63
1199870000	KTB QL 221513 S4E2	C.63
1199880000	KTB QL 221513 S4E3	C.63
1199890000	KTB QL 221513 S4E4	C.63
1199900000	KTB QL 262615 S4E0	C.63
1199910000	KTB QL 262615 S4E1	C.63
1199920000	KTB QL 262615 S4E2	C.63
1199930000	KTB QL 262615 S4E3	C.63
1199940000	KTB QL 262615 S4E4	C.63
1199950000	KTB QL 262620 S4E0	C.63
1199960000	KTB QL 262620 S4E1	C.63
1199970000	KTB QL 262620 S4E2	C.63
1199980000	KTB QL 262620 S4E3	C.63
1199990000	KTB QL 262620 S4E4	C.63

1200000000

1200010000	KTB QL 303015 S4E0	C.63
1200020000	KTB QL 303015 S4E1	C.63
1200030000	KTB QL 303015 S4E2	C.63
1200040000	KTB QL 303015 S4E3	C.63
1200050000	KTB QL 303015 S4E4	C.63
1200060000	KTB QL 303020 S4E0	C.63
1200070000	KTB QL 303020 S4E1	C.63
1200080000	KTB QL 303020 S4E2	C.63
1200090000	KTB QL 303020 S4E3	C.63
1200100000	KTB QL 303020 S4E4	C.63
1200110000	KTB QL 352615 S4E0	C.63
1200120000	KTB QL 352615 S4E1	C.63

Order No.	Type	Page
1200130000	KTB QL 352615 S4E2	C.63
1200140000	KTB QL 352615 S4E3	C.63
1200150000	KTB QL 352615 S4E4	C.63
1200160000	KTB QL 352620 S4E0	C.63
1200170000	KTB QL 352620 S4E1	C.63
1200180000	KTB QL 352620 S4E2	C.63
1200190000	KTB QL 352620 S4E3	C.63
1200210000	KTB QL 352620 S4E4	C.63
1200220000	KTB QL 403015 S4E0	C.63
1200230000	KTB QL 403015 S4E1	C.63
1200240000	KTB QL 403015 S4E2	C.63
1200250000	KTB QL 403015 S4E3	C.63
1200260000	KTB QL 403015 S4E4	C.63
1200270000	KTB QL 403020 S4E0	C.63
1200280000	KTB QL 403020 S4E1	C.63
1200290000	KTB QL 403020 S4E2	C.63
1200310000	KTB QL 403020 S4E3	C.63
1200320000	KTB QL 403020 S4E4	C.63
1200330000	KTB QL 453815 S4E0	C.63
1200340000	KTB QL 453815 S4E1	C.63
1200350000	KTB QL 453815 S4E2	C.63
1200360000	KTB QL 453815 S4E3	C.63
1200370000	KTB QL 453815 S4E4	C.63
1200380000	KTB QL 453820 S4E0	C.63
1200390000	KTB QL 453820 S4E1	C.63
1200410000	KTB QL 453820 S4E2	C.63
1200420000	KTB QL 453820 S4E3	C.63
1200430000	KTB QL 453820 S4E4	C.63
1200440000	KTB QL 484815 S4E0	C.63
1200450000	KTB QL 484815 S4E1	C.63
1200460000	KTB QL 484815 S4E2	C.63
1200470000	KTB QL 484815 S4E3	C.63
1200480000	KTB QL 484815 S4E4	C.63
1200490000	KTB QL 484820 S4E0	C.63
1200510000	KTB QL 484820 S4E1	C.63
1200510000	KTB QL 484820 S4E1	C.72
1200520000	KTB QL 484820 S4E2	C.63
1200530000	KTB QL 484820 S4E3	C.63
1200540000	KTB QL 484820 S4E4	C.63
1200550000	KTB QL 553515 S4E0	C.63
1200560000	KTB QL 553515 S4E1	C.63
1200570000	KTB QL 553515 S4E2	C.63
1200580000	KTB QL 553515 S4E3	C.63
1200590000	KTB QL 553515 S4E4	C.63
1200610000	KTB QL 553520 S4E0	C.63
1200620000	KTB QL 553520 S4E1	C.63
1200630000	KTB QL 553520 S4E2	C.63
1200640000	KTB QL 553520 S4E3	C.63
1200650000	KTB QL 553520 S4E4	C.63
1200660000	KTB QL 624515 S4E0	C.63
1200670000	KTB QL 624515 S4E1	C.63
1200680000	KTB QL 624515 S4E2	C.63
1200690000	KTB QL 624515 S4E3	C.63
1200710000	KTB QL 624515 S4E4	C.63
1200720000	KTB QL 624520 S4E0	C.63
1200730000	KTB QL 624520 S4E1	C.63
1200740000	KTB QL 624520 S4E2	C.63
1200750000	KTB QL 624520 S4E3	C.63
1200760000	KTB QL 624520 S4E4	C.63
1200770000	KTB QL 765015 S4E0	C.63
1200780000	KTB QL 765015 S4E1	C.63
1200790000	KTB QL 765015 S4E2	C.63
1200810000	KTB QL 765015 S4E3	C.63
1200820000	KTB QL 765015 S4E4	C.63
1200830000	KTB QL 765020 S4E0	C.63
1200840000	KTB QL 765020 S4E1	C.63
1200850000	KTB QL 765020 S4E2	C.63
1200860000	KTB QL 765020 S4E3	C.63
1200870000	KTB QL 765020 S4E4	C.63
1200880000	KTB QL 916115 S4E0	C.63
1200890000	KTB QL 916115 S4E1	C.63
1200910000	KTB QL 916115 S4E2	C.63
1200920000	KTB QL 916115 S4E3	C.63
1200930000	KTB QL 916115 S4E4	C.63
1200940000	KTB QL 916120 S4E0	C.63
1200950000	KTB QL 916120 S4E1	C.63
1200960000	KTB QL 916120 S4E2	C.63
1200970000	KTB QL 916120 S4E3	C.63
1200980000	KTB QL 916120 S4E4	C.63
1200990000	KTB QL 987420 S4E0	C.63
1201010000	KTB QL 987420 S4E1	C.63
1201020000	KTB QL 987420 S4E2	C.63
1201030000	KTB QL 987420 S4E3	C.63
1201040000	KTB QL 987420 S4E4	C.63
1205070000	A2LC/40/M40-NPT1-1/2F	D.24
1205080000	A2LC/16/M16-M20F-WM	D.24
1205090000	A2LC/20S/M20-M20F-WM	D.24
1205110000	A2LC/20/M20-M20F-WM	D.24
1205120000	A2LC/25/M25-M25F-WM	D.24
1205130000	A2LC/32/M32-M32F-WM	D.24
1205140000	A2LC/40/M40-M40F-WM	D.24
1205150000	A2LC/50S/M50-M50F-WM	D.24
1205160000	A2LC/50/M50-M50F-WM	D.24
1205170000	A2LC/63S/M63-M63F-WM	D.24
1205180000	A2LC/63/M63-M63F-WM	D.24
1205190000	A2LC/16/M16-NPT1/2F-WM	D.24
1205210000	A2LC/20S/M20-NPT1/2F-WM	D.24
1205220000	A2LC/20/M20-NPT1/2F-WM	D.24
1205230000	A2LC/25/M25-NPT3/4F-WM	D.24

Order No.	Type	Page
1205240000	A2LC/32/M32-NPT1F-WM	D.24
1205250000	A2LC/50/M50-NPT2F-WM	D.24
1205260000	A2LC/63S/M63-NPT2F-WM	D.24
1205270000	A2LC/16/M16-NPT3/4F-WM	D.24
1205280000	A2LC/20S/M20-NPT3/4F-WM	D.24
1205290000	A2LC/20/M20-NPT3/4F-WM	D.24
1205310000	A2LC/25/M25-NPT1F-WM	D.24
1205320000	A2LC/50S/M50-NPT2F-WM	D.24
1205330000	A2LC/16/NPT1/2-M20F-WM	D.25
1205340000	A2LC/20S/NPT1/2-M20F-WM	D.25
1205350000	A2LC/20/NPT1/2-M20F-WM	D.25
1205360000	A2LC/25/NPT3/4-M25F-WM	D.25
1205370000	A2LC/32/NPT1-M32F-WM	D.25
1205380000	A2LC/50/NPT2-M50F-WM	D.25
1205390000	A2LC/63S/NPT2-M63F-WM	D.25
1205410000	A2LC/32/NPT1-NPT1F-WM	D.26
1205420000	A2LC/50/NPT2-NPT2F-WM	D.26
1205430000	A2LC/63S/NPT2-NPT2F-WM	D.26
1205440000	A2LC/25/NPT3/4-NPT1F-WM	D.26
1205450000	A2LC/16/NPT3/4-M20F-WM	D.25
1205460000	A2LC/20S/NPT3/4-M20F-WM	D.25
1205470000	A2LC/20/NPT3/4-M20F-WM	D.25
1205480000	A2LC/25/NPT1-M25F-WM	D.25
1205490000	A2LC/50S/NPT2-M50F-WM	D.25
1205510000	A2LC/25/NPT1-NPT3/4F-WM	D.26
1205520000	A2LC/25/NPT1-NPT1F-WM	D.26
1205530000	A2LC/50S/NPT2-NPT2F-WM	D.26
1205550000	A2LC/40/M40-NPT1-1/4F	D.24
1205560000	A2LC/50S/M50-NPT1-1/2F	D.24
1205570000	A2LC/63/M63-NPT2-1/2F	D.24
1205580000	A2LC/32/M32-NPT1-1/4F	D.24
1205590000	A2LC/63S/M63-NPT2-1/2F	D.24
1205610000	A2LC/40/NPT1-1/4-M40F	D.25
1205620000	A2LC/50S/NPT1-1/2-M50F	D.25
1205630000	A2LC/63/NPT2-1/2-M63F	D.25
1205640000	A2LC/16/NPT1/2-NPT1/2F	D.26
1205660000	A2LC/20S/NPT1/2-NPT1/2F	D.26
1205670000	A2LC/20/NPT1/2-NPT1/2F	D.26
1205680000	A2LC/25/NPT3/4-NPT3/4F	D.26
1205890000	VGM40/1-MS68 20-32 BG	D.9
1205920000	VGM40/1-SS68 20-32 BG	D.14
1205960000	A2LC/20S/NPT1/2-NPT3/4F	D.26
1206280000	A2LC/50S/NPT1-1/2-NPT1	D.26
1206290000	A2LC/63/NPT2-1/2-NPT2	D.26
1206310000	A2LC/16/NPT1/2-NPT3/4F	D.26
1206320000	A2LC/20/NPT1/2-NPT3/4F	D.26
1206330000	A2LC/32/NPT1-NPT1-1/4F	D.26
1206360000	A2LC/40/NPT1-1/4-NPT1	D.26
1206370000	A2LC/63S/NPT2-NPT2-1/2F	D.26
1206380000	A2LC/50S/NPT1-1/2-NPT2F	D.26
1206390000	A2LC/32/NPT1-1/4-M32F	D.25
1206540000	A2LC/20/NPT3/4-NPT3/4F	D.26
1206550000	A2LC/20S/NPT3/4-NPT3/4F	D.26
1206560000	A2LC/16/NPT3/4-NPT3/4F	D.26
1206570000	A2LC/63S/NPT2-1/2-NPT2F	D.26
1206580000	A2LC/50S/NPT2-NPT1-1/2F	D.26
1206590000	A2LC/40/NPT1-1/2-NPT1	D.26
1206620000	A2LC/32/NPT1-1/4-NPT1F	D.26
1206630000	A2LC/32/NPT1-1/4-NPT1-1	D.26
1206640000	A2LC/40/NPT1-1/2-NPT1-1	D.26
1206650000	A2LC/63S/NPT2-1/2-NPT2	D.26
1206660000	A2LC/20/NPT3/4-NPT1/2F	D.26
1206670000	A2LC/20S/NPT3/4-NPT1/2F	D.26
1206680000	A2LC/16/NPT3/4-NPT1/2F	D.26
1206690000	A2LC/63S/NPT2-1/2-M63F	D.25
1206710000	A2LC/40/NPT1-1/2-M40F	D.25

1210000000

Order No.	Type	Page
1218940000	VP-HEX M16-EX W	C.70
1218940000	VP-HEX M16-EX W	D.47
1218950000	VP-HEX M20-EX W	C.70
1218950000	VP-HEX M20-EX W	C.71
1218950000	VP-HEX M20-EX W	C.72
1218950000	VP-HEX M20-EX W	C.152
1218950000	VP-HEX M20-EX W	C.153
1218950000	VP-HEX M20-EX W	D.47
1218960000	VP-HEX M25-EX W	C.72
1218960000	VP-HEX M25-EX W	C.154
1218960000	VP-HEX M25-EX W	D.47
1218970000	VP-HEX M32-EX W	C.71
1218970000	VP-HEX M32-EX W	D.47
1218980000	VP-HEX M40-EX W	C.72
1218980000	VP-HEX M40-EX W	D.47
1218990000	VP-HEX M50-EX W	D.47
1219010000	VP-HEX M63-EX W	D.47
1219020000	VPS-HEX M16-EX W	D.47
1219030000	VPS-HEX M20-EX W	D.47
1219040000	VPS-HEX M25-EX W	D.47
1219050000	VPS-HEX M32-EX W	D.47
1219060000	VPS-HEX M40-EX W	D.47
1219070000	VPS-HEX M50-EX W	D.47
1219080000	VPS-HEX M63-EX W	D.47

1250000000

Order No.	Type	Page
1252190000	TPSD FIXING SET KTB	C.20
1252190000	TPSD FIXING SET KTB	C.21
1252190000	TPSD FIXING SET KTB	C.22
1252190000	TPSD FIXING SET KTB	C.23
1252190000	TPSD FIXING SET KTB	C.24
1252190000	TPSD FIXING SET KTB	C.25
1252190000	TPSD FIXING SET KTB	C.26
1252190000	TPSD FIXING SET KTB	C.27
1252190000	TPSD FIXING SET KTB	C.28
1252190000	TPSD FIXING SET KTB	C.29
1252190000	TPSD FIXING SET KTB	C.30
1252190000	TPSD FIXING SET KTB	C.31
1252190000	TPSD FIXING SET KTB	C.32
1252190000	TPSD FIXING SET KTB	C.33
1252190000	TPSD FIXING SET KTB	C.34
1252190000	TPSD FIXING SET KTB	C.35
1252190000	TPSD FIXING SET KTB	C.36
1252190000	TPSD FIXING SET KTB	C.37
1252190000	TPSD FIXING SET KTB	C.38
1252190000	TPSD FIXING SET KTB	C.39
1252190000	TPSD FIXING SET KTB	C.40
1252190000	TPSD FIXING SET KTB	C.41
1252190000	TPSD FIXING SET KTB	C.42
1252190000	TPSD FIXING SET KTB	C.43
1252190000	TPSD FIXING SET KTB	C.44
1252190000	TPSD FIXING SET KTB	C.45
1252190000	TPSD FIXING SET KTB	C.46
1252190000	TPSD FIXING SET KTB	C.47
1252190000	TPSD FIXING SET KTB	C.48
1252190000	TPSD FIXING SET KTB	C.49
1252190000	TPSD FIXING SET KTB	C.50
1252190000	TPSD FIXING SET KTB	C.51
1252190000	TPSD FIXING SET KTB	C.52
1252190000	TPSD FIXING SET KTB	C.53
1252190000	TPSD FIXING SET KTB	C.54
1252190000	TPSD FIXING SET KTB	C.55
1252190000	TPSD FIXING SET KTB	C.56
1252190000	TPSD FIXING SET KTB	C.57
1252190000	TPSD FIXING SET KTB	C.58
1252190000	TPSD FIXING SET KTB	C.59
1252190000	TPSD FIXING SET KTB	C.60
1252730000	DOHA KTB A4 S2 R	C.28
1252730000	DOHA KTB A4 S2 R	C.29
1252730000	DOHA KTB A4 S2 R	C.30
1252730000	DOHA KTB A4 S2 R	C.33
1252730000	DOHA KTB A4 S2 R	C.34
1252730000	DOHA KTB A4 S2 R	C.37
1252730000	DOHA KTB A4 S2 R	C.38
1252730000	DOHA KTB A4 S2 R	C.39
1252730000	DOHA KTB A4 S2 R	C.40
1252730000	DOHA KTB A4 S2 R	C.41
1252730000	DOHA KTB A4 S2 R	C.42
1252730000	DOHA KTB A4 S2 R	C.43
1252730000	DOHA KTB A4 S2 R	C.44
1252730000	DOHA KTB A4 S2 R	C.45
1252730000	DOHA KTB A4 S2 R	C.46
1252730000	DOHA KTB A4 S2 R	C.47
1252730000	DOHA KTB A4 S2 R	C.48
1252730000	DOHA KTB A4 S2 R	C.49
1252730000	DOHA KTB A4 S2 R	C.50
1252730000	DOHA KTB A4 S2 R	C.51
1252730000	DOHA KTB A4 S2 R	C.52
1252730000	DOHA KTB A4 S2 R	C.53
1252730000	DOHA KTB A4 S2 R	C.54
1252730000	DOHA KTB A4 S2 R	C.55
1252730000	DOHA KTB A4 S2 R	C.56
1252730000	DOHA KTB A4 S2 R	C.57
1252730000	DOHA KTB A4 S2 R	C.58
1252730000	DOHA KTB A4 S2 R	C.59
1252730000	DOHA KTB A4 S2 R	C.60
1252730000	DOHA KTB A4 S2 R	C.72
1252750000	DOHA KTB A5 S2 R	C.28
1252750000	DOHA KTB A5 S2 R	C.29
1252750000	DOHA KTB A5 S2 R	C.30
1252750000	DOHA KTB A5 S2 R	C.33
1252750000	DOHA KTB A5 S2 R	C.34
1252750000	DOHA KTB A5 S2 R	C.35
1252750000	DOHA KTB A5 S2 R	C.36
1252750000	DOHA KTB A5 S2 R	C.37
1252750000	DOHA KTB A5 S2 R	C.38
1252750000	DOHA KTB A5 S2 R	C.39
1252750000	DOHA KTB A5 S2 R	C.40
1252750000	DOHA KTB A5 S2 R	C.41
1252750000	DOHA KTB A5 S2 R	C.42
1252750000	DOHA KTB A5 S2 R	C.43
1252750000	DOHA KTB A5 S2 R	C.44
1252750000	DOHA KTB A5 S2 R	C.45
1252750000	DOHA KTB A5 S2 R	C.46
1252750000	DOHA KTB A5 S2 R	C.47
1252750000	DOHA KTB A5 S2 R	C.48
1252750000	DOHA KTB A5 S2 R	C.49
1252750000	DOHA KTB A5 S2 R	C.50
1252750000	DOHA KTB A5 S2 R	C.51
1252750000	DOHA KTB A5 S2 R	C.52
1252750000	DOHA KTB A5 S2 R	C.53
1252750000	DOHA KTB A5 S2 R	C.54
1252750000	DOHA KTB A5 S2 R	C.55
1252750000	DOHA KTB A5 S2 R	C.56
1252750000	DOHA KTB A5 S2 R	C.57
1252750000	DOHA KTB A5 S2 R	C.58
1252750000	DOHA KTB A5 S2 R	C.59
1252750000	DOHA KTB A5 S2 R	C.60

Order No.	Type	Page
1252780000	DOHA KTB A6 S2 R	C.21
1252780000	DOHA KTB A6 S2 R	C.22
1252780000	DOHA KTB A6 S2 R	C.24
1252780000	DOHA KTB A6 S2 R	C.25
1252780000	DOHA KTB A6 S2 R	C.26
1252780000	DOHA KTB A6 S2 R	C.27
1252780000	DOHA KTB A6 S2 R	C.28
1252780000	DOHA KTB A6 S2 R	C.29
1252780000	DOHA KTB A6 S2 R	C.30
1252780000	DOHA KTB A6 S2 R	C.31
1252780000	DOHA KTB A6 S2 R	C.32
1252780000	DOHA KTB A6 S2 R	C.33
1252780000	DOHA KTB A6 S2 R	C.34
1252780000	DOHA KTB A6 S2 R	C.35
1252780000	DOHA KTB A6 S2 R	C.36
1252780000	DOHA KTB A6 S2 R	C.37
1252780000	DOHA KTB A6 S2 R	C.38
1252780000	DOHA KTB A6 S2 R	C.39
1252780000	DOHA KTB A6 S2 R	C.40
1252780000	DOHA KTB A6 S2 R	C.41
1252780000	DOHA KTB A6 S2 R	C.42
1252780000	DOHA KTB A6 S2 R	C.43
1252780000	DOHA KTB A6 S2 R	C.44
1252780000	DOHA KTB A6 S2 R	C.45
1252780000	DOHA KTB A6 S2 R	C.46
1252780000	DOHA KTB A6 S2 R	C.47
1252780000	DOHA KTB A6 S2 R	C.48
1252780000	DOHA KTB A6 S2 R	C.49
1252780000	DOHA KTB A6 S2 R	C.50
1252780000	DOHA KTB A6 S2 R	C.51
1252780000	DOHA KTB A6 S2 R	C.52
1252780000	DOHA KTB A6 S2 R	C.53
1252780000	DOHA KTB A6 S2 R	C.54
1252780000	DOHA KTB A6 S2 R	C.55
1252780000	DOHA KTB A6 S2 R	C.56
1252780000	DOHA KTB A6 S2 R	C.57
1252780000	DOHA KTB A6 S2 R	C.58
1252780000	DOHA KTB A6 S2 R	C.59
1252780000	DOHA KTB A6 S2 R	C.60
1252780000	DOHA KTB A6 S2 R	C.71
1252780000	DOHA KTB A6 S2 R	C.72
1253230000	DESC M6X14 KTB SET	C.20
1253230000	DESC M6X14 KTB SET	C.21
1253230000	DESC M6X14 KTB SET	C.22
1253230000	DESC M6X14 KTB SET	C.23
1253230000	DESC M6X14 KTB SET	C.24
1253230000	DESC M6X14 KTB SET	C.25
1253230000	DESC M6X14 KTB SET	C.26
1253230000	DESC M6X14 KTB SET	C.27
1253230000	DESC M6X14 KTB SET	C.28
1253230000	DESC M6X14 KTB SET	C.29
1253230000	DESC M6X14 KTB SET	C.31
1253230000	DESC M6X14 KTB SET	C.32
1253230000	DESC M6X14 KTB SET	C.33
1253230000	DESC M6X14 KTB SET	C.34
1253230000	DESC M6X14 KTB SET	C.35
1253230000	DESC M6X14 KTB SET	C.36
1253230000	DESC M6X14 KTB SET	C.38
1253230000	DESC M6X14 KTB SET	C.39
1253230000	DESC M6X14 KTB SET	C.40
1253230000	DESC M6X14 KTB SET	C.41
1253230000	DESC M6X14 KTB SET	C.43
1253230000	DESC M6X14 KTB SET	C.44
1253230000	DESC M6X14 KTB SET	C.45
1253230000	DESC M6X14 KTB SET	C.46
1253230000	DESC M6X14 KTB SET	C.47
1253230000	DESC M6X14 KTB SET	C.48
1253230000	DESC M6X14 KTB SET	C.49
1253230000	DESC M6X14 KTB SET	C.50
1253230000	DESC M6X14 KTB SET	C.51
1253230000	DESC M6X14 KTB SET	C.52
1253230000	DESC M6X14 KTB SET	C.53
1253230000	DESC M6X14 KTB SET	C.54
1253230000	DESC M6X14 KTB SET	C.55
1253230000	DESC M6X14 KTB SET	C.56
1253230000	DESC M6X14 KTB SET	C.57
1253230000	DESC M6X14 KTB SET	C.58
1253230000	DESC M6X14 KTB SET	C.59
1253230000	DESC M6X14 KTB SET	C.60
1253230000	DESC M6X14 KTB SET	C.70
1253230000	DESC M6X14 KTB SET	C.71
1253230000	DESC M6X14 KTB SET	C.72
1256270000	KTB GP XX1513 AB S4 6MM	C.20
1256270000	KTB GP XX1513 AB S4 6MM	C.70
1256280000	KTB GP 22XX13 CD S4 6MM	C.20
1256290000	KTB GP 262615 AB S4 6MM	C.21
1256290000	KTB GP 262615 AB S4 6MM	C.71
1256310000	KTB GP 26XX15 CD S4 6MM	C.21
1256320000	KTB GP XX2620 AB S4 6MM	C.22
1256330000	KTB GP 26XX20 CD S4 6MM	C.22
1256340000	KTB GP XX3015 AB S4 6MM	C.24
1256350000	KTB GP 303015 CD S4 6MM	C.24
1256360000	KTB GP 303020 AB S4 6MM	C.25
1256370000	KTB GP 30XX20 CD S4 6MM	C.25
1256380000	KTB GP XX2615 AB S4 6MM	C.26
1256390000	KTB GP 352615 CD S4 6MM	C.26
1256410000	KTB GP 352620 AB S4 6MM	C.27
1256420000	KTB GP 352620 CD S4 6MM	C.27
1256430000	KTB GP 403015 AB S4 6MM	C.31

Order No.	Type	Page
1256440000	KTB GP 403015 CD S4 6MM	C.31
1256450000	KTB GP XX3020 AB S4 6MM	C.32
1256470000	KTB GP 403020 CD S4 6MM	C.32
1256480000	KTB GP XX3815 AB S4 6MM	C.35
1256490000	KTB GP 45XX15 CD S4 6MM	C.35
1256510000	KTB GP XX3820 AB S4 6MM	C.36
1256520000	KTB GP 45XX20 CD S4 6MM	C.36
1256530000	KTB GP XX4815 AB S4 6MM	C.38
1256540000	KTB GP 48XX15 CD S4 6MM	C.38
1256550000	KTB GP XX4820 AB S4 6MM	C.39
1256550000	KTB GP XX4820 AB S4 6MM	C.72
1256560000	KTB GP 48XX20 CD S4 6MM	C.39
1256570000	KTB GP 553515 AB S4 6MM	C.43
1256580000	KTB GP 55XX15 CD S4 6MM	C.43
1256590000	KTB GP 553520 AB S4 6MM	C.44
1256610000	KTB GP 55XX20 CD S4 6MM	C.44
1256620000	KTB GP XX4515 AB S4 6MM	C.46
1256630000	KTB GP 624515 CD S4 6MM	C.46
1256640000	KTB GP XX4520 AB S4 6MM	C.47
1256650000	KTB GP 624520 CD S4 6MM	C.47
1256660000	KTB GP 765015 AB S4 6MM	C.52
1256670000	KTB GP 765015 CD S4 6MM	C.52
1256680000	KTB GP 765020 AB S4 6MM	C.53
1256690000	KTB GP 765020 CD S4 6MM	C.53
1256710000	KTB GP XX6115 AB S4 6MM	C.56
1256720000	KTB GP 91XX15 CD S4 6MM	C.56
1256730000	KTB GP XX6120 AB S4 6MM	C.57
1256740000	KTB GP 916120 CD S4 6MM	C.57
1256750000	KTB GP XX7420 AB S4 6MM	C.60
1256760000	KTB GP 98XX20 CD S4 6MM	C.60
1257640000	TPSDHA KTB 100X25 S2 2R	C.21
1257640000	TPSDHA KTB 100X25 S2 2R	C.22
1257640000	TPSDHA KTB 100X25 S2 2R	C.24
1257640000	TPSDHA KTB 100X25 S2 2R	C.25
1257640000	TPSDHA KTB 100X25 S2 2R	C.26
1257640000	TPSDHA KTB 100X25 S2 2R	C.27
1257640000	TPSDHA KTB 100X25 S2 2R	C.30
1257640000	TPSDHA KTB 100X25 S2 2R	C.31
1257640000	TPSDHA KTB 100X25 S2 2R	C.32
1257640000	TPSDHA KTB 100X25 S2 2R	C.35
1257640000	TPSDHA KTB 100X25 S2 2R	C.36
1257640000	TPSDHA KTB 100X25 S2 2R	C.37
1257640000	TPSDHA KTB 100X25 S2 2R	C.38
1257640000	TPSDHA KTB 100X25 S2 2R	C.39
1257640000	TPSDHA KTB 100X25 S2 2R	C.42
1257640000	TPSDHA KTB 100X25 S2 2R	C.43
1257640000	TPSDHA KTB 100X25 S2 2R	C.44
1257640000	TPSDHA KTB 100X25 S2 2R	C.46
1257640000	TPSDHA KTB 100X25 S2 2R	C.47
1257640000	TPSDHA KTB 100X25 S2 2R	C.52
1257640000	TPSDHA KTB 100X25 S2 2R	C.53
1257640000	TPSDHA KTB 100X25 S2 2R	C.56
1257640000	TPSDHA KTB 100X25 S2 2R	C.57
1257640000	TPSDHA KTB 100X25 S2 2R	C.60
1257640000	TPSDHA KTB 100X25 S2 2R	C.71
1257640000	TPSDHA KTB 100X25 S2 2R	C.72
1257650000	KTB MOPL 2215 S2N H	C.20
1257660000	KTB MOPL 2626 S2N H	C.21
1257660000	KTB MOPL 2626 S2N H	C.22
1257670000	KTB MOPL 3030 S2N H	C.24
1257670000	KTB MOPL 3030 S2N H	C.25
1257680000	KTB MOPL 3526 S2N H	C.26
1257680000	KTB MOPL 3526 S2N H	C.27
1257690000	KTB MOPL 4030 S2N H	C.31
1257690000	KTB MOPL 4030 S2N H	C.32
1257700000	KTB MOPL 4538 S2N H	C.35
1257700000	KTB MOPL 4538 S2N H	C.36
1257710000	KTB MOPL 4848 S2N H	C.38
1257710000	KTB MOPL 4848 S2N H	C.39
1257720000	KTB MOPL 5535 S2N H	C.43
1257720000	KTB MOPL 5535 S2N H	C.44
1257740000	KTB MOPL 6245 S2N H	C.46
1257740000	KTB MOPL 6245 S2N H	C.47
1257750000	KTB MOPL 7650 S2N H	C.52
1257750000	KTB MOPL 7650 S2N H	C.53
1257760000	KTB MOPL 9161 S2N H	C.56
1257760000	KTB MOPL 9161 S2N H	C.57
1257770000	KTB MOPL 9874 S2N H	C.60

1260000000

1261910000	ADAPS M16-M20-W	D.57
1261920000	ADAPS M20-M16-W	D.57
1261930000	ADAPS M20-M25-W	D.57
1261940000	ADAPS M25-M20-W	D.57
1261950000	ADAPS M25-M32-W	D.57
1261960000	ADAPS M32-M25-W	D.57
1261970000	ADAPS M32-M40-W	D.57
1261980000	ADAPS M40-M32-W	D.57
1261990000	ADAPS M40-M50-W	D.57
1262010000	ADAPS M50-M40-W	D.57
1262020000	ADAPS M16-NPT1/2-W	D.57
1262030000	ADAPS M16-NPT3/4-W	D.57
1262040000	ADAPS M20-NPT1/2-W	D.57
1262050000	ADAPS M20-NPT3/4-W	D.57
1262060000	ADAPS M25-NPT1/2-W	D.57
1262070000	ADAPS M25-NPT3/4-W	D.57
1262080000	ADAPS M25-NPT1-W	D.57
1262090000	ADAPS M32-NPT3/4-W	D.57
1262100000	ADAPS M32-NPT1-W	D.57
1262110000	ADAPS M32-NPT1-1/4-W	D.57
1262120000	ADAPS M32-NPT1-1/2-W	D.57
1262130000	ADAPS M40-NPT1-W	D.57
1262140000	ADAPS M40-NPT1-1/4-W	D.57
1262150000	ADAPS M40-NPT1-1/2-W	D.57
1262170000	ADAPS M40-NPT2-W	D.57
1262180000	ADAPS M50-NPT1-1/4-W	D.57
1262190000	ADAPS M50-NPT1-1/2-W	D.57
1262200000	ADAPS M50-NPT2-W	D.57
1262330000	ADAPS NPT1/2-M16-W	D.56
1262340000	ADAPS NPT1/2-M20-W	D.56
1262350000	ADAPS NPT3/4-M20-W	D.56
1262370000	ADAPS NPT3/4-M25-W	D.56
1262380000	ADAPS NPT1-M25-W	D.56
1262390000	ADAPS NPT1-M32-W	D.56
1262410000	ADAPS NPT1-1/4-M32-W	D.56
1262420000	ADAPS NPT1-1/4-M40-W	D.56
1262430000	ADAPS NPT1-1/2-M40-W	D.56
1262440000	ADAPS NPT1-1/2-M50-W	D.56
1262450000	ADAPS NPT2-M50-W	D.56
1262470000	ADAP NPT1/2-NPT3/4-W	D.54
1262480000	ADAP NPT3/4-NPT1/2-W	D.54
1262490000	ADAP NPT3/4-NPT1-W	D.54
1262510000	ADAP NPT1-NPT3/4-W	D.54
1262520000	ADAP NPT1-NPT1-1/4-W	D.54
1262530000	ADAP NPT1-1/4-NPT1-W	D.54
1262540000	ADAP NPT1-1/4-NPT1-1/2	D.54
1262550000	ADAP NPT1-1/2-NPT1-1/4	D.54
1262560000	ADAP NPT1-1/2-NPT2-W	D.54
1262570000	ADAP NPT2-NPT1-1/2-W	D.54
1262730000	ADAP M16-M20-W	D.55
1262740000	ADAP M20-M16-W	D.55
1262750000	ADAP M20-M25-W	D.55
1262760000	ADAP M25-M20-W	D.55
1262770000	ADAP M25-M32-W	D.55
1262780000	ADAP M32-M25-W	D.55
1262790000	ADAP M32-M40-W	D.55
1262800000	ADAP M40-M32-W	D.55
1262810000	ADAP M40-M50-W	D.55
1262830000	ADAP M50-M40-W	D.55
1262840000	ADAP M16-NPT1/2-W	D.55
1262850000	ADAP M16-NPT3/4-W	D.55
1262860000	ADAP M20-NPT1/2-W	D.55
1262870000	ADAP M20-NPT3/4-W	D.55
1262880000	ADAP M25-NPT1/2-W	D.55
1262890000	ADAP M25-NPT3/4-W	D.55
1262900000	ADAP M25-NPT1-W	D.55
1262910000	ADAP M32-NPT3/4-W	D.55
1262930000	ADAP M32-NPT1-W	D.55
1262940000	ADAP M32-NPT1-1/4-W	D.55
1262950000	ADAP M32-NPT1-1/2-W	D.55
1262960000	ADAP M40-NPT1-W	D.55
1262970000	ADAP M40-NPT1-1/4-W	D.55
1262980000	ADAP M40-NPT1-1/2-W	D.55
1262990000	ADAP M40-NPT2-W	D.55
1263000000	ADAP M50-NPT1-1/4-W	D.55
1263010000	ADAP M50-NPT1-1/2-W	D.55
1263030000	ADAP M50-NPT2-W	D.55
1263150000	ADAP NPT1/2-M16-W	D.54
1263170000	ADAP NPT1/2-M20-W	D.54
1263180000	ADAP NPT3/4-M20-W	D.54
1263190000	ADAP NPT3/4-M25-W	D.54
1263200000	ADAP NPT1-M25-W	D.54
1263210000	ADAP NPT1-M32-W	D.54
1263220000	ADAP NPT1-1/4-M32-W	D.54
1263230000	ADAP NPT1-1/4-M40-W	D.54
1263240000	ADAP NPT1-1/2-M40-W	D.54
1263250000	ADAP NPT1-1/2-M50-W	D.54
1263270000	ADAP NPT2-M50-W	D.54
1265640000	ADAPS NPT1/2-NPT3/4-W	D.56
1265650000	ADAPS NPT3/4-NPT1/2-W	D.56
1265670000	ADAPS NPT3/4-NPT1-W	D.56
1265680000	ADAPS NPT1-NPT3/4-W	D.56
1265690000	ADAPS NPT1-NPT1-1/4-W	D.56
1265700000	ADAPS NPT1-1/4-NPT1-W	D.56
1265710000	ADAPS NPT1-1/4-NPT1-1/2	D.56
1265720000	ADAPS NPT1-1/2-NPT1-1/4	D.56
1265730000	ADAPS NPT1-1/2-NPT2-W	D.56
1265740000	ADAPS NPT2-NPT1-1/2-W	D.56

1270000000

1273890000	VG 16 HQ K68 6.5-9.5	D.15
1274150000	GFSC M5X10 TX20 SET	C.20
1274150000	GFSC M5X10 TX20 SET	C.21
1274150000	GFSC M5X10 TX20 SET	C.22
1274150000	GFSC M5X10 TX20 SET	C.23
1274150000	GFSC M5X10 TX20 SET	C.24
1274150000	GFSC M5X10 TX20 SET	C.25
1274150000	GFSC M5X10 TX20 SET	C.26
1274150000	GFSC M5X10 TX20 SET	C.27
1274150000	GFSC M5X10 TX20 SET	C.28
1274150000	GFSC M5X10 TX20 SET	C.29
1274150000	GFSC M5X10 TX20 SET	C.30
1274150000	GFSC M5X10 TX20 SET	C.31
1274150000	GFSC M5X10 TX20 SET	C.32
1274150000	GFSC M5X10 TX20 SET	C.33
1274150000	GFSC M5X10 TX20 SET	C.34
1274150000	GFSC M5X10 TX20 SET	C.35
1274150000	GFSC M5X10 TX20 SET	C.36
1274150000	GFSC M5X10 TX20 SET	C.37
1274150000	GFSC M5X10 TX20 SET	C.38
1274150000	GFSC M5X10 TX20 SET	C.39
1274150000	GFSC M5X10 TX20 SET	C.40
1274150000	GFSC M5X10 TX20 SET	C.41
1274150000	GFSC M5X10 TX20 SET	C.42
1274150000	GFSC M5X10 TX20 SET	C.43
1274150000	GFSC M5X10 TX20 SET	C.44
1274150000	GFSC M5X10 TX20 SET	C.45
1274150000	GFSC M5X10 TX20 SET	C.46
1274150000	GFSC M5X10 TX20 SET	C.47
1274150000	GFSC M5X10 TX20 SET	C.48
1274150000	GFSC M5X10 TX20 SET	C.49
1274150000	GFSC M5X10 TX20 SET	C.50
1274150000	GFSC M5X10 TX20 SET	C.51
1274150000	GFSC M5X10 TX20 SET	C.52
1274150000	GFSC M5X10 TX20 SET	C.53
1274150000	GFSC M5X10 TX20 SET	C.54
1274150000	GFSC M5X10 TX20 SET	C.55
1274150000	GFSC M5X10 TX20 SET	C.56
1274150000	GFSC M5X10 TX20 SET	C.57
1274150000	GFSC M5X10 TX20 SET	C.58
1274150000	GFSC M5X10 TX20 SET	C.59
1274150000	GFSC M5X10 TX20 SET	C.60
1274150000	GFSC M5X10 TX20 SET	C.98
1274150000	GFSC M5X10 TX20 SET	C.99
1274150000	GFSC M5X10 TX20 SET	C.100
1274150000	GFSC M5X10 TX20 SET	C.101
1274150000	GFSC M5X10 TX20 SET	C.102
1274150000	GFSC M5X10 TX20 SET	C.103
1274150000	GFSC M5X10 TX20 SET	C.104
1274150000	GFSC M5X10 TX20 SET	C.105
1274150000	GFSC M5X10 TX20 SET	C.106
1274150000	GFSC M5X10 TX20 SET	C.107
1274150000	GFSC M5X10 TX20 SET	C.108
1274150000	GFSC M5X10 TX20 SET	C.112
1274150000	GFSC M5X10 TX20 SET	C.113
1274150000	GFSC M5X10 TX20 SET	C.114
1274150000	GFSC M5X10 TX20 SET	C.115
1274150000	GFSC M5X10 TX20 SET	C.116
1274150000	GFSC M5X10 TX20 SET	C.117
1274150000	GFSC M5X10 TX20 SET	C.118
1274150000	GFSC M5X10 TX20 SET	C.119
1274150000	GFSC M5X10 TX20 SET	C.120
1274150000	GFSC M5X10 TX20 SET	C.121
1274150000	GFSC M5X10 TX20 SET	C.124
1274150000	GFSC M5X10 TX20 SET	C.125
1274150000	GFSC M5X10 TX20 SET	C.126
1274150000	GFSC M5X10 TX20 SET	C.127
1274150000	GFSC M5X10 TX20 SET	C.128
1274150000	GFSC M5X10 TX20 SET	C.129
1274150000	GFSC M5X10 TX20 SET	C.132
1274150000	GFSC M5X10 TX20 SET	C.133
1274150000	GFSC M5X10 TX20 SET	C.134
1274150000	GFSC M5X10 TX20 SET	C.135
1274150000	GFSC M5X10 TX20 SET	C.136
1274150000	GFSC M5X10 TX20 SET	C.137
1277220000	PEBZ M10 BR SET	C.186
1277220000	PEBZ M10 BR SET	C.187
1277220000	PEBZ M10 BR SET	C.188
1277220000	PEBZ M10 BR SET	C.189
1277220000	PEBZ M10 BR SET	C.190
1277220000	PEBZ M10 BR SET	C.191
1277220000	PEBZ M10 BR SET	C.192
1277220000	PEBZ M10 BR SET	C.193
1277220000	PEBZ M10 BR SET	C.194
1277220000	PEBZ M10 BR SET	C.212
1277220000	PEBZ M10 BR SET	C.213
1277220000	PEBZ M10 BR SET	C.214
1277220000	PEBZ M10 BR SET	C.215
1277220000	PEBZ M10 BR SET	C.216
1277220000	PEBZ M10 BR SET	C.217
1277220000	PEBZ M10 BR SET	C.218
1277220000	PEBZ M10 BR SET	C.219
1277220000	PEBZ M10 BR SET	C.220
1277220000	PEBZ M10 BR SET	C.221
1277220000	PEBZ M10 BR SET	C.222
1277220000	PEBZ M10 BR SET	C.223
1277220000	PEBZ M10 BR SET	C.224
1277220000	PEBZ M10 BR SET	C.225
1277220000	PEBZ M10 BR SET	C.226
1277220000	PEBZ M10 BR SET	C.227
1277220000	PEBZ M10 BR SET	C.228
1277220000	PEBZ M10 BR SET	C.256
1277220000	PEBZ M10 BR SET	C.257
1277220000	PEBZ M10 BR SET	C.258
1277220000	PEBZ M10 BR SET	C.259
1277220000	PEBZ M10 BR SET	C.260
1277220000	PEBZ M10 BR SET	C.264
1277220000	PEBZ M10 BR SET	C.265
1277220000	PEBZ M10 BR SET	C.266
1277220000	PEBZ M10 BR SET	C.267
1277220000	PEBZ M10 BR SET	C.268
1277220000	PEBZ M10 BR SET	C.269
1277220000	PEBZ M10 BR SET	C.270
1277220000	PEBZ M10 BR SET	C.271
1277220000	PEBZ M10 BR SET	C.272
1277220000	PEBZ M10 BR SET	C.276
1277220000	PEBZ M10 BR SET	C.277
1277220000	PEBZ M10 BR SET	C.278
1277250000	PEBZ M6 BR SET	C.179
1277250000	PEBZ M6 BR SET	C.180
1277250000	PEBZ M6 BR SET	C.181
1277250000	PEBZ M6 BR SET	C.182
1277250000	PEBZ M6 BR SET	C.183
1277250000	PEBZ M6 BR SET	C.184
1277250000	PEBZ M6 BR SET	C.185
1277250000	PEBZ M6 BR SET	C.186
1277250000	PEBZ M6 BR SET	C.187
1277250000	PEBZ M6 BR SET	C.188
1277250000	PEBZ M6 BR SET	C.189
1277250000	PEBZ M6 BR SET	C.190
1277250000	PEBZ M6 BR SET	C.191
1277250000	PEBZ M6 BR SET	C.192
1277250000	PEBZ M6 BR SET	C.193
1277250000	PEBZ M6 BR SET	C.194
1277250000	PEBZ M6 BR SET	C.212
1277250000	PEBZ M6 BR SET	C.213
1277250000	PEBZ M6 BR SET	C.214
1277250000	PEBZ M6 BR SET	C.215
1277250000	PEBZ M6 BR SET	C.216
1277250000	PEBZ M6 BR SET	C.217
1277250000	PEBZ M6 BR SET	C.218
1277250000	PEBZ M6 BR SET	C.219
1277250000	PEBZ M6 BR SET	C.220
1277250000	PEBZ M6 BR SET	C.221
1277250000	PEBZ M6 BR SET	C.222
1277250000	PEBZ M6 BR SET	C.223
1277250000	PEBZ M6 BR SET	C.224
1277250000	PEBZ M6 BR SET	C.225
1277250000	PEBZ M6 BR SET	C.226
1277250000	PEBZ M6 BR SET	C.227
1277250000	PEBZ M6 BR SET	C.228
1277250000	PEBZ M6 BR SET	C.256
1277250000	PEBZ M6 BR SET	C.257
1277250000	PEBZ M6 BR SET	C.258
1277250000	PEBZ M6 BR SET	C.259
1277250000	PEBZ M6 BR SET	C.260
1277250000	PEBZ M6 BR SET	C.264
1277250000	PEBZ M6 BR SET	C.265
1277250000	PEBZ M6 BR SET	C.266
1277250000	PEBZ M6 BR SET	C.267
1277250000	PEBZ M6 BR SET	C.268
1277250000	PEBZ M6 BR SET	C.269
1277250000	PEBZ M6 BR SET	C.270
1277250000	PEBZ M6 BR SET	C.271
1277250000	PEBZ M6 BR SET	C.272
1277250000	PEBZ M6 BR SET	C.276
1277250000	PEBZ M6 BR SET	C.277
1277250000	PEBZ M6 BR SET	C.278
1279320000	TPSDHA KTB 70X70M3 S2 R	C.20
1279320000	TPSDHA KTB 70X70M3 S2 R	C.21
1279320000	TPSDHA KTB 70X70M3 S2 R	C.22
1279320000	TPSDHA KTB 70X70M3 S2 R	C.23
1279320000	TPSDHA KTB 70X70M3 S2 R	C.24
1279320000	TPSDHA KTB 70X70M3 S2 R	C.25
1279320000	TPSDHA KTB 70X70M3 S2 R	C.26
1279320000	TPSDHA KTB 70X70M3 S2 R	C.27
1279320000	TPSDHA KTB 70X70M3 S2 R	C.28
1279320000	TPSDHA KTB 70X70M3 S2 R	C.29
1279320000	TPSDHA KTB 70X70M3 S2 R	C.30
1279320000	TPSDHA KTB 70X70M3 S2 R	C.31
1279320000	TPSDHA KTB 70X70M3 S2 R	C.32
1279320000	TPSDHA KTB 70X70M3 S2 R	C.33
1279320000	TPSDHA KTB 70X70M3 S2 R	C.34
1279320000	TPSDHA KTB 70X70M3 S2 R	C.35
1279320000	TPSDHA KTB 70X70M3 S2 R	C.36
1279320000	TPSDHA KTB 70X70M3 S2 R	C.37
1279320000	TPSDHA KTB 70X70M3 S2 R	C.38
1279320000	TPSDHA KTB 70X70M3 S2 R	C.39
1279320000	TPSDHA KTB 70X70M3 S2 R	C.40
1279320000	TPSDHA KTB 70X70M3 S2 R	C.41
1279320000	TPSDHA KTB 70X70M3 S2 R	C.42
1279320000	TPSDHA KTB 70X70M3 S2 R	C.43
1279320000	TPSDHA KTB 70X70M3 S2 R	C.44
1279320000	TPSDHA KTB 70X70M3 S2 R	C.45
1279320000	TPSDHA KTB 70X70M3 S2 R	C.46
1279320000	TPSDHA KTB 70X70M3 S2 R	C.47
1279320000	TPSDHA KTB 70X70M3 S2 R	C.48
1279320000	TPSDHA KTB 70X70M3 S2 R	C.49
1279320000	TPSDHA KTB 70X70M3 S2 R	C.50
1279320000	TPSDHA KTB 70X70M3 S2 R	C.51
1279320000	TPSDHA KTB 70X70M3 S2 R	C.52
1279320000	TPSDHA KTB 70X70M3 S2 R	C.53
1279320000	TPSDHA KTB 70X70M3 S2 R	C.54
1279320000	TPSDHA KTB 70X70M3 S2 R	C.55
1279320000	TPSDHA KTB 70X70M3 S2 R	C.56
1279320000	TPSDHA KTB 70X70M3 S2 R	C.57
1279320000	TPSDHA KTB 70X70M3 S2 R	C.58
1279320000	TPSDHA KTB 70X70M3 S2 R	C.59
1279320000	TPSDHA KTB 70X70M3 S2 R	C.60
1279320000	TPSDHA KTB 70X70M3 S2 R	C.70
1279320000	TPSDHA KTB 70X70M3 S2 R	C.71
1279320000	TPSDHA KTB 70X70M3 S2 R	C.72

Order No.	Type	Page
1280000000		
1280890000	KTB GP XX1513 AB S4 3MM	C.70
1280910000	KTB GP 262615 AB S4	C.71
1281130000	KTB GP XX4820 AB S4 3MM	C.72
1281360000	KTB RNHD 221513 R	C.20
1281360000	KTB RNHD 221513 R	C.70
1281370000	KTB RNHD 262615 R	C.21
1281370000	KTB RNHD 262615 R	C.71
1281380000	KTB RNHD 262620 R	C.22
1281390000	KTB RNHD 303015 R	C.24
1281400000	KTB RNHD 303020 R	C.25
1281410000	KTB RNHD 352615 R	C.26
1281420000	KTB RNHD 352620 R	C.27
1281430000	KTB RNHD 403015 R	C.31
1281440000	KTB RNHD 403020 R	C.32
1281450000	KTB RNHD 453815 R	C.35
1281460000	KTB RNHD 453820 R	C.36
1281470000	KTB RNHD 484815 R	C.38
1281480000	KTB RNHD 484820 R	C.39
1281480000	KTB RNHD 484820 R	C.72
1281490000	KTB RNHD 553515 R	C.43
1281500000	KTB RNHD 553520 R	C.44
1281510000	KTB RNHD 624515 R	C.46
1281520000	KTB RNHD 624520 R	C.47
1281530000	KTB RNHD 765015 R	C.52
1281540000	KTB RNHD 765020 R	C.53
1281550000	KTB RNHD 916115 R	C.56
1281570000	KTB RNHD 916120 R	C.57
1281580000	KTB RNHD 987420 R	C.60
1283430000	PEBZ M6 S4 SET	C.179
1283430000	PEBZ M6 S4 SET	C.180
1283430000	PEBZ M6 S4 SET	C.181
1283430000	PEBZ M6 S4 SET	C.182
1283430000	PEBZ M6 S4 SET	C.183
1283430000	PEBZ M6 S4 SET	C.184
1283430000	PEBZ M6 S4 SET	C.185
1283430000	PEBZ M6 S4 SET	C.186
1283430000	PEBZ M6 S4 SET	C.187
1283430000	PEBZ M6 S4 SET	C.188
1283430000	PEBZ M6 S4 SET	C.189
1283430000	PEBZ M6 S4 SET	C.190
1283430000	PEBZ M6 S4 SET	C.191
1283430000	PEBZ M6 S4 SET	C.192
1283430000	PEBZ M6 S4 SET	C.193
1283430000	PEBZ M6 S4 SET	C.194
1283430000	PEBZ M6 S4 SET	C.212
1283430000	PEBZ M6 S4 SET	C.213
1283430000	PEBZ M6 S4 SET	C.214
1283430000	PEBZ M6 S4 SET	C.215
1283430000	PEBZ M6 S4 SET	C.216
1283430000	PEBZ M6 S4 SET	C.217
1283430000	PEBZ M6 S4 SET	C.218
1283430000	PEBZ M6 S4 SET	C.219
1283430000	PEBZ M6 S4 SET	C.220
1283430000	PEBZ M6 S4 SET	C.221
1283430000	PEBZ M6 S4 SET	C.222
1283430000	PEBZ M6 S4 SET	C.223
1283430000	PEBZ M6 S4 SET	C.224
1283430000	PEBZ M6 S4 SET	C.225
1283430000	PEBZ M6 S4 SET	C.226
1283430000	PEBZ M6 S4 SET	C.227
1283430000	PEBZ M6 S4 SET	C.228
1283430000	PEBZ M6 S4 SET	C.256
1283430000	PEBZ M6 S4 SET	C.257
1283430000	PEBZ M6 S4 SET	C.258
1283430000	PEBZ M6 S4 SET	C.259
1283430000	PEBZ M6 S4 SET	C.260
1283430000	PEBZ M6 S4 SET	C.264
1283430000	PEBZ M6 S4 SET	C.265
1283430000	PEBZ M6 S4 SET	C.266
1283430000	PEBZ M6 S4 SET	C.267
1283430000	PEBZ M6 S4 SET	C.268
1283430000	PEBZ M6 S4 SET	C.269
1283430000	PEBZ M6 S4 SET	C.270
1283430000	PEBZ M6 S4 SET	C.271
1283430000	PEBZ M6 S4 SET	C.272
1283430000	PEBZ M6 S4 SET	C.276
1283430000	PEBZ M6 S4 SET	C.277
1283430000	PEBZ M6 S4 SET	C.278
1283440000	PEBZ M10 S4 SET	C.186
1283440000	PEBZ M10 S4 SET	C.187
1283440000	PEBZ M10 S4 SET	C.188
1283440000	PEBZ M10 S4 SET	C.189
1283440000	PEBZ M10 S4 SET	C.190
1283440000	PEBZ M10 S4 SET	C.191
1283440000	PEBZ M10 S4 SET	C.192
1283440000	PEBZ M10 S4 SET	C.193
1283440000	PEBZ M10 S4 SET	C.194
1283440000	PEBZ M10 S4 SET	C.212
1283440000	PEBZ M10 S4 SET	C.213
1283440000	PEBZ M10 S4 SET	C.214
1283440000	PEBZ M10 S4 SET	C.215
1283440000	PEBZ M10 S4 SET	C.216
1283440000	PEBZ M10 S4 SET	C.217
1283440000	PEBZ M10 S4 SET	C.218
1283440000	PEBZ M10 S4 SET	C.219
1283440000	PEBZ M10 S4 SET	C.220
1283440000	PEBZ M10 S4 SET	C.221

Order No.	Type	Page
1283440000	PEBZ M10 S4 SET	C.222
1283440000	PEBZ M10 S4 SET	C.223
1283440000	PEBZ M10 S4 SET	C.224
1283440000	PEBZ M10 S4 SET	C.225
1283440000	PEBZ M10 S4 SET	C.226
1283440000	PEBZ M10 S4 SET	C.227
1283440000	PEBZ M10 S4 SET	C.228
1283440000	PEBZ M10 S4 SET	C.256
1283440000	PEBZ M10 S4 SET	C.257
1283440000	PEBZ M10 S4 SET	C.258
1283440000	PEBZ M10 S4 SET	C.259
1283440000	PEBZ M10 S4 SET	C.260
1283440000	PEBZ M10 S4 SET	C.264
1283440000	PEBZ M10 S4 SET	C.265
1283440000	PEBZ M10 S4 SET	C.266
1283440000	PEBZ M10 S4 SET	C.267
1283440000	PEBZ M10 S4 SET	C.268
1283440000	PEBZ M10 S4 SET	C.269
1283440000	PEBZ M10 S4 SET	C.270
1283440000	PEBZ M10 S4 SET	C.271
1283440000	PEBZ M10 S4 SET	C.272
1283440000	PEBZ M10 S4 SET	C.276
1283440000	PEBZ M10 S4 SET	C.277
1283440000	PEBZ M10 S4 SET	C.278
1283450000	TPSDHA KTB 130X50 S2 R	C.21
1283450000	TPSDHA KTB 130X50 S2 R	C.22
1283450000	TPSDHA KTB 130X50 S2 R	C.24
1283450000	TPSDHA KTB 130X50 S2 R	C.25
1283450000	TPSDHA KTB 130X50 S2 R	C.26
1283450000	TPSDHA KTB 130X50 S2 R	C.27
1283450000	TPSDHA KTB 130X50 S2 R	C.30
1283450000	TPSDHA KTB 130X50 S2 R	C.31
1283450000	TPSDHA KTB 130X50 S2 R	C.32
1283450000	TPSDHA KTB 130X50 S2 R	C.35
1283450000	TPSDHA KTB 130X50 S2 R	C.36
1283450000	TPSDHA KTB 130X50 S2 R	C.37
1283450000	TPSDHA KTB 130X50 S2 R	C.38
1283450000	TPSDHA KTB 130X50 S2 R	C.39
1283450000	TPSDHA KTB 130X50 S2 R	C.42
1283450000	TPSDHA KTB 130X50 S2 R	C.43
1283450000	TPSDHA KTB 130X50 S2 R	C.44
1283450000	TPSDHA KTB 130X50 S2 R	C.46
1283450000	TPSDHA KTB 130X50 S2 R	C.47
1283450000	TPSDHA KTB 130X50 S2 R	C.52
1283450000	TPSDHA KTB 130X50 S2 R	C.53
1283450000	TPSDHA KTB 130X50 S2 R	C.56
1283450000	TPSDHA KTB 130X50 S2 R	C.57
1283450000	TPSDHA KTB 130X50 S2 R	C.60
1283450000	TPSDHA KTB 130X50 S2 R	C.71
1283450000	TPSDHA KTB 130X50 S2 R	C.72
1285200000	SD FIXING SET	C.20
1285200000	SD FIXING SET	C.21
1285200000	SD FIXING SET	C.22
1285200000	SD FIXING SET	C.23
1285200000	SD FIXING SET	C.24
1285200000	SD FIXING SET	C.25
1285200000	SD FIXING SET	C.26
1285200000	SD FIXING SET	C.27
1285200000	SD FIXING SET	C.28
1285200000	SD FIXING SET	C.29
1285200000	SD FIXING SET	C.30
1285200000	SD FIXING SET	C.31
1285200000	SD FIXING SET	C.32
1285200000	SD FIXING SET	C.33
1285200000	SD FIXING SET	C.34
1285200000	SD FIXING SET	C.35
1285200000	SD FIXING SET	C.36
1285200000	SD FIXING SET	C.37
1285200000	SD FIXING SET	C.38
1285200000	SD FIXING SET	C.39
1285200000	SD FIXING SET	C.40
1285200000	SD FIXING SET	C.41
1285200000	SD FIXING SET	C.42
1285200000	SD FIXING SET	C.43
1285200000	SD FIXING SET	C.44
1285200000	SD FIXING SET	C.45
1285200000	SD FIXING SET	C.46
1285200000	SD FIXING SET	C.47
1285200000	SD FIXING SET	C.48
1285200000	SD FIXING SET	C.49
1285200000	SD FIXING SET	C.50
1285200000	SD FIXING SET	C.51
1285200000	SD FIXING SET	C.52
1285200000	SD FIXING SET	C.53
1285200000	SD FIXING SET	C.54
1285200000	SD FIXING SET	C.55
1285200000	SD FIXING SET	C.56
1285200000	SD FIXING SET	C.57
1285200000	SD FIXING SET	C.58
1285200000	SD FIXING SET	C.59
1285200000	SD FIXING SET	C.60
1300000000		
1305810000	KLIPPON POK 080806	C.210
1305810000	KLIPPON POK 080806	C.212
1305810000	KLIPPON POK 080806	C.230
1305820000	KLIPPON POK 081106	C.210
1305820000	KLIPPON POK 081106	C.213

Order No.	Type	Page
1305820000	KLIPPON POK 081106	C.230
1305830000	KLIPPON POK 081606	C.210
1305830000	KLIPPON POK 081606	C.214
1305830000	KLIPPON POK 081606	C.230
1305840000	KLIPPON POK 081906	C.210
1305840000	KLIPPON POK 081906	C.215
1305850000	KLIPPON POK 082306	C.210
1305850000	KLIPPON POK 082306	C.216
1305870000	KLIPPON POK 121209	C.210
1305870000	KLIPPON POK 121209	C.217
1305870000	KLIPPON POK 121209	C.230
1305880000	KLIPPON POK 122209	C.210
1305880000	KLIPPON POK 122209	C.218
1305890000	KLIPPON POK 161609	C.210
1305890000	KLIPPON POK 161609	C.219
1305890000	KLIPPON POK 161609	C.230
1305900000	KLIPPON POK 162609	C.210
1305900000	KLIPPON POK 162609	C.220
1305910000	KLIPPON POK 163609	C.210
1305910000	KLIPPON POK 163609	C.221
1305920000	KLIPPON POK 165609	C.210
1305920000	KLIPPON POK 165609	C.222
1305930000	KLIPPON POK 252512	C.210
1305930000	KLIPPON POK 252512	C.223
1305930000	KLIPPON POK 252512	C.250
1305930000	KLIPPON POK 252512	C.251
1305930000	KLIPPON POK 252512	C.252
1305930000	KLIPPON POK 252512	C.253
1305940000	KLIPPON POK 254012	C.210
1305940000	KLIPPON POK 254012	C.225
1305950000	KLIPPON POK 256012	C.210
1305950000	KLIPPON POK 256012	C.227
1305970000	KLIPPON POK 404012	C.210
1305970000	KLIPPON POK 404012	C.228
1305980000	KLIPPON POK 252516	C.210
1305980000	KLIPPON POK 252516	C.224
1305990000	KLIPPON POK 254016	C.210
1305990000	KLIPPON POK 254016	C.226
1306000000	KLIPPON POK 080806 EX	C.210
1306000000	KLIPPON POK 080806 EX	C.212
1306010000	KLIPPON POK 081106 EX	C.210
1306010000	KLIPPON POK 081106 EX	C.213
1306020000	KLIPPON POK 081606 EX	C.210
1306020000	KLIPPON POK 081606 EX	C.214
1306030000	KLIPPON POK 081906 EX	C.210
1306030000	KLIPPON POK 081906 EX	C.215
1306040000	KLIPPON POK 082306 EX	C.210
1306040000	KLIPPON POK 082306 EX	C.216
1306050000	KLIPPON POK 121209 EX	C.210
1306050000	KLIPPON POK 121209 EX	C.217
1306070000	KLIPPON POK 122209 EX	C.210
1306070000	KLIPPON POK 122209 EX	C.218
1306080000	KLIPPON POK 161609 EX	C.210
1306080000	KLIPPON POK 161609 EX	C.219
1306090000	KLIPPON POK 162609 EX	C.210
1306090000	KLIPPON POK 162609 EX	C.220
1306100000	KLIPPON POK 163609 EX	C.210
1306100000	KLIPPON POK 163609 EX	C.221
1306110000	KLIPPON POK 165609 EX	C.210
1306110000	KLIPPON POK 165609 EX	C.222
1306120000	KLIPPON POK 252512 EX	C.210
1306120000	KLIPPON POK 252512 EX	C.223
1306130000	KLIPPON POK 254012 EX	C.210
1306130000	KLIPPON POK 254012 EX	C.225
1306140000	KLIPPON POK 256012 EX	C.210
1306140000	KLIPPON POK 256012 EX	C.227
1306150000	KLIPPON POK 404012 EX	C.210
1306150000	KLIPPON POK 404012 EX	C.228
1306170000	KLIPPON POK 252516 EX	C.210
1306170000	KLIPPON POK 252516 EX	C.224
1306180000	KLIPPON POK 254016 EX	C.210
1306180000	KLIPPON POK 254016 EX	C.226
1310000000		
1314090000	KTB RNHD XX1513 S4E R	C.20
1314100000	KTB RNHD 262615 S4E R	C.21
1314110000	KTB RNHD 262620 S4E R	C.22
1314120000	KTB RNHD 303015 S4E R	C.24
1314130000	KTB RNHD 303020 S4E R	C.25
1314140000	KTB RNHD XX2615 S4E R	C.26
1314150000	KTB RNHD XX2620 S4E R	C.27
1314170000	KTB RNHD XX3015 S4E R	C.31
1314180000	KTB RNHD XX3020 S4E R	C.32
1314190000	KTB RNHD XX3815 S4E R	C.35
1314200000	KTB RNHD XX3820 S4E R	C.36
1314220000	KTB RNHD XX4815 S4E R	C.38
1314230000	KTB RNHD XX4820 S4E R	C.39
1314240000	KTB RNHD 553515 S4E R	C.43
1314250000	KTB RNHD 553520 S4E R	C.44
1314270000	KTB RNHD XX4515 S4E R	C.46
1314280000	KTB RNHD XX4520 S4E R	C.47
1314290000	KTB RNHD 765015 S4E R	C.52
1314300000	KTB RNHD 765020 S4E R	C.53
1314320000	KTB RNHD XX6115 S4E R	C.56
1314330000	KTB RNHD XX6120 S4E R	C.57
1314340000	KTB RNHD XX7420 S4E R	C.60

Order No.	Type	Page
1320000000		
1328120000	KLIPPON K21 EX RAL7001	C.150
1328130000	KLIPPON K51 EX RAL7001	C.150
1328140000	KLIPPON K61 EX RAL7001	C.150
1329630000	KLIPPON K1 EX RAL7001	C.150
1329640000	KLIPPON K11 EX RAL7001	C.150
1329650000	KLIPPON K2 EX RAL7001	C.150
1329670000	KLIPPON K3 EX RAL7001	C.150
1329680000	KLIPPON K31 EX RAL7001	C.150
1329690000	KLIPPON K32 EX RAL7001	C.150
1329700000	KLIPPON K4 EX RAL7001	C.150
1329710000	KLIPPON K41 EX RAL7001	C.150
1329720000	KLIPPON K5 EX RAL7001	C.150
1329730000	KLIPPON K52 EX RAL7001	C.150
1329740000	KLIPPON K6 EX RAL7001	C.150
1329750000	KLIPPON K7 EX RAL7001	C.150
1329770000	KLIPPON K71 EX RAL7001	C.150
1390000000		
1390910000	KLIPPON COPL 080806	C.212
1390920000	KLIPPON COPL 081106	C.213
1390930000	KLIPPON COPL 081606	C.214
1390940000	KLIPPON COPL 081906	C.215
1390950000	KLIPPON COPL 082306	C.216
1390970000	KLIPPON COPL 121209	C.217
1390980000	KLIPPON COPL 122209	C.218
1390990000	KLIPPON COPL 161609	C.219
1391000000	KLIPPON COPL 162609	C.220
1391010000	KLIPPON COPL 163609	C.221
1391020000	KLIPPON COPL 165609	C.222
1391030000	KLIPPON COPL 252512/16	C.223
1391030000	KLIPPON COPL 252512/16	C.224
1391040000	KLIPPON COPL 254012/16	C.225
1391040000	KLIPPON COPL 254012/16	C.226
1391050000	KLIPPON COPL 256012	C.227
1391070000	KLIPPON COPL 404012	C.228
1420000000		
1424090000	ADAP NPT3/4-NPT1-1/2-W	D.54
1424110000	ADAP NPT1-NPT1-1/2-W	D.54
1460000000		
1460040000	VG M16 EXE MS	C.70
1460050000	VG M20 EXE MS	C.70
1460050000	VG M20 EXE MS	C.71
1460050000	VG M20 EXE MS	C.72
1460050000	VG M20 EXE MS	C.152
1460050000	VG M20 EXE MS	C.153
1460070000	VG M25 EXE MS	C.72
1460070000	VG M25 EXE MS	C.154
1460080000	VG M32 EXE MS	C.71
1460090000	VG M40 EXE MS	C.72
1463720000	VGM25-MS68 EMC 11-20SET	D.12
1463730000	VGM32-MS68 EMC 15-25SET	D.12
1530000000		
1534280000	POK MOPL 0808 MINI	C.212
1534290000	POK MOPL 0811 MINI	C.213
1534310000	POK MOPL 0816 MINI	C.214
1534320000	POK MOPL 0819 MINI	C.215
1534330000	POK MOPL 0823 MINI	C.216
1534340000	POK MOPL 1212 MINI	C.217
1534350000	POK MOPL 1222 MINI	C.218
1534360000	POK MOPL 1616 MINI	C.219
1534370000	POK MOPL 1626 MINI	C.220
1534380000	POK MOPL 1636 MINI	C.221
1534390000	POK MOPL 1656 MINI	C.222
1534410000	POK MOPL 2525 MINI	C.223
1534410000	POK MOPL 2525 MINI	C.224
1534420000	POK MOPL 2540 MINI	C.225
1534420000	POK MOPL 2540 MINI	C.226
1534430000	POK MOPL 2560 MINI	C.227
1534440000	POK MOPL 4040 MINI	C.228
1537070000	KLIPPON CS POK 121209-2	C.242
1537080000	KLIPPON CS POK 121209-2	C.242
1537090000	KLIPPON CS POK 121209-2	C.243
1537100000	KLIPPON CS POK 121209-2	C.243
1537110000	KLIPPON CS POK 121209-4	C.243
1537120000	KLIPPON CS POK 121209-4	C.244
1537130000	KLIPPON CS POK 121209-4	C.244
1537140000	KLIPPON CS POK 122209-2	C.245
1537150000	KLIPPON CS POK 122209-2	C.245
1537170000	KLIPPON CS POK 122209-2	C.245
1537180000	KLIPPON CS POK 122209-4	C.246
1537200000	KLIPPON CS STB 1-1	C.160
1537210000	KLIPPON CS STB 1-1	C.160
1537220000	KLIPPON CS STB 1-1	C.161
1537230000	KLIPPON CS STB 1-1	C.161
1537240000	KLIPPON CS STB 1-2	C.161
1537250000	KLIPPON CS STB 1-2	C.162
1537280000	KLIPPON CS STB 1-2	C.162
1537290000	KLIPPON CS STB 1-2	C.163
1537300000	KLIPPON CS STB 2.1-2	C.163
1537310000	KLIPPON CS STB 2.1-2	C.163

Order No.	Type	Page
1537320000	KLIPPON CS STB 2.1-2	C.164
1537330000	KLIPPON CS STB 2.1-6	C.164
1537340000	KLIPPON CS STB 2.1-7	C.165
1537370000	KLIPPON CS STB 2.1-7	C.165
1537470000	KLIPPON CS K41-1	C.202
1537480000	KLIPPON CS K41-1	C.202
1537490000	KLIPPON CS K41-1	C.203
1537500000	KLIPPON CS K41-1	C.203
1537510000	KLIPPON CS K41-4	C.203
1537520000	KLIPPON CS K41-4	C.204
1537530000	KLIPPON CS K41-4	C.204
1537540000	KLIPPON CS K51-2	C.205
1537550000	KLIPPON CS K51-2	C.205
1537570000	KLIPPON CS K51-2	C.205
1537580000	KLIPPON CS K51-4	C.206

1560000000

1565240000	KLIPPON K01	C.150
1565240000	KLIPPON K01	C.177
1565240000	KLIPPON K01	C.196
1565250000	KLIPPON K02	C.150
1565250000	KLIPPON K02	C.178
1565260000	KLIPPON K32	C.150
1565260000	KLIPPON K32	C.185
1565270000	KLIPPON K41	C.150
1565270000	KLIPPON K41	C.187
1565270000	KLIPPON K41	C.196
1565280000	KLIPPON K51	C.150
1565280000	KLIPPON K51	C.189
1565290000	KLIPPON K52	C.150
1565290000	KLIPPON K52	C.190
1565290000	KLIPPON K52	C.196
1567480000	FKSC M4X6 D8/SW2	C.256
1567480000	FKSC M4X6 D8/SW2	C.257
1567480000	FKSC M4X6 D8/SW2	C.258
1567480000	FKSC M4X6 D8/SW2	C.259
1567480000	FKSC M4X6 D8/SW2	C.260
1567480000	FKSC M4X6 D8/SW2	C.264
1567480000	FKSC M4X6 D8/SW2	C.265
1567480000	FKSC M4X6 D8/SW2	C.266
1567480000	FKSC M4X6 D8/SW2	C.267
1567480000	FKSC M4X6 D8/SW2	C.268
1567480000	FKSC M4X6 D8/SW2	C.269
1567480000	FKSC M4X6 D8/SW2	C.270
1567480000	FKSC M4X6 D8/SW2	C.271
1567480000	FKSC M4X6 D8/SW2	C.272
1567480000	FKSC M4X6 D8/SW2	C.276
1567480000	FKSC M4X6 D8/SW2	C.277
1567480000	FKSC M4X6 D8/SW2	C.278
1567660000	TS35X7.5 ST STB 2.1 STB 3	C.145
1567660000	TS35X7.5 ST STB 2.1 STB 3	C.146
1568970000	VG 7-K68	D.6
1568980000	VG 9-K68	D.6
1568990000	VG 11-K68	D.6
1569000000	VG 13.5-K68	D.6
1569010000	VG 16-K68	D.6
1569020000	VG 21-K68	D.6
1569030000	VG 29-K68	D.6
1569040000	VG 36-K68	D.6
1569050000	VG 42-K68	D.6
1569060000	VG 7-MS68	D.8
1569070000	VG 9-MS68	D.8
1569080000	VG 11-MS68	D.8
1569090000	VG 13,5-MS68	D.8
1569100000	VG 16-MS68	D.8
1569110000	VG 21-MS68	D.8
1569120000	VG 29-MS68	D.8
1569130000	VG 36-MS68	D.8
1569140000	VG 42-MS68	D.8

1580000000

1580360000	HG K+POK	C.180
1580360000	HG K+POK	C.182
1580360000	HG K+POK	C.184
1580360000	HG K+POK	C.186
1580360000	HG K+POK	C.187
1580360000	HG K+POK	C.188
1580360000	HG K+POK	C.189
1580360000	HG K+POK	C.190
1580360000	HG K+POK	C.191
1580360000	HG K+POK	C.192
1580360000	HG K+POK	C.193
1580360000	HG K+POK	C.194

1650000000

1656390000	KV 11-M	D.10
1656400000	KV 13-M	D.10
1656410000	KV 16-M	D.10
1656420000	KV 21-M	D.10
1656430000	KV 29-M	D.10

1690000000

1694070000	SKMU PG7-MS	D.36
1694080000	SKMU PG9-MS	D.36
1694090000	SKMU PG11-MS	D.36
1694100000	SKMU PG13,5-MS	D.36
1694110000	SKMU PG16-MS	D.36
1697440000	SKMU PG7-K GR	D.34
1697450000	SKMU PG9-K GR	D.34
1697460000	SKMU PG11-K GR	D.34
1697470000	SKMU PG 13,5-K GR	D.34
1697480000	SKMU PG16-K GR	D.34
1698220000	SKMU PG21-K GR	D.34
1698230000	SKMU PG29-K GR	D.34
1698240000	SKMU PG36-K GR	D.34
1698250000	SKMU PG42-K GR	D.34

1710000000

1718770000	VG 48-K68	D.6
1718790000	VG 48-MS68	D.8
1718900000	SKMU EMV PG7	D.38
1718910000	SKMU EMV PG9	D.38
1718920000	SKMU EMV PG11	D.38
1718930000	SKMU EMV PG13,5	D.38
1718940000	SKMU EMV PG16	D.38
1718950000	SKMU EMV PG21	D.38
1718960000	SKMU EMV PG29	D.38
1719090000	SKMU PG48-K GR	D.34
1719100000	SKMU PG7-K SW	D.35
1719110000	SKMU PG9-K SW	D.35
1719120000	SKMU PG11-K SW	D.35
1719130000	SKMU PG13,5-K SW	D.35
1719140000	SKMU PG16-K SW	D.35
1719150000	SKMU PG21-K SW	D.35
1719160000	SKMU PG29-K SW	D.35
1719170000	SKMU PG36-K SW	D.35
1719180000	SKMU PG42-K SW	D.35
1719190000	SKMU PG48-K SW	D.35
1719200000	SKMU PG21-MS	D.36
1719210000	SKMU PG29-MS	D.36
1719220000	SKMU PG36-MS	D.36
1719230000	SKMU PG42-MS	D.36
1719240000	SKMU PG48-MS	D.36
1719250000	VP 7-K54	D.45
1719260000	VP 48-K54	D.45
1719270000	VP 48-MS65	D.46
1719440000	GWDR PG7-PO	D.40
1719450000	GWDR PG9-PO	D.40
1719460000	GWDR PG11-PO	D.40
1719470000	GWDR PG13,5-PO	D.40
1719480000	GWDR PG16-PO	D.40
1719490000	GWDR PG21-PO	D.40
1719500000	GWDR PG29-PO	D.40
1719510000	GWDR PG36-PO	D.40
1719520000	GWDR PG42-PO	D.40
1719530000	GWDR PG48-PO	D.40
1719540000	GWDR PG7-NP	D.41
1719550000	GWDR PG9-NP	D.41
1719560000	GWDR PG11-NP	D.41
1719570000	GWDR PG13,5-NP	D.41
1719580000	GWDR PG16-NP	D.41
1719590000	GWDR PG21-NP	D.41
1719600000	GWDR PG29-NP	D.41
1719610000	GWDR PG36-NP	D.41
1719620000	GWDR PG42-NP	D.41
1719630000	GWDR PG48-NP	D.41

1720000000

1720470000	VG 7-K68 SKS	D.7
1720480000	VG 9-K68 SKS	D.7
1720490000	VG 11-K68 SKS	D.7
1720500000	VG 13.5-K68 SKS	D.7
1720510000	VG 16-K68 SKS	D.7
1720520000	VG 21-K68 SKS	D.7

1730000000

1736230000	GWDR M16-NP	D.41
1736240000	GWDR M20-NP	D.41
1736250000	GWDR M25-NP	C.168
1736250000	GWDR M25-NP	C.170
1736250000	GWDR M25-NP	C.250
1736250000	GWDR M25-NP	C.252
1736250000	GWDR M25-NP	D.41
1736260000	GWDR M32-NP	C.169
1736260000	GWDR M32-NP	C.171
1736260000	GWDR M32-NP	C.251
1736260000	GWDR M32-NP	C.253
1736260000	GWDR M32-NP	D.41
1736270000	GWDR M40-NP	D.41
1736280000	GWDR M50-NP	D.41
1736290000	GWDR M63-NP	D.41
1736300000	SZS M16	D.44
1736310000	SZS M20	D.44
1736320000	SZS M25	D.44
1736330000	SZS M32	D.44
1736340000	SZS M40	D.44
1736350000	SZS M50	D.44
1736360000	SZS M63	D.44
1736480000	EA-RING MS/M 16	D.43
1736490000	EA-RING MS/M 20	D.43
1736500000	EA-RING MS/M 25	D.43
1736510000	EA-RING MS/M 32	D.43
1736520000	EA-RING MS/M 40	D.43
1736530000	EA-RING MS/M 50	D.43
1736540000	EA-RING MS/M 63	D.43
1736550000	EA-RING MS/M 75	D.43
1736920000	SKMU M16 K SW	D.35
1736930000	SKMU M20 K SW	D.35
1736940000	SKMU M25 K SW	D.35
1736950000	SKMU M32 K SW	D.35
1736960000	SKMU M40 K SW	D.35
1736970000	SKMU M50 K SW	D.35
1736980000	SKMU M63 K SW	D.35
1736990000	SKMU M16 MS	C.70
1736990000	SKMU M16 MS	D.36
1737000000	SKMU M20 MS	C.70
1737000000	SKMU M20 MS	C.71
1737000000	SKMU M20 MS	C.72
1737000000	SKMU M20 MS	C.152
1737000000	SKMU M20 MS	C.153
1737000000	SKMU M20 MS	D.36
1737010000	SKMU M25 MS	C.72
1737010000	SKMU M25 MS	C.154
1737010000	SKMU M25 MS	D.36
1737020000	SKMU M32 MS	C.71
1737020000	SKMU M32 MS	D.36
1737030000	SKMU M40 MS	C.72
1737030000	SKMU M40 MS	D.36
1737040000	SKMU M50 MS	D.36
1737050000	SKMU M63 MS	D.36
1737060000	SKMU M75 MS	D.36

1770000000

1772200000	VG M12 - MS 68	D.8
1772210000	VG M16 - MS 68	D.8
1772220000	VG M20 - MS 68	D.8
1772230000	VG M25 - MS 68	D.8
1772240000	VG M32 - MS 68	D.8
1772250000	VG M40 - MS 68	D.8
1772260000	VG M50 - MS 68	D.8
1772270000	VG M63 - MS 68	D.8
1772280000	VG M12-1/K68	D.6
1772290000	VG M16 - K 68	D.6
1772300000	VG M20-1/K68	D.6
1772310000	VG M25 - K 68	D.6
1772320000	VG M32 - K 68	D.6
1772330000	VG M40 - K 68	D.6
1772340000	VG M50 - K 68	D.6
1772350000	VG M63-1/K68	D.6
1772360000	SKMU M12 MS	D.36
1772440000	SKMU M12 - K GR	D.34
1772450000	SKMU M16 - K GR	D.34
1772460000	SKMU M20 - K GR	D.34
1772470000	SKMU M25 - K GR	C.168
1772470000	SKMU M25 - K GR	C.170
1772470000	SKMU M25 - K GR	C.250
1772470000	SKMU M25 - K GR	C.252
1772470000	SKMU M25 - K GR	D.34
1772480000	SKMU M32 - K GR	C.169
1772480000	SKMU M32 - K GR	C.171
1772480000	SKMU M32 - K GR	C.251
1772480000	SKMU M32 - K GR	C.253
1772480000	SKMU M32 - K GR	D.34
1772490000	SKMU M40 - K GR	D.34
1772500000	SKMU M50 - K GR	D.34
1772510000	SKMU M63 - K GR	D.34
1776700000	VG M12-K68 SKS	D.7
1776710000	VG M16-K68 SKS	D.7
1776720000	VG M20-K68 SKS 10-14	D.7
1776730000	VG M25-K68 SKS	D.7
1776900000	VP M25 K54	D.45
1776910000	VP M20 K54	D.45
1776920000	VP M16 K54	D.45
1776930000	VP M12 K54	D.45
1776940000	VP M32 K54	D.45
1776950000	VP M40 K54	D.45
1776960000	VP M50 K54	D.45
1776970000	VP M63 K54	D.45
1777610000	SKMU EMV M12	D.38
1777620000	SKMU EMV M16	D.38
1777630000	SKMU EMV M20	D.38
1777640000	SKMU EMV M25	D.38
1777650000	SKMU EMV M32	D.38
1777660000	SKMU EMV M40	D.38
1777670000	SKMU EMV M50	D.38
1777680000	SKMU EMV M63	D.38
1777710000	SKMU EMV PG 36	D.38
1777720000	VP M12-MS65	D.46
1777730000	VP M16-MS65	D.46
1777740000	VP M20-MS65	D.46
1777750000	VP M25-MS65	D.46
1777760000	VP M32-MS65	D.46
1777770000	VP M40-MS65	D.46
1777780000	VP M50-MS65	D.46
1777790000	VP M63-MS65	D.46
1777920000	GWDR M12-PO	D.40
1777930000	GWDR M16-PO	D.40
1777940000	GWDR M20-PO	D.40
1777950000	GWDR M25-PO	D.40
1777960000	GWDR M32-PO	D.40
1777970000	GWDR M40-PO	D.40
1777980000	GWDR M50-PO	D.40
1777990000	GWDR M63-PO	D.40
1778860000	VG M20-K68 SKS 6-12	D.7

1800000000

1806540000	SKMU M12 K SW	D.35

1860000000

1868550000	DAE M12 SS	C.142
1868550000	DAE M12 SS	C.143
1868550000	DAE M12 SS	C.144
1868550000	DAE M12 SS	C.145
1868550000	DAE M12 SS	C.146
1868550000	DAE M12 SS	C.147
1868550000	DAE M12 SS	C.148
1868550000	DAE M12 SS	C.149
1868550000	DAE M12 SS	C.176
1868550000	DAE M12 SS	C.177
1868550000	DAE M12 SS	C.178
1868550000	DAE M12 SS	C.179
1868550000	DAE M12 SS	C.180
1868550000	DAE M12 SS	C.181
1868550000	DAE M12 SS	C.182
1868550000	DAE M12 SS	C.183
1868550000	DAE M12 SS	C.184
1868550000	DAE M12 SS	C.185
1868550000	DAE M12 SS	C.186
1868550000	DAE M12 SS	C.187
1868550000	DAE M12 SS	C.188
1868550000	DAE M12 SS	C.189
1868550000	DAE M12 SS	C.190
1868550000	DAE M12 SS	C.191
1868550000	DAE M12 SS	C.192
1868550000	DAE M12 SS	C.193
1868550000	DAE M12 SS	C.194
1868550000	DAE M12 SS	C.212
1868550000	DAE M12 SS	C.213
1868550000	DAE M12 SS	C.214
1868550000	DAE M12 SS	C.215
1868550000	DAE M12 SS	C.216
1868550000	DAE M12 SS	C.217
1868550000	DAE M12 SS	C.218
1868550000	DAE M12 SS	C.219
1868550000	DAE M12 SS	C.220
1868550000	DAE M12 SS	C.221
1868550000	DAE M12 SS	C.222
1868550000	DAE M12 SS	C.223
1868550000	DAE M12 SS	C.224
1868550000	DAE M12 SS	C.225
1868550000	DAE M12 SS	C.226
1868550000	DAE M12 SS	C.227
1868550000	DAE M12 SS	C.228
1868550000	DAE M12 SS	C.256
1868550000	DAE M12 SS	C.257
1868550000	DAE M12 SS	C.258
1868550000	DAE M12 SS	C.259
1868550000	DAE M12 SS	C.260
1868550000	DAE M12 SS	C.264
1868550000	DAE M12 SS	C.265
1868550000	DAE M12 SS	C.266
1868550000	DAE M12 SS	C.267
1868550000	DAE M12 SS	C.268
1868550000	DAE M12 SS	C.269
1868550000	DAE M12 SS	C.270
1868550000	DAE M12 SS	C.271
1868550000	DAE M12 SS	C.272
1868550000	DAE M12 SS	C.276
1868550000	DAE M12 SS	C.277
1868550000	DAE M12 SS	C.278
1868550000	DAE M12 SS	D.52
1868560000	DAE M12 PA SHORT	D.51
1868570000	DAE M12 PA LONG	C.142
1868570000	DAE M12 PA LONG	C.143
1868570000	DAE M12 PA LONG	C.144
1868570000	DAE M12 PA LONG	C.145
1868570000	DAE M12 PA LONG	C.146
1868570000	DAE M12 PA LONG	C.147
1868570000	DAE M12 PA LONG	C.148
1868570000	DAE M12 PA LONG	C.149
1868570000	DAE M12 PA LONG	C.176
1868570000	DAE M12 PA LONG	C.177
1868570000	DAE M12 PA LONG	C.178
1868570000	DAE M12 PA LONG	C.179
1868570000	DAE M12 PA LONG	C.180
1868570000	DAE M12 PA LONG	C.181
1868570000	DAE M12 PA LONG	C.182
1868570000	DAE M12 PA LONG	C.183
1868570000	DAE M12 PA LONG	C.184
1868570000	DAE M12 PA LONG	C.185
1868570000	DAE M12 PA LONG	C.186
1868570000	DAE M12 PA LONG	C.187
1868570000	DAE M12 PA LONG	C.188
1868570000	DAE M12 PA LONG	C.189
1868570000	DAE M12 PA LONG	C.190
1868570000	DAE M12 PA LONG	C.191

Order No.	Type	Page
1868570000	DAE M12 PA LONG	C.192
1868570000	DAE M12 PA LONG	C.193
1868570000	DAE M12 PA LONG	C.194
1868570000	DAE M12 PA LONG	C.212
1868570000	DAE M12 PA LONG	C.213
1868570000	DAE M12 PA LONG	C.214
1868570000	DAE M12 PA LONG	C.215
1868570000	DAE M12 PA LONG	C.216
1868570000	DAE M12 PA LONG	C.217
1868570000	DAE M12 PA LONG	C.218
1868570000	DAE M12 PA LONG	C.219
1868570000	DAE M12 PA LONG	C.220
1868570000	DAE M12 PA LONG	C.221
1868570000	DAE M12 PA LONG	C.222
1868570000	DAE M12 PA LONG	C.223
1868570000	DAE M12 PA LONG	C.224
1868570000	DAE M12 PA LONG	C.225
1868570000	DAE M12 PA LONG	C.226
1868570000	DAE M12 PA LONG	C.227
1868570000	DAE M12 PA LONG	C.228
1868570000	DAE M12 PA LONG	C.256
1868570000	DAE M12 PA LONG	C.257
1868570000	DAE M12 PA LONG	C.258
1868570000	DAE M12 PA LONG	C.259
1868570000	DAE M12 PA LONG	C.260
1868570000	DAE M12 PA LONG	C.264
1868570000	DAE M12 PA LONG	C.265
1868570000	DAE M12 PA LONG	C.266
1868570000	DAE M12 PA LONG	C.267
1868570000	DAE M12 PA LONG	C.268
1868570000	DAE M12 PA LONG	C.269
1868570000	DAE M12 PA LONG	C.270
1868570000	DAE M12 PA LONG	C.271
1868570000	DAE M12 PA LONG	C.272
1868570000	DAE M12 PA LONG	C.276
1868570000	DAE M12 PA LONG	C.277
1868570000	DAE M12 PA LONG	C.278
1868570000	DAE M12 PA LONG	D.51

1890000000

1898210000	MOPL K3 N FE	C.183

1900000000

1905270000	MOPL K2 N FE	C.181
1905280000	MOPL K1 N FE	C.179
1909710000	VG M25-K67	C.168
1909710000	VG M25-K67	C.170
1909710000	VG M25-K67	C.250
1909710000	VG M25-K67	C.252
1909720000	VG M32-K67	C.169
1909720000	VG M32-K67	C.171
1909720000	VG M32-K67	C.251
1909720000	VG M32-K67	C.253
1909860000	VG M16-1/K68	D.6
1909870000	VG M25-1/K68	D.6
1909880000	VG M32-1/K68	D.6
1909890000	VG M40-1/K68	D.6
1909910000	VG M16-1/MS68	D.8
1909920000	VG M25-1/MS68	D.8
1909930000	VG M32-1/MS68	D.8
1909940000	VG M40-1/MS68	D.8
1909950000	VG M50-1/MS68	D.8
1909990000	TS15 64 KLIPPON K11	C.180
1909990000	TS15 64 KLIPPON K11	C.196

1910000000

1910010000	TS15 90 KLIPPON K2 CSS	C.181
1910010000	TS15 90 KLIPPON K2 CSS	C.196
1910020000	TS15 114 KLIPPON K21 CSS	C.182
1910020000	TS15 114 KLIPPON K21 CSS	C.196
1910030000	TS15 155 KLIPPON K3 CSS	C.183
1910030000	TS15 155 KLIPPON K3 CSS	C.196
1910040000	TS15 164 KLIPPON K31 CSS	C.184
1910040000	TS15 164 KLIPPON K31 CSS	C.196
1910060000	TS35 64 KLIPPON K4K11	C.186
1910060000	TS35 64 KLIPPON K4K11	C.196
1910070000	TS35 105 KLIPPON K41/POK4	C.187
1910070000	TS35 105 KLIPPON K41/POK4	C.196
1910070000	TS35 105 KLIPPON K41/POK4	C.230
1910070000	TS35 105 KLIPPON K41/POK4	C.235
1910080000	TS35/148 KLIPPON K5 CSS	C.188
1910080000	TS35/148 KLIPPON K5 CSS	C.196
1910090000	TS35/203 KLIPPON K51POK5	C.189
1910100000	TS35/140 KLIPPON K52 POK51	C.190
1910100000	TS35/140 KLIPPON K52 POK51	C.196
1910100000	TS35/140 KLIPPON K52 POK51	C.230
1910100000	TS35/140 KLIPPON K52 POK51	C.236
1910110000	TS35/172 KLIPPON K6 CSS	C.191
1910120000	TS35/243 KLIPPON K61POK6	C.192
1910130000	TS35/324 KLIPPON K7 CSS	C.193
1910140000	TS35/260 KLIPPON K71 CSS	C.194
1913320000	GWDR M12-NP	D.41

1920000000

1921720000	VG H M20 MS	D.10
1921740000	VG H M25 MS	D.10
1921760000	VG H M32 MS	D.10
1921770000	VG H M40 MS	D.10
1928060000	TS15 68 KLIPPON POK1 CSS	C.230
1928060000	TS15 68 KLIPPON POK1 CSS	C.232
1928070000	TS15 98 KLIPPON POK2 CSS	C.230
1928070000	TS15 98 KLIPPON POK2 CSS	C.233
1928080000	TS15 147 KLIPPON POK3 CSS	C.230
1928080000	TS15 147 KLIPPON POK3 CSS	C.234

1930000000

1937630000	KLIPPON K1 VMQ RAL7001	C.150
1937630000	KLIPPON K1 VMQ RAL7001	C.179
1937720000	KLIPPON K71 VMQ RAL7001	C.150
1937720000	KLIPPON K71 VMQ RAL7001	C.194
1937730000	KLIPPON K61 VMQ RAL7001	C.150
1937730000	KLIPPON K61 VMQ RAL7001	C.192
1937740000	KLIPPON K52 VMQ RAL7001	C.150
1937740000	KLIPPON K52 VMQ RAL7001	C.190
1937750000	KLIPPON K51 VMQ RAL7001	C.150
1937750000	KLIPPON K51 VMQ RAL7001	C.189
1937800000	KLIPPON K41 VMQ RAL7001	C.150
1937800000	KLIPPON K41 VMQ RAL7001	C.187
1937810000	KLIPPON K32 VMQ RAL7001	C.150
1937810000	KLIPPON K32 VMQ RAL7001	C.185
1937820000	KLIPPON K31 VMQ RAL7001	C.150
1937820000	KLIPPON K31 VMQ RAL7001	C.184
1937830000	KLIPPON K21 VMQ RAL7001	C.150
1937830000	KLIPPON K21 VMQ RAL7001	C.182
1937840000	KLIPPON K02 VMQ RAL7001	C.150
1937840000	KLIPPON K02 VMQ RAL7001	C.178
1937850000	KLIPPON K01 VMQ RAL7001	C.150
1937850000	KLIPPON K01 VMQ RAL7001	C.177
1937860000	KLIPPON K5 VMQ RAL7001	C.150
1937860000	KLIPPON K5 VMQ RAL7001	C.188
1937870000	KLIPPON K6 VMQ RAL7001	C.150
1937870000	KLIPPON K6 VMQ RAL7001	C.191
1937880000	KLIPPON K7 VMQ RAL7001	C.150
1937880000	KLIPPON K7 VMQ RAL7001	C.193
1937890000	KLIPPON K4 VMQ RAL7001	C.150
1937890000	KLIPPON K4 VMQ RAL7001	C.186
1937900000	KLIPPON K3 VMQ RAL7001	C.150
1937900000	KLIPPON K3 VMQ RAL7001	C.183
1937910000	KLIPPON K11 VMQ RAL7001	C.150
1937910000	KLIPPON K11 VMQ RAL7001	C.180
1937920000	KLIPPON K0 VMQ RAL7001	C.150
1937920000	KLIPPON K0 VMQ RAL7001	C.176
1937930000	KLIPPON K2 VMQ RAL7001	C.150
1937930000	KLIPPON K2 VMQ RAL7001	C.181
1939540000	KLIPPON K01 VMQ	C.150
1939540000	KLIPPON K01 VMQ	C.177
1939550000	KLIPPON K02 VMQ	C.150
1939550000	KLIPPON K02 VMQ	C.178
1939560000	KLIPPON K1 VMQ	C.150
1939560000	KLIPPON K1 VMQ	C.179
1939570000	KLIPPON K11 VMQ	C.150
1939570000	KLIPPON K11 VMQ	C.180
1939580000	KLIPPON K2 VMQ	C.150
1939580000	KLIPPON K2 VMQ	C.181
1939590000	KLIPPON K21 VMQ	C.150
1939590000	KLIPPON K21 VMQ	C.182
1939600000	KLIPPON K3 VMQ	C.150
1939600000	KLIPPON K3 VMQ	C.183
1939610000	KLIPPON K31 VMQ	C.150
1939610000	KLIPPON K31 VMQ	C.184
1939620000	KLIPPON K32 VMQ	C.150
1939620000	KLIPPON K32 VMQ	C.185
1939630000	KLIPPON K4 VMQ	C.150
1939630000	KLIPPON K4 VMQ	C.186
1939640000	KLIPPON K41 VMQ	C.150
1939640000	KLIPPON K41 VMQ	C.187
1939650000	KLIPPON K5 VMQ	C.150
1939650000	KLIPPON K5 VMQ	C.188
1939660000	KLIPPON K51 VMQ	C.150
1939660000	KLIPPON K51 VMQ	C.189
1939670000	KLIPPON K52 VMQ	C.150
1939670000	KLIPPON K52 VMQ	C.190
1939690000	KLIPPON K6 VMQ	C.150
1939690000	KLIPPON K6 VMQ	C.191
1939700000	KLIPPON K61 VMQ	C.150
1939700000	KLIPPON K61 VMQ	C.192
1939710000	KLIPPON K7 VMQ	C.150
1939710000	KLIPPON K7 VMQ	C.193
1939730000	KLIPPON K71 VMQ	C.150
1939730000	KLIPPON K71 VMQ	C.194
1939760000	KLIPPON K0 VMQ	C.150
1939760000	KLIPPON K0 VMQ	C.176

2000000000

2007170000	WS 8/8 MM WS	C.168
2007170000	WS 8/8 MM WS	C.169
2007170000	WS 8/8 MM WS	C.170
2007170000	WS 8/8 MM WS	C.171
2007170000	WS 8/8 MM WS	C.250
2007170000	WS 8/8 MM WS	C.251
2007170000	WS 8/8 MM WS	C.252
2007170000	WS 8/8 MM WS	C.253

2020000000

2022050000	KTB MOPL 2215 MSZN H	C.20
2022060000	KTB MOPL 2626 MSZN H	C.21
2022060000	KTB MOPL 2626 MSZN H	C.22
2022190000	KTB MOPL 3030 MSZN H	C.24
2022190000	KTB MOPL 3030 MSZN H	C.25
2022310000	KTB MOPL 3526 MSZN H	C.26
2022310000	KTB MOPL 3526 MSZN H	C.27
2022420000	KTB MOPL 4030 MSZN H	C.31
2022420000	KTB MOPL 4030 MSZN H	C.32
2022590000	KTB MOPL 4538 MSZN H	C.35
2022590000	KTB MOPL 4538 MSZN H	C.36
2022610000	KTB MOPL 4848 MSZN H	C.38
2022610000	KTB MOPL 4848 MSZN H	C.39
2022650000	KTB MOPL 5535 MSZN H	C.43
2022650000	KTB MOPL 5535 MSZN H	C.44
2022670000	KTB MOPL 6245 MSZN H	C.46
2022670000	KTB MOPL 6245 MSZN H	C.47
2022680000	KTB MOPL 7650 MSZN H	C.52
2022680000	KTB MOPL 7650 MSZN H	C.53
2022740000	KTB MOPL 9161 MSZN H	C.56
2022740000	KTB MOPL 9161 MSZN H	C.57
2022760000	KTB MOPL 9874 MSZN H	C.60
2022770000	KTB GP XX1513 AB S4 PE	C.20
2022900000	KTB GP 22XX13 CD S4 PE	C.20
2022930000	KTB GP 262615 AB S4 PE	C.21
2023090000	KTB GP 26XX15 CD S4 PE	C.21
2023100000	KTB GP XX2620 AB S4 PE	C.22
2023110000	KTB GP 26XX20 CD S4 PE	C.22
2023120000	KTB GP XX3015 AB S4 PE	C.24
2023130000	KTB GP 303015 CD S4 PE	C.24
2023140000	KTB GP 303020 AB S4 PE	C.25
2023150000	KTB GP 30XX20 CD S4 PE	C.25
2023160000	KTB GP XX2615 AB S4 PE	C.26
2023210000	KTB GP 352615 CD S4 PE	C.26
2023230000	KTB GP 352620 AB S4 PE	C.27
2023280000	KTB GP 352620 CD S4 PE	C.27
2023320000	KTB GP 403015 AB S4 PE	C.31
2023330000	KTB GP 403015 CD S4 PE	C.31
2023450000	KTB GP XX3020 AB S4 PE	C.32
2023480000	KTB GP 403020 CD S4 PE	C.32
2023490000	KTB GP XX3815 AB S4 PE	C.35
2023500000	KTB GP 45XX15 CD S4 PE	C.35
2023510000	KTB GP XX3820 AB S4 PE	C.36
2023520000	KTB GP 45XX20 CD S4 PE	C.36
2023530000	KTB GP XX4815 AB S4 PE	C.38
2023540000	KTB GP 48XX15 CD S4 PE	C.38
2023580000	KTB GP XX4820 AB S4 PE	C.39
2023620000	KTB GP 48XX20 CD S4 PE	C.39
2023660000	KTB GP 553515 AB S4 PE	C.43
2023670000	KTB GP 55XX15 CD S4 PE	C.43
2023740000	KTB GP 553520 AB S4 PE	C.44
2023790000	KTB GP 55XX20 CD S4 PE	C.44
2023820000	KTB GP XX4515 AB S4 PE	C.46
2023870000	KTB GP 624515 CD S4 PE	C.46
2023880000	KTB GP XX4520 AB S4 PE	C.47
2023930000	KTB GP 624520 CD S4 PE	C.47
2024040000	KTB GP 765015 AB S4 PE	C.52
2024090000	KTB GP 765015 CD S4 PE	C.52
2024100000	KTB GP 765020 AB S4 PE	C.53
2024140000	KTB GP 765020 CD S4 PE	C.53
2024150000	KTB GP 916115 AB S4 PE	C.56
2024300000	KTB GP 916115 CD S4 PE	C.56
2024470000	KTB GP XX6120 AB S4 PE	C.57
2024490000	KTB GP 916120 CD S4 PE	C.57
2024560000	KTB GP 987420 AB S4 PE	C.60
2024590000	KTB GP 98XX20 CD S4 PE	C.60

2060000000

2066710000	VP M12 EX SI 7J	D.49
2066720000	VP M16 EX SI 7J	C.232
2066720000	VP M16 EX SI 7J	D.49
2066730000	VP M20 EX SI 7J	C.233
2066730000	VP M20 EX SI 7J	C.234
2066730000	VP M20 EX SI 7J	C.235
2066730000	VP M20 EX SI 7J	C.236
2066730000	VP M20 EX SI 7J	D.49
2066740000	VP M25 EX SI 7J	D.49
2066750000	VP M32 EX SI 7J	D.49
2066760000	VP M40 EX SI 7J	D.49
2066770000	VP M50 EX SI 7J	D.49
2066940000	VP M63 EX SI 7J	D.49

2430000000

2435070000	VG M12 EMV-4 MS 3-6.5	D.11
2435140000	VG M16 EMV-4 MS 5-10	D.11
2435150000	VG M20 EMV-4 MS 6-12	D.11
2435160000	VG M20 EMV-4 MS 8-14	D.11
2435170000	VG M25 EMV-4 MS 10-18	D.11
2435180000	VG M32 EMV-4 MS 16-25	D.11
2435190000	VG M40 EMV-4 MS 22-32	D.11
2435200000	VG M50 EMV-4 MS 30-38	D.11
2435210000	VG M63 EMV-4 MS 34-44	D.11

2470000000

2473930000	KLIPPON QL KEY	C.112
2473930000	KLIPPON QL KEY	C.113
2473930000	KLIPPON QL KEY	C.114
2473930000	KLIPPON QL KEY	C.115
2473930000	KLIPPON QL KEY	C.116
2473930000	KLIPPON QL KEY	C.117
2473930000	KLIPPON QL KEY	C.118
2473930000	KLIPPON QL KEY	C.119
2473930000	KLIPPON QL KEY	C.120
2473930000	KLIPPON QL KEY	C.121
2473930000	KLIPPON QL KEY	C.124
2473930000	KLIPPON QL KEY	C.125
2473930000	KLIPPON QL KEY	C.126
2473930000	KLIPPON QL KEY	C.127
2473930000	KLIPPON QL KEY	C.128
2473930000	KLIPPON QL KEY	C.129

2510000000

2519520000	KLIPPON BDX M20 B	C.70
2519520000	KLIPPON BDX M20 B	C.71
2519520000	KLIPPON BDX M20 B	C.72
2519520000	KLIPPON BDX M20 B	C.152
2519520000	KLIPPON BDX M20 B	C.153
2519520000	KLIPPON BDX M20 B	C.154
2519520000	KLIPPON BDX M20 B	D.53
2519550000	KLIPPON BDX M20 S	C.70
2519550000	KLIPPON BDX M20 S	C.71
2519550000	KLIPPON BDX M20 S	C.72
2519550000	KLIPPON BDX M20 S	C.142
2519550000	KLIPPON BDX M20 S	C.143
2519550000	KLIPPON BDX M20 S	C.144
2519550000	KLIPPON BDX M20 S	C.145
2519550000	KLIPPON BDX M20 S	C.146
2519550000	KLIPPON BDX M20 S	C.147
2519550000	KLIPPON BDX M20 S	C.148
2519550000	KLIPPON BDX M20 S	C.149
2519550000	KLIPPON BDX M20 S	C.152
2519550000	KLIPPON BDX M20 S	C.153
2519550000	KLIPPON BDX M20 S	C.154
2519550000	KLIPPON BDX M20 S	D.53
2519570000	KLIPPON BDX M20X15 S	C.212
2519570000	KLIPPON BDX M20X15 S	C.213
2519570000	KLIPPON BDX M20X15 S	C.214
2519570000	KLIPPON BDX M20X15 S	C.215
2519570000	KLIPPON BDX M20X15 S	C.216
2519570000	KLIPPON BDX M20X15 S	C.217
2519570000	KLIPPON BDX M20X15 S	C.218
2519570000	KLIPPON BDX M20X15 S	C.219
2519570000	KLIPPON BDX M20X15 S	C.220
2519570000	KLIPPON BDX M20X15 S	C.221
2519570000	KLIPPON BDX M20X15 S	C.222
2519570000	KLIPPON BDX M20X15 S	C.223
2519570000	KLIPPON BDX M20X15 S	C.224
2519570000	KLIPPON BDX M20X15 S	C.225
2519570000	KLIPPON BDX M20X15 S	C.226
2519570000	KLIPPON BDX M20X15 S	C.227
2519570000	KLIPPON BDX M20X15 S	C.228
2519570000	KLIPPON BDX M20X15 S	D.53
2519590000	KLIPPON BDX M25 S	D.53

2580000000

2583350000	CABTITE BSE SML GY	E.8
2583360000	CABTITE SE 1.5-2 SML GY	E.8
2583380000	CABTITE SE 2-3 SML GY	E.8
2583400000	CABTITE SE 3-4 SML GY	E.8
2583440000	CABTITE SE 4-5 SML GY	E.8
2583450000	CABTITE SE 5-6 SML GY	E.8
2583460000	CABTITE SE 6-7 SML GY	E.8
2583470000	CABTITE FR 16/8 BK	E.10
2583480000	CABTITE FR 10/6 BK	E.9
2583490000	CABTITE FR 4-1 BK	E.9
2583500000	CABTITE CSE 7-24 LRG BK	E.8
2583510000	CABTITE CSE 2-11 SML BK	E.8
2583520000	CABTITE SE 2/ASI SML BK	E.8
2583530000	CABTITE SE 1/ASI SML BK	E.8
2583540000	CABTITE SE 2/8 SML BK	E.8
2583550000	CABTITE SE 2/7 SML BK	E.8
2583560000	CABTITE SE 4/4-5 SML BK	E.8
2583580000	CABTITE SE 4/3-4 SML BK	E.8
2583590000	CABTITE SE 4/2-3 SML BK	E.8
2583610000	CABTITE SE 2/5-6 SML BK	E.8
2583620000	CABTITE SE 2/4-5 SML BK	E.8
2583630000	CABTITE SE 32-33 LRG BK	E.8
2583640000	CABTITE SE 31-32 LRG BK	E.8
2583650000	CABTITE SE 30-31 LRG BK	E.8
2583660000	CABTITE SE 29-30 LRG BK	E.8
2583670000	CABTITE SE 28-29 LRG BK	E.8
2583680000	CABTITE SE 27-28 LRG BK	E.8
2583690000	CABTITE SE 26-27 LRG BK	E.8
2583700000	CABTITE SE 25-26 LRG BK	E.8
2583710000	CABTITE SE 24-25 LRG BK	E.8
2583720000	CABTITE FR 24/10 BK SET	E.10
2583730000	CABTITE SE 23-24 LRG BK	E.8
2583740000	CABTITE FR 16/8 BK SET	E.10
2583750000	CABTITE SE 22-23 LRG BK	E.8

X

Order No.	Type	Page
2583760000	CABTITE FR 10/6 BK SET	E.9
2583770000	CABTITE SE 21-22 LRG BK	E.8
2583780000	CABTITE FR 4-1 BK SET	E.9
2583790000	CABTITE SE 20-21 LRG BK	E.8
2583800000	CABTITE FR 24/10 BK	E.10
2583810000	CABTITE SE 19-20 LRG BK	E.8
2583830000	CABTITE SE 18-19 LRG BK	E.8
2583840000	CABTITE SE 17-18 LRG BK	E.8
2583850000	CABTITE SE 16-17 LRG BK	E.8
2583860000	CABTITE SE 15-16 LRG BK	E.8
2583880000	CABTITE SE 14-15 LRG BK	E.8
2583890000	CABTITE CR 24/10 EMV	E.14
2583900000	CABTITE BSE LRG BK	E.8
2583910000	CABTITE CR 16/8 EMV	E.14
2583930000	CABTITE CR 10/6 EMV	E.14
2583950000	CABTITE CR 4/1 EMV	E.14
2583960000	CABTITE SE 15-16 SML BK	E.8
2583980000	CABTITE SE 14-15 SML BK	E.8
2584000000	CABTITE SE 13-14 SML BK	E.8
2584010000	CABTITE LNS M63 BK	E.13
2584020000	CABTITE SE 12-13 SML BK	E.8
2584030000	CABTITE LNS M50 BK	E.13
2584040000	CABTITE SE 11-12 SML BK	E.8
2584050000	CABTITE LNS M40 BK	E.13
2584060000	CABTITE SE 10-11 SML BK	E.8
2584070000	CABTITE LNS M32 BK	E.13
2584080000	CABTITE SE 9-10 SML BK	E.8
2584090000	CABTITE LNS M25 BK	E.13
2584110000	CABTITE LNS M20 BK	E.13
2584120000	CABTITE CGS M63 BK	E.13
2584130000	CABTITE CGS M50 BK	E.13
2584150000	CABTITE CGS M40 BK	E.13
2584160000	CABTITE CGS M32 BK	E.13
2584180000	CABTITE CGS M25 BK	E.13
2584200000	CABTITE CGS M20 BK	E.13
2584210000	CABTITE FRL 24/10 BK	E.10
2584220000	CABTITE FRL 16/8 BK	E.10
2584240000	CABTITE FRL 10/6 BK	E.9
2584260000	CABTITE FRL 4-1 BK	E.9
2584270000	CABTITE GI H BK	E.13
2584290000	CABTITE GI X BK	E.13
2584300000	CABTITE GI T BK	E.13
2584320000	CABTITE GI I BK	E.13
2584330000	CABTITE SE 8-9 SML BK	E.8
2584340000	CABTITE SE 31-32 LRG GY	E.8
2584350000	CABTITE SE 28-29 LRG GY	E.8
2584360000	CABTITE SE 30-31 LRG GY	E.8
2584370000	CABTITE SE 27-28 LRG GY	E.8
2584380000	CABTITE SE 29-30 LRG GY	E.8
2584390000	CABTITE SE 26-27 LRG GY	E.8
2584400000	CABTITE SE 25-26 LRG GY	E.8
2584410000	CABTITE SE 24-25 LRG GY	E.8
2584420000	CABTITE SE 23-24 LRG GY	E.8
2584430000	CABTITE SE 22-23 LRG GY	E.8
2584440000	CABTITE SE 21-22 LRG GY	E.8
2584450000	CABTITE SE 20-21 LRG GY	E.8
2584460000	CABTITE SE 19-20 LRG GY	E.8
2584470000	CABTITE SE 18-19 LRG GY	E.8
2584480000	CABTITE SE 17-18 LRG GY	E.8
2584490000	CABTITE SE 16-17 LRG GY	E.8
2584500000	CABTITE SE 15-16 LRG GY	E.8
2584510000	CABTITE SE 14-15 LRG GY	E.8
2584520000	CABTITE BSE LRG GY	E.8
2584550000	CABTITE SE 15-16 SML GY	E.8
2584560000	CABTITE SE 14-15 SML GY	E.8
2584570000	CABTITE SE 13-14 SML GY	E.8
2584590000	CABTITE SE 12-13 SML GY	E.8
2584600000	CABTITE SE 11-12 SML GY	E.8
2584610000	CABTITE SE 10-11 SML GY	E.8
2584630000	CABTITE SE 9-10 SML GY	E.8
2584650000	CABTITE SE 8-9 SML GY	E.8
2584660000	CABTITE SE 7-8 SML GY	E.8
2584670000	CABTITE SE 7-8 SML BK	E.8
2584680000	CABTITE SE 4-5 SML BK	E.8
2584690000	CABTITE SE 6-7 SML BK	E.8
2584710000	CABTITE SE 5-6 SML BK	E.8
2584730000	CABTITE SE 3-4 SML BK	E.8
2584760000	CABTITE SE 2-3 SML BK	E.8
2584780000	CABTITE SE 1.5-2 SML BK	E.8
2584790000	CABTITE BSE SML BK	E.8
2584800000	CABTITE SE 2/ASI SML GY	E.8
2584810000	CABTITE SE 1/ASI SML GY	E.8
2584820000	CABTITE SE 2/8 SML GY	E.8
2584830000	CABTITE SE 2/7 SML GY	E.8
2584840000	CABTITE SE 4/4-5 SML GY	E.8
2584860000	CABTITE SE 4/3-4 SML GY	E.8
2584870000	CABTITE SE 4/2-3 SML GY	E.8
2584890000	CABTITE SE 2/5-6 SML GY	E.8
2584900000	CABTITE SE 2/4-5 SML GY	E.8
2584910000	CABTITE SE 33-34 LRG GY	E.8
2584920000	CABTITE SE 32-33 LRG GY	E.8

2590000000

2595510000	CABTITE SE 33-34 LRG BK	E.8
2595520000	CABTITE SE 34-35 LRG BK	E.8
2595530000	CABTITE SE 34-35 LRG GY	E.8

Order No.	Type	Page

2630000000

2635120000	CABTITE SC M5X25 SET	E.9
2635120000	CABTITE SC M5X25 SET	E.10
2635120000	CABTITE SC M5X25 SET	E.11
2635120000	CABTITE SC M5X25 SET	E.12
2637360000	CABTITE TOOL ATSE PA	E.9
2637360000	CABTITE TOOL ATSE PA	E.10
2637360000	CABTITE TOOL ATSE PA	E.11
2637360000	CABTITE TOOL ATSE PA	E.12

2650000000

2652280000	CABTITE SE 3/5-6 SML BK	E.8
2652290000	CABTITE SE 3/5-6 SML GY	E.8
2652300000	CABTITE BP 2MM PA	E.14
2652310000	CABTITE BP 3MM PA	E.14
2652320000	CABTITE BP 4MM PA	E.14
2652330000	CABTITE BP 5MM PA	E.14
2652340000	CABTITE BP 6MM PA	E.14
2652350000	CABTITE BP 7MM PA	E.14
2652360000	CABTITE BP 8MM PA	E.14
2652370000	CABTITE BP 9MM PA	E.14
2652380000	CABTITE BP 10MM PA	E.14
2652400000	CABTITE BP 12MM PA	E.14
2652410000	CABTITE BP 13MM PA	E.14
2652420000	CABTITE BP 14MM PA	E.14
2652430000	CABTITE BP 17MM PA	E.14

2660000000

2660200318	KEB MOFT SMALL S4 SET	C.98
2660200318	KEB MOFT SMALL S4 SET	C.99
2660200318	KEB MOFT SMALL S4 SET	C.100
2660200318	KEB MOFT SMALL S4 SET	C.101
2660200318	KEB MOFT SMALL S4 SET	C.102
2660200318	KEB MOFT SMALL S4 SET	C.103
2660200318	KEB MOFT SMALL S4 SET	C.104
2660200318	KEB MOFT SMALL S4 SET	C.105
2660200318	KEB MOFT SMALL S4 SET	C.106
2660200318	KEB MOFT SMALL S4 SET	C.107
2660200318	KEB MOFT SMALL S4 SET	C.108
2660200318	KEB MOFT SMALL S4 SET	C.112
2660200318	KEB MOFT SMALL S4 SET	C.113
2660200318	KEB MOFT SMALL S4 SET	C.114
2660200318	KEB MOFT SMALL S4 SET	C.115
2660200318	KEB MOFT SMALL S4 SET	C.116
2660200318	KEB MOFT SMALL S4 SET	C.117
2660200318	KEB MOFT SMALL S4 SET	C.118
2660200318	KEB MOFT SMALL S4 SET	C.119
2660200318	KEB MOFT SMALL S4 SET	C.120
2660200318	KEB MOFT SMALL S4 SET	C.121
2660200318	KEB MOFT SMALL S4 SET	C.124
2660200318	KEB MOFT SMALL S4 SET	C.125
2660200318	KEB MOFT SMALL S4 SET	C.126
2660200318	KEB MOFT SMALL S4 SET	C.127
2660200318	KEB MOFT SMALL S4 SET	C.128
2660200318	KEB MOFT SMALL S4 SET	C.129
2660200318	KEB MOFT SMALL S4 SET	C.132
2660200318	KEB MOFT SMALL S4 SET	C.133
2660200318	KEB MOFT SMALL S4 SET	C.134
2660200318	KEB MOFT SMALL S4 SET	C.135
2660200318	KEB MOFT SMALL S4 SET	C.136
2660200318	KEB MOFT SMALL S4 SET	C.137

2690000000

2698040000	KTB MH 355520 S4E0	C.15
2698040000	KTB MH 355520 S4E0	C.30
2698050000	KTB MH 355520 S4E1	C.15
2698050000	KTB MH 355520 S4E1	C.30
2698060000	KTB MH 456220 S4E0	C.15
2698060000	KTB MH 456220 S4E0	C.37
2698070000	KTB MH 456220 S4E1	C.15
2698070000	KTB MH 456220 S4E1	C.37
2698080000	KTB MH 507620 S4E0	C.15
2698080000	KTB MH 507620 S4E0	C.42
2698090000	KTB MH 507620 S4E1	C.15
2698090000	KTB MH 507620 S4E1	C.42
2698400000	KTBLQL1005030S4B1 LL1	C.86
2698400000	KTBLQL1005030S4B1 LL1	C.88
2698420000	KTBLQL1258040S4B1 LL1	C.86
2698420000	KTBLQL1258040S4B1 LL1	C.88
2698430000	KTBLQL15010050S4B1 LL1	C.86
2698430000	KTBLQL15010050S4B1 LL1	C.89
2698520000	KTBLRNHD5030S4B LL1	C.88
2698530000	KTBLRNHD8040S4B LL1	C.88
2698540000	KTBLRNHD10050S4B LL1	C.89

2700000000

2704960000	LKSC M6X8 A2 TX30	C.98
2704960000	LKSC M6X8 A2 TX30	C.99
2704960000	LKSC M6X8 A2 TX30	C.100
2704960000	LKSC M6X8 A2 TX30	C.101
2704960000	LKSC M6X8 A2 TX30	C.102
2704960000	LKSC M6X8 A2 TX30	C.103
2704960000	LKSC M6X8 A2 TX30	C.104
2704960000	LKSC M6X8 A2 TX30	C.105

Order No.	Type	Page
2704960000	LKSC M6X8 A2 TX30	C.106
2704960000	LKSC M6X8 A2 TX30	C.107
2704960000	LKSC M6X8 A2 TX30	C.108
2704960000	LKSC M6X8 A2 TX30	C.112
2704960000	LKSC M6X8 A2 TX30	C.113
2704960000	LKSC M6X8 A2 TX30	C.114
2704960000	LKSC M6X8 A2 TX30	C.115
2704960000	LKSC M6X8 A2 TX30	C.116
2704960000	LKSC M6X8 A2 TX30	C.117
2704960000	LKSC M6X8 A2 TX30	C.118
2704960000	LKSC M6X8 A2 TX30	C.119
2704960000	LKSC M6X8 A2 TX30	C.120
2704960000	LKSC M6X8 A2 TX30	C.121
2704960000	LKSC M6X8 A2 TX30	C.124
2704960000	LKSC M6X8 A2 TX30	C.125
2704960000	LKSC M6X8 A2 TX30	C.126
2704960000	LKSC M6X8 A2 TX30	C.127
2704960000	LKSC M6X8 A2 TX30	C.128
2704960000	LKSC M6X8 A2 TX30	C.129
2704960000	LKSC M6X8 A2 TX30	C.132
2704960000	LKSC M6X8 A2 TX30	C.133
2704960000	LKSC M6X8 A2 TX30	C.134
2704960000	LKSC M6X8 A2 TX30	C.135
2704960000	LKSC M6X8 A2 TX30	C.136
2704960000	LKSC M6X8 A2 TX30	C.137

2710000000

2715560000	KTB MOPL 3555 MSZN	C.30
2715990000	VG 16 HQ K68 4-6.5	D.15
2716090000	KTB MOPL 3555 MSZN H	C.30
2716100000	KTB MOPL 4562 MSZN	C.37
2716110000	KTB MOPL 4562 MSZN H	C.37
2716120000	KTB MOPL 5076 MSZN	C.42
2716130000	KTB MOPL 5076 MSZN H	C.42

2720000000

2721930000	VG M12 EXE 4-6.5 CR7J G4	D.32
2721940000	VG M16 EXE 5-8 CR7J G4	D.32
2721950000	VG M16 EXE 6-10 CR7J G4	D.32
2721960000	VG M20 EXE 7-12 CR7J G4	D.32
2721970000	VG M20 EXE 7-13 CR7J G4	D.32
2721980000	VG M20 EXE 11-14 CR7J G4	D.32
2721990000	VG M25 EXE 12-17 CR7J G4	D.32
2722000000	VG M25 EXE 14-18 CR7J G4	D.32
2722010000	VG M32 EXE 16-21 CR7J G4	D.32
2722020000	VG M32 EXE 19-25 CR7J G4	D.32
2722030000	VG M40 EXE 20-28 CR7J G4	D.32
2722040000	VG M40 EXE 23-32 CR7J G4	D.32
2722060000	VG M63 EXE 35-44 CR7J G4	D.32
2722070000	VG M12 EXE 4-6.5 SI7J G4	D.33
2722080000	VG M16 EXE 5-8 SI7J G4	C.232
2722080000	VG M16 EXE 5-8 SI7J G4	D.33
2722090000	VG M16 EXE 6-10 SI7J G4	C.232
2722090000	VG M16 EXE 6-10 SI7J G4	D.33
2722100000	VG M20 EXE 7-12 SI7J G4	D.33
2722110000	VG M20 EXE 7-13 SI7J G4	C.233
2722110000	VG M20 EXE 7-13 SI7J G4	C.234
2722110000	VG M20 EXE 7-13 SI7J G4	C.235
2722110000	VG M20 EXE 7-13 SI7J G4	C.236
2722110000	VG M20 EXE 7-13 SI7J G4	D.33
2722120000	VG M20 EXE 11-14 SI7J G4	C.233
2722120000	VG M20 EXE 11-14 SI7J G4	C.234
2722120000	VG M20 EXE 11-14 SI7J G4	C.235
2722120000	VG M20 EXE 11-14 SI7J G4	C.236
2722120000	VG M20 EXE 11-14 SI7J G4	D.33
2722130000	VG M25 EXE 12-17 SI7J G4	D.33
2722140000	VG M25 EXE 14-18 SI7J G4	D.33
2722150000	VG M32 EXE 16-21 SI7J G4	D.33
2722160000	VG M32 EXE 19-25 SI7J G4	D.33
2722170000	VG M40 EXE 20-28 SI7J G4	D.33
2722180000	VG M40 EXE 23-32 SI7J G4	D.33
2722210000	VG M12 EXI 4-6.5 CR7J G4	D.32
2722220000	VG M16 EXI 5-8 CR7J G4	D.32
2722230000	VG M16 EXI 6-10 CR7J G4	D.32
2722240000	VG M20 EXI 7-12 CR7J G4	D.32
2722250000	VG M20 EXI 7-13 CR7J G4	D.32
2722260000	VG M20 EXI 11-14 CR7J G4	D.32
2722270000	VG M25 EXI 12-17 CR7J G4	D.32
2722280000	VG M25 EXI 14-18 CR7J G4	D.32
2722290000	VG M32 EXI 16-21 CR7J G4	D.32
2722300000	VG M32 EXI 19-25 CR7J G4	D.32
2722310000	VG M40 EXI 20-28 CR7J G4	D.32
2722320000	VG M40 EXI 23-32 CR7J G4	D.32
2722350000	VG M12 EXI 4-6.5 SI7J G4	D.33
2722360000	VG M16 EXI 5-8 SI7J G4	D.33
2722370000	VG M16 EXI 6-10 SI7J G4	D.33
2722380000	VG M20 EXI 7-12 SI7J G4	D.33
2722390000	VG M20 EXI 7-13 SI7J G4	D.33
2722400000	VG M20 EXI 11-14 SI7J G4	D.33
2722410000	VG M25 EXI 12-17 SI7J G4	D.33
2722420000	VG M25 EXI 14-18 SI7J G4	D.33
2722430000	VG M32 EXI 16-21 SI7J G4	D.33
2722440000	VG M32 EXI 19-25 SI7J G4	D.33
2722450000	VG M40 EXI 20-28 SI7J G4	D.33
2722460000	VG M40 EXI 23-32 SI7J G4	D.33
2722480000	VG M63 EXI 35-44 SI7J G4	D.33

Order No.	Type	Page

2740000000

2743540000	CABTITE EP A 24/12 GY	E.17
2743550000	CABTITE EP A 24/14 GY	E.17
2743560000	CABTITE EP A 24/17 GY	E.17
2743570000	CABTITE EP A 24/18 GY	E.17
2743580000	CABTITE EP A 24/19 GY	E.17
2743590000	CABTITE EP A 24/26 GY	E.17
2743600000	CABTITE EP A 24/42 GY	E.17
2743610000	CABTITE EP A 24/48 GY	E.17
2743620000	CABTITE EP A 24/50 GY	E.17
2743630000	CABTITE EP B 24/12 GY	E.17
2743640000	CABTITE EP B 24/14 GY	E.17
2743650000	CABTITE EP B 24/17 GY	E.17
2743660000	CABTITE EP B 24/18 GY	E.17
2743670000	CABTITE EP B 24/19 GY	E.17
2743680000	CABTITE EP B 24/26 GY	E.17
2743690000	CABTITE EP B 24/42 GY	E.17
2743700000	CABTITE EP B 24/48 GY	E.17
2743710000	CABTITE EP B 24/50 GY	E.17
2749520000	SD T20 TR X 100	C.176
2749520000	SD T20 TR X 100	C.177
2749520000	SD T20 TR X 100	C.178
2749520000	SD T20 TR X 100	C.179
2749520000	SD T20 TR X 100	C.180
2749520000	SD T20 TR X 100	C.181
2749520000	SD T20 TR X 100	C.182
2749520000	SD T20 TR X 100	C.183
2749520000	SD T20 TR X 100	C.184
2749520000	SD T20 TR X 100	C.185
2749520000	SD T20 TR X 100	C.186
2749520000	SD T20 TR X 100	C.187
2749520000	SD T20 TR X 100	C.188
2749520000	SD T20 TR X 100	C.189
2749520000	SD T20 TR X 100	C.190
2749520000	SD T20 TR X 100	C.191
2749520000	SD T20 TR X 100	C.192
2749520000	SD T20 TR X 100	C.193
2749520000	SD T20 TR X 100	C.194
2749640000	SDIS SLIM 1.2X6.5X150	C.98
2749640000	SDIS SLIM 1.2X6.5X150	C.99
2749640000	SDIS SLIM 1.2X6.5X150	C.100
2749640000	SDIS SLIM 1.2X6.5X150	C.101
2749640000	SDIS SLIM 1.2X6.5X150	C.102
2749640000	SDIS SLIM 1.2X6.5X150	C.103
2749640000	SDIS SLIM 1.2X6.5X150	C.104
2749640000	SDIS SLIM 1.2X6.5X150	C.105
2749640000	SDIS SLIM 1.2X6.5X150	C.106
2749640000	SDIS SLIM 1.2X6.5X150	C.107
2749640000	SDIS SLIM 1.2X6.5X150	C.108
2749640000	SDIS SLIM 1.2X6.5X150	C.132
2749640000	SDIS SLIM 1.2X6.5X150	C.133
2749640000	SDIS SLIM 1.2X6.5X150	C.134
2749640000	SDIS SLIM 1.2X6.5X150	C.135
2749640000	SDIS SLIM 1.2X6.5X150	C.136
2749640000	SDIS SLIM 1.2X6.5X150	C.137

2770000000

2779310000	CABTITE EP 24/13 GY	E.18
2779320000	CABTITE EP 24/14 GY	E.18
2779330000	CABTITE EP 24/16 GY	E.18
2779340000	CABTITE EP 24/16-1 GY	E.18
2779350000	CABTITE EP 24/17 GY	E.18
2779360000	CABTITE EP 24/20 GY	E.18
2779370000	CABTITE EP 24/21 GY	E.18
2779380000	CABTITE EP 24/32 GY	E.18

2890000000

2891450000	CABTITE FRFT 4-1	E.11
2891470000	CABTITE FRFT 4-1 SET	E.11
2891480000	CABTITE FRFT 10/6	E.11
2891500000	CABTITE FRFT 10/6 SET	E.11
2891510000	CABTITE FRFT 16/8	E.12
2891530000	CABTITE FRFT 16/8 SET	E.12
2891540000	CABTITE FRFT 24/10	E.12
2891560000	CABTITE FRFT 24/10 SET	E.12

2900000000

2907560000	CABTITE OFRL BK	E.11
2907560000	CABTITE OFRL BK	E.12

2970000000

2978890000	VP M12/10 EX CR 7J BK	D.50
2978900000	VP M16/15 EX CR 7J BK	D.50
2978910000	VP M20/15 EX CR 7J BK	D.50
2978920000	VP M25/15 EX CR 7J BK	D.50
2978930000	VP M40/18 EX CR 7J BK	D.50
2978940000	VP M50/18 EX CR 7J BK	D.50
2978950000	VP M63/18 EX CR 7J BK	D.50
2978960000	VP NPT 1/2 EX 7J BK	D.50
2978970000	VP NPT 3/4 EX 7J BK	D.50
2978980000	VP NPT 1 EX 7J BK	D.50
2978990000	VP M32/15 EX CR 7J BK	D.50

Order No.	Type	Page
3010000000		
3018950000	MP TBF 30/19	C.256
3070000000		
3073000000	MOPL K11 STAHL	C.180
3073020000	MOPL K21 STAHL	C.182
3073040000	MOPL K31 STAHL	C.184
3073050000	MOPL K32 STAHL	C.185
3073060000	MOPL K4 STAHL	C.186
3073070000	MOPL K41 STAHL	C.187
3073080000	MOPL K5 STAHL	C.188
3073090000	MOPL K51 STAHL	C.189
3073100000	MOPL K52 STAHL	C.190
3073110000	MOPL K6 STAHL	C.191
3073120000	MOPL K61 STAHL	C.192
3073130000	MOPL K7 STAHL	C.193
3073140000	MOPL K71 STAHL	C.194
3890000000		
3896100000	SP M6 15 MSZN	C.98
3896100000	SP M6 15 MSZN	C.99
3896100000	SP M6 15 MSZN	C.100
3896100000	SP M6 15 MSZN	C.101
3896100000	SP M6 15 MSZN	C.102
3896100000	SP M6 15 MSZN	C.103
3896100000	SP M6 15 MSZN	C.104
3896100000	SP M6 15 MSZN	C.105
3896100000	SP M6 15 MSZN	C.106
3896100000	SP M6 15 MSZN	C.107
3896100000	SP M6 15 MSZN	C.108
3896100000	SP M6 15 MSZN	C.112
3896100000	SP M6 15 MSZN	C.113
3896100000	SP M6 15 MSZN	C.114
3896100000	SP M6 15 MSZN	C.115
3896100000	SP M6 15 MSZN	C.116
3896100000	SP M6 15 MSZN	C.117
3896100000	SP M6 15 MSZN	C.118
3896100000	SP M6 15 MSZN	C.119
3896100000	SP M6 15 MSZN	C.120
3896100000	SP M6 15 MSZN	C.121
3896100000	SP M6 15 MSZN	C.124
3896100000	SP M6 15 MSZN	C.125
3896100000	SP M6 15 MSZN	C.126
3896100000	SP M6 15 MSZN	C.127
3896100000	SP M6 15 MSZN	C.128
3896100000	SP M6 15 MSZN	C.129
3896100000	SP M6 15 MSZN	C.132
3896100000	SP M6 15 MSZN	C.133
3896100000	SP M6 15 MSZN	C.134
3896100000	SP M6 15 MSZN	C.135
3896100000	SP M6 15 MSZN	C.136
3896100000	SP M6 15 MSZN	C.137
3896200000	SP M6 20 MSZN	C.98
3896200000	SP M6 20 MSZN	C.99
3896200000	SP M6 20 MSZN	C.100
3896200000	SP M6 20 MSZN	C.101
3896200000	SP M6 20 MSZN	C.102
3896200000	SP M6 20 MSZN	C.103
3896200000	SP M6 20 MSZN	C.104
3896200000	SP M6 20 MSZN	C.105
3896200000	SP M6 20 MSZN	C.106
3896200000	SP M6 20 MSZN	C.107
3896200000	SP M6 20 MSZN	C.108
3896200000	SP M6 20 MSZN	C.112
3896200000	SP M6 20 MSZN	C.113
3896200000	SP M6 20 MSZN	C.114
3896200000	SP M6 20 MSZN	C.115
3896200000	SP M6 20 MSZN	C.116
3896200000	SP M6 20 MSZN	C.117
3896200000	SP M6 20 MSZN	C.118
3896200000	SP M6 20 MSZN	C.119
3896200000	SP M6 20 MSZN	C.120
3896200000	SP M6 20 MSZN	C.121
3896200000	SP M6 20 MSZN	C.124
3896200000	SP M6 20 MSZN	C.125
3896200000	SP M6 20 MSZN	C.126
3896200000	SP M6 20 MSZN	C.127
3896200000	SP M6 20 MSZN	C.128
3896200000	SP M6 20 MSZN	C.129
3896200000	SP M6 20 MSZN	C.132
3896200000	SP M6 20 MSZN	C.133
3896200000	SP M6 20 MSZN	C.134
3896200000	SP M6 20 MSZN	C.135
3896200000	SP M6 20 MSZN	C.136
3896200000	SP M6 20 MSZN	C.137
3896300000	SP M6 30 MSZN	C.98
3896300000	SP M6 30 MSZN	C.99
3896300000	SP M6 30 MSZN	C.100
3896300000	SP M6 30 MSZN	C.101
3896300000	SP M6 30 MSZN	C.102
3896300000	SP M6 30 MSZN	C.103
3896300000	SP M6 30 MSZN	C.104
3896300000	SP M6 30 MSZN	C.105
3896300000	SP M6 30 MSZN	C.106
3896300000	SP M6 30 MSZN	C.107
3896300000	SP M6 30 MSZN	C.108

Order No.	Type	Page
3896300000	SP M6 30 MSZN	C.112
3896300000	SP M6 30 MSZN	C.113
3896300000	SP M6 30 MSZN	C.114
3896300000	SP M6 30 MSZN	C.115
3896300000	SP M6 30 MSZN	C.116
3896300000	SP M6 30 MSZN	C.117
3896300000	SP M6 30 MSZN	C.118
3896300000	SP M6 30 MSZN	C.119
3896300000	SP M6 30 MSZN	C.120
3896300000	SP M6 30 MSZN	C.121
3896300000	SP M6 30 MSZN	C.124
3896300000	SP M6 30 MSZN	C.125
3896300000	SP M6 30 MSZN	C.126
3896300000	SP M6 30 MSZN	C.127
3896300000	SP M6 30 MSZN	C.128
3896300000	SP M6 30 MSZN	C.129
3896300000	SP M6 30 MSZN	C.132
3896300000	SP M6 30 MSZN	C.133
3896300000	SP M6 30 MSZN	C.134
3896300000	SP M6 30 MSZN	C.135
3896300000	SP M6 30 MSZN	C.136
3896300000	SP M6 30 MSZN	C.137
7900000000		
7906080000	BK 4/E	C.196
8000000000		
8000003446	KLIPPON K41 2M25AB CSS	C.196
8000003447	KLIPPON K41 3M20AB CSS	C.196
8000003448	KLIPPON POK4 3M20AB CSS	C.230
8000003448	KLIPPON POK4 3M20AB CSS	C.235
8000003589	KLIPPON K41 M25WCSS EX	C.196
8000003591	KLIPPON K41 M20WCSS EX	C.196
8000003593	KLIPPON POK4 M20WCSS EX	C.230
8000003593	KLIPPON POK4 M20WCSS EX	C.235
8000003594	KLIPPON POK4 M20ZCSS EX	C.230
8000003594	KLIPPON POK4 M20ZCSS EX	C.235
8000003889	TS15X5 ST POK 0808	C.212
8000003890	TS15X5 ST POK 0811	C.213
8000003890	TS15X5 ST POK 0811	C.217
8000003891	TS15X5 ST POK 0816	C.214
8000003892	TS15X5 ST POK 0819	C.215
8000003908	TS35X7.5 ST K52	C.219
8000003909	TS35X7.5 ST POK 1626	C.220
8000003910	TS35X7.5 ST POK 1636	C.221
8000003911	TS35X7.5 ST POK 1656	C.222
8000003912	TS35X7.5 ST POK 2525	C.223
8000003912	TS35X7.5 ST POK 2525	C.224
8000003913	TS35X7.5 ST POK 4040	C.225
8000003913	TS35X7.5 ST POK 4040	C.226
8000003913	TS35X7.5 ST POK 4040	C.228
8000003914	TS35X7.5 ST POK 2560	C.227
8000004129	MOPL SET BK4 S	C.196
8000004130	KL SET 5Z2.5 S	C.196
8000004132	MOPL SET BK6 S	C.196
8000004133	KL SET 14Z2.5 S	C.196
8000004134	KL SET 13A4 S	C.196
8000004135	MOPL SET BK12 S	C.196
8000004136	KL SET 24Z2.5 S	C.196
8000004139	KL SET 4Z4 S	C.196
8000004142	KL SET 32W4 S	C.196
8000004142	KL SET 32W4 S	C.230
8000004142	KL SET 32W4 S	C.236
8000004143	KL SET 38Z2.5 S	C.196
8000004143	KL SET 38Z2.5 S	C.230
8000004143	KL SET 38Z2.5 S	C.236
8000004144	KL SET 6A4 S	C.230
8000004144	KL SET 6A4 S	C.232
8000004146	KL SET 18A4 S	C.230
8000004146	KL SET 18A4 S	C.234
8000004147	KLIPPON K1 1,5M16AB CSS	C.196
8000004148	KLIPPON K1 1M20AB CSS	C.196
8000004149	KLIPPON K11 2M16AB CSS	C.196
8000004150	KLIPPON K11 2M20AB CSS	C.196
8000004151	KLIPPON K2 2M20AB CSS	C.196
8000004152	KLIPPON K21 3M16AB CSS	C.196
8000004153	KLIPPON K3 4M20AB CSS	C.196
8000004154	KLIPPON K31 4M20AB CSS	C.196
8000004155	KLIPPON K4 2M20AB CSS	C.196
8000004158	KLIPPON K5 4M20AB CSS	C.196
8000004160	KLIPPON POK1 2M16AB CSS	C.230
8000004160	KLIPPON POK1 2M16AB CSS	C.232
8000004161	KLIPPON POK2 2M20AB CSS	C.230
8000004161	KLIPPON POK2 2M20AB CSS	C.233
8000004162	KLIPPON POK3 4M20AB CSS	C.230
8000004162	KLIPPON POK3 4M20AB CSS	C.234
8000004164	KLIPPON POK51 4M20ABCSS	C.230
8000004164	KLIPPON POK51 4M20ABCSS	C.236
8000004184	KLIPPON K01 1M16AB CSS	C.196
8000004202	KLIPPON K1 M16BCSS EX	C.196
8000004203	KLIPPON K1 M20BCSS EX	C.196
8000004204	KLIPPON K11 M16ZCSS EX	C.196
8000004207	KLIPPON K11 M16ACSS EX	C.196
8000004208	KLIPPON K11 M20ZCSS EX	C.196
8000004209	KLIPPON K11 M20ACSS EX	C.196
8000004210	KLIPPON K2 M20BCSS EX	C.196
8000004211	KLIPPON K21 M16ZCSS EX	C.196

Order No.	Type	Page
8000004212	KLIPPON K21 M16ACSS EX	C.196
8000004214	KLIPPON K31 M20ZCSS EX	C.196
8000004218	KLIPPON K5 4M20WCSS EX	C.196
8000004219	KLIPPON K5 4M20ZCSS EX	C.196
8000004220	KLIPPON K52 M20WCSS EX	C.196
8000004221	KLIPPON K52 M20ZCSS EX	C.196
8000004222	KLIPPON POK1 M16BCSS EX	C.230
8000004222	KLIPPON POK1 M16BCSS EX	C.232
8000004223	KLIPPON POK1 M16ACSS EX	C.230
8000004223	KLIPPON POK1 M16ACSS EX	C.232
8000004224	KLIPPON POK2 M20BCSS EX	C.230
8000004224	KLIPPON POK2 M20BCSS EX	C.233
8000004225	KLIPPON POK2 M20ACSS EX	C.230
8000004225	KLIPPON POK2 M20ACSS EX	C.233
8000004226	KLIPPON POK3 M20BCSS EX	C.230
8000004226	KLIPPON POK3 M20BCSS EX	C.234
8000004228	KLIPPON POK3 M20ACSS EX	C.230
8000004228	KLIPPON POK3 M20ACSS EX	C.234
8000004229	KLIPPON POK51 M20WCSS E	C.230
8000004229	KLIPPON POK51 M20WCSS E	C.236
8000004230	KLIPPON POK51 M20ZCSS E	C.230
8000004230	KLIPPON POK51 M20ZCSS E	C.236
8000004365	KL SET KLIPPON POK1 BK4	C.230
8000004365	KL SET KLIPPON POK1 BK4	C.232
8000004366	KL SET KLIPPON POK2 BK6	C.230
8000004366	KL SET KLIPPON POK2 BK6	C.233
8000004367	KL SET KLIPPON POK3BK12	C.230
8000004367	KL SET KLIPPON POK3BK12	C.234
8000006708	TS35X7.5 ST KTB2215 VER	C.20
8000006709	TS35X7.5 ST KTB2626 VER	C.21
8000006709	TS35X7.5 ST KTB2626 VER	C.22
8000006710	TS35X7.5 ST KTB3030 VER	C.24
8000006710	TS35X7.5 ST KTB3030 VER	C.25
8000006711	TS35X7.5 ST KTB3526 VER	C.26
8000006711	TS35X7.5 ST KTB3526 VER	C.27
8000006712	TS35X7.5 ST KTB4030 VER	C.31
8000006712	TS35X7.5 ST KTB4030 VER	C.32
8000006713	TS35X7.5 ST KTB4538 VER	C.35
8000006713	TS35X7.5 ST KTB4538 VER	C.36
8000006714	TS35X7.5 ST KTB4848 VER	C.38
8000006714	TS35X7.5 ST KTB4848 VER	C.39
8000006715	TS35X7.5 ST KTB5535 VER	C.43
8000006715	TS35X7.5 ST KTB5535 VER	C.44
8000006716	TS35X7.5 ST KTB6245 VER	C.46
8000006716	TS35X7.5 ST KTB6245 VER	C.47
8000006717	TS35X7.5 ST KTB7650 VER	C.52
8000006717	TS35X7.5 ST KTB7650 VER	C.53
8000006718	TS35X7.5 ST KTB9161 VER	C.56
8000006718	TS35X7.5 ST KTB9161 VER	C.57
8000006719	TS35X7.5 ST KTB9874 VER	C.60
8000006720	TS35X7.5 ST KTB2215 HOR	C.20
8000006721	TS35X7.5 ST KTB3526 HOR	C.21
8000006721	TS35X7.5 ST KTB3526 HOR	C.22
8000006721	TS35X7.5 ST KTB3526 HOR	C.26
8000006721	TS35X7.5 ST KTB3526 HOR	C.27
8000006722	TS35X7.5 ST KTB3030 HOR	C.24
8000006722	TS35X7.5 ST KTB3030 HOR	C.25
8000006723	TS35X7.5 ST KTB4030 HOR	C.31
8000006723	TS35X7.5 ST KTB4030 HOR	C.32
8000006724	TS35X7.5 ST KTB4538 HOR	C.35
8000006724	TS35X7.5 ST KTB4538 HOR	C.36
8000006725	TS35X7.5 ST KTB4848 HOR	C.38
8000006725	TS35X7.5 ST KTB4848 HOR	C.39
8000006726	TS35X7.5 ST KTB5535 HOR	C.43
8000006726	TS35X7.5 ST KTB5535 HOR	C.44
8000006727	TS35X7.5 ST KTB6245 HOR	C.46
8000006727	TS35X7.5 ST KTB6245 HOR	C.47
8000006728	TS35X7.5 ST KTB7650 HOR	C.52
8000006728	TS35X7.5 ST KTB7650 HOR	C.53
8000006729	TS35X7.5 ST KTB9161 HOR	C.56
8000006729	TS35X7.5 ST KTB9161 HOR	C.57
8000006730	TS35X7.5 ST KTB9874 HOR	C.60
8000028395	STB 2 EXE	C.150
8000028395	STB 2 EXE	C.152
8000028396	STB 3 EXE	C.150
8000028396	STB 3 EXE	C.153
8000028397	STB 4 EXE	C.150
8000028397	STB 4 EXE	C.154
8000028398	KTB MH 221513 EXIA	C.68
8000028398	KTB MH 221513 EXIA	C.70
8000028399	KTB MH 262615 EXIA	C.68
8000028399	KTB MH 262615 EXIA	C.71
8000028401	KTB QL 484820 EXE	C.68
8000028401	KTB QL 484820 EXE	C.72
8000032382	TS15X5 ST POK 0823	C.216
8000037557	TS35X7.5 ST FPC 20 HOR	C.276
8000037558	TS35X7.5 ST FPC 20 VER	C.276
8000037558	TS35X7.5 ST FPC 20 VER	C.277
8000037559	TS35X7.5 ST FPC 30 HOR	C.276
8000037560	TS35X7.5 ST FPC 40 HOR	C.277
8000037560	TS35X7.5 ST FPC 40 HOR	C.278
8000037561	TS35X7.5 ST FPC 30 VER	C.278
8000037562	TS35X7.5 ST FPC 40 VER	C.278
8000037563	TS35X7.5 ST FPC 60 HOR	C.278
8000037568	TS35X7.5 ST POK 1222	C.218
8000037598	TS15X5 ST MPC1217 VER	C.264
8000037598	TS15X5 ST MPC1217 VER	C.265
8000037598	TS15X5 ST MPC1217 VER	C.266
8000037598	TS15X5 ST MPC1217 VER	C.267

Order No.	Type	Page
8000037598	TS15X5 ST MPC1217 VER	C.268
8000037599	TS15X5 ST MPC0712 VER	C.264
8000037599	TS15X5 ST MPC0712 VER	C.265
8000037600	TS35X7.5 ST MPC1725 VER	C.268
8000037600	TS35X7.5 ST MPC1725 VER	C.269
8000037600	TS35X7.5 ST MPC1725 VER	C.270
8000037600	TS35X7.5 ST MPC1725 VER	C.271
8000037600	TS35X7.5 ST MPC1725 VER	C.272
8000037601	TS35X7.5 ST MPC1725 HOR	C.271
8000037601	TS35X7.5 ST MPC1725 HOR	C.272
8000037603	TS 35X105_MPC_12	C.264
8000037603	TS 35X105_MPC_12	C.265
8000037603	TS 35X105_MPC_12	C.267
8000037603	TS 35X105_MPC_12	C.269
8000037604	TS15X5 ST FPC 20 VER	C.276
8000037604	TS15X5 ST FPC 20 VER	C.277
8000037605	TS35 MPC 1717 VER	C.265
8000037605	TS35 MPC 1717 VER	C.267
8000037605	TS35 MPC 1717 VER	C.268
8000037605	TS35 MPC 1717 VER	C.269
8000052518	KLIPPON POK 252512 M25 E60	C.249
8000052518	KLIPPON POK 252512 M25 E60	C.252
8000052519	KLIPPON STB 4 MS M25 E90	C.167
8000052519	KLIPPON STB 4 MS M25 E90	C.170
8000052592	KLIPPON STB 4 MS FH M25 E90	C.167
8000052592	KLIPPON STB 4 MS FH M25 E90	C.168
8000052636	KLIPPON POK 252512 FH M25 E60	C.249
8000052636	KLIPPON POK 252512 FH M25 E60	C.250
8000054730	KLIPPON POK 252512 M32 E60	C.249
8000054730	KLIPPON POK 252512 M32 E60	C.253
8000054731	KLIPPON POK 252512 FH M32 E60	C.249
8000054731	KLIPPON POK 252512 FH M32 E60	C.251
8000054772	KLIPPON STB 4 MS M32 E90	C.167
8000054772	KLIPPON STB 4 MS M32 E90	C.171
8000054773	KLIPPON STB 4 MS FH M32 E90	C.167
8000054773	KLIPPON STB 4 MS FH M32 E90	C.169
8000071017	KEBXHS202015S4B1 AK	C.96
8000071017	KEBXHS202015S4B1 AK	C.98
8000071018	KEBXHS303015S4B1 AK	C.96
8000071018	KEBXHS303015S4B1 AK	C.99
8000071019	KEBXHS303020S4B1 AK	C.96
8000071019	KEBXHS303020S4B1 AK	C.100
8000071020	KEBXHS403020S4B1 AK	C.96
8000071020	KEBXHS403020S4B1 AK	C.101
8000071021	KEBXHS404020S4B1 AK	C.96
8000071021	KEBXHS404020S4B1 AK	C.102
8000071022	KEBXHS406020S4B1 AK	C.96
8000071022	KEBXHS406020S4B1 AK	C.103
8000071023	KEBXHS504020S4B1 AK	C.96
8000071023	KEBXHS504020S4B1 AK	C.104
8000071024	KEBXHS505020S4B1 AK	C.96
8000071024	KEBXHS505020S4B1 AK	C.105
8000071026	KEBXHS506020S4B1 AK	C.96
8000071026	KEBXHS506020S4B1 AK	C.106
8000071029	KEBXHS604020S4B1 AK	C.96
8000071029	KEBXHS604020S4B1 AK	C.107
8000071030	KEBXHS806020S4B1 AK	C.96
8000071030	KEBXHS806020S4B1 AK	C.108
8000071033	KEBXQL202020S4B1 AK	C.110
8000071033	KEBXQL202020S4B1 AK	C.112
8000071034	KEBXQL303020S4B1 AK	C.110
8000071034	KEBXQL303020S4B1 AK	C.113
8000071035	KEBXQL403030S4B1 AK	C.110
8000071035	KEBXQL403030S4B1 AK	C.114
8000071036	KEBXQL404030S4B1 AK	C.110
8000071036	KEBXQL404030S4B1 AK	C.115
8000071037	KEBXQL406030S4B1 AK	C.110
8000071037	KEBXQL406030S4B1 AK	C.116
8000071038	KEBXQL504030S4B1 AK	C.110
8000071038	KEBXQL504030S4B1 AK	C.117
8000071039	KEBXQL505030S4B1 AK	C.110
8000071039	KEBXQL505030S4B1 AK	C.118
8000071040	KEBXQL506030S4B1 AK	C.110
8000071040	KEBXQL506030S4B1 AK	C.119
8000071042	KEBXQL604030S4B1 AK	C.110
8000071042	KEBXQL604030S4B1 AK	C.120
8000071043	KEBXQL806030S4B1 AK	C.110
8000071043	KEBXQL806030S4B1 AK	C.121
8000073447	TS35X7.5 ST KTB3555 HOR	C.30
8000073449	TS35X7.5 ST KTB5076 VER-C	C.42
8000074117	KEB MOPL 2020 MSZN	C.98
8000074117	KEB MOPL 2020 MSZN	C.112
8000074117	KEB MOPL 2020 MSZN	C.124
8000074117	KEB MOPL 2020 MSZN	C.132
8000074171	KEB MOPL 3030 MSZN	C.99
8000074171	KEB MOPL 3030 MSZN	C.100
8000074171	KEB MOPL 3030 MSZN	C.113
8000074171	KEB MOPL 3030 MSZN	C.125
8000074171	KEB MOPL 3030 MSZN	C.126
8000074171	KEB MOPL 3030 MSZN	C.133
8000074171	KEB MOPL 3030 MSZN	C.134
8000074172	KEB MOPL 4030 MSZN	C.101
8000074172	KEB MOPL 4030 MSZN	C.114
8000074172	KEB MOPL 4030 MSZN	C.127
8000074172	KEB MOPL 4030 MSZN	C.135
8000074173	KEB MOPL 4040 MSZN	C.102
8000074173	KEB MOPL 4040 MSZN	C.115
8000074173	KEB MOPL 4040 MSZN	C.128
8000074173	KEB MOPL 4040 MSZN	C.136

X

Order No.	Type	Page
8000074174	KEB MOPL 4060 MSZN	C.103
8000074174	KEB MOPL 4060 MSZN	C.116
8000074175	KEB MOPL 5040 MSZN	C.104
8000074175	KEB MOPL 5040 MSZN	C.117
8000074175	KEB MOPL 5040 MSZN	C.129
8000074175	KEB MOPL 5040 MSZN	C.137
8000074176	KEB MOPL 5050 MSZN	C.105
8000074176	KEB MOPL 5050 MSZN	C.118
8000074177	KEB MOPL 5060 MSZN	C.106
8000074177	KEB MOPL 5060 MSZN	C.119
8000074178	KEB MOPL 6040 MSZN	C.107
8000074178	KEB MOPL 6040 MSZN	C.120
8000074179	KEB MOPL 8060 MSZN	C.108
8000074179	KEB MOPL 8060 MSZN	C.121
8000074314	KEB MOPL 2020 S2N H	C.98
8000074314	KEB MOPL 2020 S2N H	C.112
8000074314	KEB MOPL 2020 S2N H	C.124
8000074314	KEB MOPL 2020 S2N H	C.132
8000074316	KEB MOPL 3030 S2N H	C.99
8000074316	KEB MOPL 3030 S2N H	C.100
8000074316	KEB MOPL 3030 S2N H	C.113
8000074316	KEB MOPL 3030 S2N H	C.125
8000074316	KEB MOPL 3030 S2N H	C.126
8000074316	KEB MOPL 3030 S2N H	C.133
8000074316	KEB MOPL 3030 S2N H	C.134
8000074318	KEB MOPL 4030 S2N H	C.101
8000074318	KEB MOPL 4030 S2N H	C.114
8000074318	KEB MOPL 4030 S2N H	C.127
8000074318	KEB MOPL 4030 S2N H	C.135
8000074319	KEB MOPL 4040 S2N H	C.102
8000074319	KEB MOPL 4040 S2N H	C.115
8000074319	KEB MOPL 4040 S2N H	C.128
8000074319	KEB MOPL 4040 S2N H	C.136
8000074320	KEB MOPL 4060 S2N H	C.103
8000074320	KEB MOPL 4060 S2N H	C.116
8000074321	KEB MOPL 5040 S2N H	C.104
8000074321	KEB MOPL 5040 S2N H	C.117
8000074321	KEB MOPL 5040 S2N H	C.129
8000074321	KEB MOPL 5040 S2N H	C.137
8000074322	KEB MOPL 5050 S2N H	C.105
8000074322	KEB MOPL 5050 S2N H	C.118
8000074323	KEB MOPL 5060 S2N H	C.106
8000074323	KEB MOPL 5060 S2N H	C.119
8000074324	KEB MOPL 6040 S2N H	C.107
8000074324	KEB MOPL 6040 S2N H	C.120
8000074325	KEB MOPL 8060 S2N H	C.108
8000074325	KEB MOPL 8060 S2N H	C.121
8000075807	DOHA KEB A6 S4B R	C.99
8000075807	DOHA KEB A6 S4B R	C.100
8000075807	DOHA KEB A6 S4B R	C.101
8000075807	DOHA KEB A6 S4B R	C.102
8000075807	DOHA KEB A6 S4B R	C.103
8000075807	DOHA KEB A6 S4B R	C.104
8000075807	DOHA KEB A6 S4B R	C.105
8000075807	DOHA KEB A6 S4B R	C.106
8000075807	DOHA KEB A6 S4B R	C.107
8000075807	DOHA KEB A6 S4B R	C.108
8000075807	DOHA KEB A6 S4B R	C.113
8000075807	DOHA KEB A6 S4B R	C.114
8000075807	DOHA KEB A6 S4B R	C.115
8000075807	DOHA KEB A6 S4B R	C.116
8000075807	DOHA KEB A6 S4B R	C.117
8000075807	DOHA KEB A6 S4B R	C.118
8000075807	DOHA KEB A6 S4B R	C.119
8000075807	DOHA KEB A6 S4B R	C.120
8000075807	DOHA KEB A6 S4B R	C.121
8000075807	DOHA KEB A6 S4B R	C.125
8000075807	DOHA KEB A6 S4B R	C.126
8000075807	DOHA KEB A6 S4B R	C.127
8000075807	DOHA KEB A6 S4B R	C.128
8000075807	DOHA KEB A6 S4B R	C.129
8000075807	DOHA KEB A6 S4B R	C.133
8000075807	DOHA KEB A6 S4B R	C.134
8000075807	DOHA KEB A6 S4B R	C.135
8000075807	DOHA KEB A6 S4B R	C.136
8000075807	DOHA KEB A6 S4B R	C.137
8000075808	DOHA KEB A5 S4B R	C.102
8000075808	DOHA KEB A5 S4B R	C.103
8000075808	DOHA KEB A5 S4B R	C.104
8000075808	DOHA KEB A5 S4B R	C.105
8000075808	DOHA KEB A5 S4B R	C.106
8000075808	DOHA KEB A5 S4B R	C.107
8000075808	DOHA KEB A5 S4B R	C.108
8000075808	DOHA KEB A5 S4B R	C.115
8000075808	DOHA KEB A5 S4B R	C.116
8000075808	DOHA KEB A5 S4B R	C.117
8000075808	DOHA KEB A5 S4B R	C.118
8000075808	DOHA KEB A5 S4B R	C.119
8000075808	DOHA KEB A5 S4B R	C.120
8000075808	DOHA KEB A5 S4B R	C.121
8000075808	DOHA KEB A5 S4B R	C.128
8000075808	DOHA KEB A5 S4B R	C.129
8000075808	DOHA KEB A5 S4B R	C.136
8000075808	DOHA KEB A5 S4B R	C.137
8000075809	DOHA KEB A4 S4B R	C.102
8000075809	DOHA KEB A4 S4B R	C.103
8000075809	DOHA KEB A4 S4B R	C.104
8000075809	DOHA KEB A4 S4B R	C.105
8000075809	DOHA KEB A4 S4B R	C.106
8000075809	DOHA KEB A4 S4B R	C.107
8000075809	DOHA KEB A4 S4B R	C.108
8000075809	DOHA KEB A4 S4B R	C.115
8000075809	DOHA KEB A4 S4B R	C.116
8000075809	DOHA KEB A4 S4B R	C.117
8000075809	DOHA KEB A4 S4B R	C.118
8000075809	DOHA KEB A4 S4B R	C.119
8000075809	DOHA KEB A4 S4B R	C.120
8000075809	DOHA KEB A4 S4B R	C.121
8000075809	DOHA KEB A4 S4B R	C.128
8000075809	DOHA KEB A4 S4B R	C.129
8000075809	DOHA KEB A4 S4B R	C.136
8000075809	DOHA KEB A4 S4B R	C.137
8000075816	TPSDHA KEB 130X50 S4B R	C.98
8000075816	TPSDHA KEB 130X50 S4B R	C.99
8000075816	TPSDHA KEB 130X50 S4B R	C.100
8000075816	TPSDHA KEB 130X50 S4B R	C.101
8000075816	TPSDHA KEB 130X50 S4B R	C.102
8000075816	TPSDHA KEB 130X50 S4B R	C.103
8000075816	TPSDHA KEB 130X50 S4B R	C.104
8000075816	TPSDHA KEB 130X50 S4B R	C.105
8000075816	TPSDHA KEB 130X50 S4B R	C.106
8000075816	TPSDHA KEB 130X50 S4B R	C.107
8000075816	TPSDHA KEB 130X50 S4B R	C.108
8000075816	TPSDHA KEB 130X50 S4B R	C.112
8000075816	TPSDHA KEB 130X50 S4B R	C.113
8000075816	TPSDHA KEB 130X50 S4B R	C.114
8000075816	TPSDHA KEB 130X50 S4B R	C.115
8000075816	TPSDHA KEB 130X50 S4B R	C.116
8000075816	TPSDHA KEB 130X50 S4B R	C.117
8000075816	TPSDHA KEB 130X50 S4B R	C.118
8000075816	TPSDHA KEB 130X50 S4B R	C.119
8000075816	TPSDHA KEB 130X50 S4B R	C.120
8000075816	TPSDHA KEB 130X50 S4B R	C.121
8000075816	TPSDHA KEB 130X50 S4B R	C.124
8000075816	TPSDHA KEB 130X50 S4B R	C.125
8000075816	TPSDHA KEB 130X50 S4B R	C.126
8000075816	TPSDHA KEB 130X50 S4B R	C.127
8000075816	TPSDHA KEB 130X50 S4B R	C.128
8000075816	TPSDHA KEB 130X50 S4B R	C.129
8000075816	TPSDHA KEB 130X50 S4B R	C.132
8000075816	TPSDHA KEB 130X50 S4B R	C.133
8000075816	TPSDHA KEB 130X50 S4B R	C.134
8000075816	TPSDHA KEB 130X50 S4B R	C.135
8000075816	TPSDHA KEB 130X50 S4B R	C.136
8000075816	TPSDHA KEB 130X50 S4B R	C.137
8000075818	TPSDHA KEB 100X25 S4B R	C.98
8000075818	TPSDHA KEB 100X25 S4B R	C.99
8000075818	TPSDHA KEB 100X25 S4B R	C.100
8000075818	TPSDHA KEB 100X25 S4B R	C.101
8000075818	TPSDHA KEB 100X25 S4B R	C.102
8000075818	TPSDHA KEB 100X25 S4B R	C.103
8000075818	TPSDHA KEB 100X25 S4B R	C.104
8000075818	TPSDHA KEB 100X25 S4B R	C.105
8000075818	TPSDHA KEB 100X25 S4B R	C.106
8000075818	TPSDHA KEB 100X25 S4B R	C.107
8000075818	TPSDHA KEB 100X25 S4B R	C.108
8000075818	TPSDHA KEB 100X25 S4B R	C.112
8000075818	TPSDHA KEB 100X25 S4B R	C.113
8000075818	TPSDHA KEB 100X25 S4B R	C.114
8000075818	TPSDHA KEB 100X25 S4B R	C.115
8000075818	TPSDHA KEB 100X25 S4B R	C.116
8000075818	TPSDHA KEB 100X25 S4B R	C.117
8000075818	TPSDHA KEB 100X25 S4B R	C.118
8000075818	TPSDHA KEB 100X25 S4B R	C.119
8000075818	TPSDHA KEB 100X25 S4B R	C.120
8000075818	TPSDHA KEB 100X25 S4B R	C.121
8000075818	TPSDHA KEB 100X25 S4B R	C.124
8000075818	TPSDHA KEB 100X25 S4B R	C.125
8000075818	TPSDHA KEB 100X25 S4B R	C.126
8000075818	TPSDHA KEB 100X25 S4B R	C.127
8000075818	TPSDHA KEB 100X25 S4B R	C.128
8000075818	TPSDHA KEB 100X25 S4B R	C.129
8000075818	TPSDHA KEB 100X25 S4B R	C.132
8000075818	TPSDHA KEB 100X25 S4B R	C.133
8000075818	TPSDHA KEB 100X25 S4B R	C.134
8000075818	TPSDHA KEB 100X25 S4B R	C.135
8000075818	TPSDHA KEB 100X25 S4B R	C.136
8000075818	TPSDHA KEB 100X25 S4B R	C.137
8000080476	KTB FS 221513 S2B2 TUBEBOX	C.74
8000080476	KTB FS 221513 S2B2 TUBEBOX	C.77
8000080477	KTB FS 262615 S2B2 TUBEBOX SAKK 10	C.74
8000080477	KTB FS 262615 S2B2 TUBEBOX SAKK 10	C.78
8000080478	KTB FS 262615 S2N2 TRAINBOX SMALL	C.74
8000080478	KTB FS 262615 S2N2 TRAINBOX SMALL	C.79
8000080479	KTB FS 352615 S2P2 TRAINBOX HV	C.74
8000080479	KTB FS 352615 S2P2 TRAINBOX HV	C.80
8000080480	KTB FS 262615 S2B1 TRACKBOX SMALL	C.74
8000080480	KTB FS 262615 S2B1 TRACKBOX SMALL	C.82
8000080481	KTB FS 553518 S2B1 TRACKBOX EQP	C.74
8000080481	KTB FS 553518 S2B1 TRACKBOX EQP	C.83
8000080482	KTB FS 624515 S2B1 TRACKBOX BIG	C.74
8000080482	KTB FS 624515 S2B1 TRACKBOX BIG	C.84
8000080863	KTB FS 453815 S2N2 TRAINBOX BIG	C.74
8000080863	KTB FS 453815 S2N2 TRAINBOX BIG	C.81
8000090342	KEBIHS202015S2N0 AL	C.130
8000090342	KEBIHS202015S2N0 AL	C.132
8000090343	KEBIHS303015S2N0 AL	C.130
8000090343	KEBIHS303015S2N0 AL	C.133
8000090344	KEBIHS303020S2N0 AL	C.130
8000090344	KEBIHS303020S2N0 AL	C.134
8000090345	KEBIHS403020S2N0 AL	C.130
8000090345	KEBIHS403020S2N0 AL	C.135
8000090346	KEBIHS404020S2N0 AL	C.130
8000090346	KEBIHS404020S2N0 AL	C.136
8000090347	KEBIHS504020S2N0 AL	C.130
8000090347	KEBIHS504020S2N0 AL	C.137
8000090348	KEBIHS202015S2N1 AL	C.130
8000090348	KEBIHS202015S2N1 AL	C.132
8000090349	KEBIHS303015S2N1 AL	C.130
8000090349	KEBIHS303015S2N1 AL	C.133
8000090351	KEBIHS303020S2N1 AL	C.130
8000090351	KEBIHS303020S2N1 AL	C.134
8000090352	KEBIHS403020S2N1 AL	C.130
8000090352	KEBIHS403020S2N1 AL	C.135
8000090354	KEBIHS404020S2N1 AL	C.130
8000090354	KEBIHS404020S2N1 AL	C.136
8000090355	KEBIHS504020S2N1 AL	C.130
8000090355	KEBIHS504020S2N1 AL	C.137
8000090356	KEBIQL202015S2N0 AL	C.122
8000090356	KEBIQL202015S2N0 AL	C.124
8000090357	KEBIQL303015S2N0 AL	C.122
8000090357	KEBIQL303015S2N0 AL	C.125
8000090358	KEBIQL303020S2N0 AL	C.122
8000090358	KEBIQL303020S2N0 AL	C.126
8000090359	KEBIQL403020S2N0 AL	C.122
8000090359	KEBIQL403020S2N0 AL	C.127
8000090360	KEBIQL404020S2N0 AL	C.122
8000090360	KEBIQL404020S2N0 AL	C.128
8000090361	KEBIQL504020S2N0 AL	C.122
8000090361	KEBIQL504020S2N0 AL	C.129
8000090362	KEBIQL202015S2N1 AL	C.122
8000090362	KEBIQL202015S2N1 AL	C.124
8000090363	KEBIQL303015S2N1 AL	C.122
8000090363	KEBIQL303015S2N1 AL	C.125
8000090364	KEBIQL303020S2N1 AL	C.122
8000090364	KEBIQL303020S2N1 AL	C.126
8000090365	KEBIQL403020S2N1 AL	C.122
8000090365	KEBIQL403020S2N1 AL	C.127
8000090366	KEBIQL404020S2N1 AL	C.122
8000090366	KEBIQL404020S2N1 AL	C.128
8000090367	KEBIQL504020S2N1 AL	C.122
8000090367	KEBIQL504020S2N1 AL	C.129
8000092462	KTB FS 302915 S2N2 ANGLEDBOX EDGE HV	C.74
80000292462	KTB FS 302915 S2N2 ANGLEDBOX EDGE HV	C.85
8000108831	KTB MH 302015 S4E0	C.15
8000108831	KTB MH 302015 S4E0	C.23
8000108832	KTB MH 302015 S4E1	C.15
8000108832	KTB MH 302015 S4E1	C.23
8000108833	KTB MH 302015 S4E3	C.15
8000108833	KTB MH 302015 S4E3	C.23
8000108834	KTB MH 353515 S4E0	C.15
8000108834	KTB MH 353515 S4E0	C.28
8000108835	KTB MH 353515 S4E1	C.15
8000108835	KTB MH 353515 S4E1	C.28
8000108836	KTB MH 353515 S4E3	C.15
8000108836	KTB MH 353515 S4E3	C.28
8000108837	KTB MH 353520 S4E0	C.15
8000108837	KTB MH 353520 S4E0	C.29
8000108838	KTB MH 353520 S4E1	C.15
8000108838	KTB MH 353520 S4E1	C.29
8000108839	KTB MH 353520 S4E3	C.15
8000108839	KTB MH 353520 S4E3	C.29
8000108840	KTB MH 404015 S4E0	C.15
8000108840	KTB MH 404015 S4E0	C.33
8000108841	KTB MH 404015 S4E1	C.15
8000108841	KTB MH 404015 S4E1	C.33
8000108842	KTB MH 404015 S4E3	C.15
8000108842	KTB MH 404015 S4E3	C.33
8000108843	KTB MH 404020 S4E0	C.15
8000108843	KTB MH 404020 S4E0	C.34
8000108844	KTB MH 404020 S4E1	C.15
8000108844	KTB MH 404020 S4E1	C.34
8000108845	KTB MH 404020 S4E3	C.15
8000108845	KTB MH 404020 S4E3	C.34
8000108846	KTB MH 504015 S4E0	C.15
8000108846	KTB MH 504015 S4E0	C.40
8000108847	KTB MH 504015 S4E1	C.15
8000108847	KTB MH 504015 S4E1	C.40
8000108848	KTB MH 504015 S4E3	C.15
8000108848	KTB MH 504015 S4E3	C.40
8000108849	KTB MH 504020 S4E0	C.15
8000108849	KTB MH 504020 S4E0	C.41
8000108850	KTB MH 504020 S4E1	C.15
8000108850	KTB MH 504020 S4E1	C.41
8000108851	KTB MH 504020 S4E3	C.15
8000108851	KTB MH 504020 S4E3	C.41
8000108852	KTB MH 624020 S4E0	C.15
8000108852	KTB MH 624020 S4E0	C.45
8000108853	KTB MH 624020 S4E1	C.15
8000108853	KTB MH 624020 S4E1	C.45
8000108854	KTB MH 624020 S4E3	C.15
8000108854	KTB MH 624020 S4E3	C.45
8000108855	KTB MH 625015 S4E0	C.15
8000108855	KTB MH 625015 S4E0	C.48
8000108856	KTB MH 625015 S4E1	C.15
8000108856	KTB MH 625015 S4E1	C.48
8000108857	KTB MH 625015 S4E3	C.15
8000108857	KTB MH 625015 S4E3	C.48
8000108858	KTB MH 625020 S4E0	C.15
8000108858	KTB MH 625020 S4E0	C.49
8000108859	KTB MH 625020 S4E1	C.15
8000108859	KTB MH 625020 S4E1	C.49
8000108860	KTB MH 625020 S4E3	C.15
8000108860	KTB MH 625020 S4E3	C.49
8000108861	KTB MH 626215 S4E0	C.15
8000108861	KTB MH 626215 S4E0	C.50
8000108862	KTB MH 626215 S4E1	C.15
8000108862	KTB MH 626215 S4E1	C.50
8000108863	KTB MH 626215 S4E3	C.15
8000108863	KTB MH 626215 S4E3	C.50
8000108864	KTB MH 626220 S4E0	C.15
8000108864	KTB MH 626220 S4E0	C.51
8000108865	KTB MH 626220 S4E1	C.15
8000108865	KTB MH 626220 S4E1	C.51
8000108866	KTB MH 626220 S4E3	C.15
8000108866	KTB MH 626220 S4E3	C.51
8000108867	KTB MH 766215 S4E0	C.15
8000108867	KTB MH 766215 S4E0	C.54
8000108868	KTB MH 766215 S4E1	C.15
8000108868	KTB MH 766215 S4E1	C.54
8000108869	KTB MH 766215 S4E3	C.15
8000108869	KTB MH 766215 S4E3	C.54
8000108870	KTB MH 766220 S4E0	C.15
8000108870	KTB MH 766220 S4E0	C.55
8000108872	KTB MH 766220 S4E1	C.15
8000108872	KTB MH 766220 S4E1	C.55
8000108873	KTB MH 766220 S4E3	C.15
8000108873	KTB MH 766220 S4E3	C.55
8000108875	KTB MH 917620 S4E0	C.15
8000108875	KTB MH 917620 S4E0	C.58
8000108877	KTB MH 917620 S4E1	C.15
8000108877	KTB MH 917620 S4E1	C.58
8000108879	KTB MH 917620 S4E3	C.15
8000108879	KTB MH 917620 S4E3	C.58
8000108880	KTB MH 919120 S4E0	C.15
8000108880	KTB MH 919120 S4E0	C.59
8000108882	KTB MH 919120 S4E1	C.15
8000108882	KTB MH 919120 S4E1	C.59
8000108884	KTB MH 919120 S4E3	C.15
8000108884	KTB MH 919120 S4E3	C.59
8000109883	KTB QL 302015 S4E0	C.63
8000109885	KTB QL 302015 S4E1	C.63
8000109886	KTB QL 302015 S4E3	C.63
8000109887	KTB QL 353515 S4E0	C.63
8000109888	KTB QL 353515 S4E1	C.63
8000109889	KTB QL 353515 S4E3	C.63
8000109890	KTB QL 353520 S4E0	C.63
8000109891	KTB QL 353520 S4E1	C.63
8000109892	KTB QL 353520 S4E3	C.63
8000109893	KTB QL 404015 S4E0	C.63
8000109894	KTB QL 404015 S4E1	C.63
8000109895	KTB QL 404015 S4E3	C.63
8000109896	KTB QL 404020 S4E0	C.63
8000109897	KTB QL 404020 S4E1	C.63
8000109898	KTB QL 404020 S4E3	C.63
8000109899	KTB QL 504015 S4E0	C.63
8000109900	KTB QL 504015 S4E1	C.63
8000109901	KTB QL 504015 S4E3	C.63
8000109902	KTB QL 504020 S4E0	C.63
8000109903	KTB QL 504020 S4E1	C.63
8000109904	KTB QL 504020 S4E3	C.63
8000109905	KTB QL 624020 S4E0	C.63
8000109906	KTB QL 624020 S4E1	C.63
8000109907	KTB QL 624020 S4E3	C.63
8000109908	KTB QL 625015 S4E0	C.63
8000109909	KTB QL 625015 S4E1	C.63
8000109910	KTB QL 625015 S4E3	C.63
8000109911	KTB QL 625020 S4E0	C.63
8000109912	KTB QL 625020 S4E1	C.63
8000109913	KTB QL 625020 S4E3	C.63
8000109914	KTB QL 626215 S4E0	C.63
8000109915	KTB QL 626215 S4E1	C.63
8000109916	KTB QL 626215 S4E3	C.63
8000109917	KTB QL 626220 S4E0	C.63
8000109918	KTB QL 626220 S4E1	C.63
8000109919	KTB QL 626220 S4E3	C.63
8000109920	KTB QL 766215 S4E0	C.63
8000109921	KTB QL 766215 S4E1	C.63
8000109922	KTB QL 766215 S4E3	C.63
8000109923	KTB QL 766220 S4E0	C.63
8000109924	KTB QL 766220 S4E1	C.63
8000109925	KTB QL 766220 S4E3	C.63
8000109926	KTB QL 917620 S4E0	C.63
8000109927	KTB QL 917620 S4E1	C.63
8000109928	KTB QL 917620 S4E3	C.63
8000109929	KTB QL 919120 S4E0	C.63
8000109930	KTB QL 919120 S4E1	C.63
8000109931	KTB QL 919120 S4E3	C.63
8000110193	KTB MOPL 3020 MSZN	C.23
8000110194	KTB MOPL 3535 MSZN	C.28
8000110194	KTB MOPL 3535 MSZN	C.29
8000110195	KTB MOPL 4040 MSZN	C.33
8000110195	KTB MOPL 4040 MSZN	C.34
8000110196	KTB MOPL 5040 MSZN	C.40
8000110196	KTB MOPL 5040 MSZN	C.41
8000110198	KTB MOPL 6240 MSZN	C.45

Order No.	Type	Page
8000110199	KTB MOPL 6250 MSZN	C.48
8000110199	KTB MOPL 6250 MSZN	C.49
8000110200	KTB MOPL 6262 MSZN	C.50
8000110200	KTB MOPL 6262 MSZN	C.51
8000110201	KTB MOPL 7662 MSZN	C.54
8000110201	KTB MOPL 7662 MSZN	C.55
8000114130	KTB GP XX3520 AB S4 6MM	C.29
8000114132	KTB GP 35XX20 CD S4 6MM	C.29
8000114135	KTB GP XX4015 AB S4 6MM	C.33
8000114135	KTB GP XX4015 AB S4 6MM	C.40
8000114136	KTB GP 40XX15 CD S4 6MM	C.33
8000114137	KTB GP XX4020 AB S4 6MM	C.34
8000114137	KTB GP XX4020 AB S4 6MM	C.41
8000114137	KTB GP XX4020 AB S4 6MM	C.45
8000114138	KTB GP 40XX20 CD S4 6MM	C.34
8000114139	KTB GP 50XX15 CD S4 6MM	C.40
8000114140	KTB GP 50XX20 CD S4 6MM	C.41
8000114141	KTB GP 62XX20 CD S4 6MM	C.45
8000114141	KTB GP 62XX20 CD S4 6MM	C.49
8000114141	KTB GP 62XX20 CD S4 6MM	C.51
8000114142	KTB GP XX5015 AB S4 6MM	C.48
8000114143	KTB GP XX2015 AB S4 6MM	C.23
8000114144	KTB GP 62XX15 CD S4 6MM	C.48
8000114144	KTB GP 62XX15 CD S4 6MM	C.50
8000114145	KTB GP XX5020 AB S4 6MM	C.49
8000114146	KTB GP XX6215 AB S4 6MM	C.50
8000114146	KTB GP XX6215 AB S4 6MM	C.54
8000114147	KTB GP XX6220 AB S4 6MM	C.51
8000114147	KTB GP XX6220 AB S4 6MM	C.55
8000114148	KTB GP 91XX20 CD S4 6MM	C.58
8000114148	KTB GP 91XX20 CD S4 6MM	C.59
8000114149	KTB GP 30XX15 CD S4 6MM	C.23
8000114150	KTB GP XX9120 AB S4 6MM	C.59
8000114151	KTB GP 76XX15 CD S4 6MM	C.54
8000114152	KTB GP 76XX20 CD S4 6MM	C.55
8000114153	KTB GP XX7620 AB S4 6MM	C.58
8000114154	KTB GP XX3515 AB S4 6MM	C.28
8000114155	KTB GP 35XX15 CD S4 6MM	C.28
8000114887	KTB GP XX2015 AB S4 PE	C.23
8000114888	KTB GP 40XX20 CD S4 PE	C.34
8000114889	KTB GP 50XX15 CD S4 PE	C.40
8000114890	KTB GP 50XX20 CD S4 PE	C.41
8000114891	KTB GP 62XX20 CD S4 PE	C.45
8000114891	KTB GP 62XX20 CD S4 PE	C.49
8000114891	KTB GP 62XX20 CD S4 PE	C.51
8000114892	KTB GP XX5015 AB S4 PE	C.48
8000114893	KTB GP 62XX15 CD S4 PE	C.48
8000114893	KTB GP 62XX15 CD S4 PE	C.50
8000114894	KTB GP XX5020 AB S4 PE	C.49
8000114895	KTB GP XX6215 AB S4 PE	C.50
8000114895	KTB GP XX6215 AB S4 PE	C.54
8000114896	KTB GP XX6220 AB S4 PE	C.51
8000114896	KTB GP XX6220 AB S4 PE	C.55
8000114897	KTB GP 91XX20 CD S4 PE	C.58
8000114897	KTB GP 91XX20 CD S4 PE	C.59
8000114898	KTB GP 30XX15 CD S4 PE	C.23
8000114899	KTB GP XX9120 AB S4 PE	C.59
8000114900	KTB GP XX3515 AB S4 PE	C.28
8000114901	KTB GP 35XX15 CD S4 PE	C.28
8000114902	KTB GP 76XX15 CD S4 PE	C.54
8000114903	KTB GP 76XX20 CD S4 PE	C.55
8000114904	KTB GP XX7620 AB S4 PE	C.58
8000114905	KTB GP XX3520 AB S4 PE	C.29
8000114906	KTB GP 35XX20 CD S4 PE	C.29
8000114907	KTB GP XX4015 AB S4 PE	C.33
8000114907	KTB GP XX4015 AB S4 PE	C.40
8000114909	KTB GP 40XX15 CD S4 PE	C.33
8000114910	KTB GP XX4020 AB S4 PE	C.34
8000114910	KTB GP XX4020 AB S4 PE	C.41
8000114910	KTB GP XX4020 AB S4 PE	C.45
8000115024	KTB RNHD XX2015 S4E R	C.23
8000115025	KTB RNHD XX3515 S4E R	C.28
8000115026	KTB RNHD XX3520 S4E R	C.29
8000115028	KTB RNHD XX4015 S4E R	C.33
8000115028	KTB RNHD XX4015 S4E R	C.40
8000115028	KTB RNHD XX4015 S4E R	C.41
8000115029	KTB RNHD XX4020 S4E R	C.34
8000115029	KTB RNHD XX4020 S4E R	C.45
8000115030	KTB RNHD XX5015 S4E R	C.48
8000115032	KTB RNHD XX5020 S4E R	C.49
8000115033	KTB RNHD XX6215 S4E R	C.50
8000115033	KTB RNHD XX6215 S4E R	C.54
8000115034	KTB RNHD XX6220 S4E R	C.51
8000115034	KTB RNHD XX6220 S4E R	C.55
8000115036	KTB RNHD XX7620 S4E R	C.58
8000115037	KTB RNHD XX9120 S4E R	C.59
8000115041	KTB RNHD XX2015 S2 R	C.23
8000115042	KTB RNHD XX3515 S2 R	C.28
8000115043	KTB RNHD XX3520 S2 R	C.29
8000115044	KTB RNHD XX4015 S2 R	C.33
8000115044	KTB RNHD XX4015 S2 R	C.40
8000115044	KTB RNHD XX4015 S2 R	C.41
8000115045	KTB RNHD XX4020 S2 R	C.34
8000115045	KTB RNHD XX4020 S2 R	C.45
8000115046	KTB RNHD XX5015 S2 R	C.48
8000115047	KTB RNHD XX5020 S2 R	C.49
8000115048	KTB RNHD XX6215 S2 R	C.50
8000115048	KTB RNHD XX6215 S2 R	C.54
8000115049	KTB RNHD XX6220 S2 R	C.51
8000115049	KTB RNHD XX6220 S2 R	C.55
8000115050	KTB RNHD XX7620 S2 R	C.58
8000115051	KTB RNHD XX9120 S2 R	C.59
8000115902	KTB MOPL 3020 S2 H	C.23
8000115903	KTB MOPL 3535 S2N H	C.28
8000115903	KTB MOPL 3535 S2N H	C.29
8000115904	KTB MOPL 4040 S2N H	C.33
8000115904	KTB MOPL 4040 S2N H	C.34
8000115905	KTB MOPL 5040 S2N H	C.40
8000115905	KTB MOPL 5040 S2N H	C.41
8000115906	KTB MOPL 6240 S2N H	C.45
8000115907	KTB MOPL 6250 S2N H	C.48
8000115907	KTB MOPL 6250 S2N H	C.49
8000115908	KTB MOPL 6262 S2N H	C.50
8000115908	KTB MOPL 6262 S2N H	C.51
8000115909	KTB MOPL 7662 S2N H	C.54
8000115909	KTB MOPL 7662 S2N H	C.55
8000115910	KTB MOPL 9176 S2N H	C.58
8000115911	KTB MOPL 9191 S2N H	C.59
8000115913	KTB MOPL 3020 MSZN H	C.23
8000115914	KTB MOPL 3535 MSZN H	C.28
8000115914	KTB MOPL 3535 MSZN H	C.29
8000115915	KTB MOPL 4040 MSZN H	C.33
8000115915	KTB MOPL 4040 MSZN H	C.34
8000115916	KTB MOPL 5040 MSZN H	C.40
8000115916	KTB MOPL 5040 MSZN H	C.41
8000115917	KTB MOPL 6240 MSZN H	C.45
8000115918	KTB MOPL 6250 MSZN H	C.48
8000115918	KTB MOPL 6250 MSZN H	C.49
8000115919	KTB MOPL 6262 MSZN H	C.50
8000115919	KTB MOPL 6262 MSZN H	C.51
8000115920	KTB MOPL 7662 MSZN H	C.54
8000115920	KTB MOPL 7662 MSZN H	C.55
8000115921	KTB MOPL 9176 MSZN H	C.58
8000115922	KTB MOPL 9191 MSZN H	C.59
8000115923	KTB MOPL 3020 S2N	C.23
8000115924	KTB MOPL 3535 S2N	C.28
8000115924	KTB MOPL 3535 S2N	C.29
8000115925	KTB MOPL 4040 S2N	C.33
8000115925	KTB MOPL 4040 S2N	C.34
8000115931	KTB MOPL 9176 S2N	C.58
8000115932	KTB MOPL 9191 S2N	C.59
8000116040	KTB MOPL 9176 MSZN	C.58
8000116041	KTB MOPL 9191 MSZN	C.59
8000116099	TS35X7.5 ST KTB3020 VER	C.23
8000116100	TS35X7.5 ST KTB3535 VER	C.28
8000116100	TS35X7.5 ST KTB3535 VER	C.29
8000116101	TS35X7.5 ST KTB4040 VER	C.33
8000116101	TS35X7.5 ST KTB4040 VER	C.34
8000116102	TS35X7.5 ST KTB5040 VER	C.40
8000116102	TS35X7.5 ST KTB5040 VER	C.41
8000116103	TS35X7.5 ST KTB6240 VER	C.45
8000116104	TS35X7.5 ST KTB6250 VER	C.48
8000116104	TS35X7.5 ST KTB6250 VER	C.49
8000116105	TS35X7.5 ST KTB6262 VER	C.50
8000116105	TS35X7.5 ST KTB6262 VER	C.51
8000116106	TS35X7.5 ST KTB7662 VER	C.54
8000116106	TS35X7.5 ST KTB7662 VER	C.55
8000116107	TS35X7.5 ST KTB9176 VER	C.58
8000116108	TS35X7.5 ST KTB9191 VER	C.59
8000116109	TS35X7.5 ST KTB3020 HOR	C.23
8000116110	TS35X7.5 ST KTB3535 HOR	C.28
8000116110	TS35X7.5 ST KTB3535 HOR	C.29
8000116111	TS35X7.5 ST KTB4040 HOR	C.33
8000116111	TS35X7.5 ST KTB4040 HOR	C.34
8000116112	TS35X7.5 ST KTB5040 HOR	C.40
8000116112	TS35X7.5 ST KTB5040 HOR	C.41
8000116113	TS35X7.5 ST KTB6240 HOR	C.45
8000116114	TS35X7.5 ST KTB6250 HOR	C.48
8000116114	TS35X7.5 ST KTB6250 HOR	C.49
8000116115	TS35X7.5 ST KTB6262 HOR	C.50
8000116115	TS35X7.5 ST KTB6262 HOR	C.51
8000116116	TS35X7.5 ST KTB7662 HOR	C.54
8000116116	TS35X7.5 ST KTB7662 HOR	C.55
8000116117	TS35X7.5 ST KTB9176 HOR	C.58
8000116118	TS35X7.5 ST KTB9191 HOR	C.59

8560000000

8563410000	TS35X7.5 ST STB 4 STB 6	C.147
8563410000	TS35X7.5 ST STB 4 STB 6	C.148
8563410000	TS35X7.5 ST STB 4 STB 6	C.149

8680000000

8683740000	TS35X7.5 ST STB 1.1 STB 2	C.142
8683740000	TS35X7.5 ST STB 1.1 STB 2	C.143
8683740000	TS35X7.5 ST STB 1.1 STB 2	C.144

8800000000

8803610000	TS35X7.5 ST STB 5	C.147
8803610000	TS35X7.5 ST STB 5	C.148
8803610000	TS35X7.5 ST STB 5	C.149

9500000000

9500950000	MP TBF 56/30	C.258
9500960000	MP TBF 49/30	C.258

Order No.	Type	Page
9502610000	SAKK 10	C.168
9502610000	SAKK 10	C.169
9502610000	SAKK 10	C.170
9502610000	SAKK 10	C.171
9502610000	SAKK 10	C.250
9502610000	SAKK 10	C.251
9502610000	SAKK 10	C.252
9502610000	SAKK 10	C.253
9502630000	AP SAKK4/10 KER/WS	C.168
9502630000	AP SAKK4/10 KER/WS	C.169
9502630000	AP SAKK4/10 KER/WS	C.170
9502630000	AP SAKK4/10 KER/WS	C.171
9502630000	AP SAKK4/10 KER/WS	C.250
9502630000	AP SAKK4/10 KER/WS	C.251
9502630000	AP SAKK4/10 KER/WS	C.252
9502630000	AP SAKK4/10 KER/WS	C.253
9502650000	QL 2 SAKK10	C.168
9502650000	QL 2 SAKK10	C.169
9502650000	QL 2 SAKK10	C.170
9502650000	QL 2 SAKK10	C.171
9502650000	QL 2 SAKK10	C.250
9502650000	QL 2 SAKK10	C.251
9502650000	QL 2 SAKK10	C.252
9502650000	QL 2 SAKK10	C.253
9502720000	MP TBF 19/15	C.256
9502730000	MP TBF 30/30	C.257
9502740000	MP TBF 37/30	C.257
9502750000	MP TBF 60/30	C.259
9502800000	TBF 49/30/18 7035	C.254
9502800000	TBF 49/30/18 7035	C.258
9502810000	TBF 56/30/18 7035	C.254
9502810000	TBF 56/30/18 7035	C.258
9502820000	TBF 60/37/18 7035	C.254
9502820000	TBF 60/37/18 7035	C.260
9502830000	TBF 60/60/18 7035	C.254
9502830000	TBF 60/60/18 7035	C.260
9502840000	TBF 49/30/21 TRSP	C.254
9502840000	TBF 49/30/21 TRSP	C.258
9502850000	TBF 56/30/21 TRSP	C.254
9502850000	TBF 56/30/21 TRSP	C.258
9502860000	TBF 60/37/21 TRSP	C.254
9502860000	TBF 60/37/21 TRSP	C.260
9502870000	TBF 60/60/21 TRSP	C.254
9502870000	TBF 60/60/21 TRSP	C.260
9502910000	MP TBF 60/37	C.260
9502920000	MP TBF 60/60	C.260
9509510000	VH 12.5 SAKK10	C.168
9509510000	VH 12.5 SAKK10	C.169
9509510000	VH 12.5 SAKK10	C.170
9509510000	VH 12.5 SAKK10	C.171
9509510000	VH 12.5 SAKK10	C.250
9509510000	VH 12.5 SAKK10	C.251
9509510000	VH 12.5 SAKK10	C.252
9509510000	VH 12.5 SAKK10	C.253

9510000000

9510570000	POK MOPL 0808	C.212
9510580000	POK MOPL 0811	C.213
9510590000	POK MOPL 1212	C.217
9510600000	POK MOPL 1222	C.218
9510610000	POK MOPL 1616	C.219
9510620000	POK MOPL 1626	C.220
9510630000	POK MOPL 1636	C.221
9510640000	POK MOPL 2525	C.223
9510640000	POK MOPL 2525	C.224
9510650000	POK MOPL 2540	C.225
9510650000	POK MOPL 2540	C.226
9510660000	POK MOPL 2560	C.227
9510670000	POK MOPL 4040	C.228
9510680000	POK MOPL 0816	C.214
9510690000	POK MOPL 0819	C.215
9510710000	POK MOPL 1656	C.222
9510900000	MF POK SMALL	C.212
9510900000	MF POK SMALL	C.213
9510900000	MF POK SMALL	C.214
9510900000	MF POK SMALL	C.215
9510900000	MF POK SMALL	C.216
9510910000	MF POK BIG	C.217
9510910000	MF POK BIG	C.218
9510910000	MF POK BIG	C.219
9510910000	MF POK BIG	C.220
9510910000	MF POK BIG	C.221
9510910000	MF POK BIG	C.222
9510910000	MF POK BIG	C.223
9510910000	MF POK BIG	C.224
9510910000	MF POK BIG	C.225
9510910000	MF POK BIG	C.226
9510910000	MF POK BIG	C.227
9510910000	MF POK BIG	C.228

9520000000

9526840000	KLIPPON K1 EX	C.150
9526850000	KLIPPON K11 EX	C.150
9526860000	KLIPPON K2 EX	C.150
9526870000	KLIPPON K21 EX	C.150
9526880000	KLIPPON K3 EX	C.150
9526890000	KLIPPON K31 EX	C.150
9526900000	KLIPPON K32 EX	C.150
9526910000	KLIPPON K4 EX	C.150
9526920000	KLIPPON K41 EX	C.150
9526930000	KLIPPON K5 EX	C.150
9526940000	KLIPPON K51 EX	C.150
9526950000	KLIPPON K52 EX	C.150
9526960000	KLIPPON K6 EX	C.150
9526970000	KLIPPON K61 EX	C.150
9526980000	KLIPPON K7 EX	C.150
9526990000	KLIPPON K71 EX	C.150
9527590000	KLIPPON K MF KIT 25	C.187
9527590000	KLIPPON K MF KIT 25	C.189
9527590000	KLIPPON K MF KIT 25	C.190
9527590000	KLIPPON K MF KIT 25	C.192
9527590000	KLIPPON K MF KIT 25	C.194
9529080000	KLIPPON K MF KIT 16	C.188
9529080000	KLIPPON K MF KIT 16	C.191
9529080000	KLIPPON K MF KIT 16	C.193
9529090000	KLIPPON K0 RAL7001	C.150
9529090000	KLIPPON K0 RAL7001	C.176
9529100000	KLIPPON K01 RAL7001	C.150
9529100000	KLIPPON K01 RAL7001	C.177
9529110000	KLIPPON K02 RAL7001	C.150
9529110000	KLIPPON K02 RAL7001	C.178
9529120000	KLIPPON K1 RAL7001	C.150
9529120000	KLIPPON K1 RAL7001	C.179
9529130000	KLIPPON K11 RAL7001	C.150
9529130000	KLIPPON K11 RAL7001	C.180
9529140000	KLIPPON K2 RAL7001	C.150
9529140000	KLIPPON K2 RAL7001	C.181
9529150000	KLIPPON K21 RAL7001	C.150
9529150000	KLIPPON K21 RAL7001	C.182
9529160000	KLIPPON K3 RAL7001	C.150
9529160000	KLIPPON K3 RAL7001	C.183
9529170000	KLIPPON K31 RAL7001	C.150
9529170000	KLIPPON K31 RAL7001	C.184
9529180000	KLIPPON K32 RAL7001	C.150
9529180000	KLIPPON K32 RAL7001	C.185
9529190000	KLIPPON K4 RAL7001	C.150
9529190000	KLIPPON K4 RAL7001	C.186
9529200000	KLIPPON K41 RAL7001	C.150
9529200000	KLIPPON K41 RAL7001	C.187
9529210000	KLIPPON K5 RAL7001	C.150
9529210000	KLIPPON K5 RAL7001	C.188
9529220000	KLIPPON K51 RAL7001	C.150
9529220000	KLIPPON K51 RAL7001	C.189
9529230000	KLIPPON K52 RAL7001	C.150
9529230000	KLIPPON K52 RAL7001	C.190
9529240000	KLIPPON K6 RAL7001	C.150
9529240000	KLIPPON K6 RAL7001	C.191
9529250000	KLIPPON K61 RAL7001	C.150
9529250000	KLIPPON K61 RAL7001	C.192
9529260000	KLIPPON K7 RAL7001	C.150
9529260000	KLIPPON K7 RAL7001	C.193
9529270000	KLIPPON K71 RAL7001	C.150
9529270000	KLIPPON K71 RAL7001	C.194

9530000000

9535170000	MPC 07/12/07 7035	C.262
9535170000	MPC 07/12/07 7035	C.264
9535180000	MPC 07/12/07 TRSP	C.262
9535180000	MPC 07/12/07 TRSP	C.264
9535190000	MPC 07/12/10 7035	C.262
9535190000	MPC 07/12/10 7035	C.264
9535200000	MPC 07/12/10 TRSP	C.262
9535200000	MPC 07/12/10 TRSP	C.264
9535210000	MPC 07/12/12 7035	C.262
9535210000	MPC 07/12/12 7035	C.265
9535220000	MPC 07/12/12 TRSP	C.262
9535220000	MPC 07/12/12 TRSP	C.265
9535230000	MPC 12/12/07 7035	C.262
9535230000	MPC 12/12/07 7035	C.265
9535240000	MPC 12/12/07 TRSP	C.262
9535240000	MPC 12/12/07 TRSP	C.265
9535250000	MPC 12/12/10 7035	C.262
9535250000	MPC 12/12/10 7035	C.266
9535260000	MPC 12/12/10 TRSP	C.262
9535260000	MPC 12/12/10 TRSP	C.266
9535270000	MPC 12/12/12 7035	C.262
9535270000	MPC 12/12/12 7035	C.266
9535280000	MPC 12/12/12 TRSP	C.262
9535280000	MPC 12/12/12 TRSP	C.266
9535290000	MPC 12/17/07 7035	C.262
9535290000	MPC 12/17/07 7035	C.267
9535300000	MPC 12/17/07 TRSP	C.262
9535300000	MPC 12/17/07 TRSP	C.267
9535310000	MPC 12/17/10 7035	C.262
9535310000	MPC 12/17/10 7035	C.267
9535320000	MPC 12/17/10 TRSP	C.262
9535320000	MPC 12/17/10 TRSP	C.267
9535330000	MPC 12/17/12 7035	C.262
9535330000	MPC 12/17/12 7035	C.268
9535340000	MPC 12/17/12 TRSP	C.262
9535340000	MPC 12/17/12 TRSP	C.268
9535350000	MPC 12/17/15 7035	C.262
9535350000	MPC 12/17/15 7035	C.268
9535360000	MPC 12/17/15 TRSP	C.262
9535360000	MPC 12/17/15 TRSP	C.268

Order No.	Type	Page
9535370000	MPC 17/17/07 7035	C.262
9535370000	MPC 17/17/07 7035	C.269
9535380000	MPC 17/17/07 TRSP	C.262
9535380000	MPC 17/17/07 TRSP	C.269
9535390000	MPC 17/17/10 7035	C.262
9535390000	MPC 17/17/10 7035	C.269
9535400000	MPC 17/17/10 TRSP	C.262
9535400000	MPC 17/17/10 TRSP	C.269
9535410000	MPC 17/17/12 7035	C.262
9535410000	MPC 17/17/12 7035	C.270
9535430000	MPC 17/17/15 7035	C.262
9535430000	MPC 17/17/15 7035	C.270
9535440000	MPC 17/17/15 TRSP	C.262
9535440000	MPC 17/17/15 TRSP	C.270
9535450000	MPC 17/25/07 7035	C.262
9535450000	MPC 17/25/07 7035	C.271
9535470000	MPC 17/25/10 7035	C.262
9535470000	MPC 17/25/10 7035	C.271
9535480000	MPC 17/25/10 TRSP	C.262
9535480000	MPC 17/25/10 TRSP	C.271
9535490000	MPC 17/25/15 7035	C.262
9535490000	MPC 17/25/15 7035	C.272
9535500000	MPC 17/25/15 TRSP	C.262
9535500000	MPC 17/25/15 TRSP	C.272
9535540000	MP MPC 07/12	C.264
9535540000	MP MPC 07/12	C.265
9535550000	MP MPC 12/12	C.265
9535550000	MP MPC 12/12	C.266
9535560000	MP MPC 12/17	C.267
9535560000	MP MPC 12/17	C.268
9535570000	MP MPC 17/17	C.269
9535570000	MP MPC 17/17	C.270
9535580000	MP MPC 17/25	C.271
9535580000	MP MPC 17/25	C.272
9535590000	HG MPC	C.264
9535590000	HG MPC	C.265
9535590000	HG MPC	C.266
9535590000	HG MPC	C.267
9535590000	HG MPC	C.268
9535590000	HG MPC	C.269
9535590000	HG MPC	C.270
9535590000	HG MPC	C.271
9535590000	HG MPC	C.272
9535600000	MF MPC	C.264
9535600000	MF MPC	C.265
9535600000	MF MPC	C.266
9535600000	MF MPC	C.267
9535600000	MF MPC	C.268
9535600000	MF MPC	C.269
9535600000	MF MPC	C.270
9535600000	MF MPC	C.271
9535600000	MF MPC	C.272
9535640000	SC MPC	C.264
9535640000	SC MPC	C.266
9535640000	SC MPC	C.268
9535640000	SC MPC	C.269
9535640000	SC MPC	C.270
9535680000	FPC 20/20/13 TRSP	C.274
9535680000	FPC 20/20/13 TRSP	C.276
9535690000	FPC 20/20/13 7035	C.274
9535690000	FPC 20/20/13 7035	C.276
9535700000	FPC 20/30/13 TRSP	C.274
9535700000	FPC 20/30/13 TRSP	C.276
9535710000	FPC 20/30/13 7035	C.274
9535710000	FPC 20/30/13 7035	C.276
9535720000	FPC 20/40/13 TRSP	C.274
9535720000	FPC 20/40/13 TRSP	C.277
9535730000	FPC 20/40/13 7035	C.274
9535730000	FPC 20/40/13 7035	C.277
9535740000	FPC 30/30/13 TRSP	C.274
9535740000	FPC 30/30/13 TRSP	C.277
9535750000	FPC 30/30/13 7035	C.274
9535750000	FPC 30/30/13 7035	C.277
9535760000	FPC 30/40/13 TRSP	C.274
9535760000	FPC 30/40/13 TRSP	C.278
9535770000	FPC 30/40/13 7035	C.274
9535770000	FPC 30/40/13 7035	C.278
9535810000	FPC 40/60/13 7035	C.274
9535810000	FPC 40/60/13 7035	C.278
9535820000	FPC 40/60/13 TRSP	C.274
9535820000	FPC 40/60/13 TRSP	C.278
9535920000	MP FPC 20/20	C.276
9535930000	MP FPC 20/30	C.276
9535940000	MP FPC 20/40	C.277
9535950000	MP FPC 30/30	C.277
9535960000	MP FPC 30/40	C.278
9535980000	MP FPC 40/60	C.278
9535990000	HG FPC	C.276
9535990000	HG FPC	C.277
9535990000	HG FPC	C.278
9536040000	MF FPC	C.276
9536040000	MF FPC	C.277
9536040000	MF FPC	C.278

Addresses worldwide

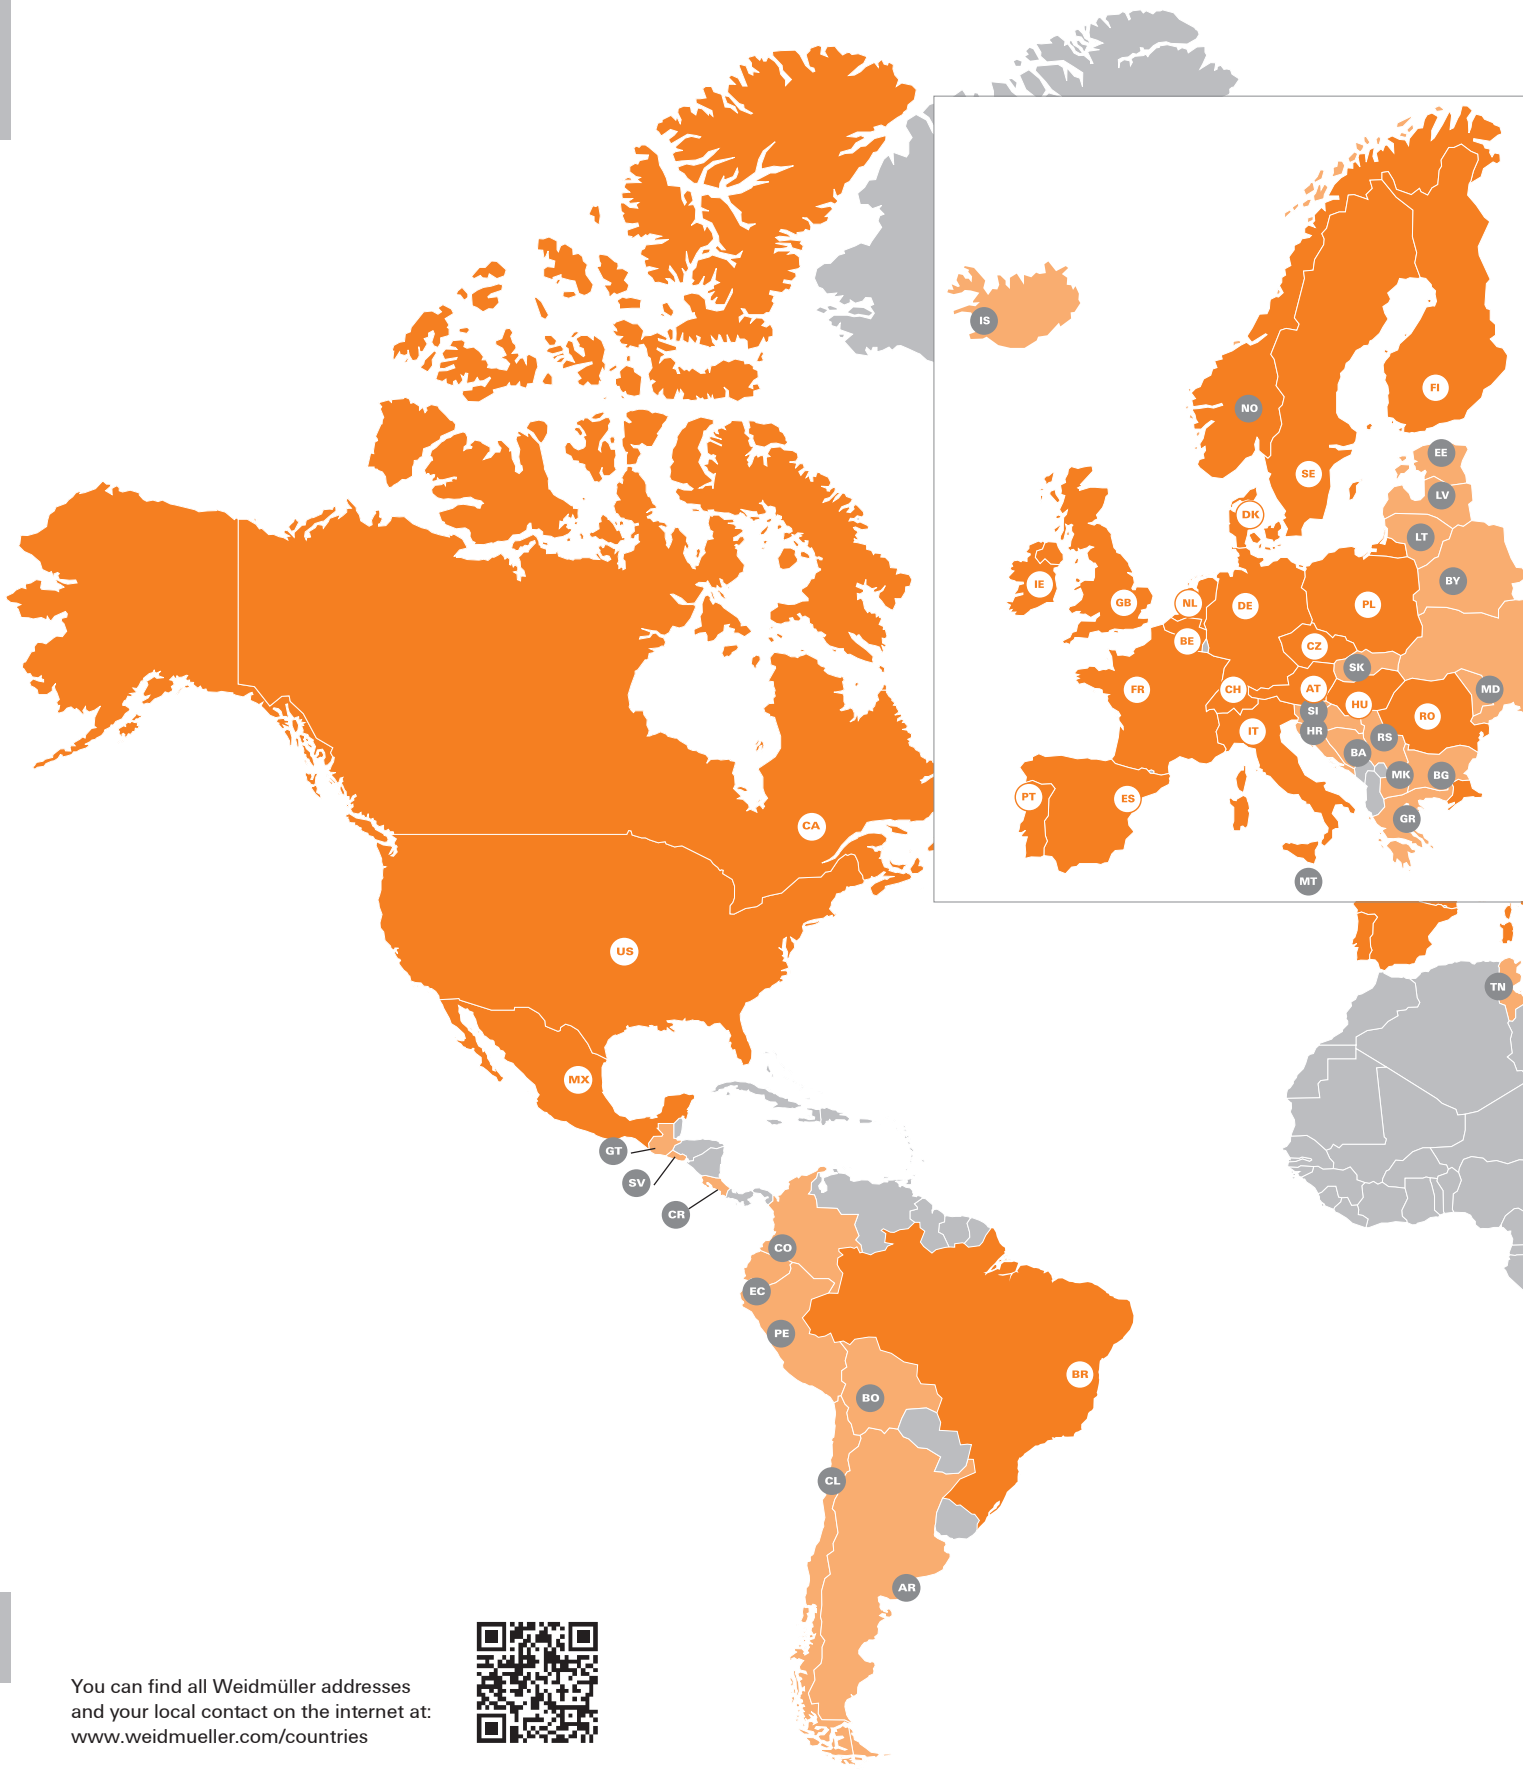

You can find all Weidmüller addresses and your local contact on the internet at: www.weidmueller.com/countries

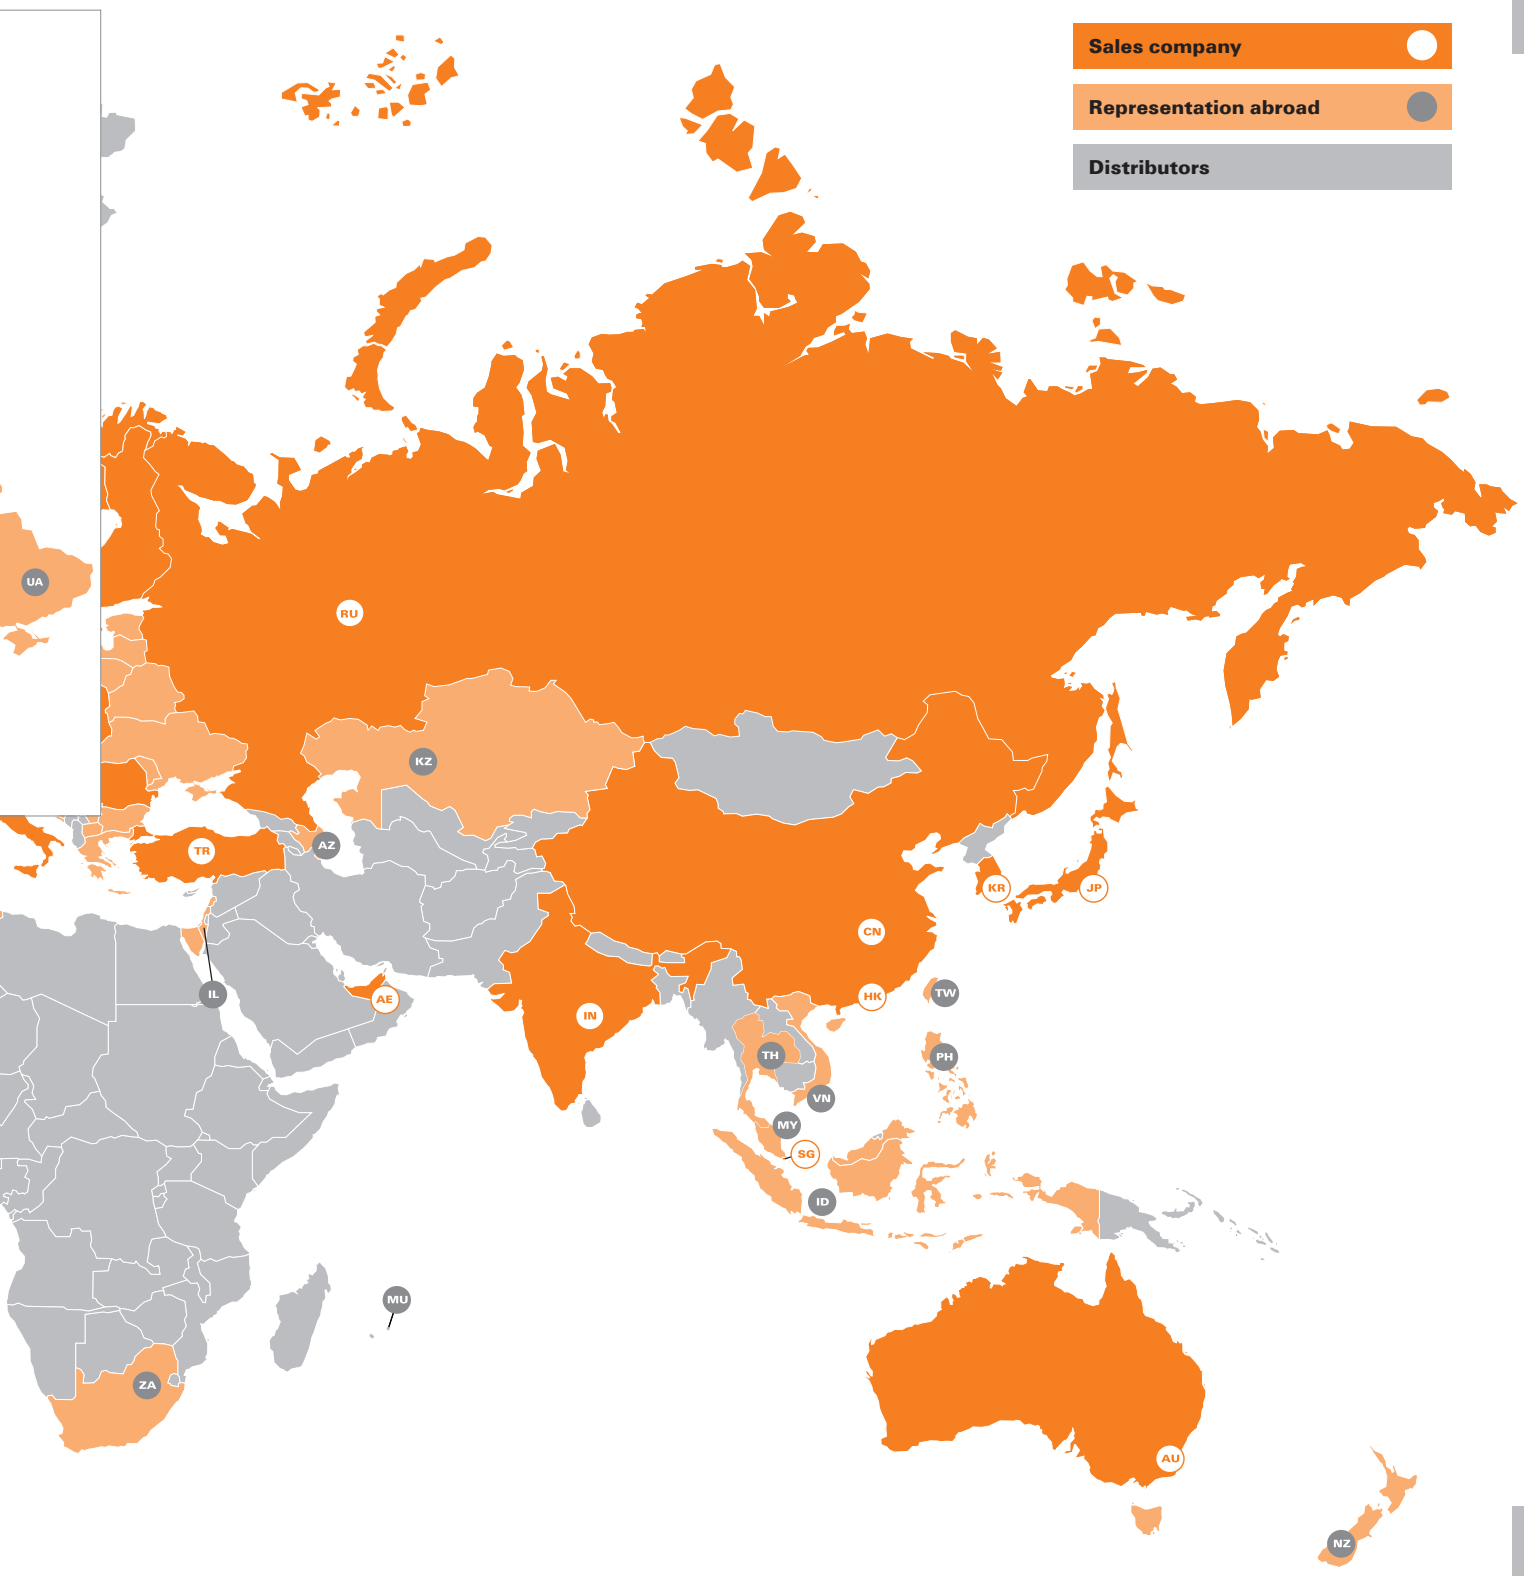
Sales company
Representation abroad
Distributors
UA
RU
KZ
TR
AZ
IL
AE
IN
CN
KR
JP
HK
TW
TH
PH
VN
MY
SG
ID
MU
ZA
AU
NZ

We cannot guarantee that there are no mistakes in the publications or software provided by us to the customer for the purpose of making orders. We try our best to quickly correct errors in our printed media.

All orders are based on our general terms of delivery, which can be reviewed on the websites of our group companies where you place your order. On demand we can also send the general terms of delivery to you.

Weidmüller – Your partner in Smart Industrial Connectivity

As experienced experts we support our customers and partners around the world with products, solutions and services in the industrial environment of power, signal and data. We are at home in their industries and markets and know the technological challenges of tomorrow. We are therefore continuously developing innovative, sustainable and useful solutions for their individual needs. Together we set standards in Industrial Connectivity.

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
32758 Detmold, Germany
T +49 5231 14-0
F +49 5231 14-292083
www.weidmueller.com

Personal support can
be found on our website:
www.weidmueller.com/contact

Made in Germany

Order number: 2977750000/07/2024/SMD