
Photo-electric sensors

XU range

Material handling & working, packaging

Catalogue



Photo-electric sensors

XU range

[Selection guide](#)page 2

XU range, general purpose

- XUM, miniature design, plastic
 - Thru-beam system with adjustable sensitivity page 8
 - Diffuse system with adjustable sensitivity page 9
 - Diffuse system with background suppression system page 10
 - Polarised reflex system with adjustable sensitivity page 10
 - Accessories for all XUM miniature sensors page 11
 - Characteristics page 12
 - Schemes page 13
 - Curves page 14
 - Description, dimensions – Systems page 18
 - Dimensions – Accessories page 19
- XUB, cylindrical miniature design 18, plastic or metal
 - Thru-beam system with adjustable sensitivity, plastic page 20
 - Thru-beam system with adjustable sensitivity, metal page 22
 - Diffuse system with adjustable sensitivity, plastic page 24
 - Diffuse system with adjustable sensitivity, metal page 25
 - Diffuse system with background suppression, plastic page 26
 - Diffuse system with background suppression, metal page 27
 - Polarised reflex system with adjustable sensitivity, plastic page 28
 - Polarised reflex system with adjustable sensitivity, metal page 29
 - Characteristics page 30
 - Schemes page 31
 - Curves page 33
 - Dimensions page 40
- XUN, hybrid miniature design, plastic
 - Thru-beam system with adjustable sensitivity page 44
 - Diffuse system with adjustable sensitivity page 45
 - Diffuse system with background suppression page 46
 - Polarised reflex system with adjustable sensitivity page 47
 - Characteristics page 48
 - Schemes page 49
 - Curves page 52
 - Dimensions page 56

XU range application

- General presentation page 60
- XU range application, contrast system for marking detection
 - Contrast mark reader sensors, white light page 62
 - Contrast mark reader sensors, RGB light page 62
 - Contrast mark reader sensors, laser light page 62
 - Characteristics page 63
 - Schemes page 64
 - Curves page 65
 - Dimensions page 65
- XU range application, blue light sensors for very dark object detection
 - Adjustable blue light sensors page 66
 - Fixed blue light sensors, miniature page 66
 - Fixed blue light sensors, sub-miniature page 66
 - Adjustable blue light sensors (potentiometer) page 66
 - Characteristics page 67
 - Schemes page 68
 - Curves page 70
 - Dimensions page 71

- XU range application, laser sensors for accurate detection
 - Lasers sensors, diffuse mode detection page 72
 - Lasers sensors, BGS mode detection page 72
 - Lasers sensors, reflex mode detection page 72
 - Characteristics page 73
 - Schemes page 74
 - Dimensions page 75
 - Curves page 76
- XU range application, sensors for colour detection
 - Colour sensors, white light, multiple colour page 78
 - Colour sensors, RGB light, unique colour. page 78
 - Characteristics page 78
 - Schemes page 79
 - Curves page 79
 - Dimensions page 79
- XU range application, sensors for transparent object detection
 - Polarised reflex system page 80
 - BGS mode detection, adjustable page 80
 - BGS mode detection, not adjustable page 80
 - BGS mode detection, compact page 80
 - Characteristics page 81
 - Schemes page 82
 - Dimensions page 83
 - Curves page 84

XUVU Ultrasonic sensors

- Ultrasonic fork for label detection page 86

XU range accessories

- IO-Link Master page 88
- Fixing brackets. page 92
- Mounting rings page 92
- Reflectors. page 96
- Cabling accessories. page 98
 - Pre-wired connectors, references page 98
 - Jumper cables, references page 99
 - Pre-wired connectors M8 and M12, characteristics page 100
 - Shielded cables with pre-wired connectors M12, characteristics page 102
 - Jumper cables M12-M12, characteristics page 104
 - Shielded jumper cables M12-M12, characteristics page 105
 - Jumper cables M8-M8 and M8-M12, characteristics page 106

Index

- Product reference index page 108

Miniature design	Hybrid miniature design
Plastic	Plastic



19.5 x 31.5 x 10.8		15 x 59.2 x 31.9	
✓		-	
-		✓	
-		-	
-		-	
With excess gain = 1	With excess gain = 2	With excess gain = 1	With excess gain = 2
30	24	30	20
0.25	0.17	-	
1.9	1.5	1	0.7
1.1	0.8	0.6	0.42
4...300: White paper or object. Sn (90%) 5...265: Grey object. Sn (18%) 8...200: Black object. Sn (6%)		0.3 from white object (90%) to black object (6%)	
0.05...8	0.05...6.7	7	5
Red light for: XUM2, XUM6, XUM8, XUM9 Infrared light for: XUM4, XUM 5		Red light	
All: IP65, IP67		All: IP65, IP67 M12 connector only: IP69K	
✓		-	
-		✓	
-		-	
-		-	
-		-	
✓		✓	
-		-	
✓		✓	
✓		-	
-		✓	
✓		-	
XUM		XUN	
8		44	

Recommended applications

Material handling, Material working, Packaging

Marking detection



Format			
Dimensions (w x h x d) in mm			
Case (material)	Plastic	PBT/PC	
		ABS	
		ABS/PC	
		PUR	
	Metal	Glass-filled technopolymer	
		Nickel plated brass	
	Stainless steel		
	Zinc die-cast		
Technology			
Sensing distance (Sn)		XUKC	
		XUMR	
		XUMT	
	Thru-beam	XU●2	
	Diffuse short distance	XU●4	
	Diffuse medium distance	XU●5	
	Diffuse long distance	XU●6	
	Background suppression fixed	XU●7	
	Background suppression adjust.	XU●8	
Polarised reflex	XU●9		
LED emission			
Degree of protection		IP67	
		IP69K	
Supply		---	
		~	
		⌚	
Output		Autodetect PNP/NPN	
		PNP	
		NPN	
Connection	Pre-cabled	L=2 m	
		Connector	M8
			M12
	Pigtail	L=0.15 m (M12)	
		L=0.2 m (M8)	
Type reference			
Pages			

Miniature			
12 x 34 x 20		10.8 x 31.5 x 19.5	12 x 34 x 20
-	-	-	-
✓	✓	-	✓
-	-	-	-
-	-	-	-
-	-	✓	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
Contrast			
-	-	-	-
12 mm	12 mm	12 mm	-
-	-	-	-
-	-	-	-
-	-	-	150 mm
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
White light	RGB light	RGB light	Laser light
✓	✓	✓	✓
✓	✓	-	✓
12...24V			
-	-	-	-
-	-	-	-
✓	✓	✓	✓
-	-	-	-
-	-	-	✓
✓	✓	✓	✓
-	-	-	-
✓	✓	-	✓
-	-	-	-
XUMRAWAY●●	XUMRAGAY●● XUMRACAY●●	XUMRPGAYM8	XUM5ALAY●●
62			

(1) Depending on fibres used.
(2) Depending on model.

Material handling, Material working, Packaging

Very dark object detection



Compact	Miniature	Sub-miniature
23 x 50 x 50	12 x 34 x 20	8 x 21.1 x 14.6
-	-	-
✓	✓	-
-	-	-
-	-	✓
-	-	-
-	-	-
-	-	-
BGS		
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	80 mm	50 mm
1200 mm	200 mm	100 mm
-	-	-
Blue light		
✓	✓	✓
✓	✓	-
12...24V	12...24V	12...24V for XUT7 24V for XUT8
-	-	-
-	-	-
-	XUM8ABAY●●	XUT8ABAY●●
✓	XUM7ABPX●●	XUT7ABPX●●
-	-	-
-	XUM7ABPX●●	✓
-	✓	-
✓	-	-
-	XUM8ABAY●●	-
-	-	✓
XUK8ABPX●●	XUM7ABPX●● XUM8ABAY●●	XUT7ABPX●● XUT8ABAY●●

Recommended applications

Material handling, Material working, Packaging

Accurate detection



Format	
Dimensions (w x h x d) in mm	
Case (material)	Plastic
	PBT/PC
	ABS
	ABS/PC
	PUR
Metal	Glass-filled technopolymer
	Nickel plated brass
	Stainless steel
	Zinc die-cast
Technology	
Sensing distance (Sn)	XUKC
	XUMR
	XUMT
	Thru-beam XU●2
	Diffuse short distance XU●4
	Diffuse medium distance XU●5
	Diffuse long distance XU●6
	Background suppression fixed XU●7
	Background suppression adjust. XU●8
Polarised reflex XU●9	
LED emission	
Degree of protection	IP65
	IP67
	IP69K
Supply	---
	~
	⌚
Output	Autodetect PNP/NPN
	PNP
	NPN
Connection	Pre-cabled
	L=2 m
	Connector
	M8
	M12
Pigtail	L=0.15 m (M12)
	L=0.2 m (M8)
Type reference	
Pages	

Miniature		Sub-miniature
12 x 34 x 20	10.8 x 31.5 x 19.5	8 x 21.1 x 14.6
-	-	-
✓	-	-
-	-	-
-	-	✓
-	✓	-
-	-	-
-	-	-
-	-	-
Diffuse, BGS, reflex	BGS, reflex	BGS, reflex
-	-	-
-	-	-
-	-	-
Thru-beam	-	-
250 mm	-	-
-	-	-
-	-	-
150 mm	200 mm	100 mm
15 m	200 mm	4 m
Laser light		
-	✓	-
✓	✓	✓
✓	-	-
12...24V	10...30V	12...24V
-	-	-
-	-	-
✓	-	XUT8ALAYL2
-	✓	XUT9ALPX●●
-	-	-
✓	-	✓
✓	✓	-
-	-	-
✓	-	-
-	-	✓
XUM5ALAY●● XUM8ALAY●● XUM9ALAY●● XUM●PLPXM8	XUM8PLPXM8 XUM9PLPXM8	XUT8ALAY●● XUT9ALPX●●
72		

Material handling, Material working, Packaging

Color object detection

Transparent object detection



Compact	Miniature	Compact	Miniature		Sub-miniature
3 x 50 x 250	8 x 21.1 x 14.6	23 x 50 x 50	12 x 34 x 20	10.8 x 31.5 x 19.5	8 x 21.1 x 14.6
-	-	-	-	-	-
-	✓	-	✓	-	-
-	-	✓	-	-	-
-	-	-	-	-	✓
-	-	-	-	✓	-
-	-	-	-	-	-
-	-	-	-	-	-
✓	-	-	-	-	-
Color mode		BGS	Reflex (polarized, transparent, BGS)	Transparent reflex	BGS
60 mm XUKCBSAY 150 mm XUKCBLAY	✓	-	-	-	-
-	12 mm	-	-	-	-
-	-	-	2 m	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	100 mm	-	50 mm
-	-	1200 mm	200 mm	-	100 mm
-	-	-	-	-	-
White light	RGB light	Blue light	Red light for XUMTA Blue light for XUM7 and XUM8	Red light	Blue light
-	-	-	-	-	-
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	-	✓ (only XUT8)
24V	12...24V	12...24V	24V for XUMTA 12...24V for XUM8 and XUM7	10...30V	24V
-	-	-	-	-	-
-	-	-	-	-	-
-	✓	-	XUM8ABAY●● XUMTARAY●●	-	XUT8ABAY●●
-	-	✓	XUM7ABPX●●	✓	XUT7ABPX●●
-	-	-	-	-	-
-	-	-	XUMTARAY●● XUM7ABPX●●	-	XUT7ABPX●● XUT8ABAY●●
-	✓	-	XUMTARAY●● XUM7ABPX●● XUM8ABAY●●	✓	-
✓	-	✓	-	-	-
-	✓	-	XUMTARAY●● XUM8ABAY●●	-	-
-	-	-	-	-	XUT7ABPX●● XUT8ABAY●●
XUKCB●AYM12	XUMRACAYM8	XUK8ABPXM12	XUMTARAY●● XUM8ABAY●● XUM7ABPX●●	XUMTPRPM8	XUT7ABPX●● XUT8ABAY●●

78

80

Photo-electric sensors

XUM, general purpose, single mode function

Miniature design, plastic

Three-wire DC, solid-state output



XUM2A●XBL2,
XUM2A●XBL03M8,
XUM2A●XBL03M12



XUM2A●XBM8

Thru-beam system with adjustable sensitivity								
Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)			
Transmitter + receiver IO-Link								
30 m/24 m	NC/NO (Light ON/Dark ON) configuration by IO-Link and potentiometer	Autodetect PNP/NPN	M8 connector (4-pin)	XUM2APYBM8 (1)	0.010			
			Pigtail M12 (4-pin)	XUM2APYBL03M12 (1)	-			
Transmitter + receiver								
30 m/24 m	NC/NO (Light ON/Dark ON) configuration by potentiometer	PNP	Pre-cabled (L = 2 m)	XUM2APXBL2	0.096			
			M8 connector (4-pin)	XUM2APXBM8	0.026			
			Pigtail M8 (4-pin)	XUM2APXBL03M8 (1)	-			
			Pigtail M12 (4-pin)	XUM2APXBL03M12 (1)	-			
			NPN	Pre-cabled (L = 2 m)	XUM2ANXBL2	0.096		
		M8 connector (4-pin)	XUM2ANXBM8	0.026				
		Pigtail M8 (4-pin)	XUM2ANXBL03M8 (1)	-				
		Pigtail M12 (4-pin)	XUM2ANXBL03M12 (1)	-				
		Transmitter only						
		30 m/24 m			Pre-cabled (L = 2 m)	XUM2AKXBL2T	0.063	
M8 connector (4-pin)	XUM2AKXBM8T				0.010			
Pigtail M8 (4-pin)	XUM2AKXBL03M8T (1)				-			
Pigtail M12 (4-pin)	XUM2AKXBL03M12T (1)				-			
Receiver only IO-Link								
30 m/24 m	NC/NO (Light ON/Dark ON) configuration by IO-Link and potentiometer	Autodetect PNP/NPN	M8 connector (4-pin)	XUM2APYBM8R (1)	0.010			
			Pigtail M12 (4-pin)	XUM2APYBL03M12R (1)	-			
Receiver only								
30 m/24 m	NC/NO (Light ON/Dark ON) configuration by potentiometer	PNP	Pre-cabled (L = 2 m)	XUM2APXBL2R	0.063			
			M8 connector (4-pin)	XUM2APXBM8R	0.010			
			Pigtail M8 (4-pin)	XUM2APXBL03M8R (1)	-			
			M12 connector (4-pin)	XUM2APXBL03M12R (1)	-			
			NPN	Pre-cabled (L = 2 m)	XUM2ANXBL2R	0.063		
		M8 connector (4-pin)	XUM2ANXBM8R	0.010				
		Pigtail M8 (4-pin)	XUM2ANXBL03M8R (1)	-				
		Pigtail M12 (4-pin)	XUM2ANXBL03M12R (1)	-				

Accessories

For all XUM miniature sensors

See page 11.

For thru-beam system

See page 11.

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

(1) Available 4th quarter 2025

Photo-electric sensors

XUM, general purpose, single mode function

Miniature design, plastic

Three-wire DC, solid-state output



Diffuse system with adjustable sensitivity

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
Diffuse short range					
0.25 m/0.17 m	NO/NC (Light ON/Dark ON) configuration by potentiometer	PNP	Pre-cabled (L = 2 m)	XUM4APXBL2	0.063
			M8 connector (4-pin)	XUM4APXBM8	0.010
			Pigtail M8 (4-pin)	XUM4APXBL03M8 (1)	–
			Pigtail M12 (4-pin)	XUM4APXBL03M12 (1)	–
	NPN	Pre-cabled (L = 2 m)	XUM4ANXBL2	0.063	
		M8 connector (4-pin)	XUM4ANXBM8	0.010	
		Pigtail M8 (4-pin)	XUM4ANXBL03M8 (1)	–	
		Pigtail M12 (4-pin)	XUM4ANXBL03M12 (1)	–	



Diffuse long range IO-Link

1.9 m/1.5 m	NO/NC (Light ON/Dark ON) configuration by IO-Link and potentiometer	Autodetect PNP/NPN	M8 connector (4-pin)	XUM5APYBM8 (1)	–
			Pigtail M12 (4-pin)	XUM5APYBL03M12 (1)	–

Diffuse long range

1.9 m/1.5 m	NO/NC (Light ON/Dark ON) configuration by potentiometer	PNP	Pre-cabled (L = 2 m)	XUM5APXBL2	0.063
			M8 connector (4-pin)	XUM5APXBM8	0.010
			Pigtail M8 (4-pin)	XUM5ANXBL03M8 (1)	–
			M12 connector (4-pin)	XUM5ANXBL03M12 (1)	–
	NPN	Pre-cabled (L = 2 m)	XUM5ANXBL2	0.063	
		M8 connector (4-pin)	XUM5ANXBM8	0.010	
		Pigtail M8 (4-pin)	XUM5ANXBL03M8 (1)	–	
		Pigtail M12 (4-pin)	XUM5ANXBL03M12 (1)	–	



Diffuse medium range IO-Link

1.1 m/0.8 m	NO/NC (Light ON/Dark ON) configuration by IO-Link and potentiometer	Autodetect PNP/NPN	M8 connector (4-pin)	XUM6APYBM8 (1)	–
			Pigtail M12 (4-pin)	XUM6APYBL03M12 (1)	–

Diffuse medium range

1.1 m/0.8 m	NO/NC (Light ON/Dark ON) configuration by potentiometer	PNP	Pre-cabled (L = 2 m)	XUM6APXBL2	0.063
			M8 connector (4-pin)	XUM6APXBM8	0.010
			Pigtail M8 (4-pin)	XUM6APXBL03M8 (1)	–
			Pigtail M12 (4-pin)	XUM6APXBL03M12 (1)	–
	NPN	Pre-cabled (L = 2 m)	XUM6ANXBL2	0.063	
		M8 connector (4-pin)	XUM6ANXBM8	0.010	
		Pigtail M8 (4-pin)	XUM6ANXBL03M8 (1)	–	
		Pigtail M12 (4-pin)	XUM6ANXBL03M12 (1)	–	

Accessories for XU sensors

For all XUM miniature sensors

See page 11.

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See pages 98 to 103.


(1) Available 4th quarter 2025

Photo-electric sensors

XUM, general purpose, single mode function

Miniature design, plastic

Three-wire DC, solid-state output

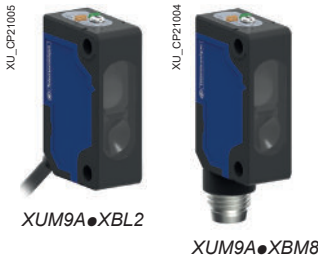

Diffuse system with background suppression and adjustable sensitivity					
Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
300 mm/200 mm (white object or paper)	NO/NC (Light ON/Dark ON)	PNP	Pre-cabled (L = 2 m)	XUM8APXBL2	0.063
			configuration by potentiometer	XUM8APXBM8	0.010
		NPN	Pre-cabled (L = 2 m)	XUM8ANXBL2	0.063
			M8 connector (4-pin)	XUM8ANXBM8	0.010

Polarised reflex system with adjustable sensitivity					
Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
Sensors IO-Link					
8 m/6.7 m with reflector XUZC50	NC/NO (Light ON/Dark ON) configuration by IO-Link and potentiometer	Autodetect PNP/NPN	M8 connector (4-pin)	XUM9APYBM8 (1)	0.010
			Pigtail M12 (4-pin)	XUM9APYBL03M12 (1)	-

Standard sensors					
Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
8 m/6.7 m with reflector XUZC50	NC/NO (Light ON/Dark ON) configuration by potentiometer	PNP	Pre-cabled (L = 2 m)	XUM9APXBL2	0.063
			M8 connector (4-pin)	XUM9APXBM8	0.010
			Pigtail M8 (4-pin)	XUM9APXBL03M8 (1)	-
			Pigtail M12 (4-pin)	XUM9APXBL03M12 (1)	-
		NPN	Pre-cabled (L = 2 m)	XUM9ANXBL2	0.063
			M8 connector (4-pin)	XUM9ANXBM8	0.010
			Pigtail M8 (4-pin)	XUM9ANXBL03M8 (1)	-
			Pigtail M12 (4-pin)	XUM9ANXBL03M12 (1)	-



(1) Available 4th quarter 2025

Accessories

For all XUM miniature sensors

See page 11.

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.


Photo-electric sensors

XUM, general purpose, single mode function

Accessories



XUZASM05



XUZDVM05



XUZDHM05



XUZDRM05

Accessories for all XUM miniature sensors

Setting-up accessory

Description	For use with sensors	Reference	Weight (kg)
Air blower mounting block (1) for cleaning the sensitive face of the sensor, using compressed air.	XUM●A●XBL2 XUM●A●XBM8	XUZASM05	0.030

Supplied with 2 mounting screws (M3 x 20),
1 air supply port plugging screw for the unused port (of 2 available) and 1 gasket.

Accessories for thru-beam system

Diaphragms

Description	Dimensions (mm)	Sensing distance (m)	Reference	Weight (kg)
Vertical diaphragm Sold in lots of 2	0.5 x 6.4	1	XUZDVM05	0.003
	1 x 6.4	1.5	XUZDVM10	0.003
	2 x 6.4	3.5	XUZDVM20	0.003
Horizontal diaphragm Sold in lots of 2	0.5 x 6.4	0.7	XUZDHM05	0.003
	1 x 6.4	1.5	XUZDHM10	0.003
	2 x 6.4	3	XUZDHM20	0.003
Round diaphragm Sold in lots of 2	0.5 x 6.4	0.08	XUZDRM05	0.003
	1 x 6.4	0.3	XUZDRM10	0.003
	2 x 6.4	1.2	XUZDRM20	0.003

Accessories for XU sensors

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See pages 98 to 103.

(1) To order these references, please contact our Customer Care Centre.

Photo-electric sensors

XUM, general purpose, single mode function

Miniature design, plastic

Three-wire DC, solid-state output

Characteristics				XUM●A●●BM8	XUM●A●●BL03M●	XUM●A●XBL2	
Sensor type				XUM●A●●BM8	XUM●A●●BL03M●	XUM●A●XBL2	
Product certifications				CE, UKCA, cULus			
Connection	Connector			M8	–	–	
	Pigtail			–	Length: 0.3 m	–	
	Pre-cabled			–	–	Length: 2 m	
Configuration				IO-Link Potentiometer	IO-Link Potentiometer	Potentiometer	
Nominal sensing distance Sn	Thru-beam system	XUM2	m	30 (with excess gain = 1) 24 (with excess gain = 2)			
	Diffuse system (using a 200 x 200 mm white paper)	XUM4	m	0.25 (with excess gain = 1) 0.17 (with excess gain = 2)			
		XUM5	m	1.9 (with excess gain = 1) 1.5 (with excess gain = 2)			
		XUM6	m	1.1 (with excess gain = 1) 0.8 (with excess gain = 2)			
	Background suppression system	XUM8	mm	4...300: White paper or object. Sn (90%) 5...265: Grey object. Sn (18%) 8...200: Black object. Sn (6%)			
Polarised reflex system (using a 50 x 50 mm reflector XUZC50)	XUM9	m	0.05...8 (with excess gain = 1) 0.05...6.7 (with excess gain = 2)				
Hysteresis				2% < H < 20% at Sn			
Type of transmission	Red	XUM2	Thru-beam system				
		XUM6	Diffuse system				
		XUM8	Background suppression system				
		XUM9	Polarised reflex system				
	Infrared	XUM4	Diffuse system				
		XUM5	Diffuse system				
Degree of protection		Conforming to IEC 60529		IP65, IP67			
Storage temperature		°C		-40...+70			
Operating temperature		°C		-30...+55			
Materials	Case			PBT			
	Lens			PMMA			
	Display			PC			
	Cable			–	PVC	PVC	
Vibration resistance	Conforming to IEC 60068-2-6		Hz	Frequency range 10 to 500			
				gn	Acceleration 9 gn		
Shock resistance	Conforming to IEC 60068-2-27		gn	Peak acceleration 100 gn			
			ms	Duration of the pulse 11			
Indicator lights	Output state			Yellow LED			
	Stability			Green LED (XUM4, XUM5, XUM6, XUM8, XUM9)			
	Power on			Green LED (XUM2)			
Rated supply voltage		V		12...24 --- with protection against reverse polarity			
Voltage limits (including ripple)		V		10...30 ---			
Current consumption, no-load		mA		< 20 max.			
Switching capacity		mA		100			
Voltage drop, closed state		V		≤ 2			
Maximum switching frequency		Hz		1000			
Delays	First-up	ms		< 100			
	Response	ms		0.5			
	Recovery	ms		0.5			
	IO-Link	ms		< 300			

Photo-electric sensors

XUM, general purpose, single mode function

Miniature design, plastic

Three-wire DC, solid-state output

Wiring schemes


Thru-beam system

M8 and M12 connectors - 4-pin IO-Link

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)
	C	IO-Link communication


Autodetect PNP/NPN or by IO-Link

XUM2APYBM8, XUM2APYBM8R, XUM2APYBL03M12, XUM2APYBL03M12R

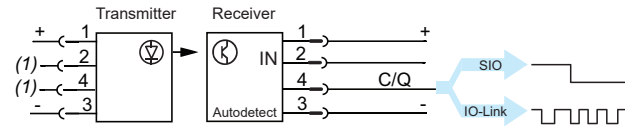


M8 and M12 connectors - 4-pin

Pin	Signal	Definition
3	-	0 V $\overline{\text{---}}$
1	+	+ 24 V $\overline{\text{---}}$
4	OUT/Output	




PNP

XUM2APXBM8, XUM2APXBL03M8, XUM2AKXBM8T, XUM2AKXBL03M8T, XUM2APXBM8R, XUM2APXBL03M8R, XUM2APXBL03M12, XUM2AKXBL03M12T, XUM2APXBL03M12R

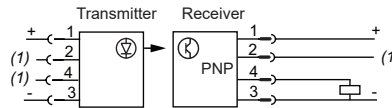

NPN

XUM2ANXBM8, XUM2ANXBL03M8, XUM2ANXBM8R, XUM2ANXBL03M8R, XUM2ANXBL03M12, XUM2ANXBL03M12R

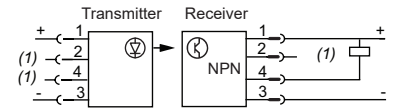


Pre-cabled - 3-wire

(-) BU (Blue)
(+) BN (Brown)
OUT/Output BK (Black)


PNP

XUM2APXBL2, XUM2AKXBL2T, XUM2APXBL2R

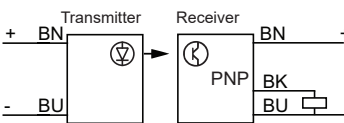

NPN

XUM2ANXBL2, XUM2ANXBL2R

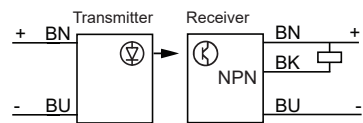


Diffuse systems with or without background suppression and polarised reflex system

M8 and M12 connectors - 4-pin IO-Link

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)
	C	IO-Link communication

XUM●APYBL03M12, XUM●APYBM8

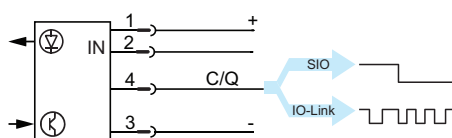


M8 and M12 connectors - 4-pin

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)


PNP

XUM●APXBL03M12, XUM●APXBM8, XUM●APXBL03M8



NPN

XUM●ANXBL03M12




Pre-cabled - 3-wire

(-) BU (Blue)
(+) BN (Brown)
OUT/Output BK (Black)


PNP

XUM●APXBL2



NPN

XUM●ANXBL2



(1) Not connected.

Photo-electric sensors

XUM, general purpose, single mode function



Miniature design, plastic

Three-wire DC, solid-state output

Detection curves


Thru-beam system

Lateral displacement

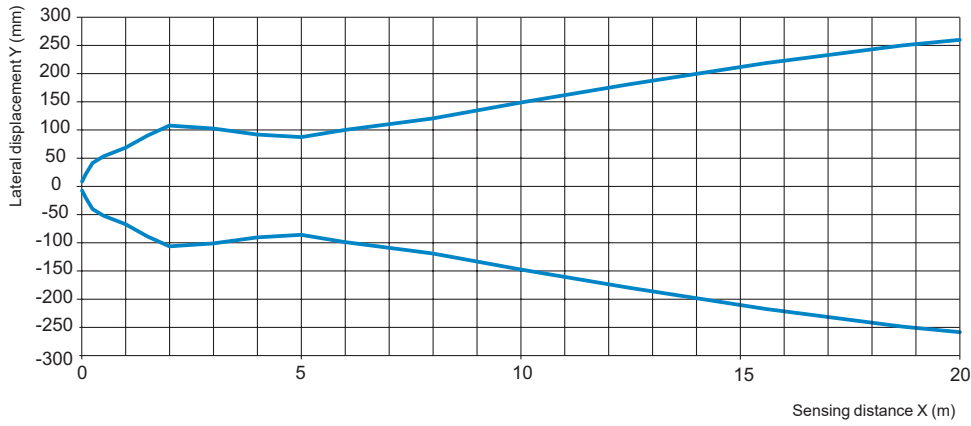

(1): Transmitter
(2): Receiver

Light beam diameter

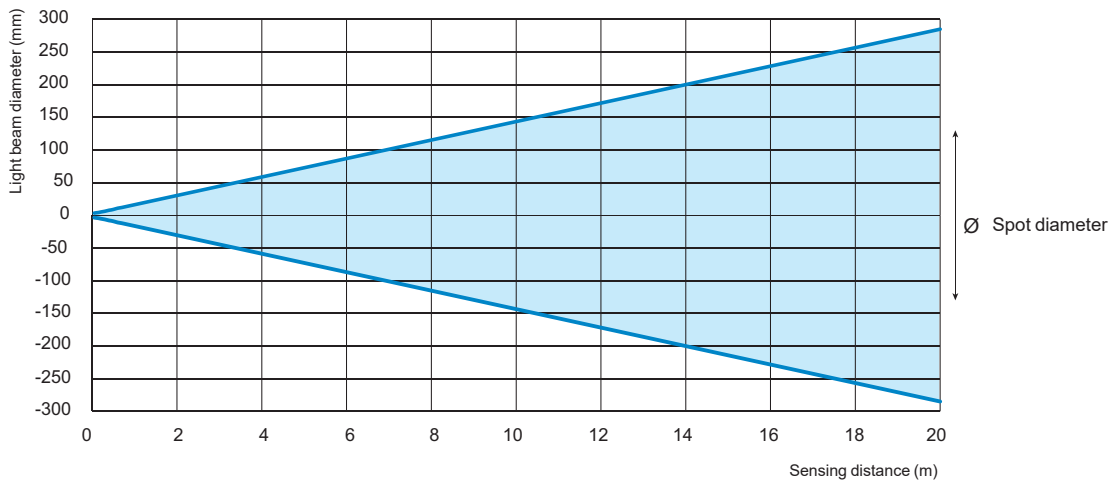

Excess gain

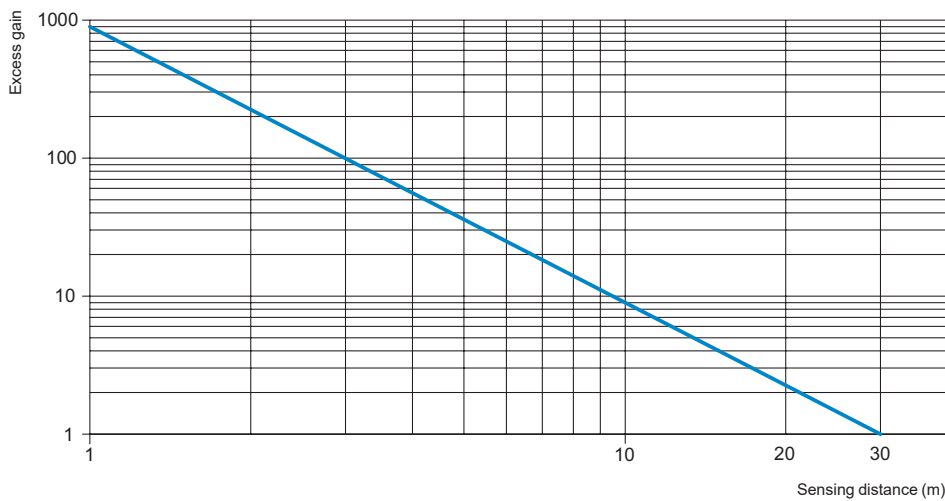


Photo-electric sensors

XUM, general purpose, single mode function



Miniature design, plastic

Three-wire DC, solid-state output

Detection curves (continued)



Diffuse system: XUM4, XUM5 and XUM6

Object size/sensing distance

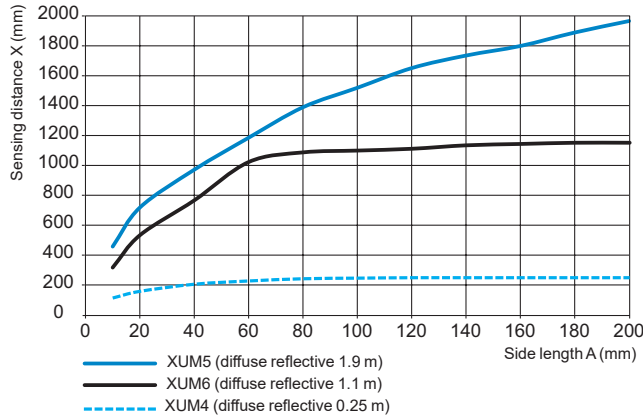

(1): Sensor
 (2): Object (white mat paper of A mm square)
 A: Side length (mm)
 X: Sensing distance (mm)

Lateral displacement

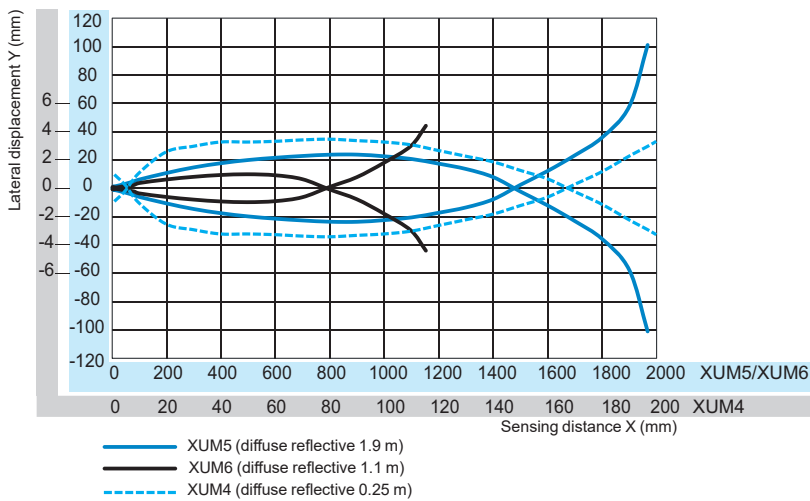

(1): Sensor
 (2): Object (200 x 200 mm square white paper)
 X: Sensing distance (mm)
 Y: Lateral displacement (mm)

Excess gain

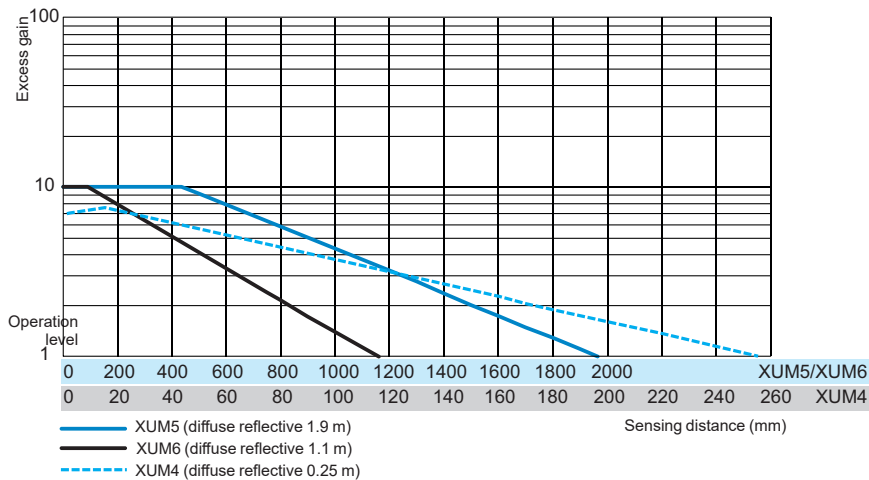


Photo-electric sensors

XUM, general purpose, single mode function



Miniature design, plastic

Three-wire DC, solid-state output

Detection curves (continued)



Diffuse system with background suppression (BGS): XUM8

Lateral displacement (preset 100 mm)

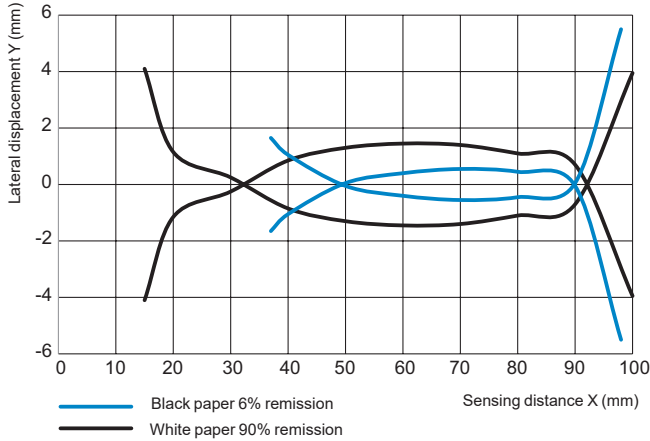


(1): Sensor
(2): Object (200 mm square white and black mat paper)
X: Sensing distance (mm)
Y: Lateral displacement (mm)

Lateral displacement (preset 200 mm)


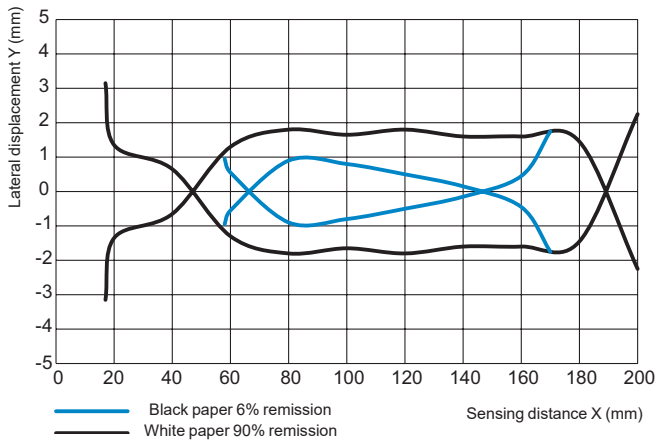


(1): Sensor
(2): Object (200 mm square white and black mat paper)
X: Sensing distance (mm)
Y: Lateral displacement (mm)

Light beam diameter

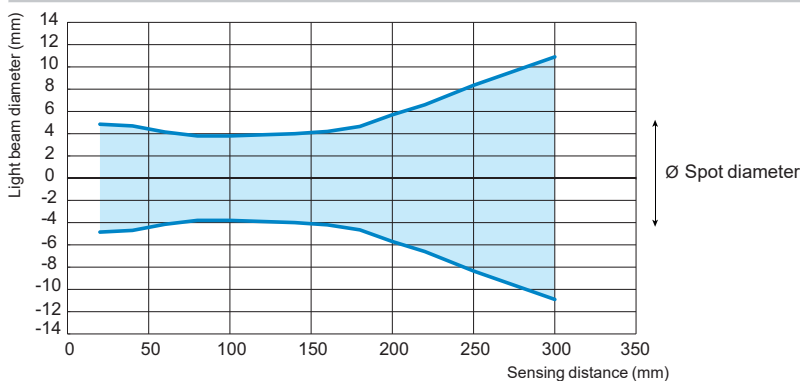

Minimum distance between the object to be detected and a white background

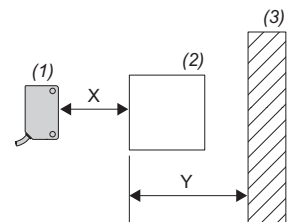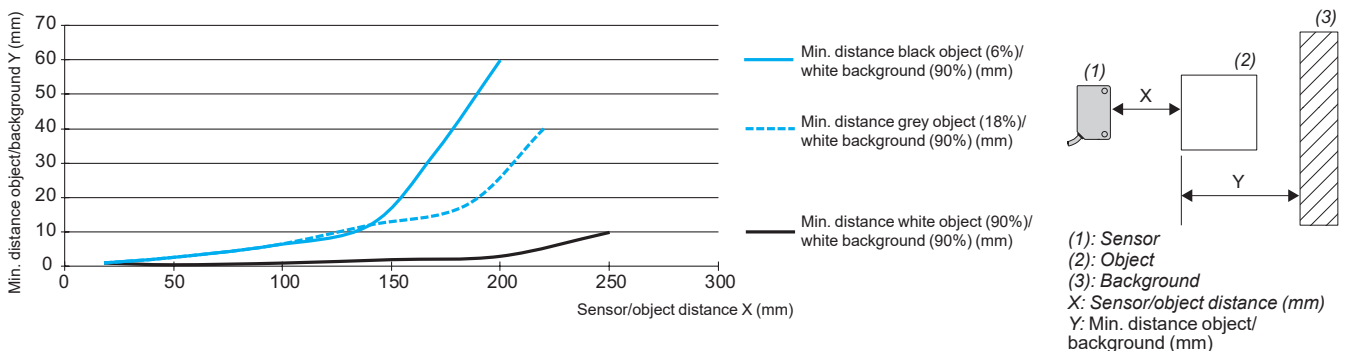

(1): Sensor
(2): Object
(3): Background
X: Sensor/object distance (mm)
Y: Min. distance object/background (mm)

Photo-electric sensors

XUM, general purpose, single mode function



Miniature design, plastic

Three-wire DC, solid-state output

Detection curves

Polarised reflex system


Reflector angle

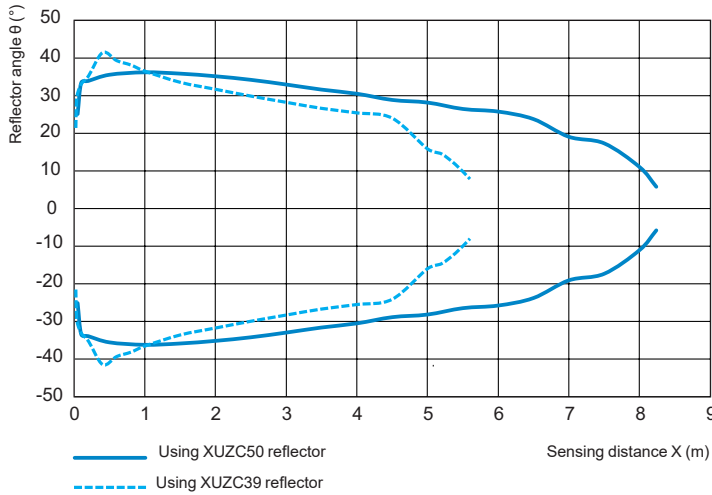

XUZC50





XUZC39



(1): Sensor
 (2): Reflector
 θ : Reflector angle (°)
 X: Sensing distance (m)


Lateral displacement

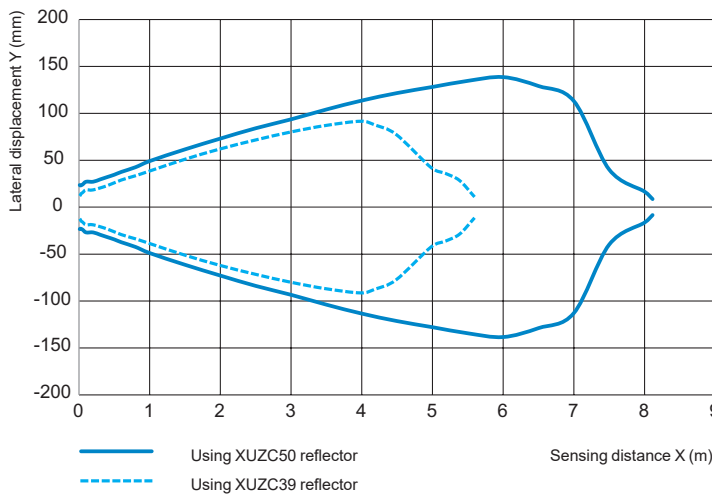

XUZC50





XUZC39



(1): Sensor
 (2): Reflector
 Y: Lateral displacement (mm)
 X: Sensing distance (m)

Excess gain

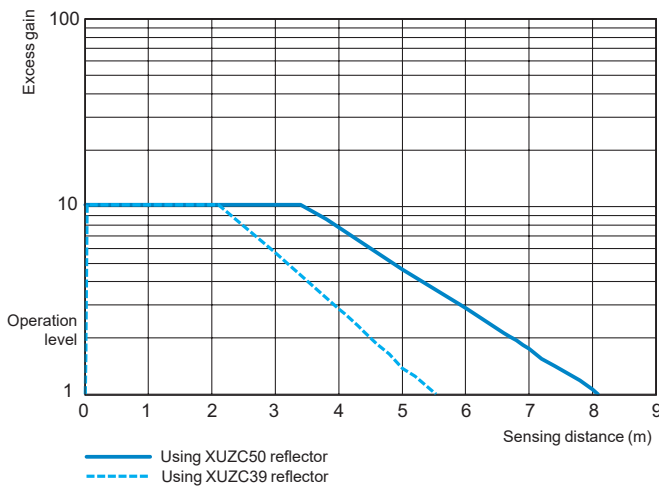

XUZC50



XUZC39

Photo-electric sensors

XUM, general purpose, single mode function

Miniature design, plastic

Three-wire DC, solid-state output



Thru-beam system

Pre-cabled and pigtail versions

Transmitter

Description - XUM2A●XBL2,
XUM2A●●BL03●●●

Dimensions - XUM2A●XBL2,
XUM2A●●BL03●●●

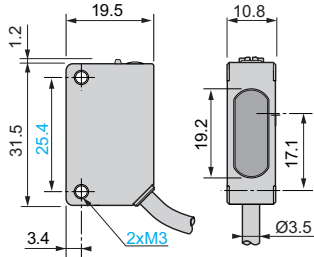



L = 2 m (pre-cabled)
0.3 m (pigtail)

Receiver

Description - XUM2A●XBL2,
XUM2A●●BL03●●●

Dimensions - XUM2A●XBL2,
XUM2A●●BL03●●●

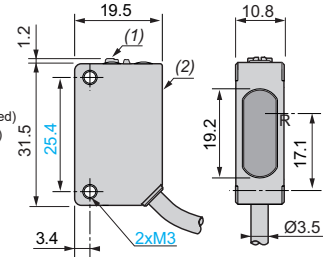
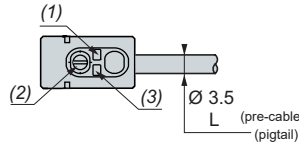


M8 connector version

Transmitter

Description - XUM2A●XBM8



Dimensions - XUM2A●XBM8

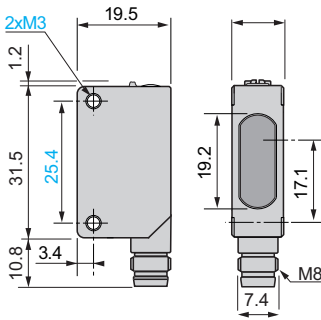

Receiver

Description - XUM2A●XBM8

Dimensions - XUM2A●XBM8

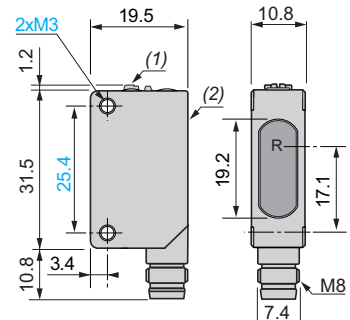

(1) Power ON indicator (green)

T: Transmission

(1) Output indicator (yellow)

R: Reception

(2) Setting potentiometer (sensitivity)
(3) Power ON indicator (green)



(1) Setting potentiometer (sensitivity)
(2) Setting potentiometer (NO/NC)

Diffuse system

Pre-cabled and pigtail versions

Description - XUM5A●XBL2,
XUM6A●XBL2, XUM4A●XBL2,
XUM●A●●BL03●●●

Dimensions - XUM5A●XBL2,
XUM6A●XBL2, XUM4A●XBL2,
XUM●A●●BL03●●●

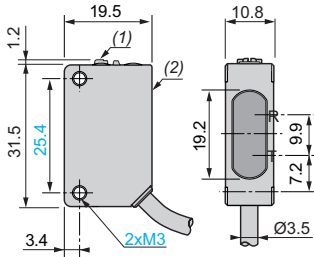



L = 2 m (pre-cabled)
0.3 m (pigtail)

M8 connector version

Description - XUM5A●XBM8,
XUM6A●XBM8, XUM4A●XBM8

Dimensions - XUM5A●XBM8,
XUM6A●XBM8, XUM4A●XBM8

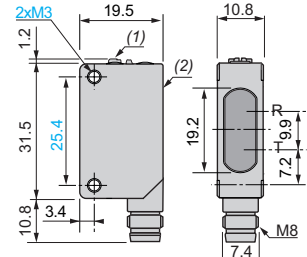

(1) Output indicator (yellow)
(2) Setting potentiometer (sensitivity)
(3) Stability indicator (green)

R: Reception
T: Transmission
(1) Setting potentiometer (sensitivity)
(2) Setting potentiometer (NO/NC)

(1) Output indicator (yellow)
(2) Setting potentiometer (sensitivity)
(3) Stability indicator (green)



R: Reception
T: Transmission
(1) Setting potentiometer (sensitivity)
(2) Setting potentiometer (NO/NC)

Diffuse system with background suppression

Pre-cabled version

Description - XUM8A●XBL2

Dimensions - XUM8A●XBL2

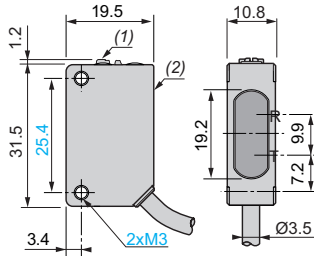

L = 2 m (pre-cabled)
0.3 m (pigtail)

M8 connector version

Description - XUM8A●XBM8

Dimensions - XUM8A●XBM8

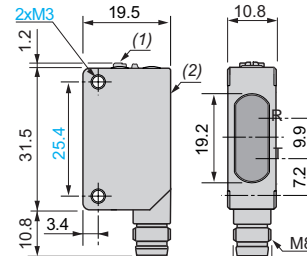



Photo-electric sensors

XUM, general purpose, single mode function

Miniature design, plastic



Three-wire DC, solid-state output

Polarised reflex system

Pre-cabled and pigtail versions

Description - XUM9A●XBL2,
XUM9A●BL03●●



Dimensions - XUM9A●XBL2,
XUM9A●BL03●●

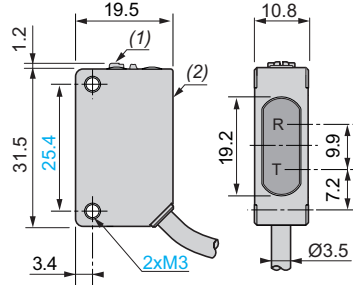

M8 connector version

Description - XUM9A●XBM8


Dimensions - XUM9A●XBM8

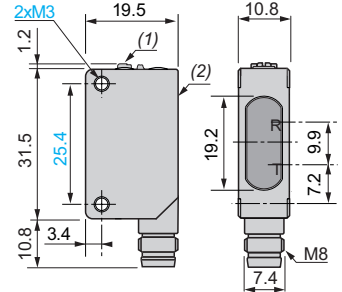

Accessories

Setting-up accessory

XUZASM05

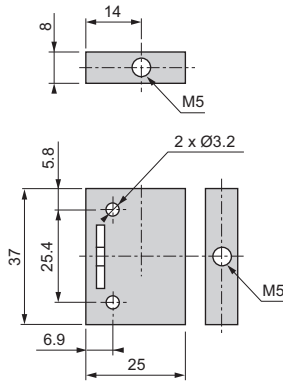




Diaphragms

XUZDVM●●

XUZDHM●●

XUZDRM●●

Reference a (mm)



Reference	a (mm)
XUZDVM05	0.5
XUZDVM10	1
XUZDVM20	2
XUZDHM05	0.5
XUZDHM10	1
XUZDHM20	2
XUZDRM05	Ø 0.5
XUZDRM10	Ø 1
XUZDRM20	Ø 2

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, plastic, kits

Four-wire DC, solid-state output

Wire setting for NO/NC



Thru-beam system with adjustable sensitivity

Max./operating distance (Sn)/ Line of sight	Function	Output	Connection	Reference	Weight (kg)
15 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by IO-Link and/or by wire on the receiver	Autodetect PNP/NPN	M12 connector (4-pin)	XUB2APYNM12	0.060
12 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by IO-Link and/or by wire on the receiver		M12 connector (4-pin)	XUB2APYWM12	0.060

Transmitter + receiver

30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	NPN	Pre-cabled (L = 2 m)	XUB2ANXNL2	0.171
	NO/NC (Dark ON/Light ON) configuration by wire on the receiver		M12 connector (4-pin)	XUB2ANXNM12	0.060
17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	NPN	Pre-cabled (L = 2 m)	XUB2ANXWL2	0.171
	NO/NC (Dark ON/Light ON) configuration by wire on the receiver		M12 connector (4-pin)	XUB2ANXWM12	0.060
30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	PNP	Pre-cabled (L = 2 m)	XUB2APXNL2	0.171
	NO/NC (Dark ON/Light ON) configuration by wire on the receiver		M12 connector (4-pin)	XUB2APXNM12	0.060
17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	PNP	Pre-cabled (L = 2 m)	XUB2APXWL2	0.171
	NO/NC (Dark ON/Light ON) configuration by wire on the receiver		M12 connector (4-pin)	XUB2APXWM12	0.060

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, plastic

Four-wire DC, solid-state output

Wire setting for NO/NC



Thru-beam system with adjustable sensitivity

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
--	----------	--------	------------	-----------	-------------

Transmitter only(1)

30 m/20 m Along case axis	–	–	Pre-cabled (L = 2 m)	XUB2AKXNL2T	0.095
			M12 connector (4-pin)	XUB2AKXNM12T	0.040

17 m/12 m 90° to case axis	–	–	Pre-cabled (L = 2 m)	XUB2AKXWL2T	0.095
			M12 connector (4-pin)	XUB2AKXWM12T	0.040

Receiver IO-Link only

30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB2APYNM12R	0.040
			M12 connector (4-pin)	XUB2APYW12R	0.040

17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB2APYWM12R	0.040
			M12 connector (4-pin)	XUB2APYWL2R	0.040

Receiver only

30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB2ANXNL2R	0.095
			M12 connector (4-pin)	XUB2ANXNM12R	0.040

17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB2ANXWL2R	0.095
			M12 connector (4-pin)	XUB2ANXWM12R	0.040

30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire	PNP	Pre-cabled (L = 2 m)	XUB2APXNL2R	0.095
			M12 connector (4-pin)	XUB2APXNM12R	0.040

17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire	PNP	Pre-cabled (L = 2 m)	XUB2APXWL2R	0.095
			M12 connector (4-pin)	XUB2APXWM12R	0.040

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

(1) All transmitters are compatible with the receivers listed below.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, metal, kits

Four-wire DC, solid-state output

Wire setting for NO/NC



Thru-beam system with adjustable sensitivity

Max./operating sensing distance (Sn)/ Line of sight	Function	Output	Connection	Reference	Weight (kg)
Transmitter + receiver IO-Link					
12 m/12 m Along case axis	NO/NC (Dark ON/Light ON) configuration by IO-Link and/or by wire on the receiver	Autodetect PNP/NPN	M12 connector (4-pin)	XUB2BPYNM12	0.060
12 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by IO-Link and/or by wire on the receiver	Autodetect PNP/NPN	M12 connector (4-pin)	XUB2BPYWM12	0.060

Transmitter + receiver

30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	NPN	Pre-cabled (L = 2 m)	XUB2BNXNL2	0.192
	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	NPN	M12 connector (4-pin)	XUB2BNXNM12	0.080
17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	NPN	Pre-cabled (L = 2 m)	XUB2BNXWL2	0.192
	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	NPN	M12 connector (4-pin)	XUB2BNXWM12	0.080
30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	PNP	Pre-cabled (L = 2 m)	XUB2BPXNL2	0.192
	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	PNP	M12 connector (4-pin)	XUB2BPXNM12	0.080
17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	PNP	Pre-cabled (L = 2 m)	XUB2BPXWL2	0.192
	NO/NC (Dark ON/Light ON) configuration by wire on the receiver	PNP	M12 connector (4-pin)	XUB2BPXWM12	0.080

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, metal

Four-wire DC, solid-state output

Wire setting for NO/NC




XUB2BKXNM12T

XUB2BKXWM12T



XUB2BKXNL2T

XUB2BKXWL2T

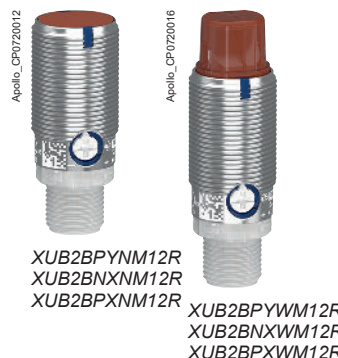

XUB2BPYNM12R
XUB2BNXNM12R
XUB2BPXNM12R

XUB2BPYWM12R
XUB2BNXWM12R
XUB2BPXWM12R



XUB2BNXNL2R
XUB2BPXNL2R

XUB2BNXWL2R
XUB2BPXWL2R

Thru-beam system with adjustable sensitivity

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
Transmitter only (1)					
30 m/20 m Along case axis	–	–	Pre-cabled (L = 2 m)	XUB2BKXNL2T	0.095
			M12 connector (4-pin)	XUB2BKXNM12T	0.040
17 m/12 m 90° to case axis	–	–	Pre-cabled (L = 2 m)	XUB2BKXWL2T	0.095
			M12 connector (4-pin)	XUB2BKXWM12T	0.040

Receiver IO-Link only

30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB2BPYNM12R	0.040
			M12 connector (4-pin)	XUB2BPYWM12R	0.040
17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB2BPYNM12R	0.040
			M12 connector (4-pin)	XUB2BPYWM12R	0.040

Receiver only

30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB2BNXNL2R	0.095
			M12 connector (4-pin)	XUB2BNXNM12R	0.040
		PNP	Pre-cabled (L = 2 m)	XUB2BPXNL2R	0.095
			M12 connector (4-pin)	XUB2BPXNM12R	0.040
17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB2BNXWL2R	0.095
			M12 connector (4-pin)	XUB2BNXWM12R	0.040
		PNP	Pre-cabled (L = 2 m)	XUB2BPXWL2R	0.095
			M12 connector (4-pin)	XUB2BPXWM12R	0.040

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

(1) All transmitters are compatible with the receivers listed below.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, plastic

Four-wire DC, solid-state output

Wire setting for NO/NC



XUB●●●●●
XUB●●●●●
XUB●●●●●



XUB●●●●●
XUB6●●●●●



XUB●●●●●
XUB●●●●●



XUB6●●●●●

Diffuse system with adjustable sensitivity, IO-Link

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
--	----------	--------	------------	-----------	-------------

Long range, red LED emission

1 m/0.7 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB5APYNM12	0.040
------------------------------	---	-----------------------	--------------------------	--------------------	-------

Medium range, red LED emission

0.6 m/0.42 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB6APYNM12	0.040
---------------------------------	---	-----------------------	--------------------------	--------------------	-------

0.5 m/0.35 m 90° to case axis	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB6APYWM12	0.040
----------------------------------	---	-----------------------	--------------------------	--------------------	-------

Diffuse system with adjustable sensitivity

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
--	----------	--------	------------	-----------	-------------

Long range, red LED emission

1 m/0.7 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB5ANXNL2	0.095
			M12 connector (4-pin)	XUB5ANXNM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB5APXNL2	0.095
			M12 connector (4-pin)	XUB5APXNM12	0.040

Medium range, red LED emission

0.6 m/0.42 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB6ANXNL2	0.095
			M12 connector (4-pin)	XUB6ANXNM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB6APXNL2	0.095
			M12 connector (4-pin)	XUB6APXNM12	0.040
0.5 m/0.35 m 90° to case axis	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB6ANXWL2	0.095
			M12 connector (4-pin)	XUB6ANXWM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB6APXWL2	0.095
			M12 connector (4-pin)	XUB6APXWM12	0.040

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, metal

Four-wire DC, solid-state output

Wire setting for NO/NC



XUB5BPYNM12
XUB5BNXNM12
XUB5BPXNM12



XUB6BPYWM12
XUB6BNXWM12
XUB6BPXWM12



XUB5BNXNL2
XUB5BPXNL2



XUB6BNXWL2
XUB6BPXWL2

Diffuse system with adjustable sensitivity, IO-Link

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
Long range, red LED emission					
1 m/0.7 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB5BPYNM12	0.040
Medium range, red LED emission					
0.6 m/0.42 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB6BPYNM12	0.040
0.5 m/0.35 m 90° to case axis	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB6BPYWM12	0.040

Diffuse system with adjustable sensitivity

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
Long range, red LED emission					
1 m/0.7 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB5BNXNL2	0.095
			M12 connector (4-pin)	XUB5BNXNM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB5BPXNL2	0.095
			M12 connector (4-pin)	XUB5BPXNM12	0.040
Medium range, red LED emission					
0.6 m/0.42 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB6BNXNL2	0.095
			M12 connector (4-pin)	XUB6BNXNM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB6BPXNL2	0.095
			M12 connector (4-pin)	XUB6BPXNM12	0.040
0.5 m/0.35 m 90° to case axis	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB6BNXWL2	0.095
			M12 connector (4-pin)	XUB6BNXWM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB6BPXWL2	0.095
			M12 connector (4-pin)	XUB6BPXWM12	0.040

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, plastic

Four-wire DC, solid-state output

Wire setting for NO/NC

Apcello_CP0720004



XUB8APYNM12
XUB8ANXNM12
XUB8APXNM12

Apcello_CP0720008



XUB8APYWM12
XUB8ANXWM12
XUB8APXWM12

Apcello_CP0720002



XUB8ANXNL2
XUB8APXNL2

Apcello_CP0720006



XUB8ANXWL2
XUB8APXWL2

Diffuse system with background suppression (BGS), IO-Link

Plastic, red LED emission

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
0.3 m/0.3 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	PNP	M12 connector (4-pin)	XUB8APYNM12	0.040
0.15 m/0.15 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link			XUB8APYWM12	0.040

Diffuse system with background suppression (BGS)

Plastic, red LED emission

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)		
0.3 m/0.3 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB8ANXNL2	0.095		
			M12 connector (4-pin)	XUB8ANXNM12	0.040		
		PNP	Pre-cabled (L = 2 m)	XUB8APXNL2	0.095		
			M12 connector (4-pin)	XUB8APXNM12	0.040		
		0.15 m/0.15 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB8ANXWL2	0.095
					M12 connector (4-pin)	XUB8ANXWM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB8APXWL2	0.095		
			M12 connector (4-pin)	XUB8APXWM12	0.040		

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, metal

Four-wire DC, solid-state output

Wire setting for NO/NC



XUB8BPYNM12
XUB8BNXNM12
XUB8BPXNM12



XUB8BPYWM12
XUB8BNXWM12
XUB8BPXWM12



XUB8BNXNL2
XUB8BPXNL2



XUB8BNXWL2
XUB8BPXWL2

Diffuse system with background suppression (BGS), IO-Link

Metal, red LED emission

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
0.3 m/0.3 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	PNP	M12 connector (4-pin)	XUB8BPYNM12	
0.15 m/0.15 m 90° to case axis			M12 connector (4-pin)	XUB8BPYWM12	

Diffuse system with background suppression (BGS)

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
Metal, red LED emission					
0.3 m/0.3 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB8BNXNL2	0.095
			M12 connector (4-pin)	XUB8BNXNM12	0.040
0.15 m/0.15 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire	PNP	Pre-cabled (L = 2 m)	XUB8BPXNL2	0.095
			M12 connector (4-pin)	XUB8BPXNM12	0.040
		NPN	Pre-cabled (L = 2 m)	XUB8BNXWL2	0.095
			M12 connector (4-pin)	XUB8BNXWM12	0.040
PNP	Pre-cabled (L = 2 m)	XUB8BPXWL2	0.095		
	M12 connector (4-pin)	XUB8BPXWM12	0.040		

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, plastic

Four-wire DC, solid-state output

Wire setting for NO/NC

Apcello_CP0720004



XUB9APYNM12
XUB9ANXNM12
XUB9APXNM12

Apcello_CP0720008



XUB9APYWM12
XUB9ANXWM12
XUB9APXWM12

Apcello_CP0720002



XUB9ANXNL2
XUB9APXNL2

Apcello_CP0720006



XUB9ANXWL2
XUB9APXWL2

Polarised reflex system with adjustable sensitivity, IO-Link

Plastic, red LED emission

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
7 m/5 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB9APYNM12	0.040
5.5 m/4 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB9APYWM12	0.040

Polarised reflex system with adjustable sensitivity

Plastic, red LED emission

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)		
7 m/5 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB9ANXNL2	0.095		
			M12 connector (4-pin)	XUB9ANXNM12	0.040		
		PNP	Pre-cabled (L = 2 m)	XUB9APXNL2	0.095		
			M12 connector (4-pin)	XUB9APXNM12	0.040		
		5.5 m/4 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB9ANXWL2	0.095
					M12 connector (4-pin)	XUB9ANXWM12	0.040
PNP	Pre-cabled (L = 2 m)	XUB9APXWL2	0.095				
		M12 connector (4-pin)	XUB9APXWM12	0.040			

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, metal

Four-wire DC, solid-state output

Wire setting for NO/NC

Apollo_CP0720012



XUB9BPYNM12
XUB9BNXNM12
XUB9BPXNM12

Apollo_CP0720016



XUB9BPYWM12
XUB9BNXWM12
XUB9BPXWM12

Apollo_CP0720010



XUB9BNXNL2
XUB9BPXNL2

Apollo_CP0720014



XUB9BNXWL2
XUB9BPXWL2

Polarised reflex system with adjustable sensitivity, IO-Link

Metal, red LED emission

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
7 m/5 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB9BPYNM12	0.040
5.5 m/4 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB9BPYWM12	0.040

Polarised reflex system with adjustable sensitivity

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
--	----------	--------	------------	-----------	-------------

Metal, red LED emission

7 m/5 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB9BNXNL2	0.095
			M12 connector (4-pin)	XUB9BNXNM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB9BPXNL2	0.095
			M12 connector (4-pin)	XUB9BPXNM12	0.040
5.5 m/4 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB9BNXWL2	0.095
			M12 connector (4-pin)	XUB9BNXWM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB9BPXWL2	0.095
			M12 connector (4-pin)	XUB9BPXWM12	0.040

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, plastic
Four-wire DC, solid-state output
Wire setting for NO/NC

Characteristics				
Sensor type			XUB2APY●M12, XUB2BPY●M12, XUB2A●X●M12, XUB2B●X●L2, XUB2A●X●M12, XUB2APY●M12R, XUB2BPY●M12R, XUB2A●X●M12T, XUB2A●X●M12R, XUB2B●X●M12T, XUB2B●X●M12R, XUB5APYNM12, XUB5BPYNM12, XUB5A●X●M12, XUB5B●X●M12, XUB6APY●M12, XUB6A●X●M12, XUB6B●X●M12, XUB8APY●M12, XUB8BPY●M12, XUB8A●X●M12, XUB8B●X●M12, XUB9APY●M12, XUB9BPY●M12, XUB9A●X●M12, XUB9B●X●M12	XUB2A●X●L2, XUB2A●X●L2, XUB2B●X●L2, XUB2A●X●L2R, XUB2B●X●L2R, XUB2B●X●L2R, XUB5A●X●L2, XUB5B●X●L2, XUB6A●X●L2, XUB6B●X●L2, XUB8A●X●L2, XUB8B●X●L2, XUB9A●X●L2, XUB9B●X●L2
Product certifications		XUB8	CE, UKCA, cULus, ECOLAB, RCM	
		Others	CE, UKCA, cULus, ECOLAB	
Connection	Connector		M12	
	Pre-cabled		–	
			Length: 2 m	
Sensing distance Excess gain = 1 : maximum sensing distance Excess gain = 2 : nominal sensing distance	Thru-beam system XUB2	Along case axis (axial)	m 30 (with excess gain = 1) 20 (with excess gain = 2)	
		90° to case axis (radial)	m 17 (with excess gain = 1) 12 (with excess gain = 2)	
	Diffuse long dist. system XUB5 (using a 200 x 200 mm white paper)	Along case axis (axial)	m 1 (with excess gain = 1) 0.7 (with excess gain = 2)	
		Diffuse med. dist. system XUB6 (using a 200 x 200 mm white paper)	Along case axis (axial)	m 0.6 (with excess gain = 1) 0.42 (with excess gain = 2)
		90° to case axis (radial)	m 0.5 (with excess gain = 1) 0.35 (with excess gain = 2)	
	Diffuse BGS XUB8 (using a 200 x 200 mm white or black mat paper)	Along case axis (axial)	m 0.3 (from white object (90%) to black object (6%))	
		90° to case axis (radial)	m 0.15 (rom white object (90%) to black object (6%))	
	Polarised reflex system XUB9 (using a 50 x 50 mm reflector XU2C50)	Along case axis	m 7 (with excess gain = 1) 5 (with excess gain = 2)	
		90° to case axis	m 5.5 (with excess gain = 1) 4 (with excess gain = 2)	
	Blind zone	XUB8	mm Axial: < 5, radial: < 13	
Others		mm 0 (white object and potentiometer max.)		
Sensing distance setting			Potentiometer 1 turn (+/- 220 degrees)	
Colour of detection light beam			Red	
Output type			PNP/NPN (or autodetect PNP/NPN with IO-Link)	
Hysteresis			2% < H < 20% at Sn	
Degree of protection	Conforming to IEC 60529		IP65, IP67	
	Conforming to DIN 40050-9		IP69K	
Artificial optical radiation	Conforming to IEC 62471		Class 0 (risk exempt)	
Radiated disturbances emissions	Conforming to EN 55011/CISPR 1		Class A	
Storage temperature		°C	-40...+70	
Operating temperature		°C	-30...+55	
Materials	Case	XUB●A	PBT/PC	
		XUB●B	Brass	
	Back cap		MABS	
	Potentiometer screw		PBT	
	Lens cover		PMMA	
	Cable		–	
			PVC	
Vibration resistance	Conforming to IEC 60068-2-6	Hz	Frequency range 10 to 55	
		gn	Acceleration 7	
Shock resistance	Conforming to IEC 60068-2-27	gn	Peak acceleration 30	
		ms	Duration of the pulse 11	
Rated supply voltage		V	12...24 --- with protection against reverse polarity	
Voltage limits (including ripple)		V	10...30 ---	
Current consumption, no-load	IO-Link, XUB8	mA	< 30	
		Others	mA < 20	
Switching capacity		mA	100	
Voltage drop, closed state		V	≤ 2	
Maximum switching frequency		Hz	1000	
Delays	First-up, XUB8 and IO-Link	ms	< 300	
	Others	ms	< 100	
	Response	ms	0.5 max.	
	Recovery	ms	0.5 max	

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18


Four-wire DC, solid-state output

Wire setting for NO/NC

Wiring schemes

Thru-beam system


M12 connector - 4 pins, plastic and metal, IO-Link



Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)
	C	IO-Link communication


Autodetect PNP/NPN or by IO-Link

XUB2●PYNM12R, XUB2●PYWM12R, XUB2●KXNM12T, XUB2●KXWM12T

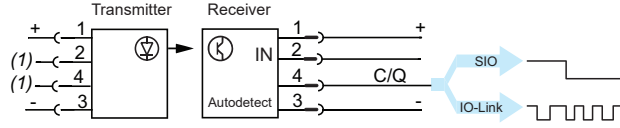

Note: IODD IO-Link files available on our website www.telemecaniquesensors.com/iolink


M12 connector - 4 pins, plastic and metal



Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)


PNP

XUB2●PXNM12R, XUB2●PXWM12R,
XUB2●KXNM12T, XUB2●KXWM12T

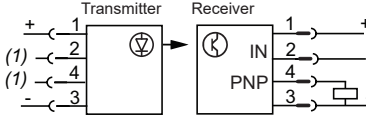

NPN

XUB2●NXNM12R, XUB2●NXWM12R,
XUB2●KXNM12T, XUB2●KXWM12T

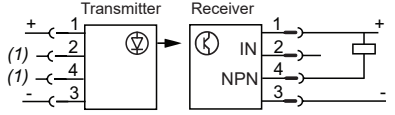


Pre-cabled - 4 wires, plastic and metal

+BN (Brown)
IN (input) GY (Grey)
OUT (output) BK (Black)
-BU (Blue)


PNP

XUB2●PXNL2R, XUB2●APXWL2R,
XUB2●KXNL2T, XUB2●KXWL2T

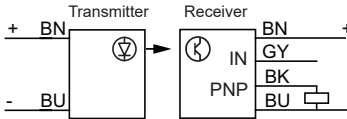


NPN

XUB2●NXNL2R, XUB2●NXWL2R,
XUB2●KXNL2T, XUB2●KXWL2T

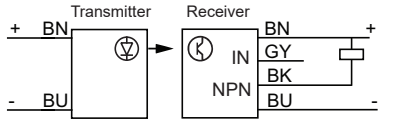

Diffuse system


M12 connector - 4 pins, plastic and metal, IO-Link



Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)
	C	IO-Link communication


Autodetect PNP/NPN or by IO-Link

XUB5APYNM12, XUB6APYNM12, XUB6APYWM12, XUB5BPYNM12,
XUB6BPYNM12, XUB6BPYWM12

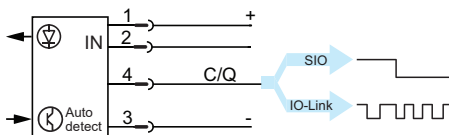

Note: IODD IO-Link files available on our website www.telemecaniquesensors.com/iolink


M12 connector - 4 pins, plastic and metal



Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)


PNP

XUB5APXNM12, XUB6APXNM12,
XUB6APXWM12, XUB5BPXNM12,
XUB6BPXNM12, XUB6BPXWM12,



NPN

XUB5ANXNM12, XUB6ANXNM12,
XUB6ANXWM12, XUB5BNXNM12,
XUB6BNXNM12, XUB6BNXWM12




Pre-cabled - 4 wires, plastic and metal

+BN (Brown)
IN (input) GY (Grey)
OUT (output) BK (Black)
-BU (Blue)


PNP

XUB5APXNL2, XUB6APXNL2, XUB6APXWL2,
XUB5BPXNL2, XUB6BPXNL2, XUB6BPXWL2



NPN

XUB5ANXNL2, XUB6ANXNL2,
XUB6ANXWL2, XUB5BNXNL2,
XUB6BNXNL2, XUB6BNXWL2



(1) Not connected.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18


Four-wire DC, solid-state output

Wire setting for NO/NC

Wiring schemes (continued)

Diffuse system with background suppression


M12 connector - 4 pins, plastic and metal, IO-Link



Pin	Signal	Definition
1	+	+ 24 V
2	IN	+ = NC - = NO Open = NO
3	-	0 V
4	Q	Switching signal (SIO)
	C	Coded switching signal (IO-Link)


Autodetect PNP/NPN or by IO-Link

XUB8APYNM12, XUB8APYW12, XUB8BPYNM12, XUB8BPYW12

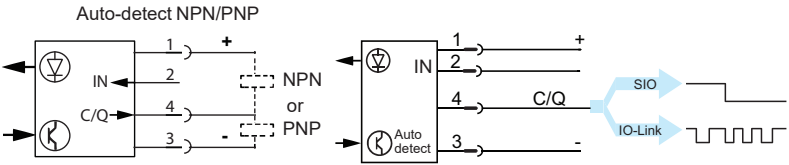

Note: IODD IO-Link files available on our website www.telemecaniquesensors.com/iolink


M12 connector - 4 pins, plastic and metal



Pin	Signal	Definition
1	+	+ 24 V
2	IN	+ = NO - = NC Open = NO
3	-	0 V
4	Q	Switching signal (SIO)


PNP

XUB8APXNM12, XUB8APXW12
XUB8BPXNM12, XUB8BPXW12



NPN

XUB8ANXNM12, XUB8ANXW12
XUB8BNXNM12, XUB8BNXW12

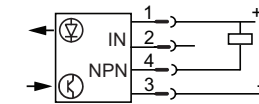


Pre-cabled - 4 wires, plastic and metal

+BN (Brown)
IN (input) GY (Grey)
OUT (output) BK (Black)
-BU (Blue)


PNP

XUB8APXNL2, XUB8APXWL2
XUB8BPXNL2, XUB8BPXWL2




NPN

XUB8ANXNL2, XUB8ANXWL2
XUB8BNXNL2, XUB8BNXWL2



Polarised reflex system


M12 connector - 4 pins, plastic and metal, IO-Link



Pin	Signal	Definition
1	+	+ 24 V
2	IN	+ = NC - = NO Open = NO
3	-	0 V
4	Q	Switching signal (SIO)
	C	Coded switching signal (IO-Link)


Autodetect PNP/NPN or by IO-Link

XUB9APYNM12, XUB9APYW12, XUB9BPYNM12, XUB9BPYW12

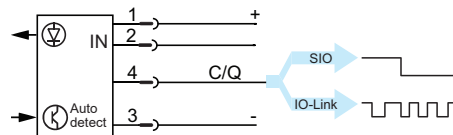

Note: IODD IO-Link files available on our website www.telemecaniquesensors.com/iolink


M12 connector - 4 pins, plastic and metal



Pin	Signal	Definition
1	+	+ 24 V
2	IN	+ = NC - = NO Open = NO
3	-	0 V
4	Q	Switching signal (SIO)
	C	Coded switching signal (IO-Link)


PNP

XUB9APXNM12, XUB9APXW12,
XUB9BPXNM12, XUB9BPXW12



NPN

XUB9ANXNM12, XUB9ANXW12,
XUB9BNXNM12, XUB9BNXW12




Pre-cabled, 4 wires, plastic and metal

+BN (Brown)
IN (input) GY (Grey)
OUT (output) BK (Black)
-BU (Blue)

PNP

XUB9APXNL2, XUB9BAPXWL2,
XUB9BPXNL2, XUB9BPXWL2



NPN

XUB9ANXNL2, XUB9ANXWL2,
XUB9BNXNL2, XUB9BNXWL2




Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18



Four-wire DC, solid-state output

Wire setting for NO/NC


Detection curves

Thru-beam system

Lateral displacement

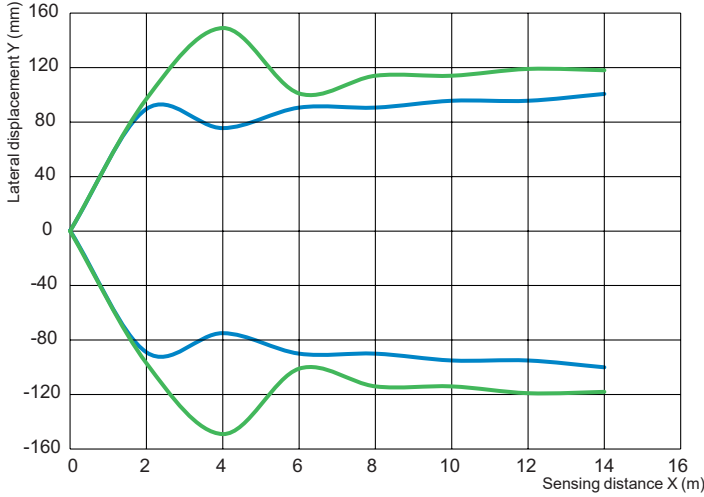


Line of sight: along case axis (axial)



Line of sight: 90° to case axis (radial)

Light beam diameter

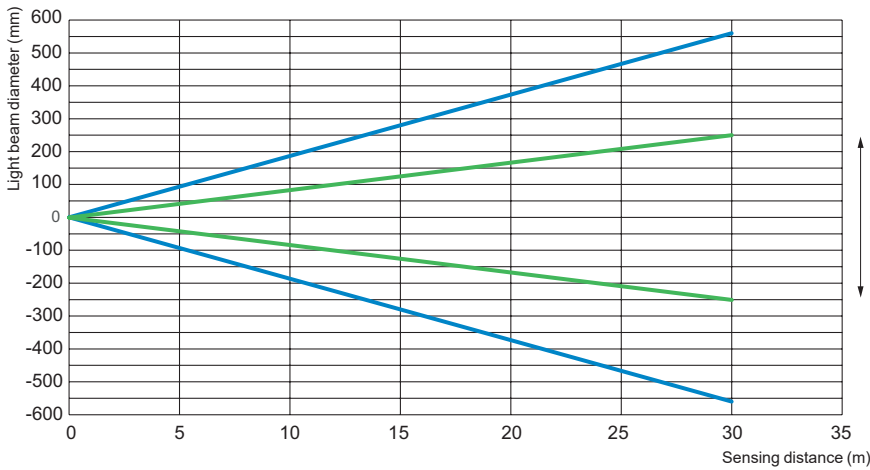


∅ Spot diameter

Line of sight: 90° to case axis (radial)

Line of sight: along case axis (axial)

Excess gain

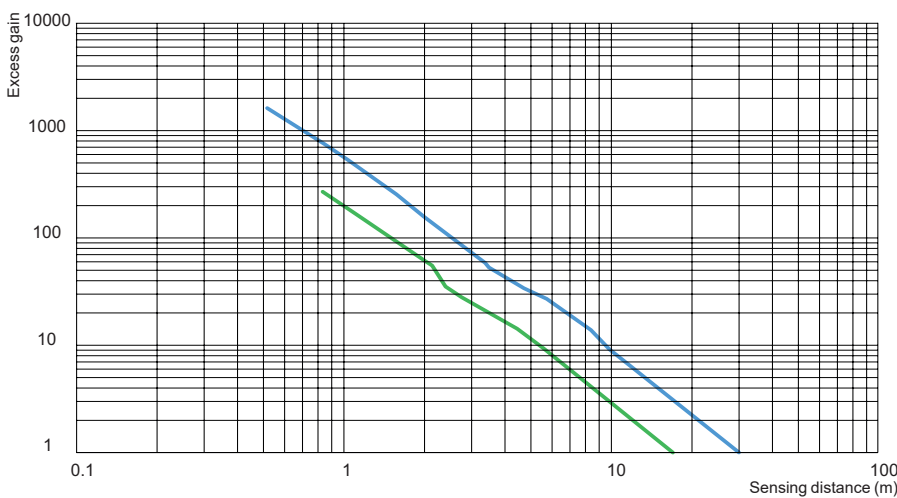

Line of sight: 90° to case axis (radial)

Line of sight: Along case axis (axial)

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18



Four-wire DC, solid-state output

Wire setting for NO/NC

Detection curves (continued)



Diffuse system

Minimum object size/sensing distance. Line of sight: along case axis (axial)

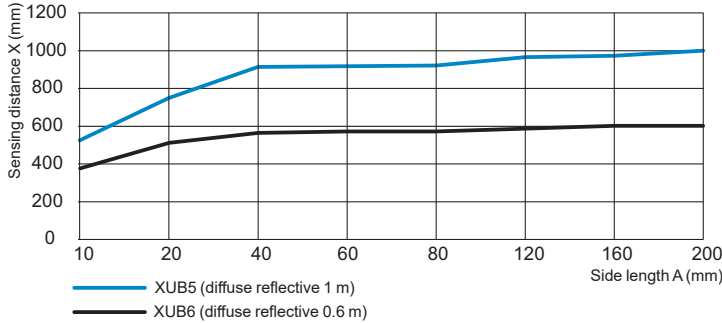



- (1): Sensor
- (2): Object (white matt paper of A x A mm)
- A: Side length (mm)
- X: Sensing distance (mm)

Minimum object size/sensing distance. Line of sight: 90° to case axis (radial)

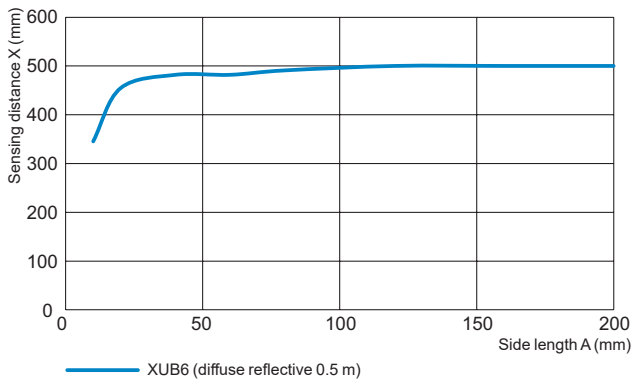



- (1): Sensor
- (2): Object (white matt paper of A x A mm)
- A: Side length (mm)
- X: Sensing distance (mm)

Lateral displacement. Line of sight: along case axis (axial)

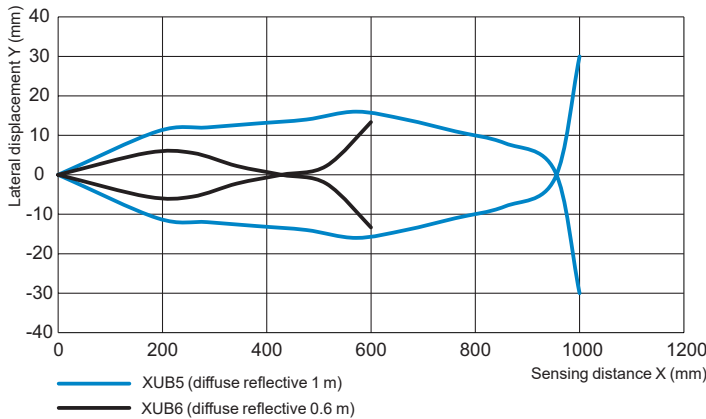

- (1): Sensor
- (2): Object (200 x 200 mm white paper)
- X: Sensing distance (mm)
- Y: Lateral displacement (mm)

Lateral displacement. Line of sight: 90° to case axis (radial)

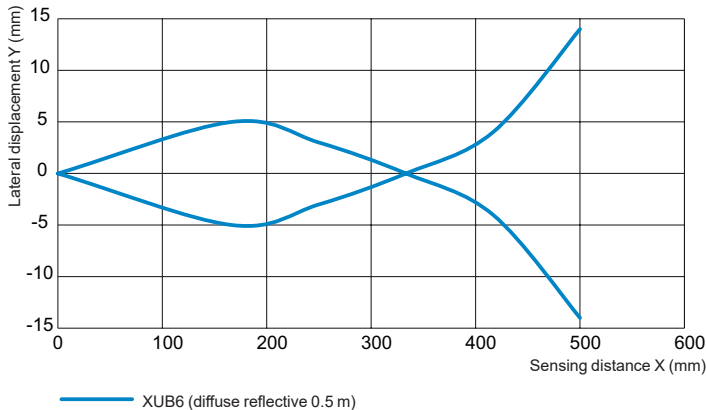

- (1): Sensor
- (2): Object (200 x 200 mm white paper)
- X: Sensing distance (mm)
- Y: Lateral displacement (mm)

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18


Four-wire DC, solid-state output

Wire setting for NO/NC


Detection curves (continued)

Diffuse system (continued)

Excess gain. Line of sight: along case axis (axial)

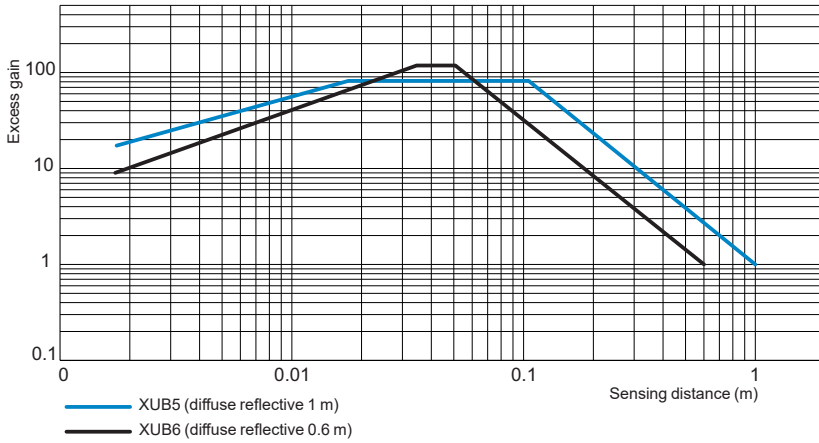

Excess gain. Line of sight: 90° to case axis (radial)


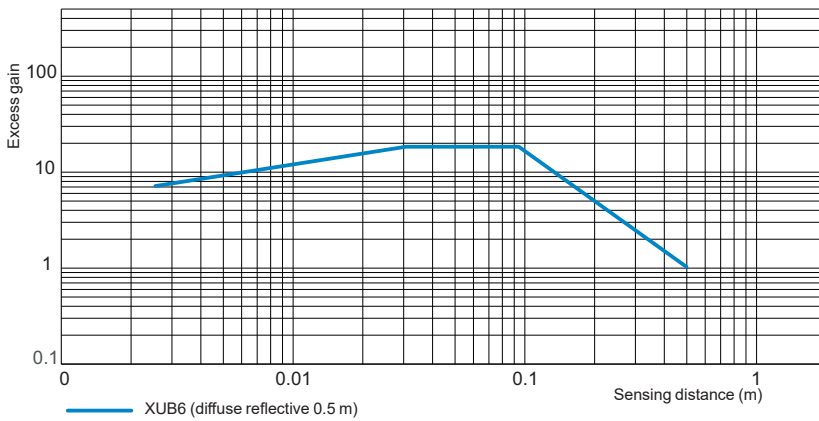


Detection curves (continued)

Diffuse system with background suppression

Lateral displacement. Line of sight: along case axis (axial)

(Preset 300 mm)


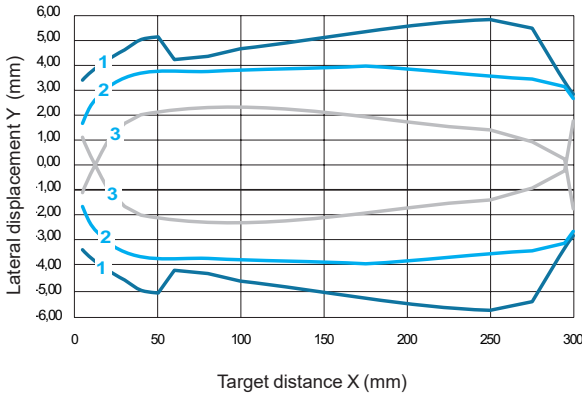


(1): Sensor
 (2): Object (200 x 200 mm white or black paper)
 X: Sensing distance (mm)
 Y: Lateral displacement (mm)

- White object / white background(90%)
- Grey object / grey (background 90%)
- Black object / black background (90%)

Lateral displacement. Line of sight: 90° to case axis (radial)


(Preset 150 mm)

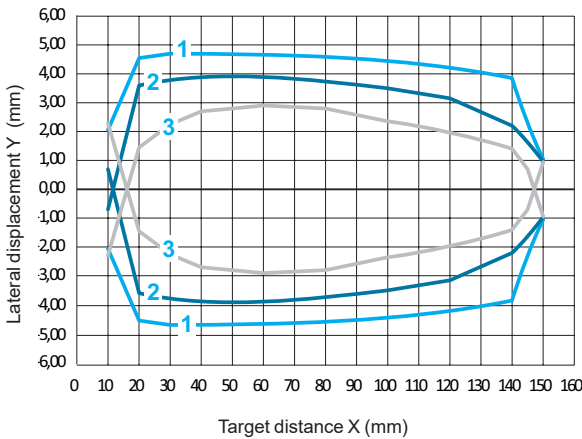

(1): Sensor
 (2): Object (200 x 200 mm white or black paper)
 X: Sensing distance (mm)
 Y: Lateral displacement (mm)

- White object / white background(90%)
- Grey object / grey (background 90%)
- Black object / black background (90%)

Light beam width. Line of sight: along case axis (axial)

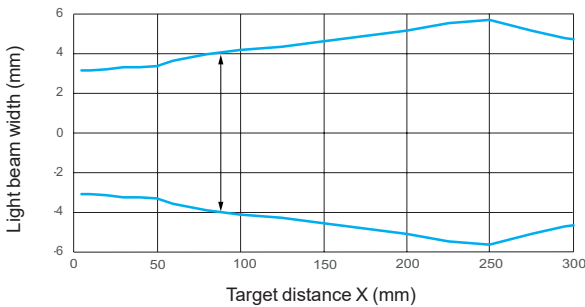

Light beam width. Line of sight: 90° to case axis (radial)

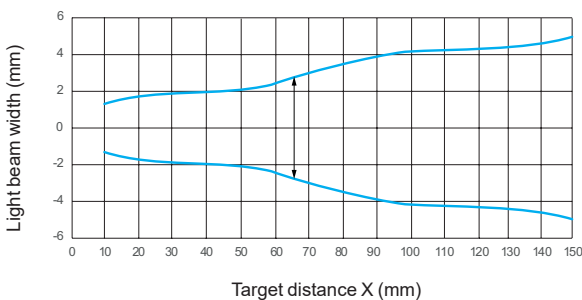


Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, plastic



Four-wire DC, solid-state output

Wire setting for NO/NC

Detection curves (continued)



Diffuse system with background suppression (continued)

Sensing distance. Line of sight: along case axis (axial)

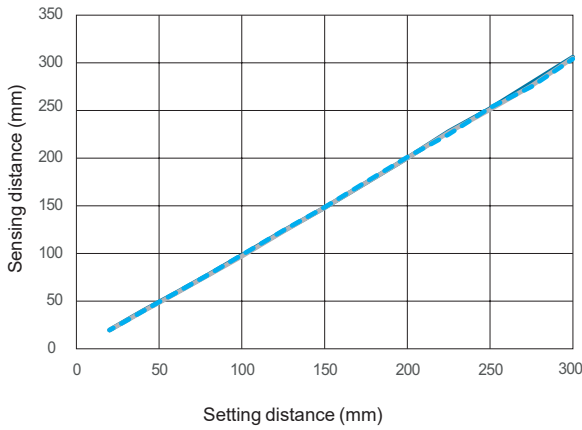



- White object (90%)
- Grey object (18%)
- Black object (6%)

Sensing distance. Line of sight: 90° to case axis (radial)

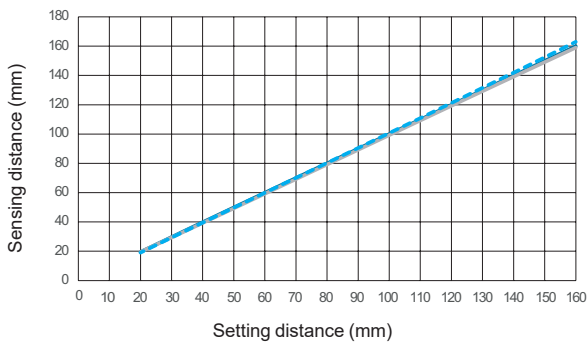

- White object (90%)
- Grey object (18%)
- Black object (6%)

Minimum distance between the object to detect and white background (mm). Line of sight: along case axis (axial)

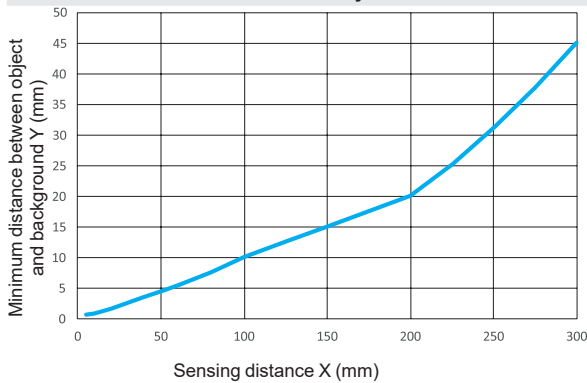

Minimum distance between the object to detect and white background (mm). Line of sight: 90° to case axis (radial)


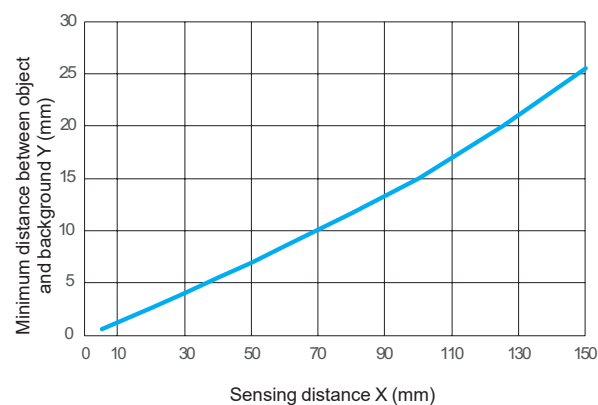


Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18



Four-wire DC, solid-state output

Wire setting for NO/NC


Detection curves (continued)

Polarised reflex system

Reflector angle. Line of sight: along case axis (axial)

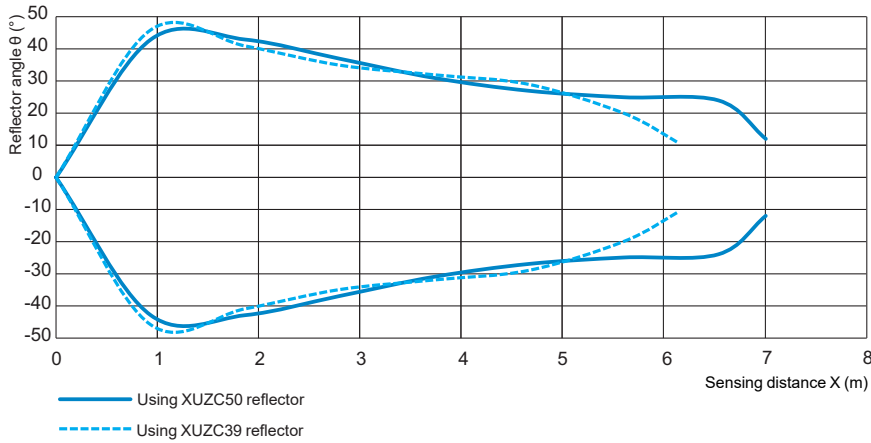

(1): Sensor
(2): Reflector
 θ : Reflector angle (°)
X: Sensing distance (m)





XUZC50




XUZC39

Reflector angle. Line of sight: 90° to case axis (radial)

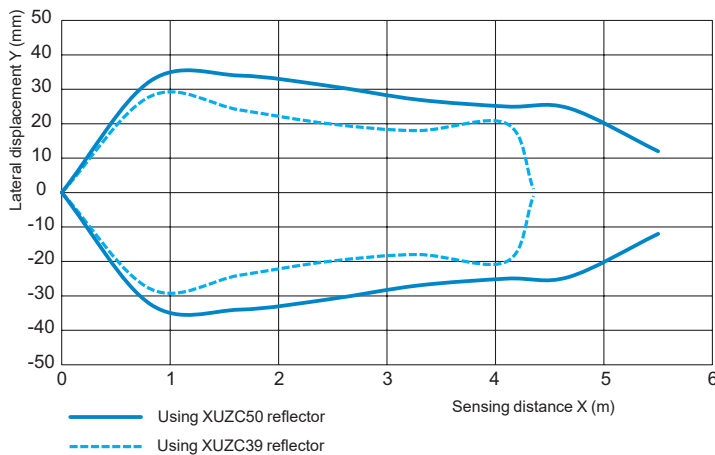

(1): Sensor
(2): Reflector
 θ : Reflector angle (°)
X: Sensing distance (m)





XUZC50




XUZC39

Lateral displacement. Line of sight: along case axis (axial)

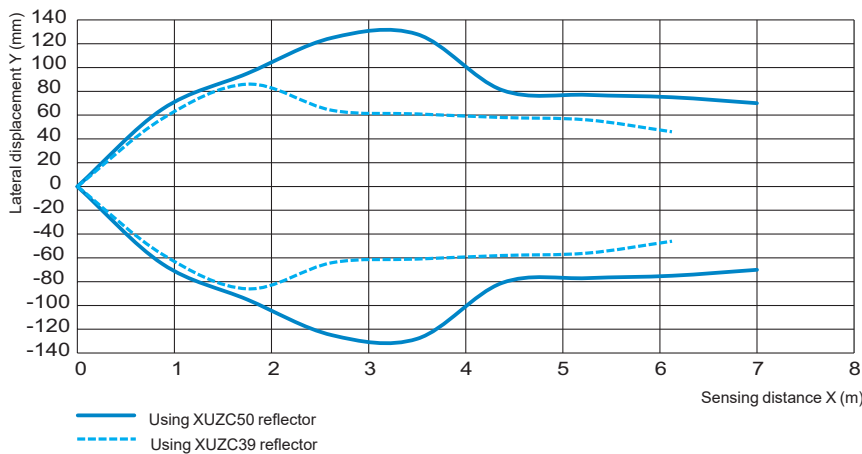

(1): Sensor
(2): Reflector
Y: Lateral displacement (mm)
X: Sensing distance (m)



XUZC50



XUZC39

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, plastic



Four-wire DC, solid-state output

Wire setting for NO/NC


Detection curves (continued)

Polarised reflex system (continued)

Lateral displacement. Line of sight: 90° to case axis (radial)

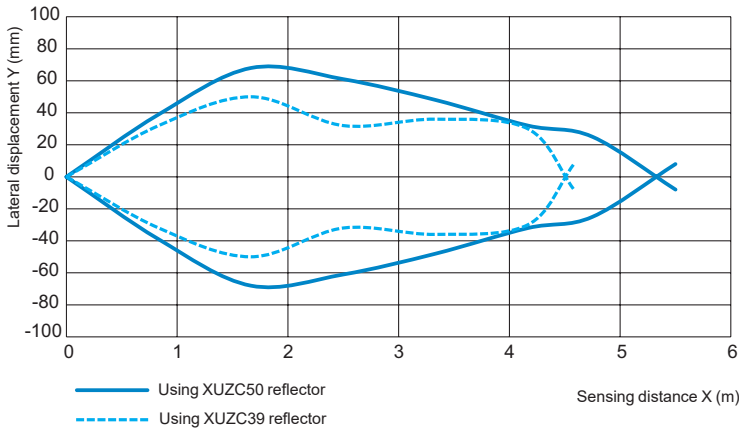

(1): Sensor
 (2): Reflector
 Y: Lateral displacement (mm)
 X: Sensing distance (m)




XUZY50



XUZY39

Excess gain

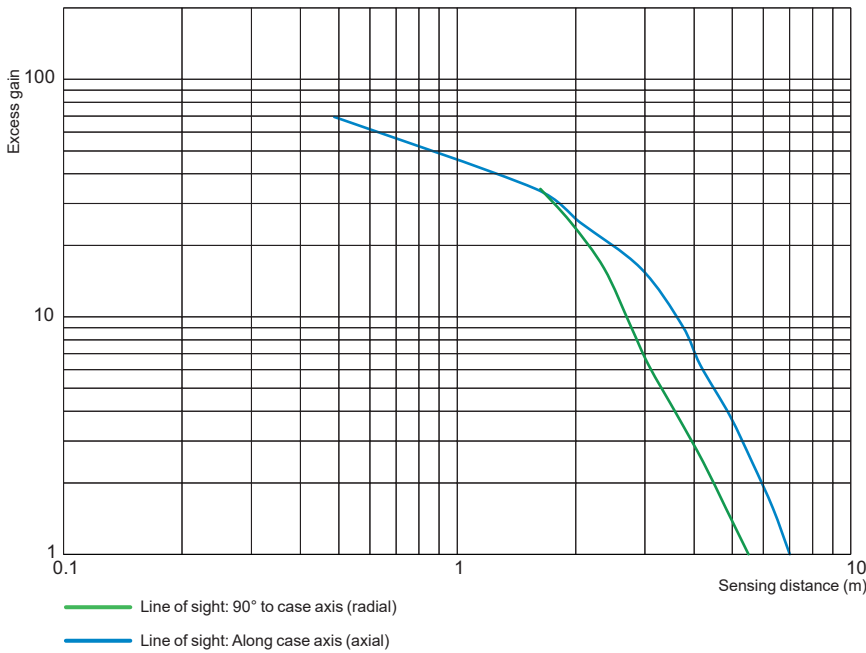

— Line of sight: 90° to case axis (radial)
 — Line of sight: Along case axis (axial)

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, plastic

Four-wire DC, solid-state output

Wire setting for NO/NC

Thru-beam system, plastic, M12 connector version

Line of sight: along case axis (axial)



Kits Transmitter + Receiver: XUB2ANXNM12, XUB2APXNM12, XUB2APYNM12

Transmitter

XUB2AKXNM12T

Receiver

XUB2APYNM12R, XUB2ANXNM12R, XUB2APXNM12R

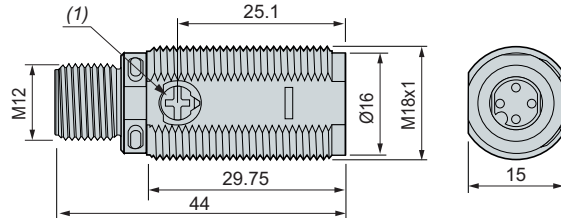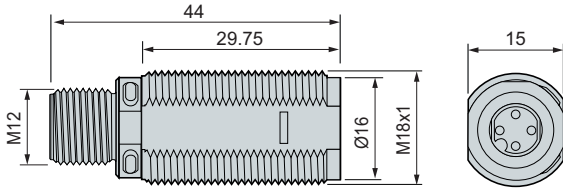

Line of sight: 90° to case axis (radial)



Kit Transmitter + Receiver: XUB2ANXWM12

Transmitter

XUB2AKXWM12T

Receiver

XUB2APYWM12R, XUB2ANXWM12R, XUB2APXWM12R

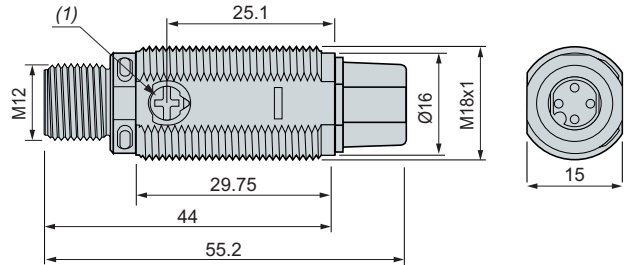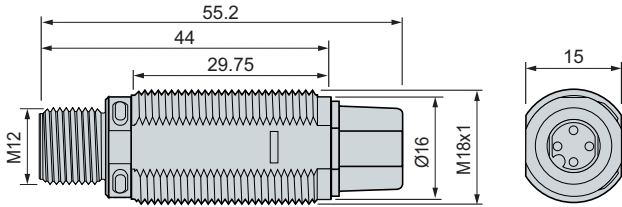

Thru-beam system, plastic, pre-cabled version

Line of sight: along case axis (axial)



Kit Transmitter + Receiver: XUB2ANXNL2, XUB2APXNL2

Transmitter

XUB2AKXNL2T

Receiver

XUB2ANXNL2R, XUB2APXNL2R

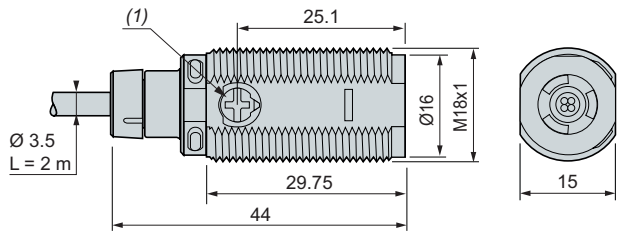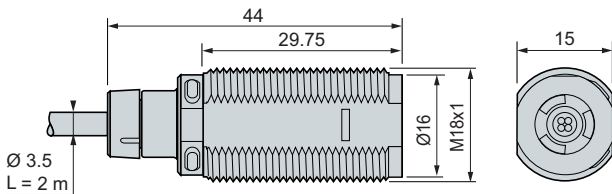

Pre-cabled version, line of sight 90° to case axis



Kits Transmitter + Receiver: XUB2APXWM12, XUB2APYWM12, XUB2ANXWL2, XUB2APXWL2

Transmitter

XUB2AKXWL2T

Receiver

XUB2ANXWL2R, XUB2APXWL2R

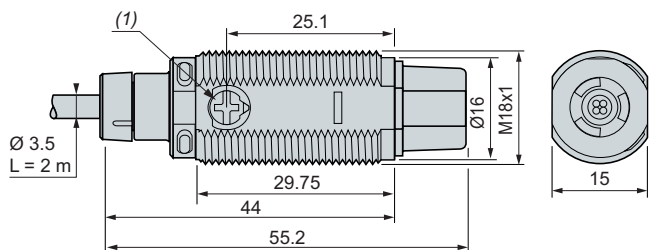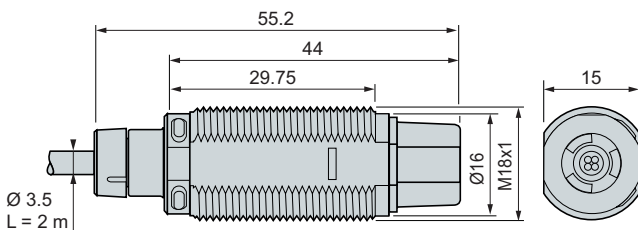

(1) Potentiomètre de réglage (sensibilité)

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, metal

Four-wire DC, solid-state output

Wire setting for NO/NC

Thru-beam system, metal, M12 connector version

Line of sight: along case axis (axial)



Kits Transmitter + Receiver: XUB2BPXNM12, XUB2BNXNM12, XUB2BPYNM12

Transmitter

XUB2BKXNM12T

Receiver

XUB2BPYNM12R, XUB2BNXNM12R, XUB2BPXNM12R

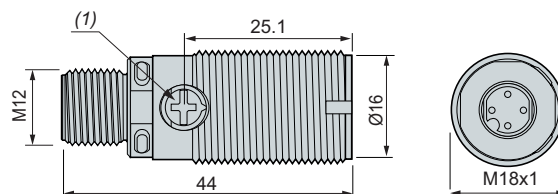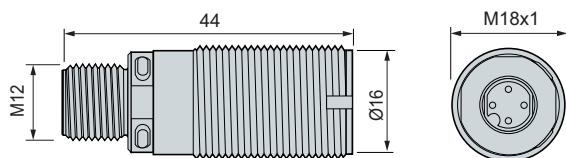

Line of sight: 90° to case axis (radial)



Kits Transmitter + Receiver: XUB2BNXWM12, XUB2BPYWM12, XUB2BPXWM12

Transmitter

XUB2BKXWM12T

Receiver

XUB2BPYWM12R, XUB2BNXWM12R, XUB2BPXWM12R

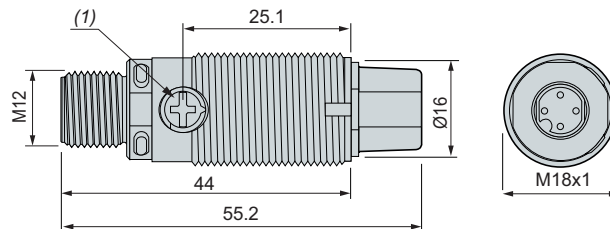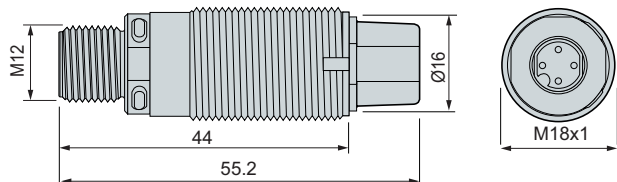

Thru-beam system, metal, pre-cabled version

Line of sight: along case axis (axial)



Kits Transmitter + Receiver: XUB2BNXNL2, XUB2BPXNL2

Transmitter

XUB2BKXNL2T

Receiver

XUB2BNXNL2R, XUB2BPXNL2R

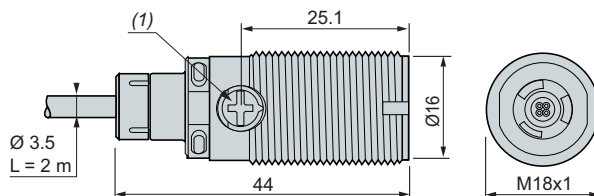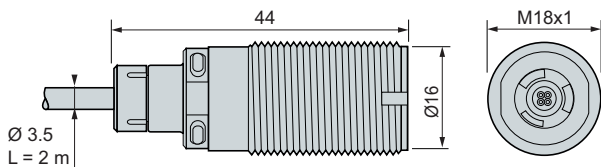

Pre-cabled version, line of sight 90° to case axis



Kits Transmitter + Receiver: XUB2BNXWL2, XUB2BPXWL2

Transmitter

XUB2BKXWL2T

Receiver

XUB2BNXWL2R, XUB2BPXWL2R

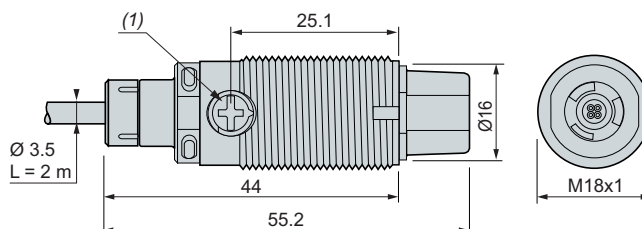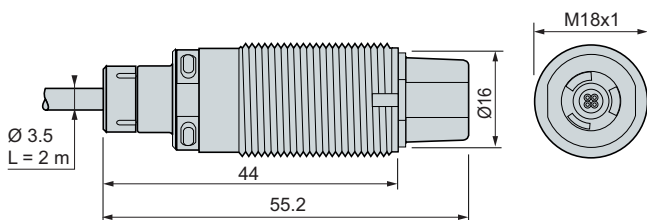

(1) Potentiomètre de réglage (sensibilité)

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18


Four-wire DC, solid-state output

Wire setting for NO/NC

Diffuse system (with or without background suppression), plastic, M12 connector version


Line of sight: along case axis (axial)

XUB5ANXNM12, XUB5APXNM12, XUB5APYNM12,
XUB6ANXNM12, XUB6APXNM12, XUB6APYNM12,
XUB8ANXNM12, XUB8APXNM12, XUB8APYNM12

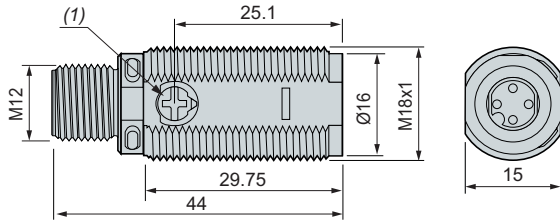

Line of sight: 90° to case axis (radial)


XUB6ANXWM12, XUB6APXWM12, XUB6APYWM12,
XUB8ANXWM12, XUB8APXWM12, XUB8APYWM12

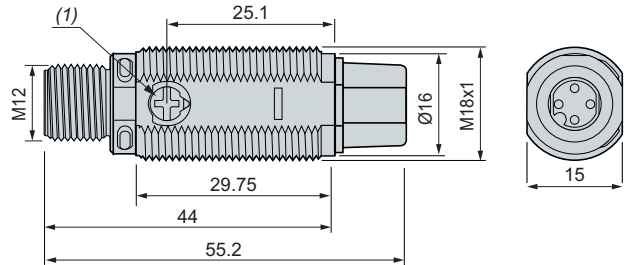

Diffuse system (with or without background suppression), plastic, pre-cabled version


Line of sight: along case axis (axial)

XUB5ANXNL2, XUB5APXNL2, XUB6ANXNL2, XUB6APXNL2,
XUB8ANXNL2, XUB8APXNL2

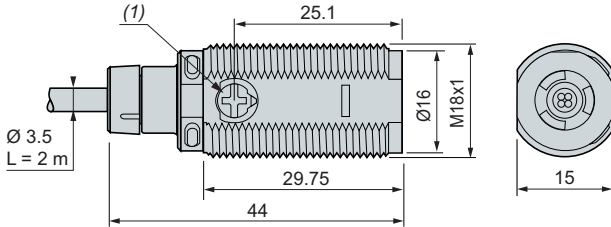

Line of sight: 90° to case axis (radial)


XUB6ANXWL2, XUB6APXWL2, XUB8ANXWL2, XUB8APXWL2

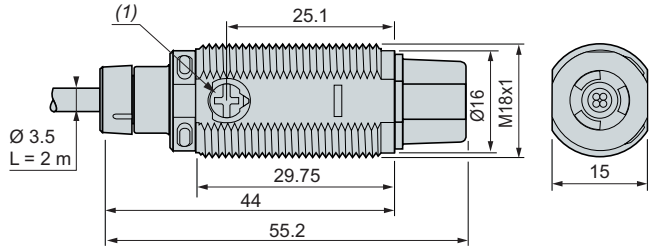

Diffuse system (with or without background suppression), metal, M12 connector version


Line of sight: along case axis (axial)

XUB5BNXNM12, XUB5BPXNM12, XUB5BPYNM12,
XUB6BNXNM12, XUB6BPXNM12, XUB6BPYNM12,
XUB8BNXNM12, XUB8BPXNM12, XUB8BPYNM12

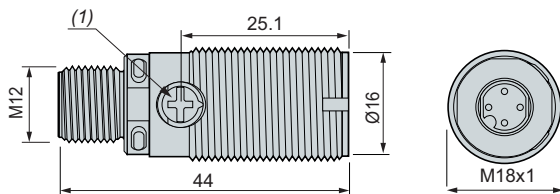

Line of sight: 90° to case axis (radial)


XUB6BNXWM12, XUB6BPXWM12, XUB6BPYWM12,
XUB8BNXWM12, XUB8BPXWM12, XUB8BPYWM12

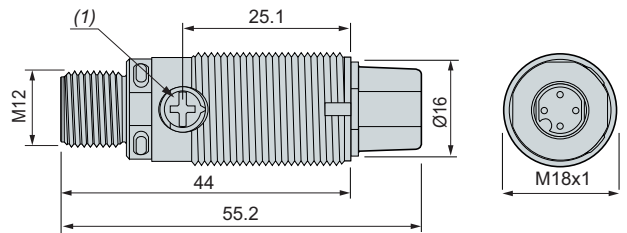

Diffuse system (with or without background suppression), metal, pre-cabled version


Line of sight: along case axis (axial)

XUB5BNXNL2, XUB5BPXNL2, XUB6BNXNL2, XUB6BPXNL2,
XUB8BNXNL2, XUB8BPXNL2

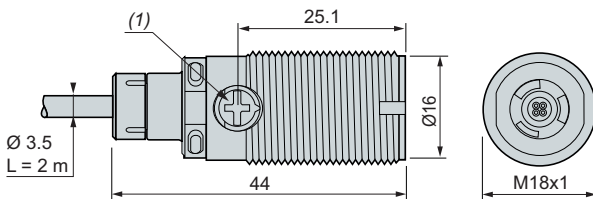

Line of sight: 90° to case axis (radial)

XUB6BNXWL2, XUB6BPXWL2, XUB8BNXWL2, XUB8BPXWL2

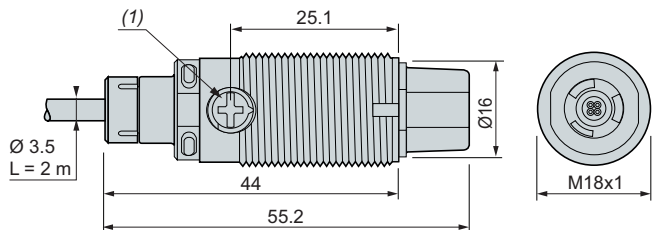

(1) Adjustment potentiometer (sensitivity).

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18


Four-wire DC, solid-state output

Wire setting for NO/NC

Polarised reflex system, plastic, M12 connector version


Line of sight: along case axis (axial)

XUB9ANXNM12, XUB9APXNM12 and XUB9APYNM12

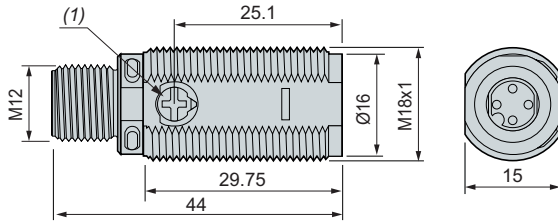

Line of sight: 90° to case axis (radial)


XUB9ANXWM12, XUB9APXWM12 and XUB9APYWM12

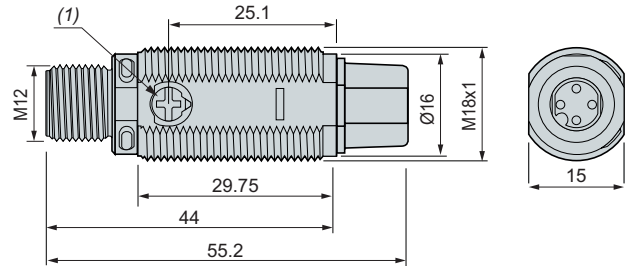

Polarised reflex system, plastic, pre-cabled version


Line of sight: along case axis (axial)

XUB9ANXNL2 and XUB9APXNL2

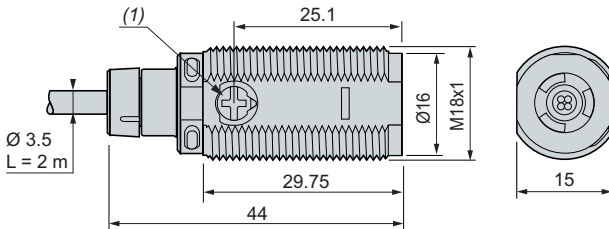

Line of sight: 90° to case axis (radial)


XUB9ANXWL2 and XUB9APXWL2

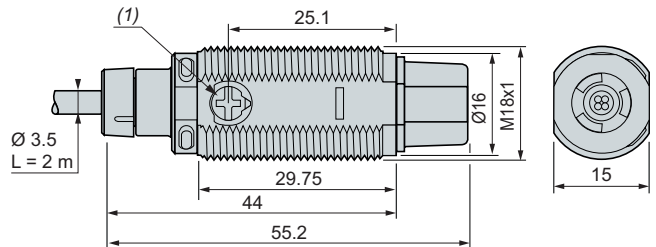

Polarised reflex system, metal, M12 connector version


Line of sight: along case axis (axial)

XUB9BNXNM12, XUB9BPXNM12 and XUB9BPNM12

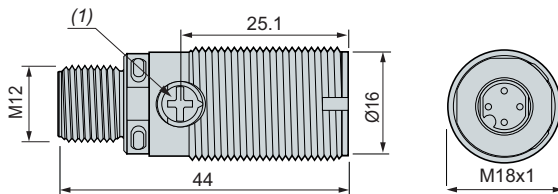

Line of sight: 90° to case axis (radial)


XUB9BNXWM12, XUB9BPXWM12 and XUB9BPYWM12

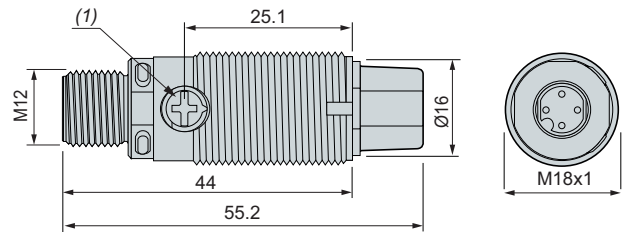

Polarised reflex system, metal, pre-cabled version


Line of sight: along case axis (axial)

XUB9BNXNL2 and XUB9BPXNL2

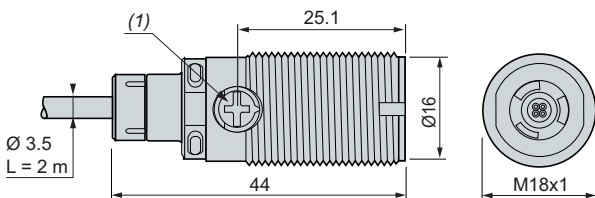

Line of sight: 90° to case axis (radial)

XUB9BNXWL2 and XUB9BPYWL2

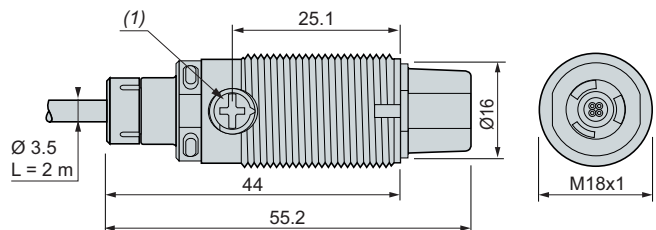

(1) Adjustment potentiometer (sensitivity).

Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic

Three- and four-wire DC, solid-state output,

Wire setting for NO/NC



XUN2APYNM12

XUN2APYNM12R



XUN2ANXNL2, XUN2APXNL2,
XUN2ANXSL2, XUN2APXSL2

XUN2AKXNL2T



XUN2ANXNM12
XUN2APXNM12

XUN2AKXNM12T



XUN2ANXNL2R
XUN2APXNL2R

XUN2ANXNM12R
XUN2APXNM12R

Thru-beam system with adjustable sensitivity

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
--------------------------------------	----------	--------	------------	-----------	-------------

Transmitter + receiver IO-Link

30 m/20 m	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUN2APYNM12	0.013
-----------	--	--------------------	-----------------------	--------------------	-------

Transmitter + receiver

30 m/20 m	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled 4-wire (L = 2 m)	XUN2ANXNL2	0.040
			M12 connector (4-pin)	XUN2ANXNM12	0.013
		PNP	Pre-cabled 4-wire (L = 2 m)	XUN2APXNL2	0.040
			M12 connector (4-pin)	XUN2APXNM12	0.013
	NO configuration by wire	NPN	Pre-cabled 3-wire (L = 2 m)	XUN2ANXSL2	0.040
			PNP	Pre-cabled 3-wire (L = 2 m)	XUN2APXSL2

Transmitter only (1)

30 m/20 m			Pre-cabled 4-wire (L = 2 m)	XUN2AKXNL2T	0.040
			M12 connector (4-pin)	XUN2AKXNM12T	0.013

Receiver IO-Link only

30 m/20 m	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUN2APYNM12R	0.013
-----------	--	--------------------	-----------------------	---------------------	-------

Receiver

30 m/20 m	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled 4-wire (L = 2 m)	XUN2ANXNL2R	0.040
			M12 connector (4-pin)	XUN2ANXNM12R	0.013
		PNP	Pre-cabled 4-wire (L = 2 m)	XUN2APXNL2R	0.040
			M12 connector (4-pin)	XUN2APXNM12R	0.013

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

(1) All transmitters are compatible with the receivers listed below.

Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic

Three- and four-wire DC, solid-state output,

Wire setting for NO/NC



XUN5APYNM12
XUN6APYNM12



XUN5ANXNL2, XUN5APXNL2,
XUN5ANXSL2, XUN5APXSL2



XUN6ANXNL2
XUN6APXNL2



XUN5ANXNM12
XUN5APXNM12



XUN6ANXNM12
XUN6APXNM12

Diffuse system with adjustable sensitivity IO-Link

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
--------------------------------------	----------	--------	------------	-----------	-------------

Long range, red LED emission

1 m/0.7 m	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUN5APYNM12	0.013
-----------	--	--------------------	-----------------------	-------------	-------

Medium range, red LED emission

0.6 m/0.42 m	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUN6APYNM12	0.013
--------------	--	--------------------	-----------------------	-------------	-------

Diffuse system with adjustable sensitivity

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
--------------------------------------	----------	--------	------------	-----------	-------------

Long range, red LED emission

1 m/0.7 m	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled 4-wire (L = 2 m)	XUN5ANXNL2	0.040	
			M12 connector (4-pin)	XUN5ANXNM12	0.013	
			PNP	Pre-cabled 4-wire (L = 2 m)	XUN5APXNL2	0.040
	NO configuration by wire	NPN	Pre-cabled 3-wire (L = 2 m)	XUN5ANXSL2	0.040	
			PNP	Pre-cabled 3-wire (L = 2 m)	XUN5APXSL2	0.040
			M12 connector (4-pin)	XUN5APXNM12	0.013	

Medium range, red LED emission

0.6 m/0.42 m	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled 4-wire (L = 2 m)	XUN6ANXNL2	0.040	
			M12 connector (4-pin)	XUN6ANXNM12	0.013	
			PNP	Pre-cabled 4-wire (L = 2 m)	XUN6APXNL2	0.040
	NO configuration by wire	NPN	Pre-cabled 3-wire (L = 2 m)	XUN6ANXSL2	0.040	
			PNP	Pre-cabled 3-wire (L = 2 m)	XUN6APXSL2	0.040
			M12 connector (4-pin)	XUN6APXNM12	0.013	

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic

Three- and four-wire DC, solid-state output,

Wire setting for NO/NC



XUN8APYNM12



XUN8ANXNL2



XUN8ANXNM12



XUN8ANXNL2
XUN8APXSL2
XUN8ANXSL2



XUN8ANXNM12

Diffuse system with background suppression, IO-Link

Plastic, red LED emission

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
0.03 m/0.022 m	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUN8APYNM12	0.013

Diffuse system with background suppression

Plastic, red LED emission

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
0.03 m/0.022 m	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled, 4-wire (L = 2 m)	XUN8ANXNL2	0.040
			M12 connector (4-pin)	XUN8ANXNM12	0.013
		PNP	Pre-cabled, 4-wire (L = 2 m)	XUN8APXNL2	0.040
			M12 connector (4-pin)	XUN8APXNM12	0.013
	NO configuration by wire	NPN	Pre-cabled, 3-wire (L = 2 m)	XUN8ANXSL2	0.040
			Pre-cabled, 3-wire (L = 2 m)	XUN8APXSL2	0.040

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic

Three- and four-wire DC, solid-state output,

Wire setting for NO/NC



Apelle_CP0720020

XUN9APYNM12



Apelle_CP0720018

XUN9ANXNL2
XUN9APXNL2
XUN9APXSL2
XUN9ANXSL2



Apelle_CP0720020

XUN9ANXNM12
XUN9APXNM12

Polarised reflex system with adjustable sensitivity, IO-Link

Plastic, red LED emission

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
7 m/5 m	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUN9APYNM12	0.013

Polarised reflex system with adjustable sensitivity

Plastic, red LED emission

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
7 m/5 m	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled 4-wire (L = 2 m)	XUN9ANXNL2	0.040
			M12 connector (4-pin)	XUN9ANXNM12	0.013
	NO configuration by wire	PNP	Pre-cabled 4-wire (L = 2 m)	XUN9APXNL2	0.040
			M12 connector (4-pin)	XUN9APXNM12	0.013
	NO configuration by wire	NPN	Pre-cabled, 3-wire (L = 2 m)	XUN9ANXSL2	0.040
			PNP	Pre-cabled, 3-wire (L = 2 m)	XUN9APXSL2

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic

Three- and four-wire DC, solid-state output,

Wire setting for NO/NC

Characteristics			
Sensor type		XUN2APYNM12, XUN2APYNM12R, XUN2A●XNM12, XU2AKXNM12T, XUN2A●XNM12R, XUN5APYNM12, XUN5A●XNM12, XUN6APYNM12, XUN6A●XNM12, XUN8APYNM12, XUN8A●XNM12, XUN9APYNM12, XUN9A●XNM12	XUN2A●XNL2, XUN2A●XNL2R, XUN2AKXNL2T, XUN5A●XNL2, XUN6A●XNL2, XUN8A●XNL2, XUN9A●XNL2
Product certifications		XUN2, XUN5, XUN6, XUN9	CE, UKCA, cULus
		XUN8	CE, UKCA, cULus, RCM
Connection		Connector	M12
		Pre-cabled, 2 m long	–
			4-wire
			3-wire
Sensing distance		Thru-beam system XUN2	m
Excess gain = 1 : maximum sensing distance			30 (with excess gain = 1) 20 (with excess gain = 2)
Excess gain = 2 : nominal sensing distance		Diffuse long dist. system XUN5 (using a white paper 200 x 200 mm)	m
			1 (with excess gain = 1) 0.7 (with excess gain = 2)
		Diffuse medium dist. system XUN6 (using a white paper 200 x 200 mm)	m
			0.6 (with excess gain = 1) 0.42 (with excess gain = 2)
		Diffuse system with BGS XUN8 (using a white or black paper 200 x 200 mm)	m
			0.3 (from white object (90%) to black object (6%))
		Polarised reflex system XUN9 (using a 50 x 50 mm reflector XU2C50)	m
			7 (with excess gain = 1) 5 (with excess gain = 2)
Blind zone		XUN2, XUN5, XUN6, XUN9	mm
		XUN8	mm
			0 (white object and potentiometer max.) < 5
Sensing distance setting			Potentiometer 1 turn (+/- 220 degrees)
Colour of detection light beam			Red
Output type			PNP/NPN (or autodetect PNP/NPN with IO-Link)
Hysteresis			2 % < H < 20 % at Sn
Degree of protection		Conforming to IEC 60529	IP65, IP67
		Conforming to DIN 40050-9	IP69K (M12 connector version only)
Artificial optical radiation		Conforming to IEC 62471	Class 0 (risk exempt)
Radiated disturbances emissions		Conforming to EN 55011/CISPR 1	Class A
Storage temperature			°C
			-40...+70
Operating temperature			°C
			-30...+55
Materials		Case	XUN2, XUN5, XUN6, XUN9
			XUN8
			PBT/PC
		Lens cover	
			PMMA
		Transparent cover	XUN2, XUN5, XUN6, XUN9
			XUN8
			ABS
		Potentiometer screw	XUN2, XUN5, XUN6, XUN9
			XUN8
			PMMA
			PA66
			PBT
		Cable	–
			PVC
Vibration resistance		Conforming to IEC 60068-2-6	Hz
			gn
			Frequency range 10 to 55 Acceleration 7
Shock resistance		Conforming to IEC 60068-2-27	gn
			ms
			Peak acceleration 30 Duration of the pulse 11
Rated supply voltage			V
			12...24 --- with protection against reverse polarity
Voltage limits (including ripple)			V
			10...30 ---
Current consumption, no-load		XUN2, XUN5, XUN6, XUN9	mA
		XUN8	mA
		IO-Link	mA
			< 20 < 30 < 30
Switching capacity			mA
			100
Voltage drop, closed state			V
			< 2 max.
Maximum switching frequency			Hz
			1000
Delays		First-up IO-Link, XUN8	ms
		First-up, others	ms
		Response	ms
		Recovery	ms
			< 300 < 100 0.5 max. 0.5 max

Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic

Three- and four-wire DC, solid-state output

Wire setting for NO/NC

Wiring schemes


Thru-beam system

M12 connector - 4 pins - IO-Link

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{DC}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{DC}}$
4	Q	Switching signal (SIO)
	C	IO-Link communication

Autodetect PNP/NPN or by IO-Link

XUN2APYNM12

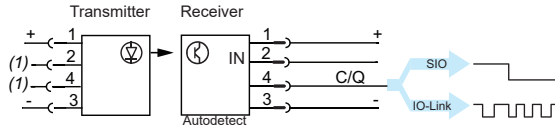


Note: IO-Link files available on our website www.telemecanique.com/iolink

M12 connector - 4 pins

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{DC}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{DC}}$
4	Q	Switching signal (SIO)


PNP

XUN2APXNM12

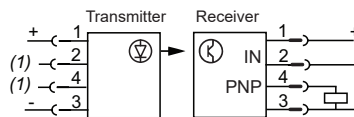

NPN

XUN2ANXNM12

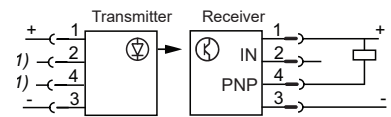


Pre-cabled - 3 wires

+BN (Brown)
OUT (output) BK (Black)
-BU (Blue)


PNP

XUN2APXSL2

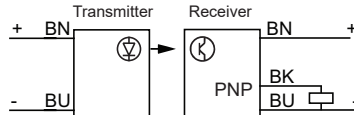

NPN

XUN2ANXSL2

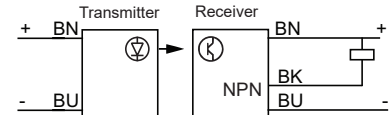


Pre-cabled - 4 wires

+BN (Brown)
IN (input) GY (Grey)
OUT (output) BK (Black)
-BU (Blue)


PNP

XUN2APXNL2

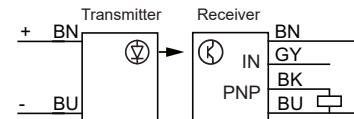

NPN

XUN2ANXNL2

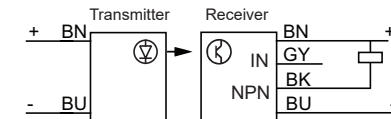


Diffuse system

M12 connector - 4 pins - IO-Link

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{DC}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{DC}}$
4	Q	Switching signal (SIO)
	C	IO-Link communication

Autodetect PNP/NPN or by IO-Link

XUN5APYNM12, XUN6APYNM12

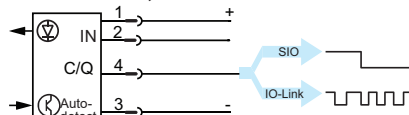


Note: IO-Link files available on our website www.telemecanique.com/iolink

M12 connector - 4 pins

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{DC}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{DC}}$
4	Q	Switching signal (SIO)

PNP


XUN5APXNM12, XUN6APXNM12



(1) Not connected

NPN

XUN5ANXNM12, XUN6ANXNM12

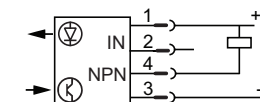


Pre-cabled - 3 wires

+BN (Brown)
OUT (output) BK (Black)
-BU (Blue)


PNP

XUN5APXSL2, XUN6APXSL2



NPN

XUN5ANXSL2, XUN6ANXSL2




Pre-cabled - 4 wires

+BN (Brown)
IN (input) GY (Grey)
OUT (output) BK (Black)
-BU (Blue)

PNP

XUN5APXNL2, XUN6APXNL2

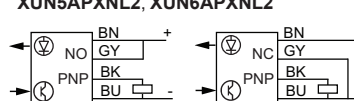

NPN

XUN5ANXNL2, XUN6ANXNL2

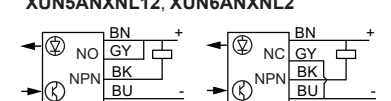


Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic


Three- and four-wire DC, solid-state output

Wire setting for NO/NC

Wiring schemes (continued)

Diffuse system with background suppression (BGS)


M12 connector - 4 pins - IO-Link



Pin	Signal	Definition
1	+	+ 24 V
2	IN	+ = NC - = NO Open = NO
3	-	0 V
4	Q	Switching signal (SIO)
	C	IO-Link communication


Autodetect PNP/NPN or by IO-Link

XUN8APYNM12

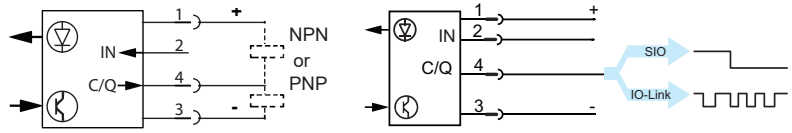

Note: IODD IO-Link files available on our website www.telemecaniquesensors.com/iolink


M12 connector - 4 pin



Control input IN:
(+) = NC
(-) = NO
Open = NO


PNP

XUN8APXNM12

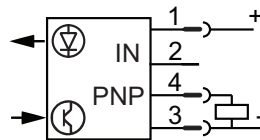

NPN

XUN8ANXNM12

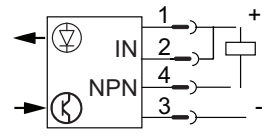


Pre-cabled 3 wires

+BN (Brown)
OUT (output) BK (Black)
-BU (Blue)


PNP

XUN8APXSL2

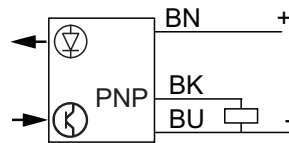

NPN

XUN8ANXSL2

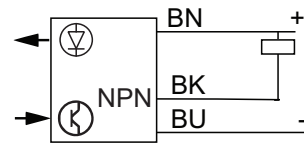


Pre-cabled 4 wires

+BN (Brown)
IN (input) GY (Grey)
OUT (output) BK (Black)
-BU (Blue)

PNP

XUN8APXNL2

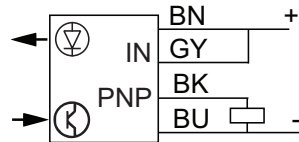

NPN

XUN8ANXNL2

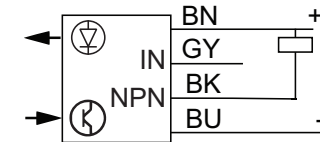


Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic


Three- and four-wire DC, solid-state output

Wire setting for NO/NC

Wiring schemes (continued)

Polarised reflex system


M12 connector - 4 pins - IO-Link



Pin	Signal	Definition
1	+	+ 24 V
2	IN	+ = NO - = NC Open = NO
3	-	0 V
4	Q	Switching signal (SIO)
C		IO-Link communication


Autodetect PNP/NPN or by IO-Link

XUN9APYNM12

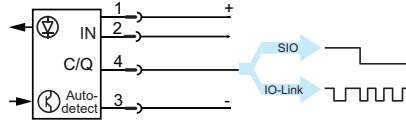

Note: IODD IO-Link files available on our website www.telemecanique.com/iolink


M12 connector - 4 pins



Control input IN:
(+) = NO
(-) = NC
Open = NO


PNP

XUN9APXNM12

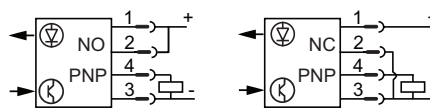

NPN

XUN9ANXNM12

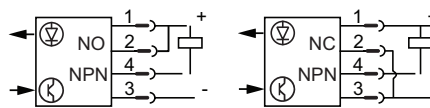


Pre-cabled - 3 wires

+BN (Brown)
OUT (output) BK (Black)
-BU (Blue)


PNP

XUN9APXSL2



NPN

XUN9ANXSL12




Pre-cabled - 4 wires

+BN (Brown)
IN (input) GY (Grey)
OUT (output) BK (Black)
-BU (Blue)

PNP

XUN9APXNL2

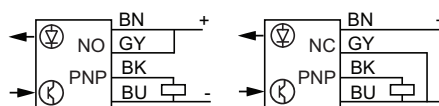

NPN

XUN9ANXNL12

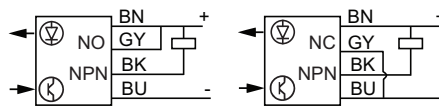




Photo-electric sensors

XUN general purpose, single mode function
 Hybrid miniature design, plastic, thru-beam system
 Three- and four-wire DC, solid-state output,
 Wire setting for NO/NC


Detection curves

Thru-beam system

Lateral displacement

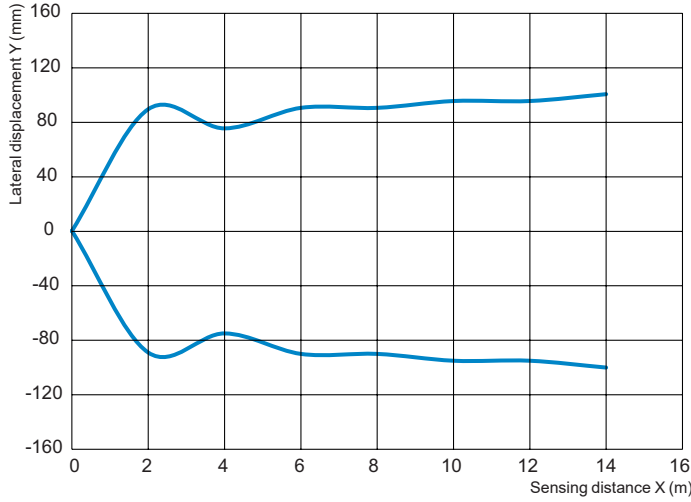

Light beam diameter

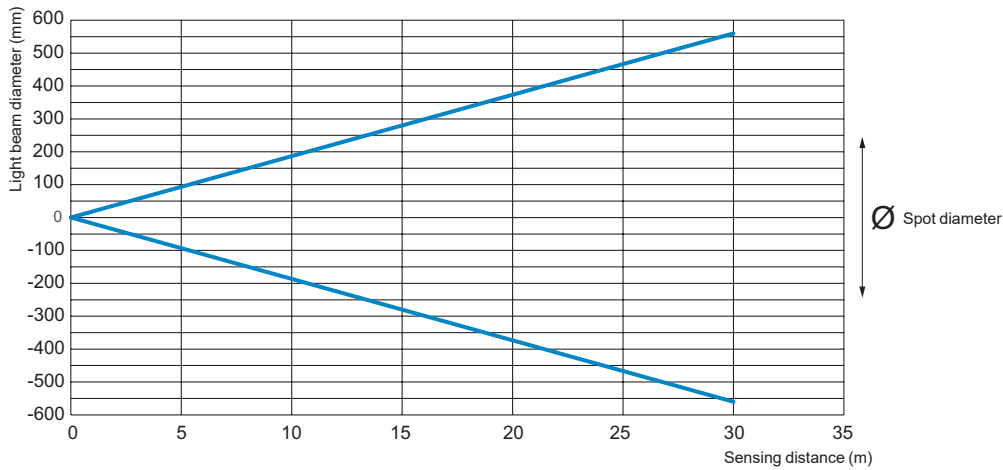

∅ Spot diameter

Excess gain

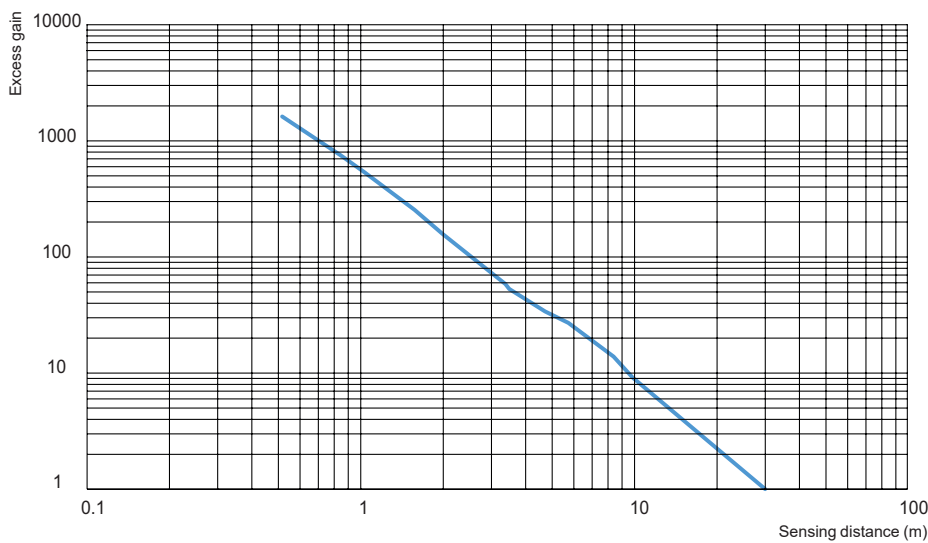


Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic, diffuse system



Three- and four-wire DC, solid-state output,

Wire setting for NO/NC

Detection curves (continued)



Diffuse system

Minimum object size/sensing distance

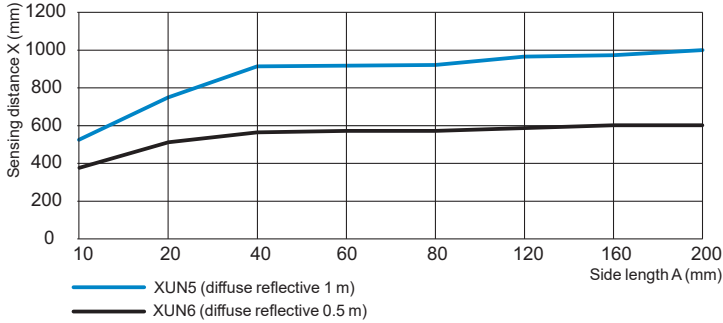

(1): Sensor
 (2): Object (white matt paper of A mm square)
 A: Side length (mm)
 X: Sensing distance (mm)

Lateral displacement

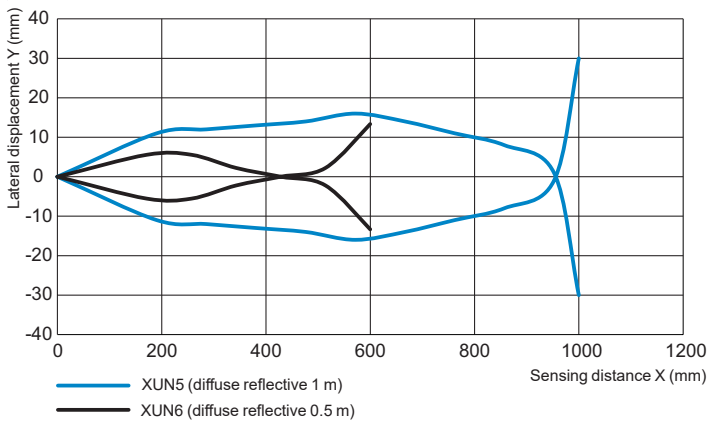

(1): Sensor
 (2): Object (200 mm square white paper)
 X: Sensing distance (mm)
 Y: Lateral displacement (mm)

Excess gain

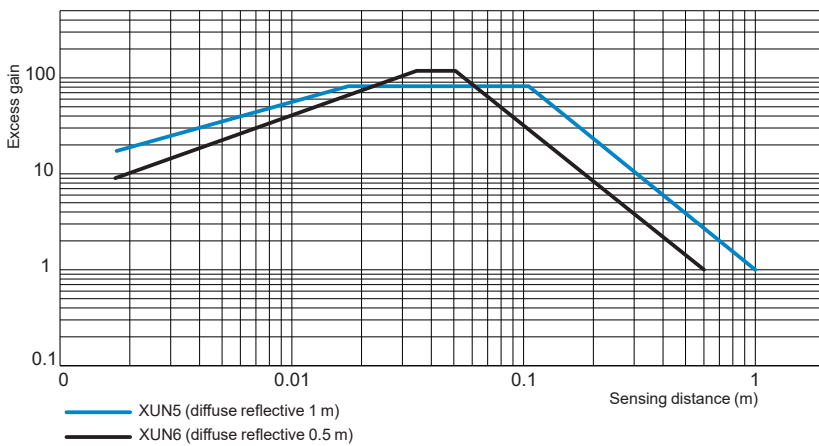


Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic,

Three- and four-wire DC, solid-state output,



Wire setting for NO/NC

Detection curves (continued)

Diffuse system with background suppression

Lateral displacement: along case axis (axial)


(Preset 300)

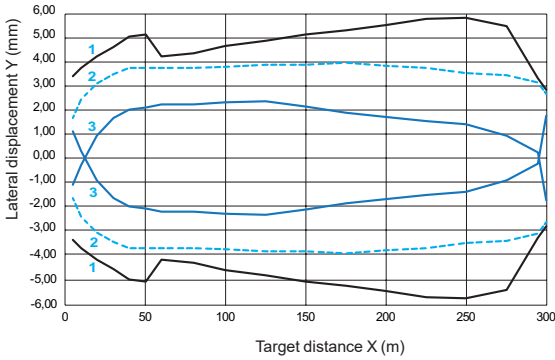



(1): Sensor
 (2): Object (200 x 200 mm white or black matt paper)
 X: Sensing distance (mm)
 Y: Lateral displacement (mm)

- 1 — White object (90%) / white background (90%)
- 2 — Grey object (18%) / white background (90%)
- 3 — Black object (6%) / white background (90%)

Light beam width: along case axis (axial)

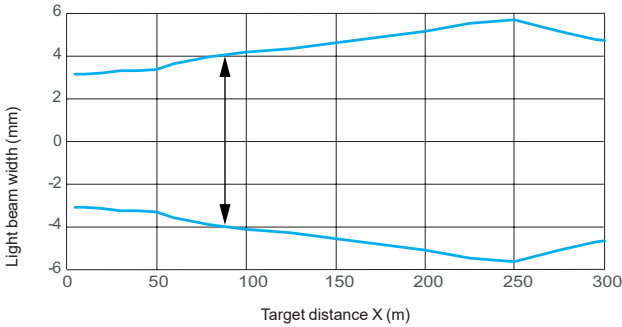

Sensing distance vs distance setting: along case axis (axial)

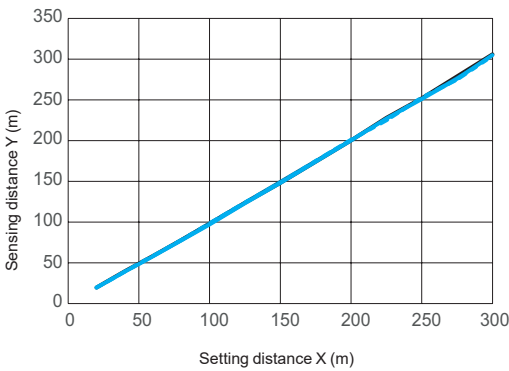

(1): Sensor
 (2): Object (200 x 200 mm white or black matt paper)
 X: Sensing distance (mm)

- 1 — White object (90%) / white background (90%)
- 2 — Grey object (18%) / white background (90%)
- 3 — Black object (6%) / white background (90%)

Minimum distance between the object to detect and white background: along case axis (axial)

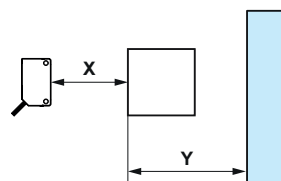
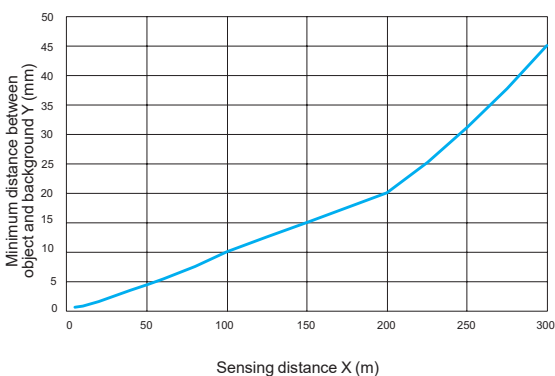



Photo-electric sensors

XUN general purpose, single mode function
 Hybrid miniature design, plastic,
 Three- and four-wire DC, solid-state output,
 Wire setting for NO/NC


Detection curves (continued)

Polarised reflex system

Reflector angle

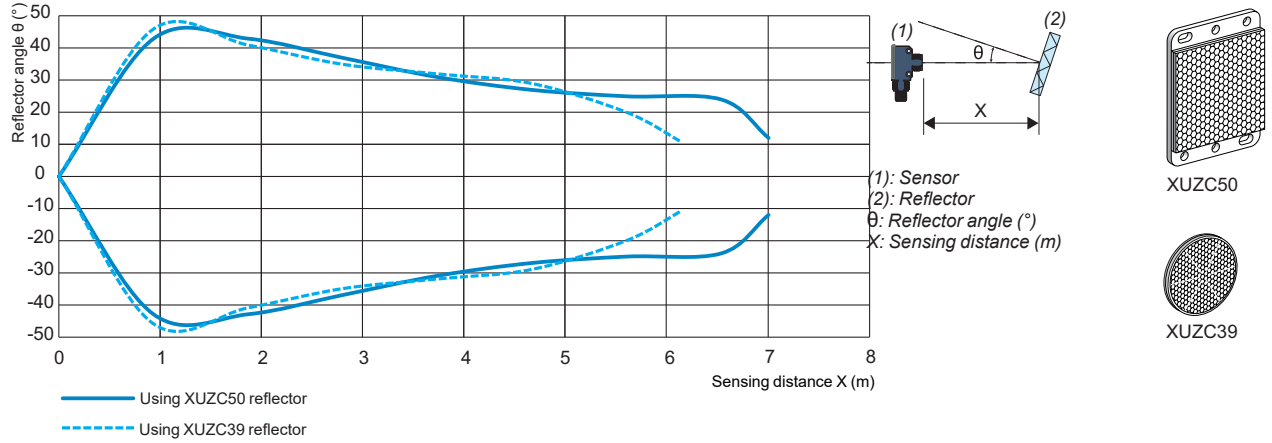

Lateral displacement

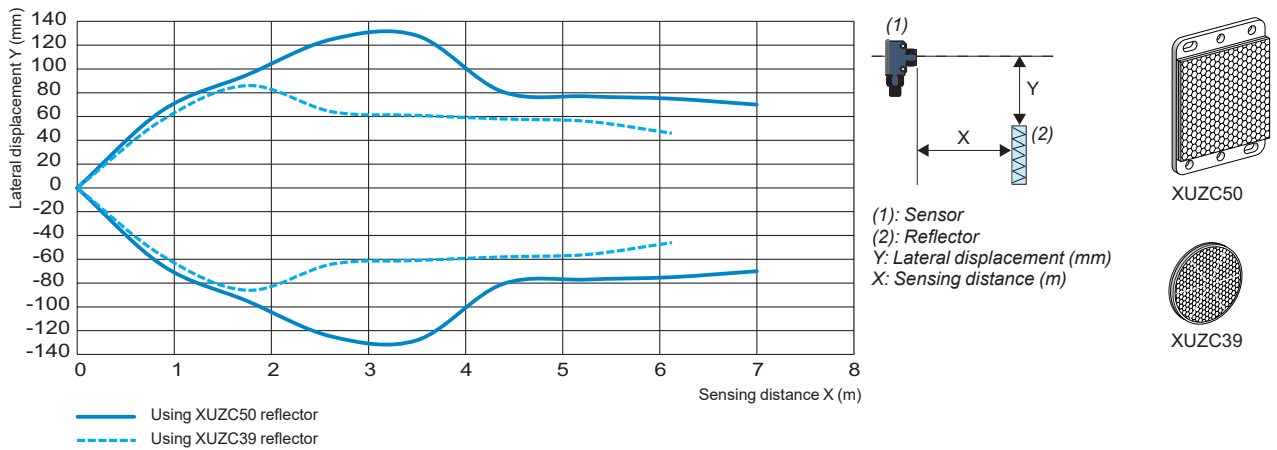

Excess gain

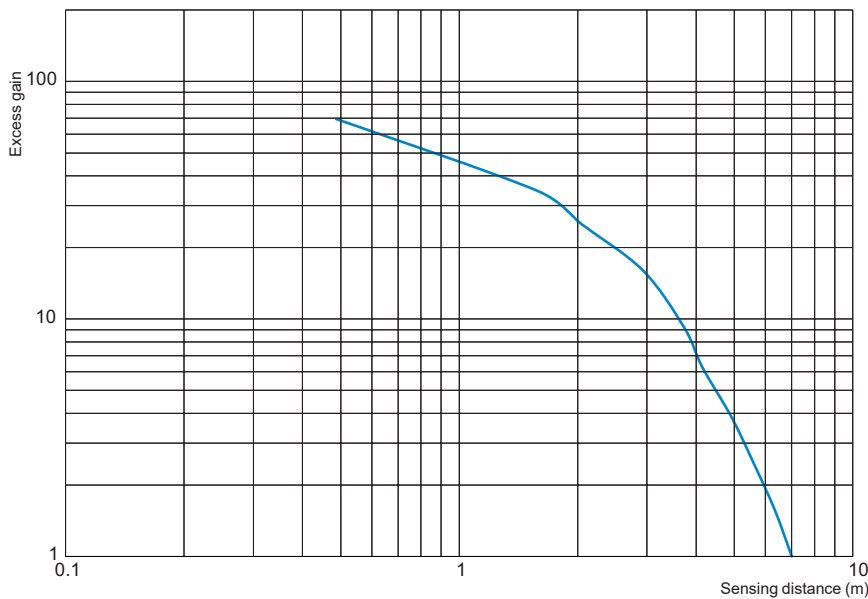



Photo-electric sensors

XUN general purpose, single mode function
 Hybrid miniature design, plastic,
 Three- and four-wire DC, solid-state output,
 Wire setting for NO/NC

Thru-beam system, plastic, M12 connector version


Transmitter + receiver (common top, side and front views)

XUN2APYNM12, XUN2ANXNM12, XUN2APXNM12

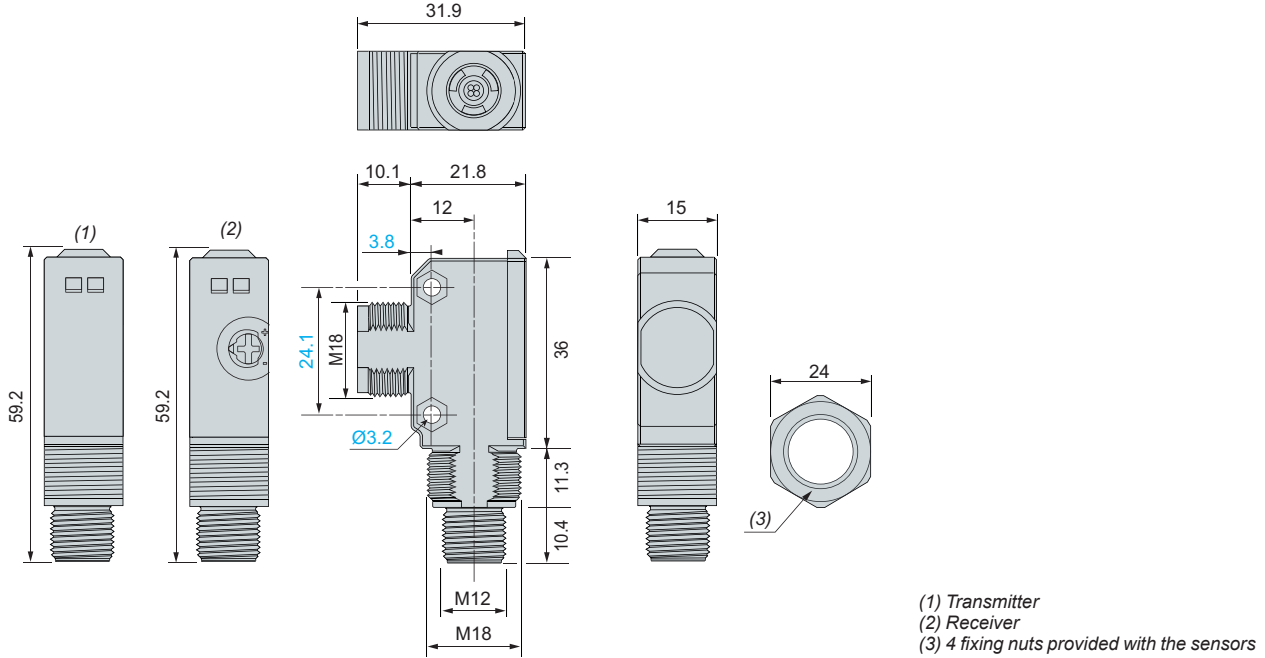


Transmitter only

XUN2AKXNM12T

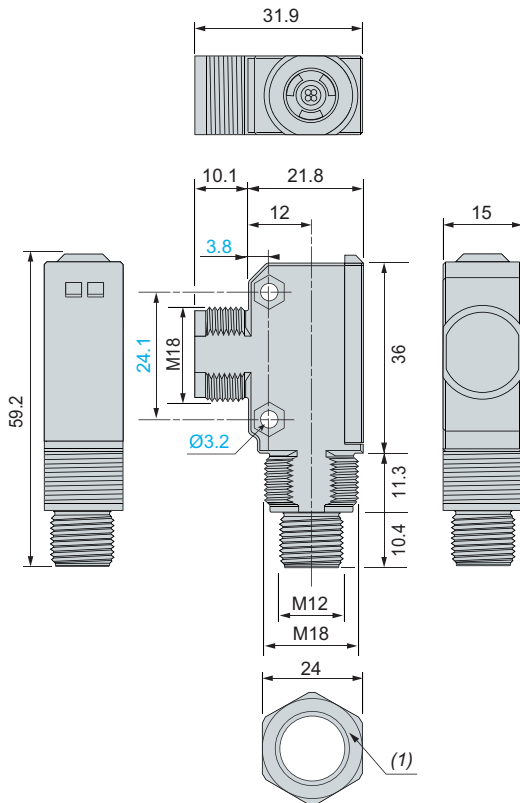

Receiver only

XUN2APYNM12R, XUN2ANXNM12R, XUN2APXNM12R

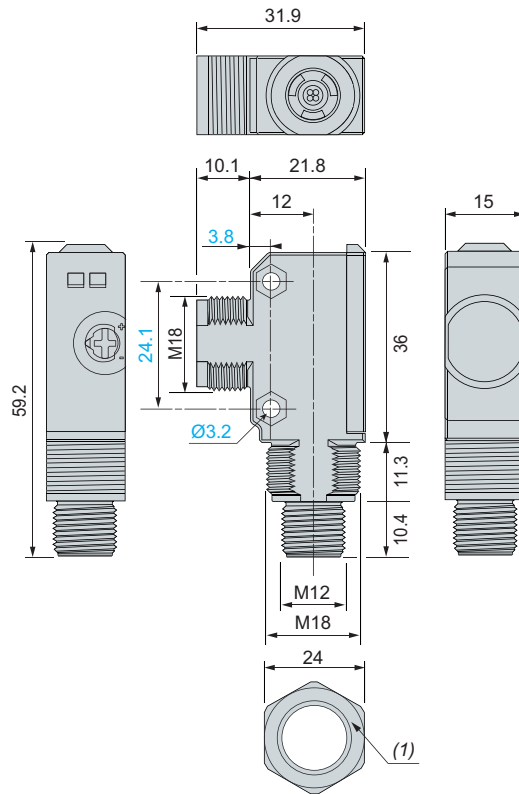

(1) 2 fixing nuts provided with the sensor.


Photo-electric sensors

XUN general purpose, single mode function
 Hybrid miniature design, plastic,
 Three- and four-wire DC, solid-state output,
 Wire setting for NO/NC

Thru-beam system, plastic, pre-cabled version


Transmitter + receiver (common top, side and front views)

XUN2ANXNL2, XUN2APXNL2, XUN2ANXSL2, XUN2APXSL2

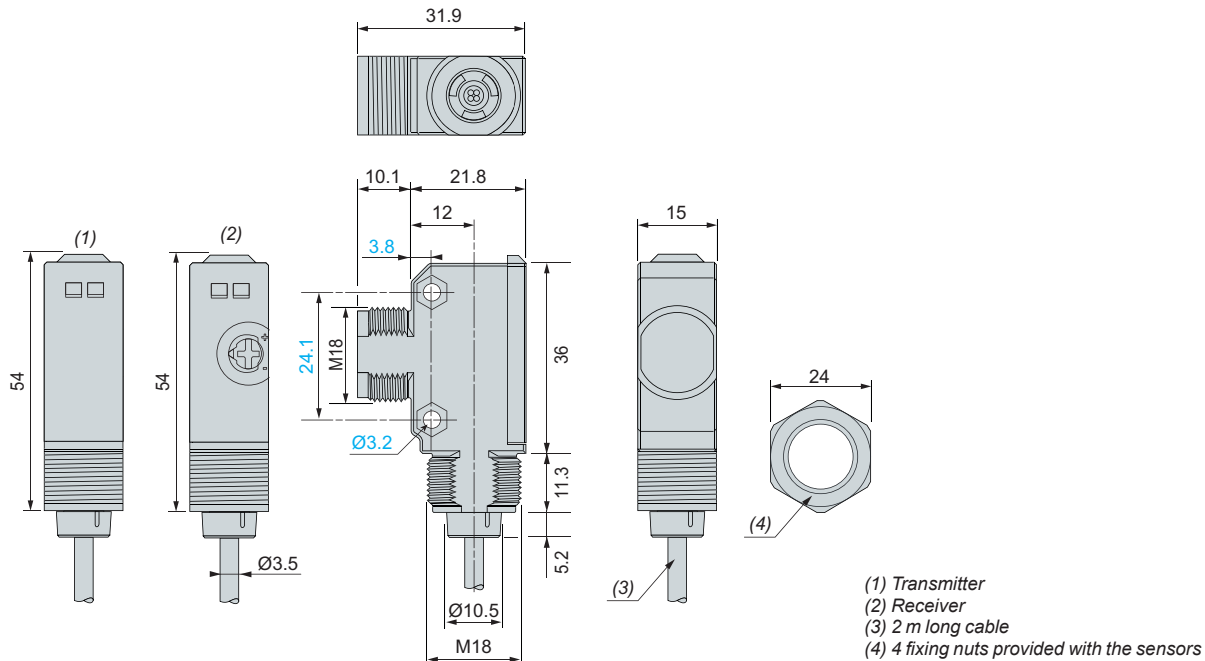

Transmitter only

XUN2AKXNL2T

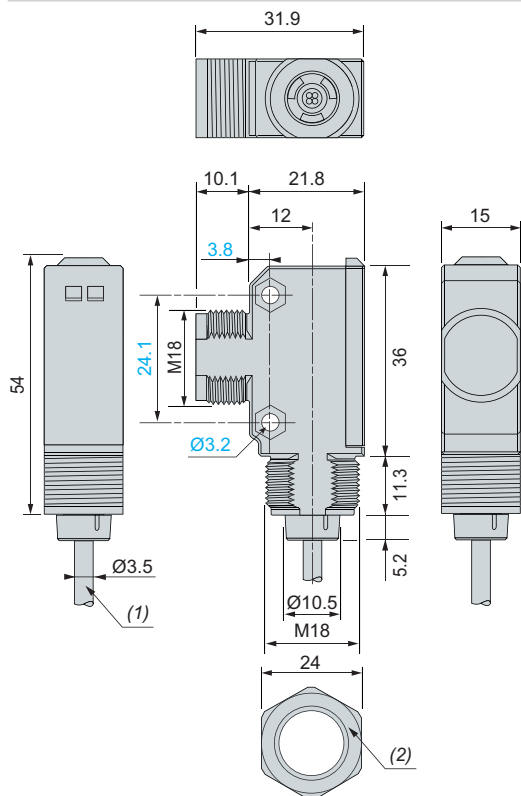

Receiver only

XUN2ANXNL2R, XUN2APXNL2R

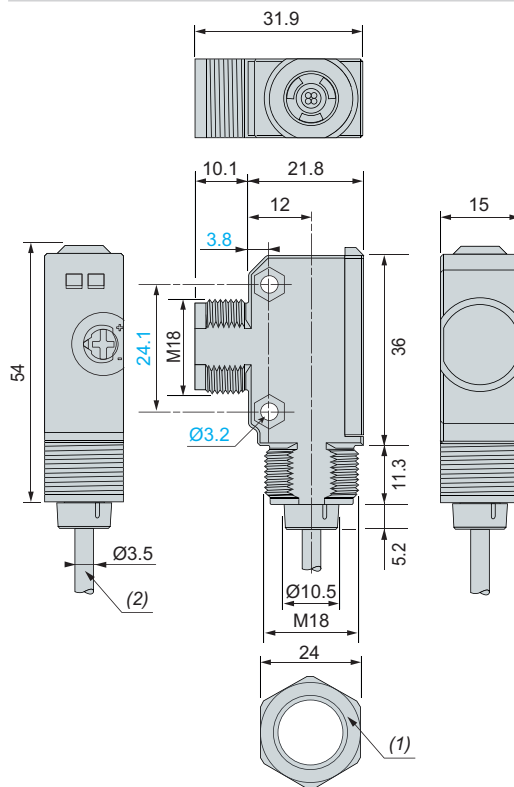


Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic,

Four-wire DC, solid-state output,

Wire setting for NO/NC



Diffuse system

M12 connector version

XUN5APYNM12, XUN5ANXNM12, XUN5APXNM12,
XUN6APYNM12, XUN6ANXNM12, XUN6APXNM12
XUN8ANXNM12, XUN8APXNM12, XUN8APYNM12

Pre-cabled version

XUN5ANXNL2, XUN5APXNL2, XUN5ANXSL2, XUN5APXSL2,
XUN6ANXNL2, XUN6APXNL2, XUN6ANXSL2, XUN6APXSL2,
XUN8ANXNL2, XUN8ANXSL2, XUN8APXNL2, XUN8APXSL2

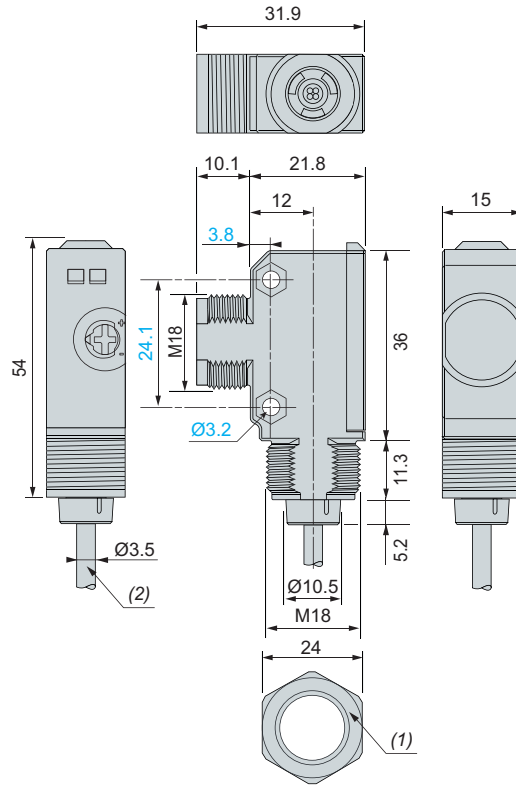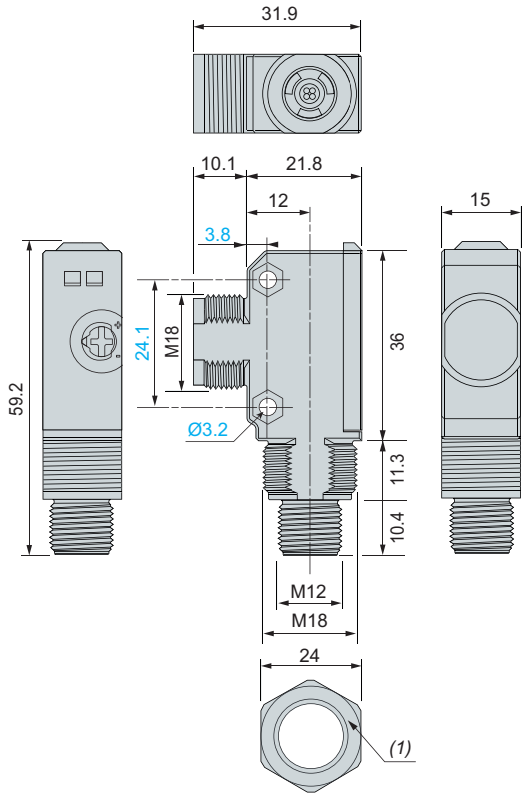

(1) 2 fixing nuts provided with the sensor.
(2) 2 m long cable.


Photo-electric sensors

XUN general purpose, single mode function
 Hybrid miniature design, plastic,
 Three- and four-wire DC, solid-state output,
 Wire setting for NO/NC

Polarised reflex system


M12 connector version

XUN9APYNM12, XUN9ANXNM12, XUN9APXNM12

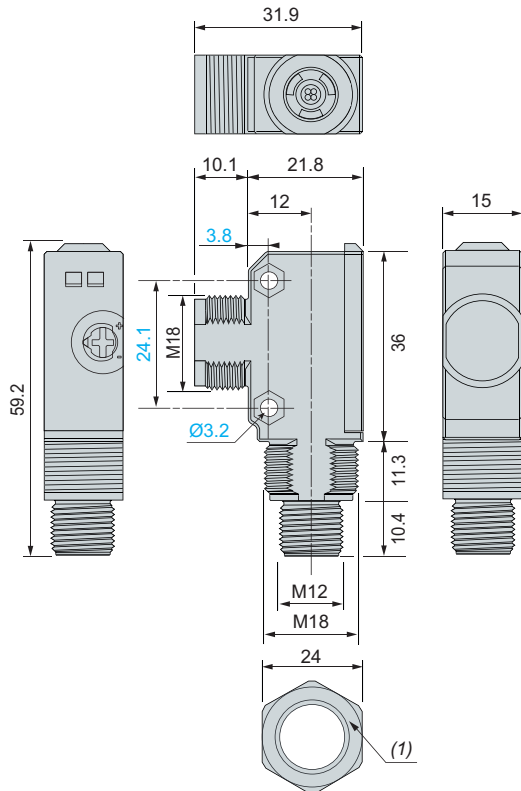

Pre-cabled version (3- and 4-wire)

XUN9ANXNL2, XUN9APXNL2, XUN9ANXSL2, XUN9APXSL2

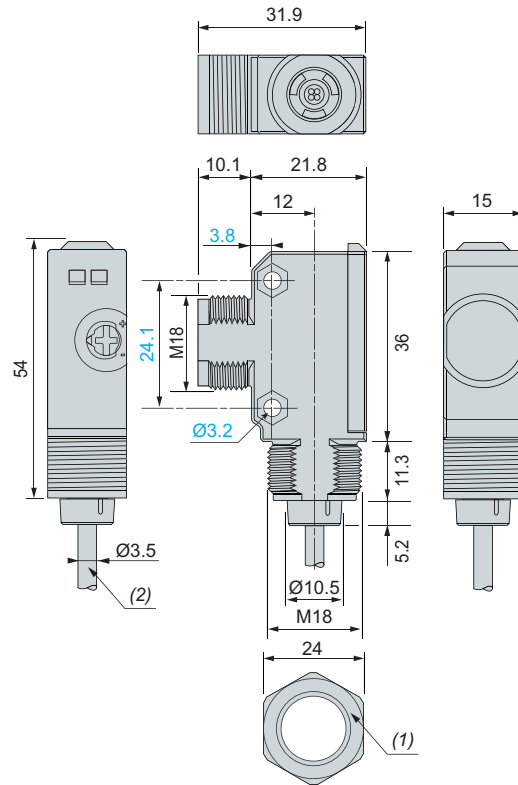

- (1) 2 fixing nuts provided with the sensor.
- (2) 2 m long cable.



XU photo-electric sensors
for packaging, food & beverage

Telemecanique Sensors presents an expanded XU range of application photo-electric sensors to be embedded in automated lines for the packaging market segment.

With their diverse technical characteristics, high performance and smart management capabilities, they are designed to address a wide scope of specific needs.



Packaging



Handling



Food and Beverage

Fast object detection

Sensor family per application

- > Marking detection
- > Very dark object detection
- > Accurate detection
- > Colour object detection, from simple colour to very complex colour sorting



Read the promotional video



Five detection types

Select the perfectly suitable light spot

- > **Blue light**: for low-reflectivity objects, especially dark ones. Blue light short waves mean less penetration, resulting in higher surface reflection.
- > **Red light**: for detecting objects at a long distance and/or transparent objects
- > **Laser light**: to detect very small objects and contrast marks with pinpoint accuracy, even at a long sensing distance
- > **White light**: for simple contrast detection (high contrast), short distances
- > **RGB light**: for more accurate contrast in colour prints



Blue light



Red light



Laser



White light



RGB

Designed for small spaces in packaging machines

Choose the casing, connection type and size



- > Plastic or metal (1) casing
- > Pre-cabled, with pigtail or connector
- > Compact, miniature, and sub-miniature size



Simple communication with the PLC via Ethernet

Smart devices communicate via IO-Link protocol

- > Install your new IO-Link sensor easily: automatic reading of the device identification file (IODD) and automatic detection of the sensor output mode
- > Automated parameter settings: configure the detection parameters
- > Extended diagnostics, with real-time information for optimised usage and maintenance

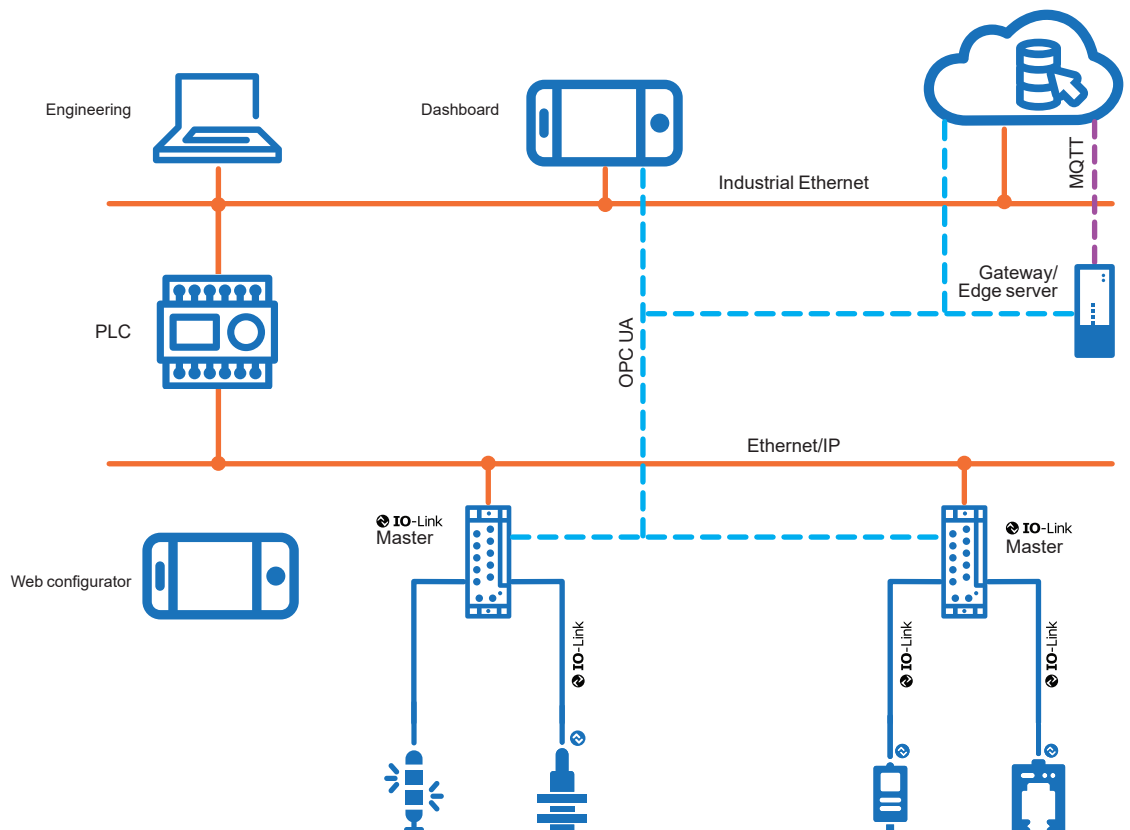

(1) XUKC only has a metal casing.

Photo-electric sensors

XU range application

Contrast system for marking detection

Miniature design, plastic



XUMRAWAYM8
XUMRAGAYM8
XUMRACAYM8



XUMRAWAYP015
XUMRAGAYP015



XUMRPGAYM8



XUM5ALAYM8



XUM5ALAYL2

Contrast mark reader sensors IO-Link

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
--------------------------------------	----------	--------	------------	-----------	-------------

White light

15 mm/12 mm	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	M8 connector (4-pin)	XUMRAWAYM8	0.018
		Autodetect PNP/NPN	Pigtail M12 (L= 0.15 m)	XUMRAWAYP015	0.027

RGB light

15 mm/12 mm	NO/NC configuration via Teach-in or IO-Link	Autodetect PNP/NPN	M8 connector (4-pin)	XUMRAGAYM8	0.018
		Autodetect PNP/NPN	M8 connector (4-pin)	XUMRACAYM8	0.018
		Autodetect PNP/NPN	Pigtail M12 (L= 0.15 m)	XUMRAGAYP015	0.027
		Autodetect PNP/NPN	M8 connector (4-pin)	XUMRPGAYM8	0.01

Laser light

250 mm/150 mm	NO/NC configuration via Teach-in or IO-Link	Autodetect PNP/NPN	Pre-cabled (L = 2 m)	XUM5ALAYL2	0.045
		Autodetect PNP/NPN	M8 connector (4-pin)	XUM5ALAYM8	0.018
		Autodetect PNP/NPN	Pigtail M12 (L= 0.15 m)	XUM5ALAYP015	0.026

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XU range application
 Contrast system for marking detection
 Miniature design, plastic

Characteristics				XUMRA●AY●●	XUMRPGAYM8	XUM5ALAY●●
Sensor type				CE, UKCA, cULus, Ecolab	CE, UKCA, cULus	CE, UKCA, cULus, Ecolab
Product certifications						
Connection	Connector		M8	M8	M8	
	Pigtail	Connector	M12	–	M12	
		Length	m	0.15	–	0.15
	Pre-cabled	Length	–	–	2	
Maximum sensing distance S _{max}	Contrast mark reader	mm	15	15	250	
Detection light beam colour				White LED RGB (red, green, blue)	RGB (red, green, blue)	Red (laser class 1)
Degree of protection	Conforming to IEC 60529		IP67			
	Conforming to DIN 40050-9		IP69K	IP67	IP69K	
Storage temperature			°C	-20...+80	-40...+70	-20...+80
Operating temperature			°C	-20...+55	-25...+55	-20...+60
Materials	Case		ABS	Glass-filled technopolymer	ABS	
	Lens		PMMA			
	Front		PMMA	PMMA	PMMA	
	Cable		PVC	–	PVC	
Rated supply voltage			V	12...24 ---		
Voltage limits (including ripple)			V	10...30 ---		
Current consumption, no-load			mA	≤ 30 for RGB ≤ 25 for white light	≤ 40 (≤ 20 at 24V)	≤ 30
Switching capacity			mA	100	≤ 100	100
Maximum switching frequency	XUMRAWAY●●	Hz	10,000	–	–	
	XUMRAGAY●●	Hz	10,000	–	–	
	XUMRACAY●●	Hz	2500	–	–	
	XUMRPGAYM8	Hz	–	30,000 (selectable by IO-Link) 60,000 (by default)	–	
	XUM5ALAY●●	Hz	–	–	4000	
Delays	First-up	ms	300	0.08	300	
	Response	XUMRAWAY●●	µs	50	–	–
		XUMRAGAY●●	µs	50	–	–
		XUMRACAY●●	µs	200	–	–
		XUMRPGAYM8	µs	–	16	–
		XUM5ALAY●●	µs	–	–	125
	Recovery	ms	300	–	300	
IO-Link	ms	> 230				

Photo-electric sensors

XU range application

Constrast system for marking detection

Miniature design, plastic

Wiring schemes


Contrast mark reader systems

M8 and M12 connectors – 4-pin – IO-Link

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)
	C	Communication (IO-Link)

Autodetect PNP/NPN or by IO-Link

XUM●A●AYM8, XUM●A●AYP015 (white, RGB, and laser)

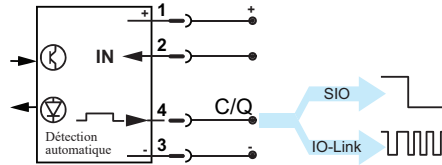


Note : IODD IO-Link files are available on our web site www.telemecaniquesensors.com/iolink

Pre-cabled – 4-wire – IO-Link

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	C	Switching signal (SIO) Communication (IO-Link)

Autodetect PNP/NPN or by IO-Link

XUM5ALAYL2 (laser)

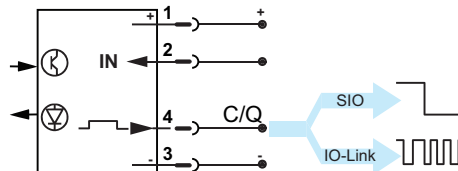


Note : IODD IO-Link files are available on our web site www.telemecaniquesensors.com/iolink

M8 connector – 4-wire – IO-Link

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN (1)	Teach-in L/D (NO/NC) Delay enable
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)
	C	Communication (IO-Link)

PNP, potentiometer or by IO-Link

XUMRPGAYM8

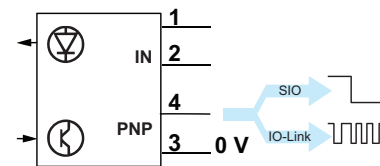


Note : IODD IO-Link files are available on our web site www.telemecaniquesensors.com/iolink

(1) By default, pin 2 is configured as push-pull OUTPUT; it can be configured as INPUT with IO-Link.

Detection curves


Contrast mark reader: XUMRA●AYM8, XUMRA●AYP015, XUMRPGAYM8

Signal process

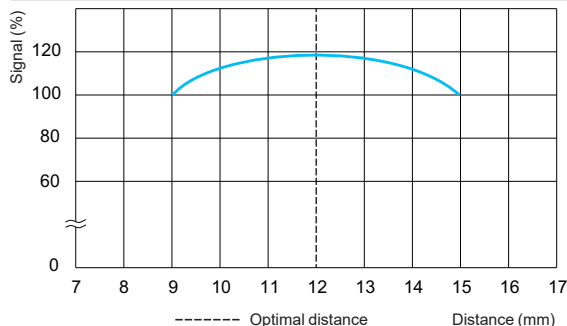


Contrast mark reader: XUM5ALAY●●

Light spot size


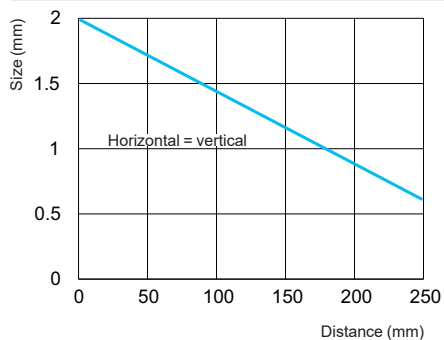


Excess gain

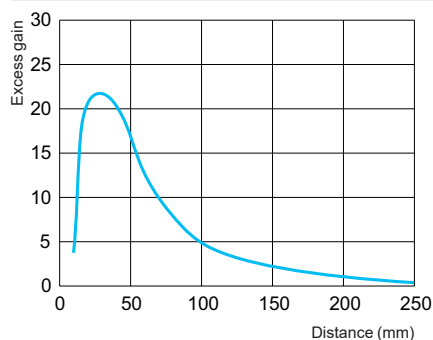

Dimensions

Miniature format: XUM

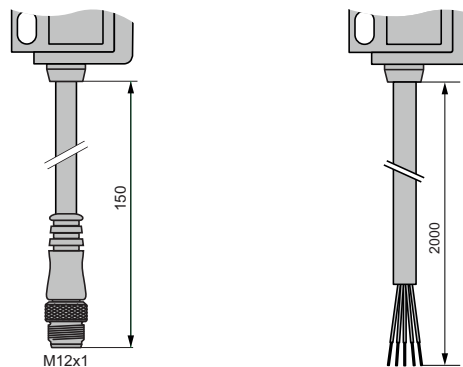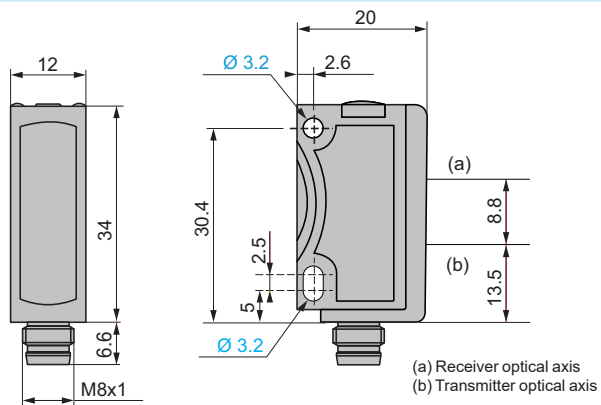

Miniature format: XUMRPGAYM8

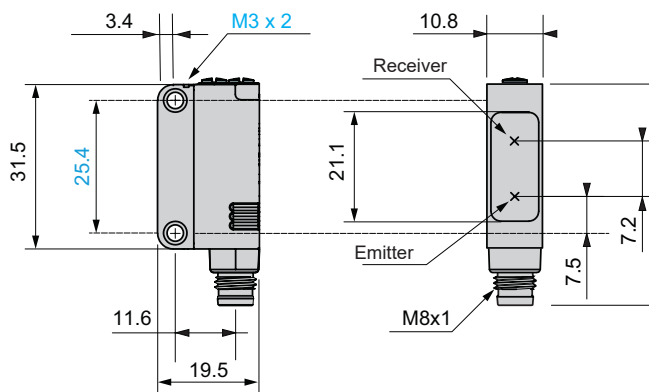


Photo-electric sensors

XU range application

Blue light sensors for very dark object detection

Compact, miniature, and sub-miniature design, plastic



XUM8ABAYP015



XUM7ABPXL2



XUM7ABPXM8,
XUM8ABAYM8



XUT7ABPXL2,
XUT8ABAYL2



XUT7ABPXP02,
XUT8ABAYP02



XUK8ABPXM12



Read the promotional video



Background suppression sensors IO-Link

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
Adjustable blue light					
200 mm/200 mm miniature format	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	M8 connector (4-pin)	XUM8ABAYM8	0.014
		Autodetect PNP/NPN	Pigtail M12 (L= 0.15 m)	XUM8ABAYP015	0.027
100 mm/100 mm sub-miniature format	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	Pre-cabled (L = 2 m)	XUT8ABAYL2	0.031
		Autodetect PNP/NPN	Pigtail M8 (L= 0.2 m)	XUT8ABAYP02	0.019

Background suppression sensors

Fixed blue light, miniature format

100 mm/80 mm	NO/NC configuration via teach-in or IO-Link	PNP	Pre-cabled (L = 2 m)	XUM7ABPXL2	0.056
		PNP	M8 connector (4-pin)	XUM7ABPXM8	0.017

Fixed blue light, sub-miniature format

50 mm/50 mm	NO/NC configuration via teach-in or IO-Link	PNP	Pre-cabled (L = 2 m)	XUT7ABPXL2	0.031
		PNP	Pigtail M8 (L= 0.2 m)	XUT7ABPXP02	0.022

Adjustable blue light (potentiometer)

1200 mm/600 mm	NO/NC configuration via teach-in or IO-Link	PNP	M12 connector (4-pin)	XUK8ABPXM12	0.046
----------------	---	-----	-----------------------	--------------------	-------

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XU range application

Blue light sensors for very dark object detection

Compact, miniature, and sub-miniature design, plastic

Characteristics				XU●7ABPX●●	XU●8ABAY●●	XUK8ABPXM12
Sensor type				XU●7ABPX●●	XU●8ABAY●●	XUK8ABPXM12
Product certifications				CE, UKCA, cULus, Ecolab		
Connection	Connector			M8	M8	M12
	Pre-cabled	Length	m	2	2	–
	Pigtail	Length XUM8	m	0.2	0.15	–
XUT8			m		0.2	
Maximum sensing distance Smax	BGS, fixed blue light	XUM7	mm	100	–	–
		XUT7	mm	50	–	–
	BGS, adjustable blue light	XUM8	mm	–	200	–
		XUT8	mm	–	100	–
		XUK8	mm	–	–	1200
Detection light beam colour				Blue		
Degree of protection	Conforming to IEC 60529			IP67		
	Conforming to DIN 40050-9			IP69K for XUM7 only	IP69K for XUM8 only	IP69K
Storage temperature				°C	-20...+80	
Operating temperature	XUM7			°C	-20...+60	-20...+60
	XUT7			°C	-20...+50	
Materials	Case	XUM		ABS	ABS	ABS/PC
		XUT		PUR	PUR	
	Lens			PMMA		
	Front			PMMA		
	Cable			PVC		
Rated supply voltage	XUM8			V	12...24 ---	12...24 ---
	XUT8			V		
Voltage limits (including ripple)				V	10...30	10...30
Current consumption, no-load	XUM			mA	≤ 30	
	XUT			mA	≤ 20	
Switching capacity	XUM			mA	≤ 100	
	XUT			mA	≤ 50	
Maximum switching frequency				Hz	1000	700
Delays	First-up			ms	< 300	
	Response	XUM	µs	500	500	830 max.
		XUT	µs		700	
	Recovery			ms	< 300	
IO-Link			ms	> 230		

Photo-electric sensors

XU range application

Blue light sensors for very dark object detection

Compact, miniature, and sub-miniature design, plastic

Wiring schemes

Background suppression sensor


M8 connector (including pigtail) - 4-pin



Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NC - = NO Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal

PNP

XUM7ABPXM8, XUT7ABPXP02

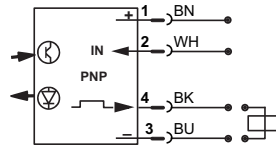

Pre-cabled - 4-wire

+BN (Brown)


IN (input) GY (Grey)

OUT (output) BK (Black)

-BU (Blue)

PNP

XUT7ABPXL2, XUM7ABPXL2

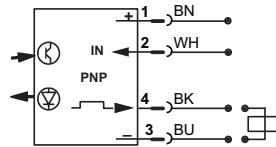

M8 and M12 connector - 4-pin IO-Link



M8


Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	C	Communication (IO-Link)



M12

Autodetect PNP/NPN or by IO-Link

XUM8ABAYM8, XUM8ABAYP015, XUT8ABAYP02

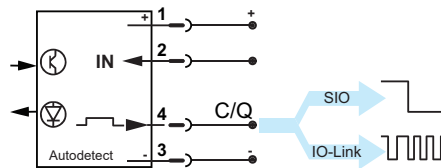

Note: IO-Link files available on our website www.telemecaniquesensors.com/iolink

Wiring schemes


Background suppression sensor

Pre-cabled - 4-wire IO-Link

	Pin	Signal	Definition
+BN (Brown)	1	+	+ 24 V $\overline{\text{---}}$
IN (input) GY (Grey)	2	IN	+ = NO - = NC Open = NO
OUT (output) BK (Black)	3	-	0 V $\overline{\text{---}}$
-BU (Blue)	4	C	Switching signal (SIO) Communication (IO-Link)


Autodetect PNP/NPN or by IO-Link

XUT8ABAYL2

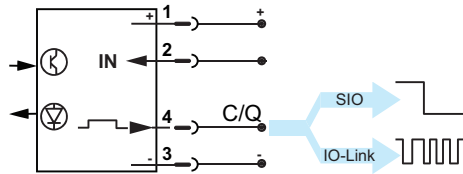

Note: IO-Link files available on our website www.telemecanique.com/iolink

M12 connector - 4-pin



	Pin	Signal	Definition
	1	+	+ 24 V $\overline{\text{---}}$
	2	IN	+ = NC - = NO Open = NO
	3	-	0 V $\overline{\text{---}}$
	4	C	Switching signal

PNP

XUK8ABPXM12

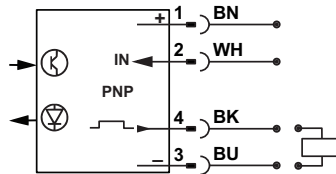


Photo-electric sensors

XU range application


Blue light sensors for very dark object detection

Compact, miniature, and sub-miniature design, plastic


Detection curves

Background suppression sensor


Scanning properties: XUM8ABAY●●

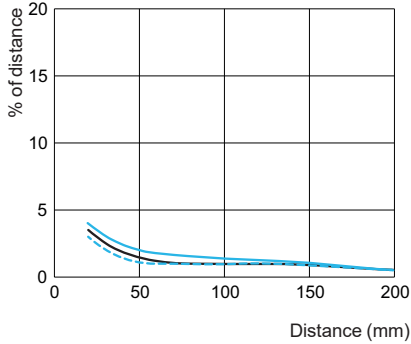

Scanning properties: XUT8ABAY●●

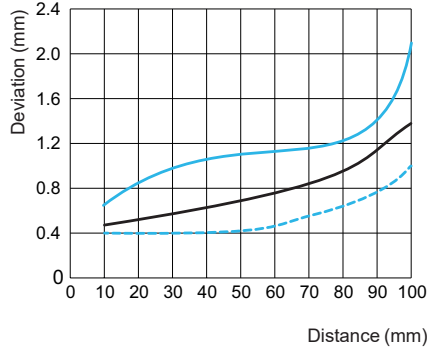


Light spot size: XUT8ABAY●●

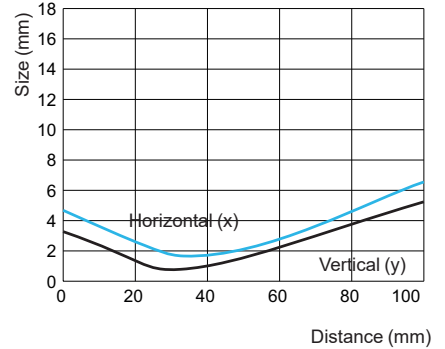


--- Min. distance white object (90%)/white background (90%) (mm)
 — Min. distance grey object (18%)/white background (90%) (mm)
 — Min. distance black object (6%)/white background (90%) (mm)


Light spot size: XUM7ABPX●●

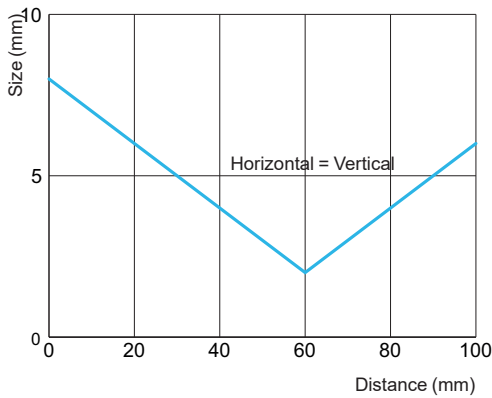


Light spot size: XUT7ABPX●●

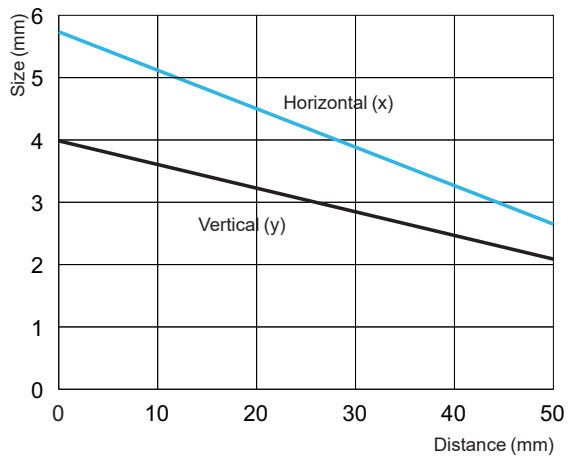

Scanning properties: XUK8ABPXM12

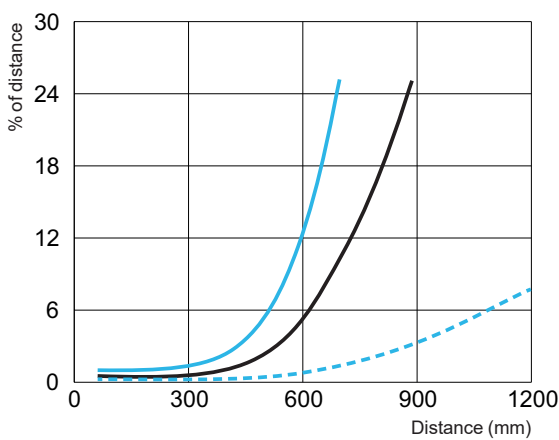

Light beam diameter: XUK8ABPXM12

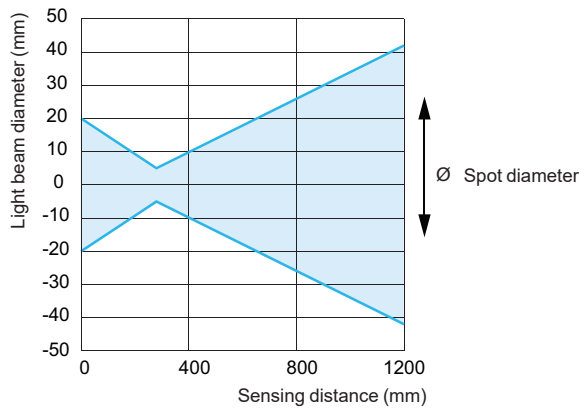

--- Min. distance white object (90%)/white background (90%) (mm)
 — Min. distance grey object (18%)/white background (90%) (mm)
 — Min. distance black object (6%)/white background (90%) (mm)

Photo-electric sensors

XU range application


Blue light sensors for very dark object detection

Compact, miniature, and sub-miniature design, plastic

Dimensions

Compact format: XUK


XUK8ABPXM12

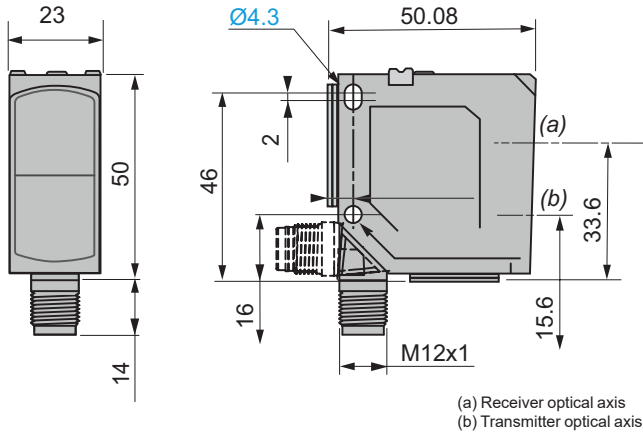

(a) Receiver optical axis
(b) Transmitter optical axis


Miniature format: XUM

XUM7ABPXL2, XUM8ABAYM8

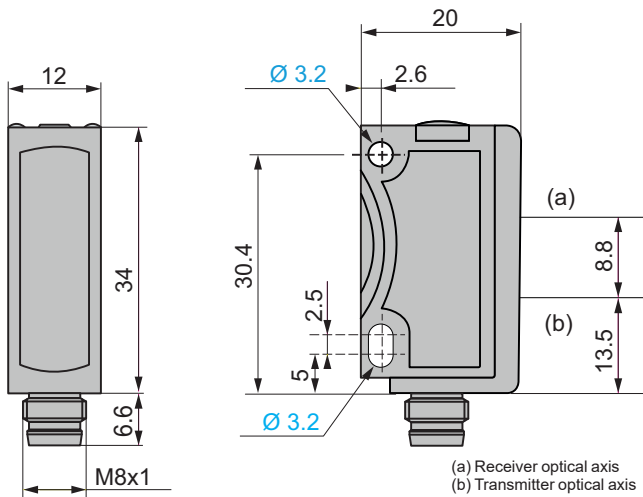


(a) Receiver optical axis
(b) Transmitter optical axis

XUM8ABAYP015

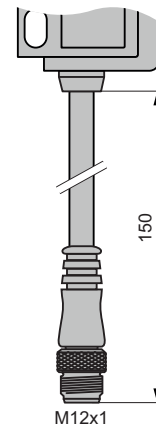


XUM7ABPXL2

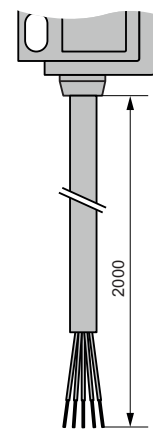


Sub-miniature format: XUT

XUT7ABPXP02, XUT7ABPXL2, XUT8ABAYP02, XUT8ABAYL2

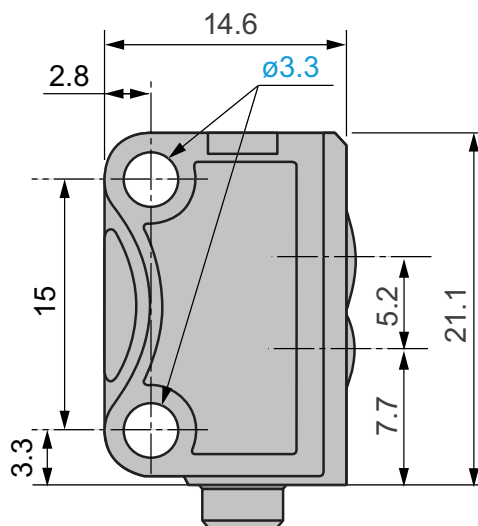

XUT●●●●●P02

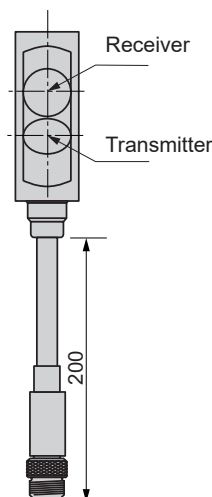

XUT●●●●●L2

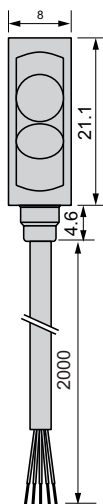


Photo-electric sensors

XU range application

Laser sensors for accurate detection

Miniature and sub-miniature design, plastic



XUM5ALAYM8,
XUM8ALAYM8,
XUM9ALAYM8



XUT8ALAYP02, XUT8ALAYL2,
XUT9ALPXP02, XUT9ALPXL2



XUM8PLPXM8
XUM9PLPXM8



XUM5ALAYP015,
XUM8ALAYP015,
XUM9ALAYP015



XUM5ALAYL2,
XUM8ALAYL2,
XUM9ALAYL2

Laser sensors

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
Diffuse mode detection IO-Link					
250 mm/150 mm	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	Pre-cabled (L = 2 m)	XUM5ALAYL2	0.045
		Autodetect PNP/NPN	M8 connector (4-pin)	XUM5ALAYM8	0.018
		Autodetect PNP/NPN	Pigtail M12 (L = 0.15 m)	XUM5ALAYP015	0.026

BGS mode detection

BGS mode detection IO-Link					
150 mm/120 mm	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	Pre-cabled (L = 2 m)	XUM8ALAYL2	0.056
		Autodetect PNP/NPN	M8 connector (4-pin)	XUM8ALAYM8	0.018
		Autodetect PNP/NPN	Pigtail M12 (L = 0.15 m)	XUM8ALAYP015	0.027
100 mm/70 mm	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	Pre-cabled (L = 2 m)	XUT8ALAYL2	0.031
		Autodetect PNP/NPN	Pigtail M8 (L = 0.2 m)	XUT8ALAYP02	0.019

BGS mode detection

200 mm/130 mm	NO/NC configuration via potentiometer	PNP	M8 connector (4-pin)	XUM8PLPXM8	0.01
---------------	---------------------------------------	-----	----------------------	-------------------	------

Reflex mode detection

Reflex mode detection IO-Link					
15 m/13 m	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	Pre-cabled (L = 2 m)	XUM9ALAYL2	0.056
		Autodetect PNP/NPN	M8 connector (4-pin)	XUM9ALAYM8	0.018
		Autodetect PNP/NPN	Pigtail M12 (L = 0.15 m)	XUM9ALAYP015	0.027

Reflex mode detection

4 m/3 m	NO/NC configuration via teach-in	PNP	Pre-cabled (L = 2 m)	XUT9ALPXL2	0.031
		PNP	Pigtail M8 (L = 0.2 m)	XUT9ALPXP02	0.019
12 m/10 m	NO/NC configuration via potentiometer	PNP	M8 connector (4-pin)	XUM9PLPXM8	0.01

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Photo-electric sensors

XU range application

Laser sensors for accurate detection

Miniature and sub-miniature design, plastic

Characteristics						
Sensor type			XUM●ALAY●●	XUM●PLPXM8		
Product certifications			CE, UKCA, cULus, Ecolab	CE, UKCA, cULus		
Connection	Connector		M8	M8		
	Pigtail	Length	XUM5, XUM8, XUM9	m	0.15	–
			XUT8, XUT9	m	0.20	–
	Pre-cabled	Length		m	2	–
Maximum sensing distance Smax	Diffuse mode		XUM5	mm	1...250	–
	Background suppression system	XUM8		mm	4...150	200
		XUT8		mm	6...70	–
	Reflex mode system		XU●9	m	0.1...13	15
Detection light beam colour			Laser class 1, red			
Degree of protection	Conforming to IEC 60529		IP67 for XUM5, XUT8, XUM8, XUT9, XUM9		IP65/ IP67	
	Conforming to DIN 40050-9		IP69K for XUM5, XUM8, XUM9		–	
Storage temperature			°C	-20...+80	-40...+70	
Operating temperature	XUM5, XUM8, XUM9		°C	-20...+60	-20...+55	
	XUT8, XUT9		°C	-20...+50	–	
Materials	Case	XUM5, XUM8, XUM9		ABS	Glass filled technopolymer	
		XUT8, XUT9		PUR	–	
	Lens		PMMA			
	Front		PMMA			
	Cable		PVC			
Rated supply voltage			V	12...24 ---	10...30 ---	
Voltage limits (including ripple)			V	10...30 ---		
Current consumption, no-load	XUM5, XUM8, XUM9		mA	≤ 30	≤35	
	XUT8, XUT9		mA	≤ 12	–	
Switching capacity	XUM5, XUM8, XUM9		mA	≤ 100	–	
	XUT8, XUT9		mA	≤ 50	–	
Maximum switching frequency	XUM5, XUM9		Hz	4000	≤2000	
	XUT8, XUM8, XUT9		Hz	1000	≤2000	
Delays	First-up		ms	< 300	–	
	Response	XUM5		µs	≤ 125	–
		XUM8		µs	≤ 500	250
		XUM9		µs	125	250
		XUT8, XUT9		µs	500	–
	Recovery		ms	< 300	–	
IO-Link		ms	> 230	–		

Photo-electric sensors

XU range application

Laser sensors for accurate detection

Miniature and sub-miniature design, plastic

Wiring schemes

Laser sensors

M8 and M12 connector - 4-pin - IO-Link




Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO



3	-	0 V
4	Q	Switching signal (SIO)
	C	Communication (IO-Link)

Autodetect PNP/NPN or by IO-Link

XUM5ALAYM8, XUM5ALAYP015, XUM8ALAYM8, XUM8ALAYP015, XUT8ALAYP02, XUM9ALAYM8, XUM9ALAYP015

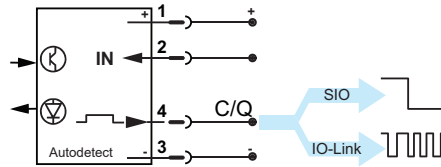

Note: IODD IO-Link files available on the website www.telemecaniquesensors.com/iolink


Pre-cabled - 4-wire - IO-Link



Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO
		- = NC
		Open = NO
3	-	0 V $\overline{\text{---}}$
4	C	Switching signal (SIO)
		Communication (IO-Link)

Autodetect PNP/NPN or by IO-Link

XUM5ALAYL2, XUM8ALAYL2, XUT8ALAYL2, XUM9ALAYL2

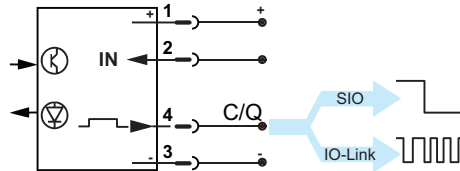

Note: IODD IO-Link files available on the website www.telemecaniquesensors.com/iolink

M8 connector - 4-pin





Pin	Signal	Definition
		XUT9ALPX XUM●PLPX
1	+	+ 24 V $\overline{\text{---}}$ 10...30 V $\overline{\text{---}}$
2	IN	+ = NC Not connected
		- = NO
		Open = NO
3	-	0 V $\overline{\text{---}}$ 0 V $\overline{\text{---}}$
4	Q	Switching PNP output signal

PNP

XUT9ALPXL2, XUT9ALXP02

XUM8PLPXM8, XUM9PLPXM8

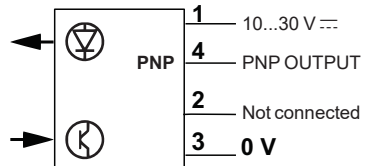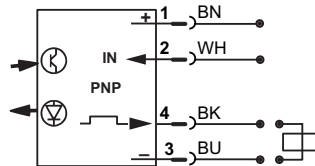

Note: IODD IO-Link files available on the website www.telemecaniquesensors.com/iolink

Photo-electric sensors

XU range application

Laser sensors for accurate detection

Miniature and sub-miniature design, plastic


Dimensions

Miniature format: XUM

XUM●ALAYM8


XUM●ALAYP015

XUM●ALAYL2

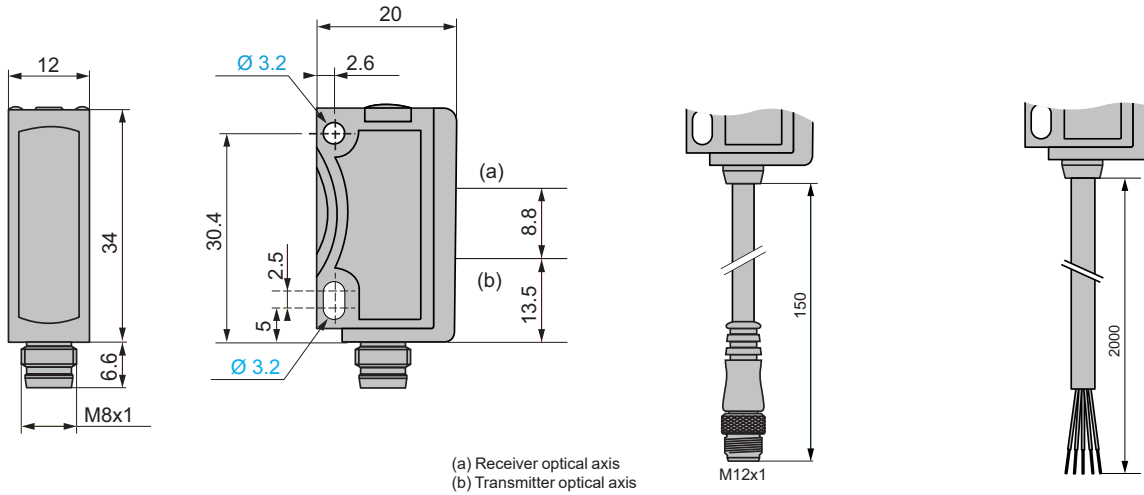

Miniature format: XUM●PLPXM8

XUM8PLPXM8, XUM9PLPXM8

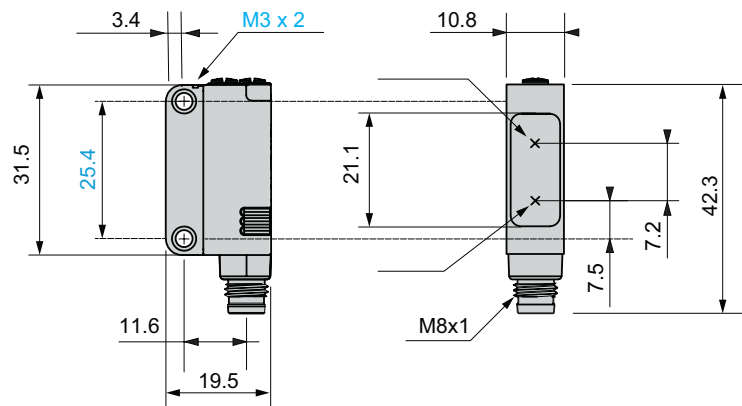

Sub-miniature format: XUT

XUT●●●●●●2

XUT●●●●●P02

XUT●●●●●L2

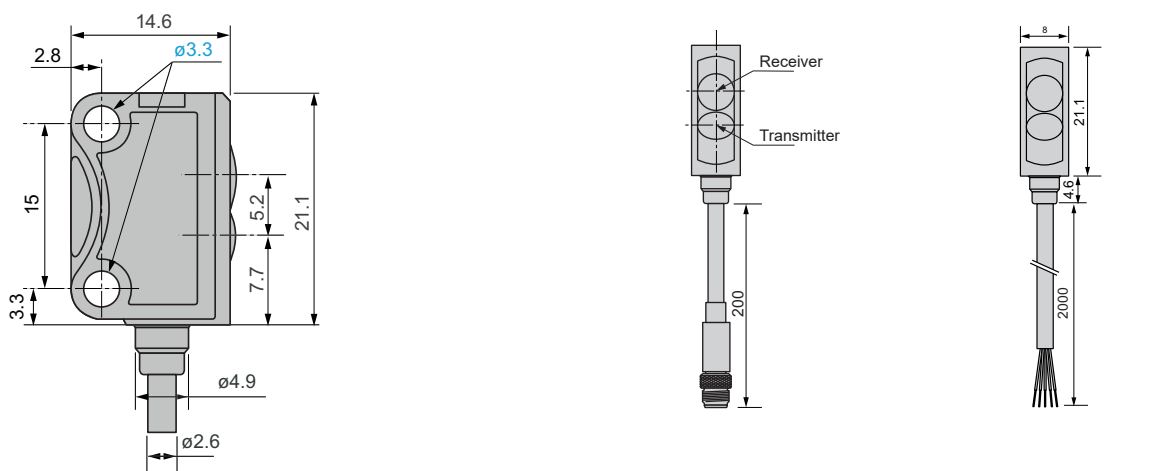


Photo-electric sensors

XU range application

Laser sensors for accurate detection



Miniature and sub-miniature design, plastic

Detection curves

Laser sensor, diffuse mode detection

Light spot size: XUM5ALAY●●

Excess gain: XUM5ALAY●●


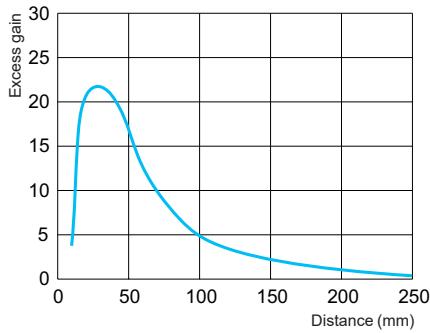
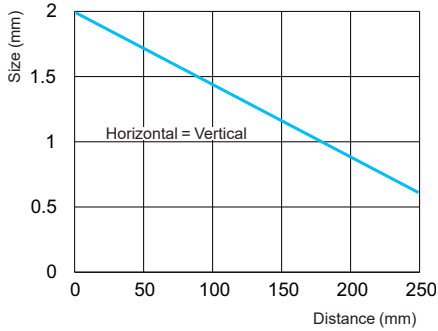


Laser sensor, reflex mode detection: XU●9AL●●

Functional reserves: XUM9ALAY●●

Light spot diameter: XUM9ALAY●●


Light spot size: XUT9ALPX●●

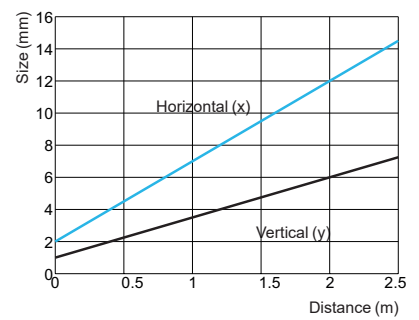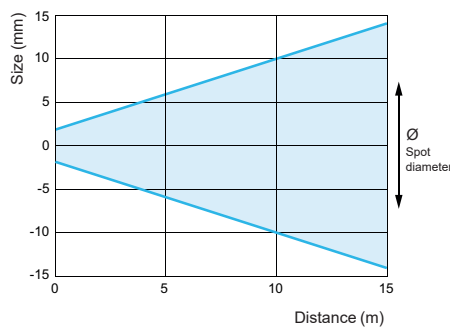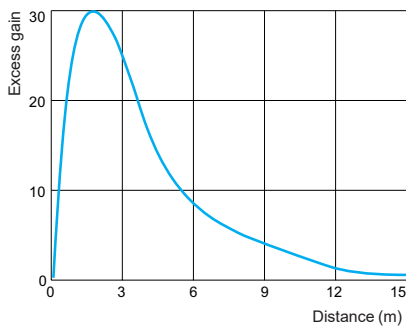


Detection curves

Laser sensor, background suppression mode


Light spot size: XUM8ALAY●●

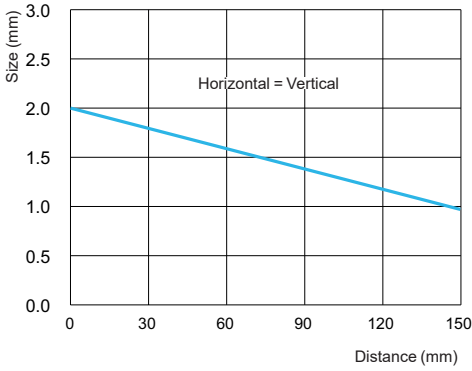


Light spot size: XUT8ALAY●●

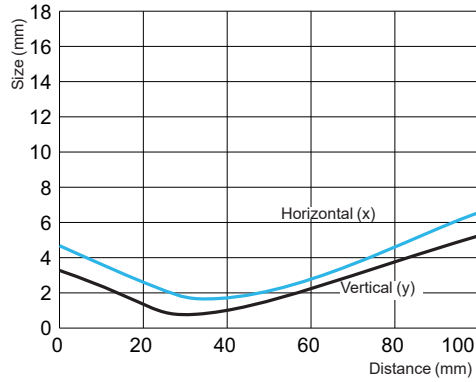

Scanning properties: XUM8ALAY●●

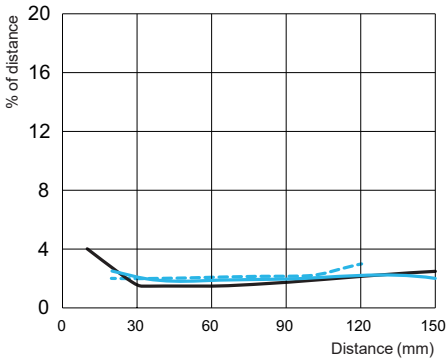

Scanning properties: XUT8ALAY●●

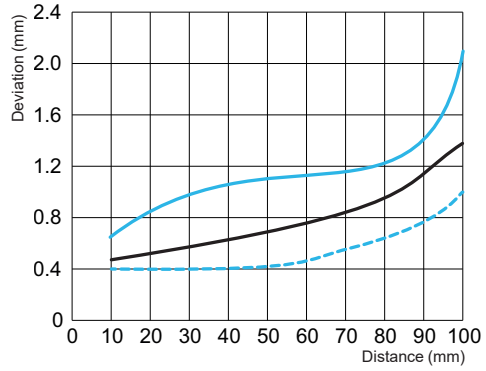

- Min. distance white object (90%)/white background (90%) (mm)
- Min. distance grey object (18%)/white background (90%) (mm)
- Min. distance black object (6%)/white background (90%) (mm)

Photo-electric sensors

XU range application
Sensors for colour object detection
Compact and miniature design, plastic



XUKCBSAYM12



XUKCBLAYM12



XUMRACAYM8

Colour sensors IO-Link

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
--------------------------------------	----------	--------	------------	-----------	-------------

White light, multiple colour

60 mm/30 mm	NO/NC configuration	Autodetect PNP/NPN	M12 connector (3-output)	XUKCBSAYM12	0.017
150 mm/120 mm	via teach-in or IO-Link	Autodetect PNP/NPN	M12 connector (3-output)	XUKCBLAYM12	0.017

RGB light, unique colour

15 mm/12 mm	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	M8 connector (4-pin)	XUMRACAYM8	0.018
-------------	---	--------------------	----------------------	-------------------	-------

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Characteristics

Sensor type				XUKCB●AYM12	XUMRACAYM8
Product certifications				CE, UKCA, cULus	CE, UKCA, cULus, Ecolab
Connection		Connector		M12 (5-pin)	M8 (4-pin)
Maximum sensing distance Smax		White light	XUKC short	mm	60
			XUKC long	mm	150
		RGB light	XUMR	mm	–
Detection light beam colour				White	Red, green and blue
Degree of protection		Conforming to IEC 60529		IP67	
		Conforming to DIN 40050-9		IP69K	
Storage temperature				°C	-20...+80
Operating temperature				°C	-20...+55
Materials		Case		Zinc die-cast	ABS
		Lens		PMMA	PMMA
		Front		PMMA	PMMA
		Cable			
Rated supply voltage				V	24 ---
Voltage limits (including ripple)				V	18...30
Current consumption, no-load				mA	≤ 60
Switching capacity				mA	≤ 100
Maximum switching frequency				Hz	3000
Delays		First-up		ms	300
		Response		µs	≤ 180
		Recovery		ms	< 300
		IO-Link		ms	> 230

Wiring schemes

Colour detection system


M12 connector - 5-pin - IO-Link



Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{DC}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{DC}}$
4	Q	Switching signal (SIO)
C		Communication (IO-Link)

Autodetect PNP/NPN or by IO-Link

XUKCB●AYM12, XUMRACAYM8

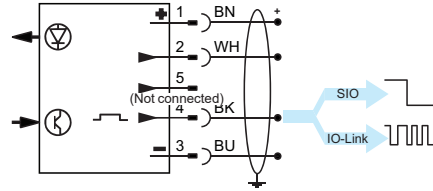


Note: IODD IO-Link files available on our website www.telemecaniquesensors.com/iolink


Detection curves

Colour detection system

Light spot size: XUKCBSAYM12 and XUKCBLAYM12

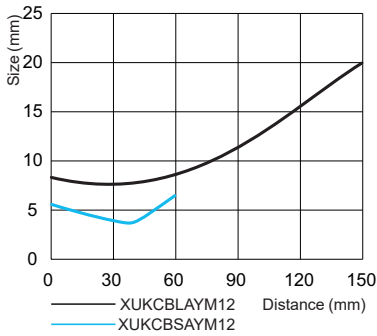


Signal process: XUMRACAYM8

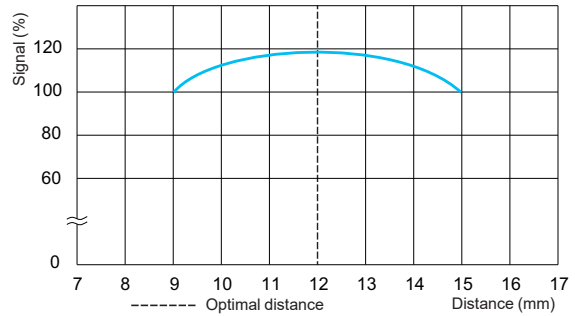


Dimensions

Compact format: XUKCB●AYM12

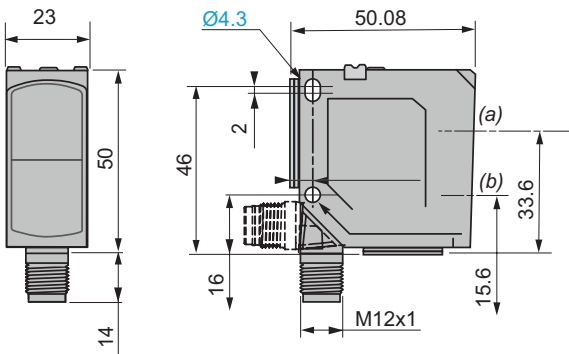

(a) Receiver optical axis
(b) Transmitter optical axis

Miniature format: XUMRACAYM8

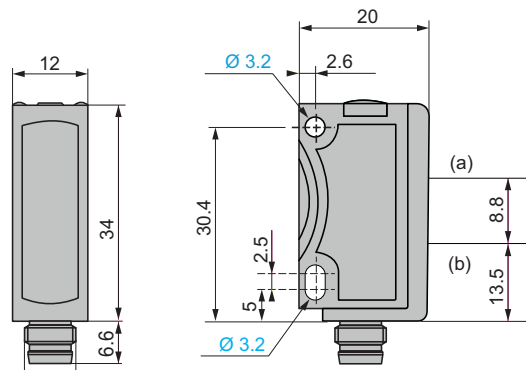

(a) Receiver optical axis
(b) Transmitter optical axis

Photo-electric sensors

XU range application

Sensors for transparent object detection

Miniature, sub-miniature, and compact design, plastic



XUMTARAYM8,
XUM7ABPXM8,
XUM8ABAYM8



XUMTARAYL2,
XUMTARAYP015,
XUM7ABPXL2,
XUM8ABAYP015



XUMTPRPXM8



XUT8ABAYL2,
XUT8ABAYP02,
XUT7ABPXL2,
XUT7ABPXP02



XUK8ABPXM12

Sensors for transparent object detection

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
Polarised reflex system IO-Link					
2 m/2 m	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	Pre-cabled (L = 2 m)	XUMTARAYL2	0.056
		Autodetect PNP/NPN	M8 connector (4-pin)	XUMTARAYM8	0.018
		Autodetect PNP/NPN	Pigtail M12 (L= 0.15 m)	XUMTARAYP015	0.027

Transparent reflex system

2 m/2 m	NO/NC configuration via potentiometer	PNP	M8 connector (4-pin)	XUMTPRPXM8	0.01
---------	---------------------------------------	-----	----------------------	-------------------	------

BGS mode detection, adjustable

IO-Link

200 mm/200 mm	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	M8 connector (4-pin)	XUM8ABAYM8	0.014
		Autodetect PNP/NPN	Pigtail M12 (L= 0.15 m)	XUM8ABAYP015	0.027
100 mm/100 mm	NO/NC configuration via teach-in or IO-Link	Autodetect PNP/NPN	Pigtail M8 (L= 0.2 m)	XUT8ABAYP02	0.019
		Autodetect PNP/NPN	Pre-cabled (L = 2 m)	XUT8ABAYL2	0.031

BGS mode detection, not adjustable

100 mm/80 mm	NO/NC configuration via teach-in	PNP	Pre-cabled (L = 2 m)	XUM7ABPXL2	0.056
		PNP	M8 connector (4-pin)	XUM7ABPXM8	0.017
50 mm/50 mm	NO/NC configuration via teach-in	PNP	Pre-cabled (L = 2 m)	XUT7ABPXL2	0.031
		PNP	Pigtail M8 (L= 0.2 m)	XUT7ABPXP02	0.022

BGS mode detection, compact

IO-Link

1200 mm/1200 mm	NO/NC configuration via teach-in or IO-Link	PNP	M12 connector (4-pin)	XUK8ABPXM12	0.046
-----------------	---	-----	-----------------------	--------------------	-------

Accessories

IO-Link Master

See page 88.

Fixing and other accessories

See page 92.

Cabling accessories

See page 98.

Characteristics										
Sensor type				XUMTARAY●●	XU●7ABP●●	XUK8ABP●●	XU●8ABAY●●	XUMTPRPXM8		
Product certifications				CE, UKCA, cULus, Ecolab				CE, UKCA, cULus		
Connection	Connector			M8	M8 (for XUM7)	M12	M8	M8		
	Pigtail	Length	XUM8	m	0.15	0.2	-	0.15		
			XUT8					0.2		
	Pre-cabled	Length	m	2	2	-	2	-		
Maximum sensing distance Smax	Polarised reflex system			XUMTA	m	0...2	-	-	-	
	Transparent reflex system			XUMTP	m	-	-	-	2	
	BGS system, not adjustable			XUM7	mm	-	0...80	-	-	
	BGS system, adjustable	XUM8			mm	-	-	White = 3...1200 Grey = 5...750 Black = 10...600	1...200	-
		XUT8			mm			3...100	-	
BGS system, blue light			XUT7	mm	-	2...50	-	-		
Detection light beam colour				Red (LED)	Blue (LED)	Blue (LED)	Blue (LED)	Red (LED)		
Degree of protection	Conforming to IEC 60529			IP67						
	Conforming to DIN 40050-9			IP69K (except XUT)				-		
Storage temperature				°C	-20...+80			-40...+70		
Operating temperature				°C	-20...+60	-20...+50	-20...+60	-25...+55		
Materials	Case	XUM		ABS	ABS	ABS/PC	ABS	Glass-filled technopolymer		
		XUT			PUR		PUR			
	Lens			PMMA						
	Front			PMMA				-		
	Cable			PVC	PVC	-	PVC	-		
Rated supply voltage	XUM		V	24 ---	12...24 ---	12...24 ---	12...24 ---	10...30 ---		
	XUT		V				24 ---			
Voltage limits (including ripple)				V	10...30					
Current consumption, no-load	XUM		mA	≤ 30	≤ 30	≤ 30	≤ 30	≤35m		
	XUT		mA		≤ 20		≤ 20			
Switching capacity	XUM		mA	≤ 100	≤ 100	≤ 100	≤ 100	≤ 100		
	XUT		mA		≤ 50		≤ 50			
Maximum switching frequency				Hz	1000	1000	600	700	1000	
Delays	First-up			ms	< 300			-		
	Response	XUM		µs	500		830	500	500	
		XUT		µs				700		
	Recovery			ms	< 300			-		
IO-Link				> 230	-	> 230	> 230	-		



Wiring schemes

Polarised reflex system

M8 and M12 connector - 4-pin - or pre-cabled - 4-wire IO-Link

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)
	C	Communication (IO-Link)

PNP
XUMTARAYL2, XUMTARAYM8, XUMTARAYP015

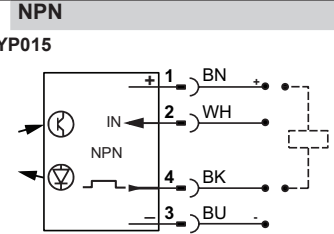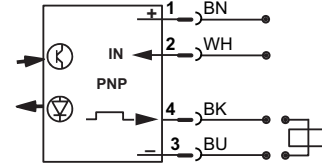



Note: IO-Link files available on the website www.telemecaniquesensors.com/iolink

BGS mode detection, adjustable IO-Link

M8 and M12 connector - 4-pin - or pre-cabled - 4-wire

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NO - = NC Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal (SIO)
	C	Communication (IO-Link)

PNP
XUM8ABAYM8, XUM8ABAYP015, XUT8ABAYP02, XUT8ABAYL2

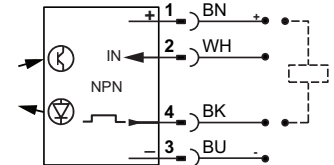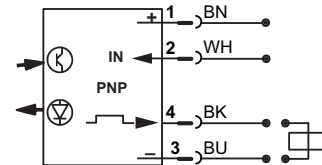

Note: IO-Link files available on the website www.telemecaniquesensors.com/iolink



BGS mode detection, not adjustable

M8 connector - 4-pin - or pre-cabled - 4-wire

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NC - = NO Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal

PNP
M8 connector
XUM7ABPXM8, XUT7ABXP02

Pre-cabled
XUM7ABPXL2, XUT7ABPXL2

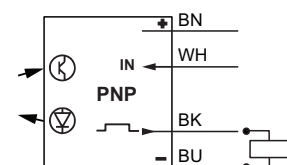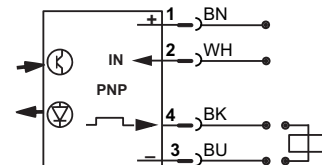


Note: IO-Link files available on the website www.telemecaniquesensors.com/iolink

M12 connector - 4-pin

Pin	Signal	Definition
1	+	+ 24 V $\overline{\text{---}}$
2	IN	+ = NC - = NO Open = NO
3	-	0 V $\overline{\text{---}}$
4	Q	Switching signal

PNP
XUK8ABPXM12

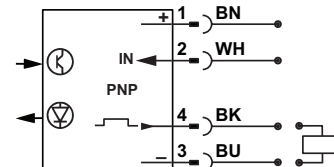

Note: IO-Link files available on the website www.telemecaniquesensors.com/iolink

Transparent reflex

M8 connector - 4-pin

Pin	Definition
1	10...30 Vdc
2	Not connected
3	0 V
4	PNP OUTPUT

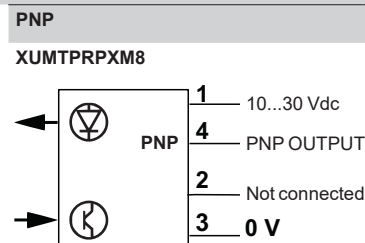


Photo-electric sensors

XU range application

Sensors for transparent object detection

Miniature, sub-miniature, and compact design, plastic


Dimensions

Miniature format: XUM

XUM●A●AYM8, XUM●A●AYL2, XUM●A●AYP015, XUM●ABPX●●


XUM●●●●●●●P015

XUM●●●●●●L2

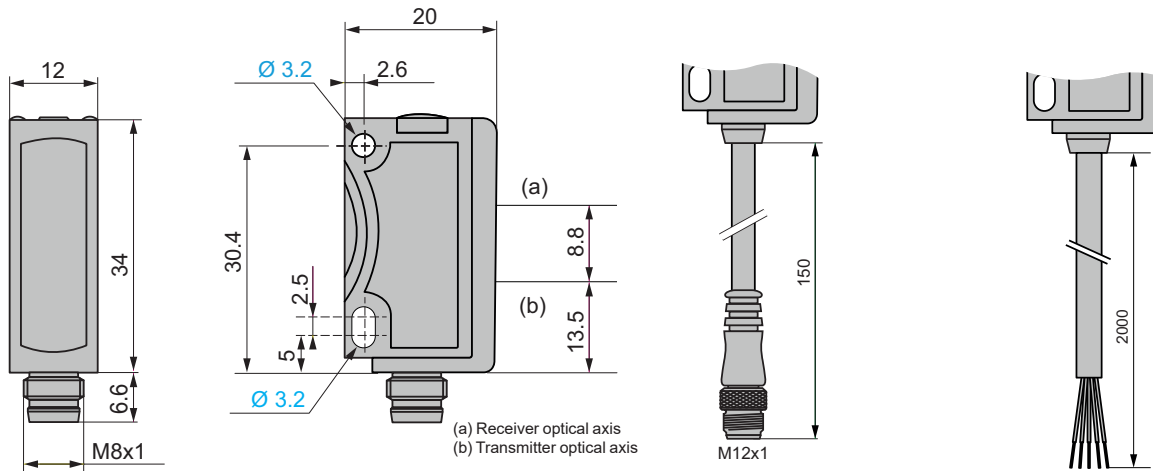

Miniature format: XUM

XUMTPRPM8

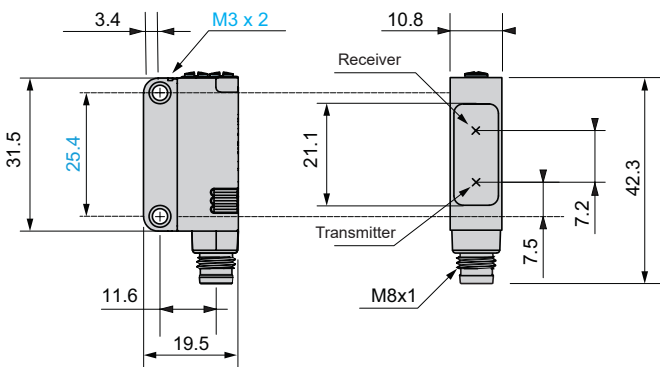


Sub-miniature format: XUT

XUT7ABXP02, XUT7ABPXL2, XUT8ABAYL2, XUT8ABAYP02


XUT●●●●●●P02

XUT●●●●●●L2

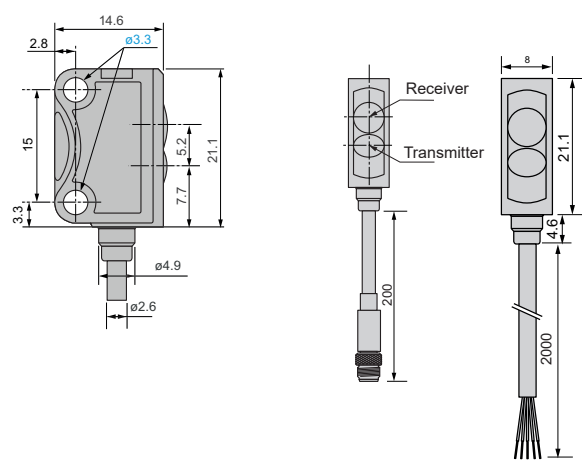

Compact format: XUK


XUK8ABPXM12

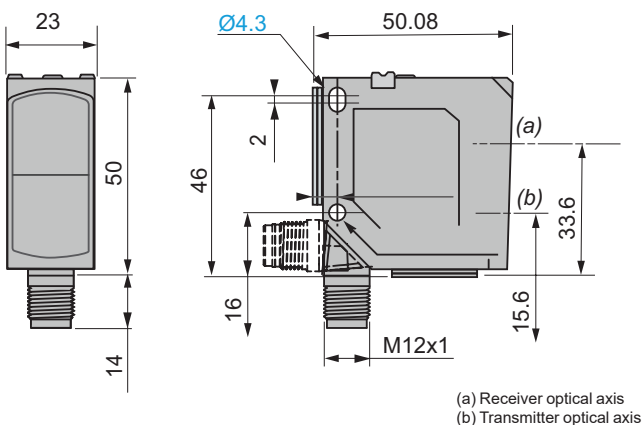

Detection curves


Polarised reflex

Light spot diameter: XUMTARAY●●

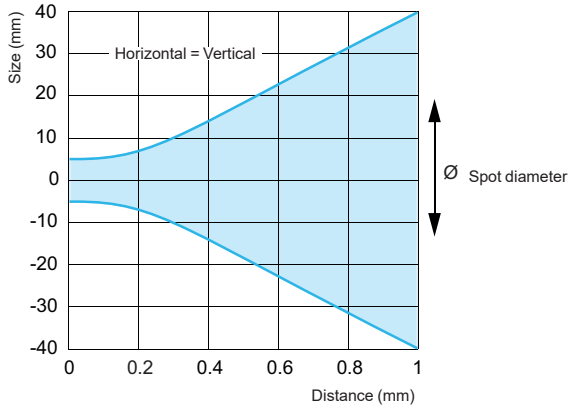

Background suppression mode


Light spot diameter: XUK8ABPXM12

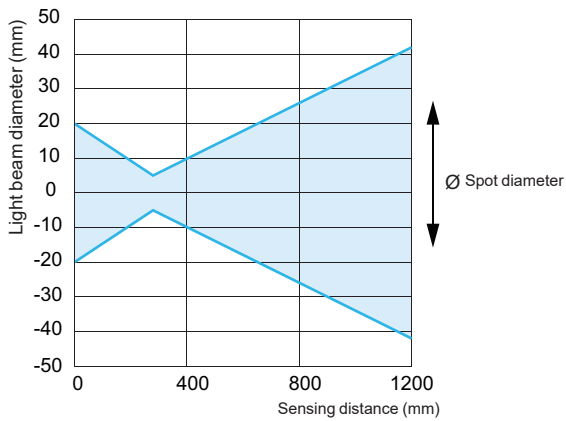


Detection curves

Background suppression mode


Scanning properties: XUT8ABAY●●

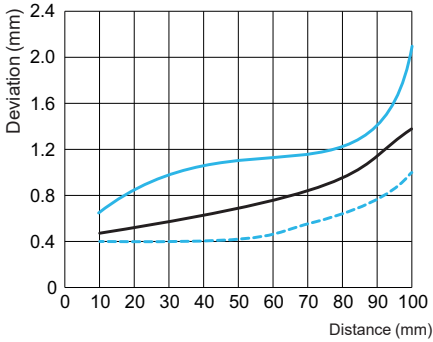

Scanning properties: XUK8ABPXM12

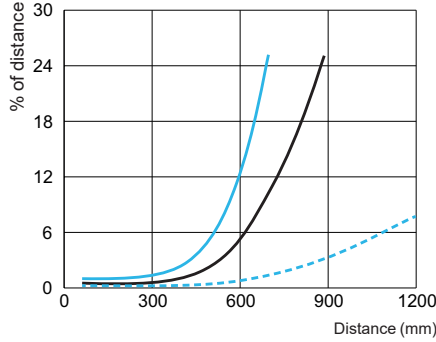


Scanning properties: XUM8ABAY●●

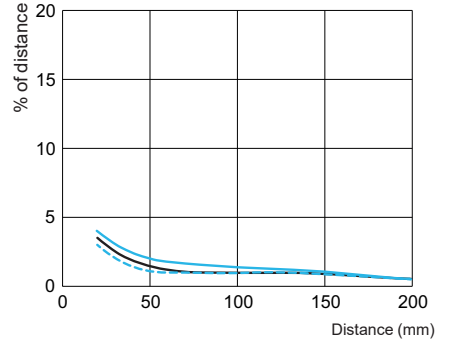


--- Min. distance white object (90%)/white background (90%) (mm)
 — Min. distance grey object (18%)/white background (90%) (mm)
 — Min. distance black object (6%)/white background (90%) (mm)


Light spot size: XUM7ABPX●●

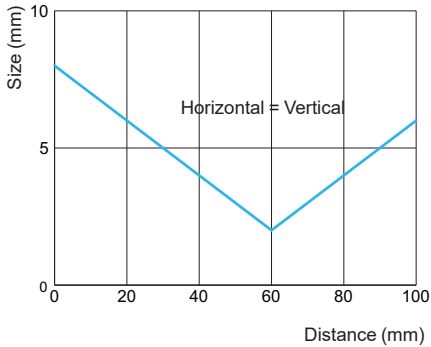

Light spot size: XUT7ABPX●●

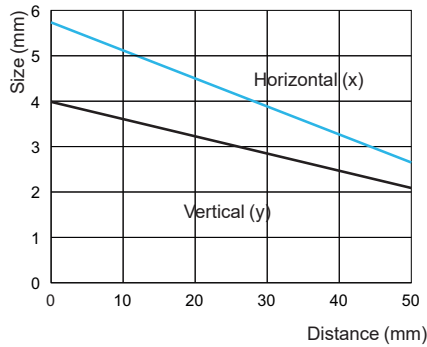

Light spot size: XUT8ABAY●●

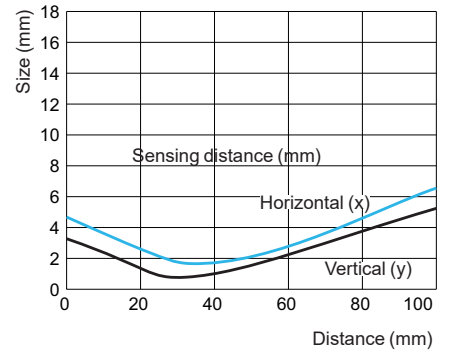

Ultrasonic sensors

XUVU for packaging series
Ultrasound fork for label detection



XUVU04M3•L2



XUVU04M3•L02M12



XUVU04M3•M8

Ultrasonic fork				
Operating sensing distance (Sn)	Function	Connection	Reference	Weight (kg)
2.6 mm	Push/pull	M8 connector (4-pin)	XUVU04M3BM8	0.095
		Pre-cabled (L = 2 m)	XUVU04M3BL2	0.12
		Pigtail M12 (L = 0.2 m)	XUVU04M3BL02M12	0.108
	PNP	M8 connector (4-pin)	XUVU04M3PM8	0.095
		Pre-cabled (L = 2 m)	XUVU04M3PL2	0.12
		Pigtail M12 (L = 0.2 m)	XUVU04M3PL02M12	0.108
	NPN	M8 connector (4-pin)	XUVU04M3NM8	0.095
		Pre-cabled (L = 2 m)	XUVU04M3NL2	0.12
		Pigtail M12 (L = 0.2 m)	XUVU04M3NL02M12	0.108

Accessories

IO-Link Master

See page 88


Cabling accessories

See page 98


Characteristics				
System		Thru-beam		
Type of transmission		Ultrasonic		
Nominal sensing distance (Sn)		2.6 mm		
Depth		43 mm		
References		XUVU04M3B●	XUVU04M3P●	
Remote adjustment		Push-Pull	PNP	
Product certifications		IEC 60947-5-2, CE, UKCA, cULus		
Materials		Valox, Zamac		
Connection		XUVU04M3●M8: 4-pin M8 connector XUVU04M3●L2: 4-wire cable XUVU04M3●L02M12: 4-pin M12 connector		
Detection performance	Minimum length of label	mm	2	
	Minimum distance between 2 labels	mm	1	
	Maximum flow rate	m/s	4 (240 m/min)	
	Detection accuracy	mm	For v = 2 m/s: +/-0.25	
Supply	Rated supply voltage	V	12-24 with protection against reverse polarity	
	Voltage limits	V	10-30 (including ripple)	
	Current consumption, no-load	mA	<50	
Protection class		III		
Output	Maximum rated current	mA	100	
	Maximum switching frequency	kHz	1.1	
	Indicator light			
	LEDs	Output state	Yellow	
		Quality of Teach/ Quality of Run	5-segment LED bar graph (green)	
	Power	Green		
Delay		µs	440	
Environment	Operating temperature	°C	+5...+55	
	Storage temperature	°C	-20...+70	
	Degree of protection		IP65	

Wiring schemes

M12/M8 connector - 4 pins - pre-cabled


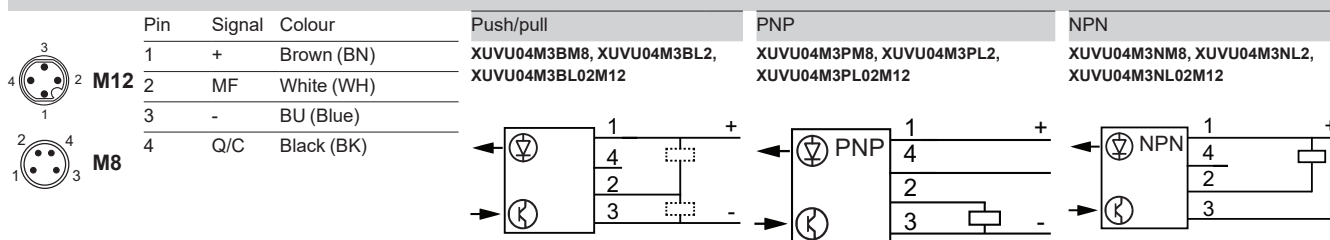


Auto-detect by IO-Link

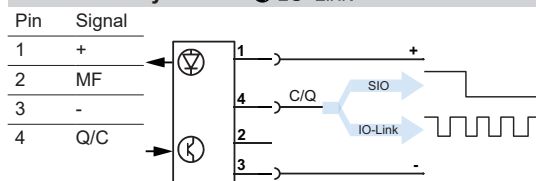

Dimensions

XUVU04M3●●●

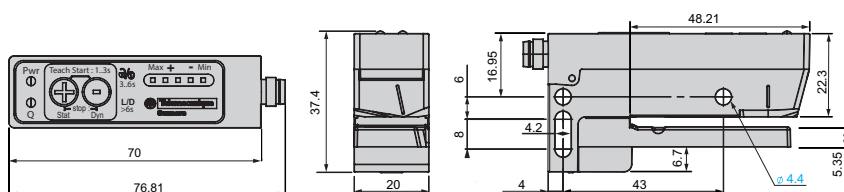


a1 ≥ 1 mm (0.039 in.)
a ≥ 2 mm (0.078 in.)

IO-Link



XZIO8AM12PY

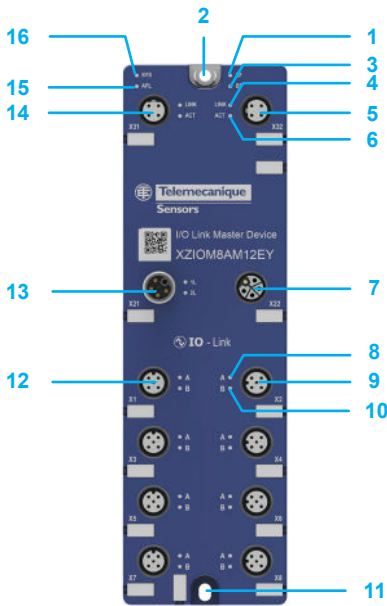

- 1 For Ethernet, module status LED (MS)
For PROFINET, system error LED (SF)
- 2 Fixing hole and functional earth (FE)
- 3 For Ethernet, network status LED (NS)
For PROFINET, bus failure LED (BF)
- 4 Link LED X32
- 5 Ethernet interface, M12, D-coded, port 2
- 6 Activity LED X32
- 7 Power Out
- 8 IO-Link status LED, port 2, channel A
- 9 IO-Link, port 2, M12, A-coded
- 10 IO-Link status LED, port 2, channel B
- 11 Fixing hole
- 12 IO-Link, port 1, M12, A-coded
- 13 Power In
- 14 Ethernet interface, M12, D-coded, port 1
- 15 Application status LED
- 16 System status LED

Presentation

IO-Link is a point-to-point network communication protocol dedicated to sensors and actuators offering advantages such as increased productivity, simplified integration and reduced inventory.

It enables:

- Simplified connection of sensors and actuators to the upper-level control and monitoring system of an automated line
- Advanced diagnostic functions, through continuous monitoring of critical parameters such as signal quality and sensor status
- Reduced commissioning time due to fewer cables and hot swappable devices
- Integration with third-party devices, thanks to multiple fieldbus protocol support (PROFINET, Ethernet/IP)

Telemecanique Sensors offers a wide choice of IO-Link conformant devices, with various detection systems such as thru-beam, diffuse, polarised reflex, etc.

IO-Link system

An IO-Link system consists of the following components:

- IO-Link Master
- IO-Link devices (sensors, RFID readers, valves, motor starters, I/O modules)
- Cabling
- Engineering tool for integration and configuration of IO-Link devices (Simply Config IO-Link Master software (1))

Description

IO-Link Masters

IO-Link Masters serve to capture digital inputs and outputs being conveyed between the PLC and the IO-Link devices.

Two types of IO-Link Master are available:

- **XZIO8AM12EY** Ethernet Master, for devices connected to an Ethernet/IP network
- **XZIO8AM12PY** PROFINET Master, for devices connected to a PROFINET network


An IO-Link Master enables:

- On the sensor side: IODD file management, sensor configuration, port diagnosis
- On the Master side: Master configuration, firmware update, factory reset, Master diagnosis, MQTT setting

Example of installation in line or star topology


Line topology

Ethernet/IP-Scanner/
PROFINET I/O controller

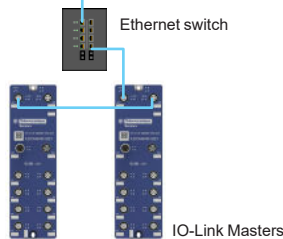

Star topology

Ethernet/IP-Scanner/
PROFINET I/O controller

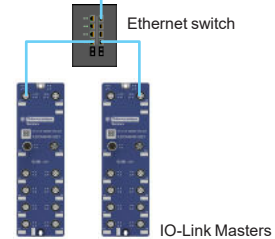

(1) Simply Config IO-Link software can be downloaded from [our website](#).

IO-Link Master devices

Description	Protocol	Power consumption	Number of ports	Connector	Reference	Weight (kg)
IO-Link Master	Ethernet/IP	24V $\overline{\text{---}}$	8 class A	M12	XZIOM8AM12EY	0.405
	PROFINET	24V $\overline{\text{---}}$	8 class A	M12	XZIOM8AM12PY	0.405

IO-Link cables

Power cables

Description	Type of connector	End fittings	Length m		Reference	Weight (kg)
Single-ended, pre-wired, L-coded power cable (PUR)	Female	5-pin (4+FE)	2	1.5 mm ²	XZCPK75DL2	0.255
			5	1.5 mm ²	XZCPK75DL5	0.585
			2	1.5 mm ²	XZCPK75CL2	0.255
			5	1.5 mm ²	XZCPK75CL5	0.585
Jumper power cable (PUR)	Male/ Female	M12 5-pin/M12 5-pin	2	1.5 mm ²	XZCR25K25DL2	0.285
			5	1.5 mm ²	XZCR25K25DL5	0.615
			2	1.5 mm ²	XZCR26K26CL2	0.285
			5	1.5 mm ²	XZCR26K26CL5	0.615

Communication cables


Description	Type of connector	Length (m)	Reference
Ethernet copper cable	M12 D-coded to RJ45, straight/straight	3	XGSZ12E4503
		10	XGSZ12E4510
Ethernet copper cable, shielded	Jumper M12/RJ45, straight/elbowed	3	XGSZ22E4503
		10	XGSZ22E4510

IO-Link connector

Description	Type of connector	End fittings	Reference	Weight (kg)
A-coded M12 T-connector	1 Male/2 Female	M12 5-pin/M12 5-pin	TCSCTN011M11F	0.035kg

Dimensions

XZIOM8AM12●Y

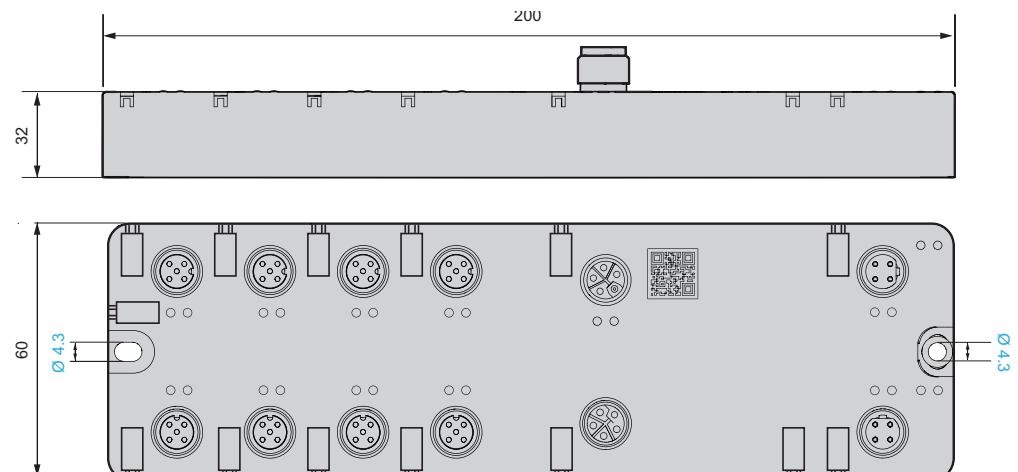

XZCR26K26●L

XGSZ12E45●●

XGSZ22E45●●

TCSCTN011M11F


Product specifications					
Reference		XZIOM8AM12EY		XZIOM8AM12PY	
Function			Ethernet/IP IO-Link Master	ProfiNet IO-Link Master	
Power supply 1L, 2L	Supply voltage 1L, 2L	V	24, -25%/+30% (18...31.2)		
	Low voltage warning 1L	V	18.0 (± 5% at 25 °C) notification on, 18.3 (± 5% at 25 °C) notification off		
	Overvoltage warning 1L	V	30.0 (± 5% at 25 °C) notification on, 29.7 (± 5% at 25 °C) notification off		
	Current consumption	A	1L: 0.1...16 (at 24 V DC) 2L: 0.01...16 (at 24 V DC)		
	Current consumption of supply port	A	Max. 16		
	Conductor cross-section	mm²	0.5...2.5		
	Connector		PWR IN: M12 L-coded, 5-pin, male PWR OUT: M12 L-coded, 5-pin, female		
	Torque	Nm	1.0		
	Reverse polarity protection		Yes		
	Power supply	V	24 --- PELV (Protective Extra Low Voltage) or SELV (Safety Extra Low Voltage)		
Total load	Maximum total load current	A	15.7		
Device	Dimensions (L x W x H)	mm	200 x 60 x 32		
	Weight	g	404		
	Housing		Plastic		
	Potting		Solvent-free electro-casting resin system based on 2 K polyurethane		
	Degree of protection		IP67 (EN 60529)		
	Protection class		III (EN 61140)		
	Mounting		Screw mounting on carrier, 2x M4		
Environmental conditions	Location of operation		Indoor		
	Ambient temperature (operation)	°C	-25...+70		
	Ambient temperature (storage)	°C	-40...+80		
	Maximum temperature change	K/min	3		
	Relative humidity		5%...95%		
	Degree of pollution		3 (EN 60664-1)		
	Altitude	m	0...2000		
	Overvoltage category		II (EN 60664-1)		
	Degree of protection		IP67 (EN 60529)		
	Protection class		III (EN 61140)		
Electrical characteristics	Insulation resistance	V	60 ---		
	Test voltage	V	550 ~ RMS		
	Minimal creepage distance	mm	0.7		
Ethernet connector	Communication interface		Ethernet		
	Autonegotiation, autocrossover		Yes		
	Connector		2x M12, D-coded, female, 4-pin		
	Torque	Nm	1.0		
IO-Link connector	Connector		8x M12, A-coded, male, 5-pin		
	Torque	Nm	1.0		
	Operating modes		Pin 2: DI or DO Pin 4: IO-Link Master, DI or DO		
LEDs	SYS		System status, green/yellow		
	APL		Application status, red/green		
	MS		Module status (EtherNet/IP), red/green		-
	SF		-		System error (PROFINET), red
	NS		Network status (EtherNet/IP), red/green		-
	BF		-		Bus error (PROFINET), red
	LINK		Link status, green		
	ACT		Activity status, yellow		
	1L, 2L		Supply voltage status, red/green		
	A, B		Port status: red/green/yellow (yellow by simultaneous red and green)		
Compliance	RoHS		Yes		
Compliance with EMC guidelines	CE sign		Yes		
	UKCA sign		Yes		
	Emission		EN 61000-6-4/BS EN 61000-6-4		
	Immunity		EN 61000-6-2/BS EN 61000-6-2		

Wiring schemes


Power supply

M12 connector - 5 pins (4 + FE) - IO-Link

Supply voltage input



Supply voltage input




Pin	Signal	Wire colour	Description
1	1L+	Brown	24 V $\overline{\text{DC}}$
2	2L-	White	Reference potential for 2L
3	1L-	Blue	Reference potential for 1L
4	2L+	Black	24 V $\overline{\text{DC}}$ auxiliary/control voltage U2L
FE	FE	Pink	Functional earth

Communication

M12 connector - D-coded - socket - 4 pins


Ethernet

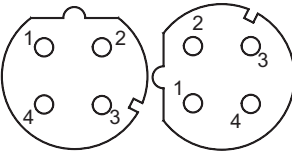

Pin	Signal	Wire colour	Description
1	TX+	Brown	Transmit data positive
2	RX+	White	Receive data positive
3	TX-	Blue	Transmit data negative
4	RX-	Black	Receive data negative


IO-Link ports (Class A)

M12 connector - 4 pins



Pin	Signal	Wire colour	Description
1	+	Brown	+24 V DC supply voltage U 1L for sensor/actuator
2	IN	White	Digital input/output channel B
3	-	Blue	Functional earth for 1L+
4	Q	Black	IO-Link data or Digital input/output channel A
5	-	-	Not connected

Auto-detect PNP/NPN or by IO-Link IO-Link

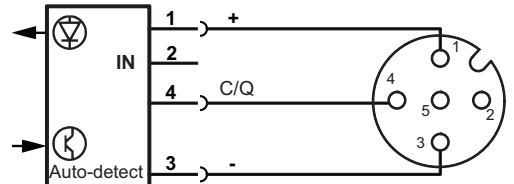

Derating curves

XZIOM8AM12EY and XZIOM8AM12PY




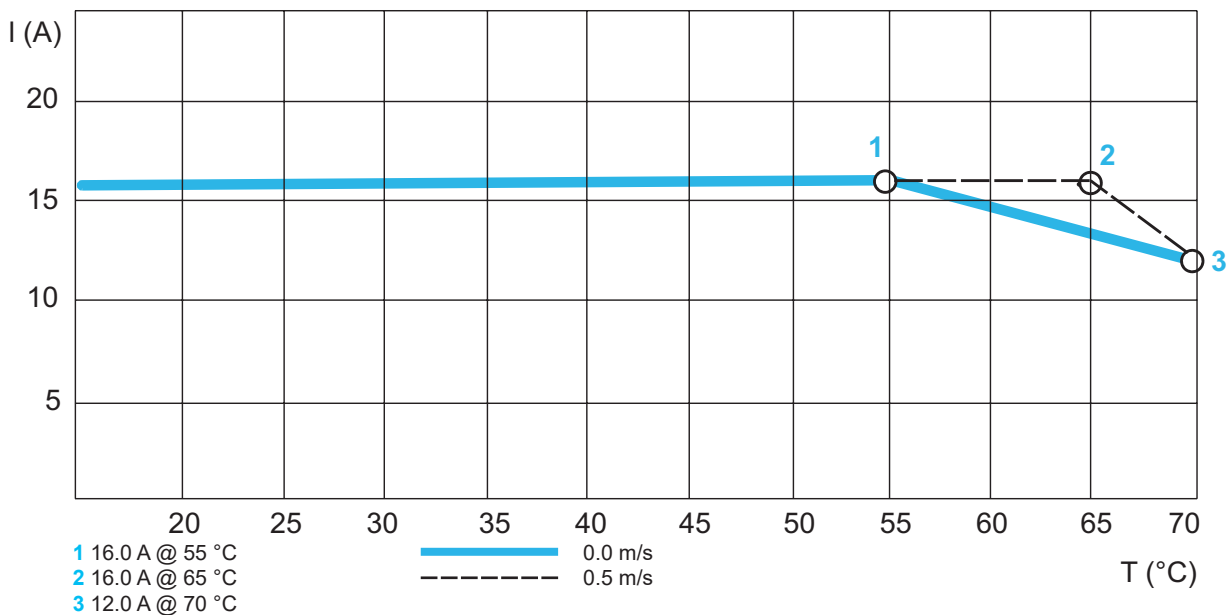


Photo-electric sensors

XU general purpose and Application Accessories

Fixing brackets

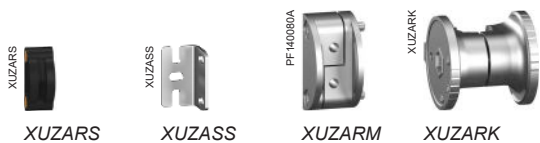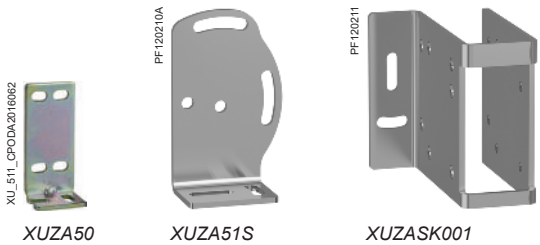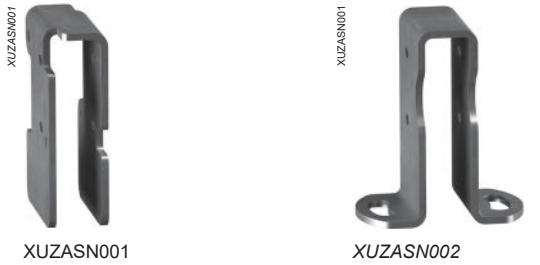

Fixing accessories

Fixing brackets

Description	For use with sensors	Reference	Weight kg
Wrap-around horizontal mounting bracket for pre-cabled sensors Supplied with 2 x M3 screws	XUM●A●XBL2	XUZASM02	0.030
Wrap-around vertical mounting bracket for pre-cabled sensors Supplied with 2 x M3 screws	XUM●A●XBL2	XUZASM03	0.062
Rear mounting bracket Supplied with 2 x M3 screws	XUM●A●XBL2, XUM●A●XBM8	XUZASM04	0.030
Stainless steel grade 316 fixing bracket Supplied with 2 x M3 screws	XUN	XUZASN001	0.124
Wrap-around vertical mounting bracket for pre-cabled sensors Supplied with 2 x M3 screws	XUN	XUZASN002	0.133
Metal fixing bracket Supplied with 2 x M3 screws	XUM, XUT, XUK	XUZA50	0.025
Stainless steel grade 316 fixing brackets Supplied with 2 x M3 screws	XUK8ABPXM12	XUZA51S	0.050
Stainless steel grade 304 fixing bracket for compact sensor 50 x 50 mm Supplied with 2 x M3 screws	XUK8ABPXM12	XUZASK001	0.240
Metal dovetail fixing clamp, 1 axis Supplied with 1 x M3 screw	XUK8ABPXM12	XUZASW001	0.014
Simple metal fixing bracket Supplied with 2 x M3 screws	XUK8ABPXM12	XUZASW002	0.017
90° stainless steel fixing brackets	XUB	XUZA118	0.045
Plastic fixing bracket with adjustable ball joint	XUB	XUZA218	0.035
Dovetail clamp Supplied with 2 x M3 screws	XUT7ABPX●●, XUT8A●AY●●, XUT9ABPX●●	XUZARS	0.005
Mounting bracket Supplied with 2 x M3 screws	XUT7ABPX●●, XUT8A●AY●●, XUT9ABPX●●	XUZASS	0.008
Dovetail clamp Supplied with 2 x M3 screws	XUM●A●AYM8, XUM●A●AYP015, XUM●A●AYL2, XUM7ABPX●●	XUZARM	0.017
Dovetail clamp Supplied with 1 x M3 screw	XUKCB●AYM12, XUK8ABPXM12	XUZARK	0.026

Mounting rings

Description	For use with sensors	Reference	Weight kg
Stainless steel flush mounting nut	XUB	XUZASB001	0.018
Plastic mounting ring 27 mm x 16.8 mm	XUB	XUZASB002	0.003
Metal mounting ring 30 mm x 18 mm	XUB	XUZASB003	0.011


Cabling accessories

See pages 98 to 103.


Fixing accessories

Fixing brackets


XUZASM04

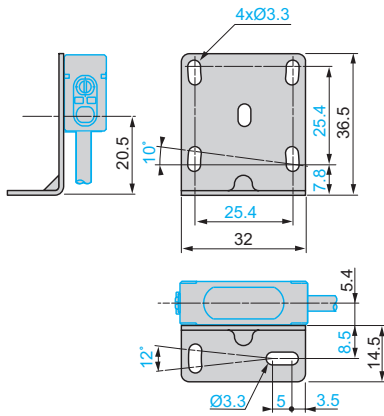


XUZASM03

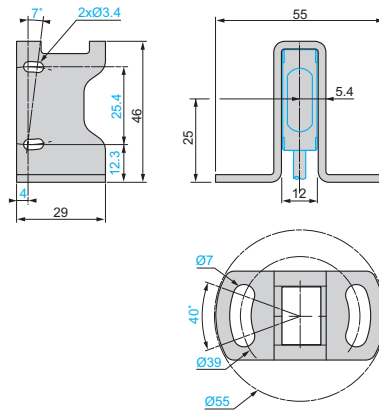


XUZASM02

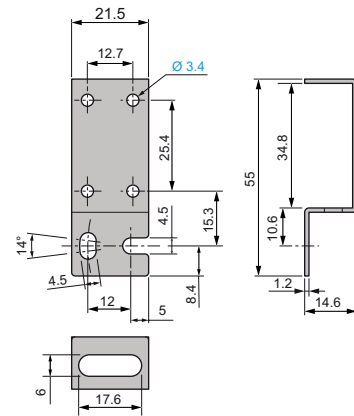


XUZASN001

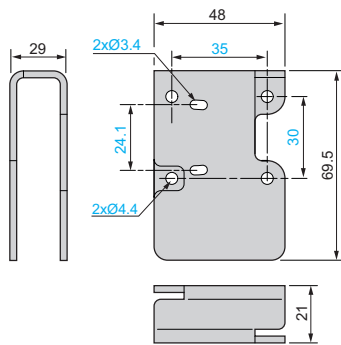

XUZASN002

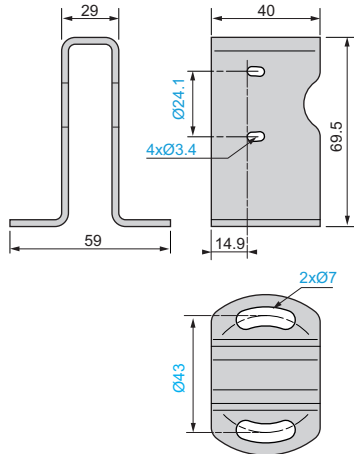


XUZA50

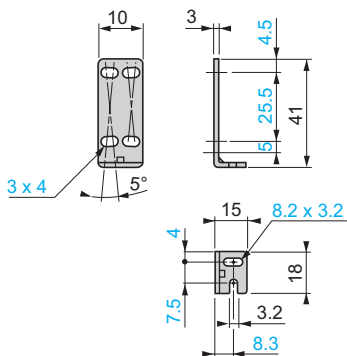


Fixing accessories

Fixing brackets


XUZA51S

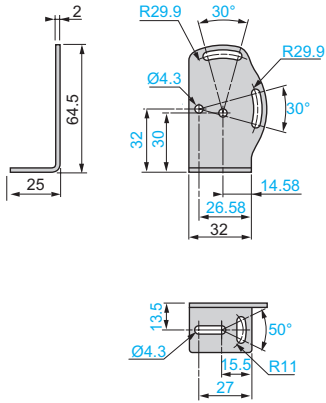


XUZASK001

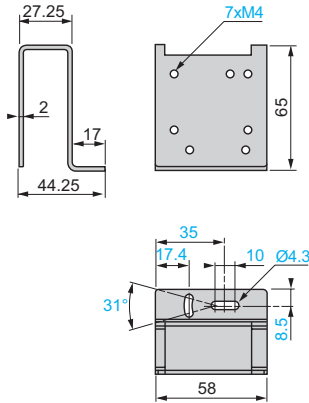


XUZASW001

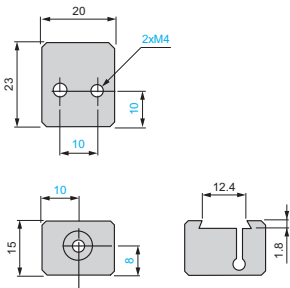


XUZASW002

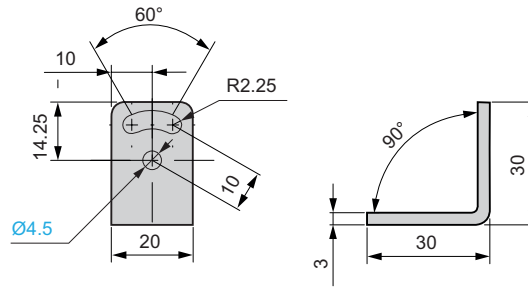

XUZA118

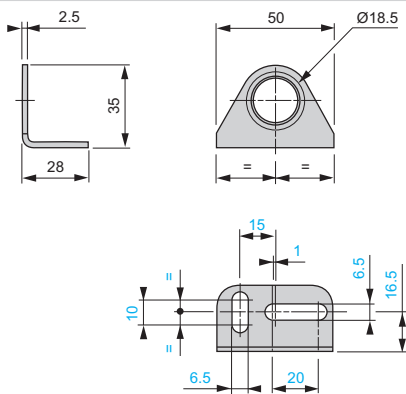


XUZA218

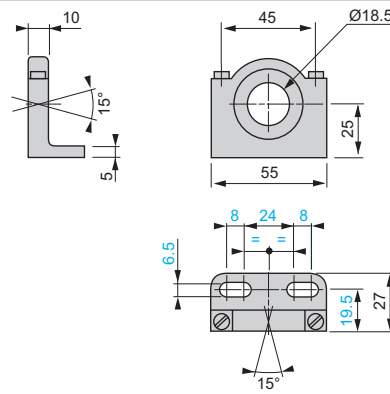


Fixing accessories

Fixing brackets


XUZARS

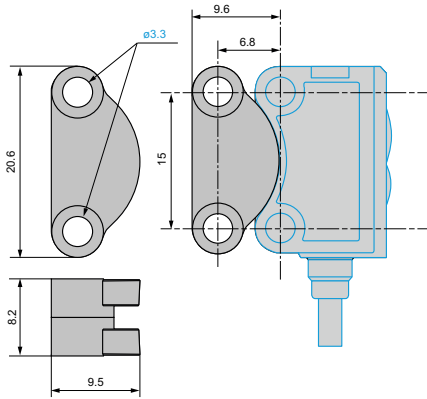


XUZASS

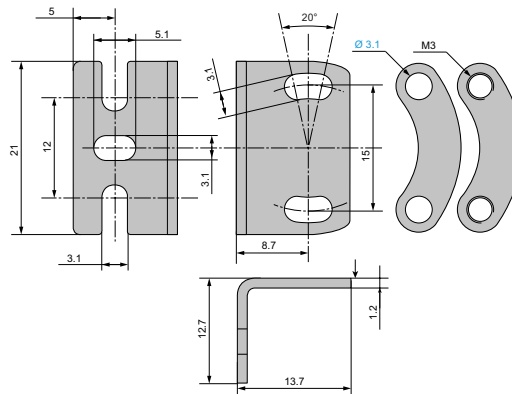

XUZARM

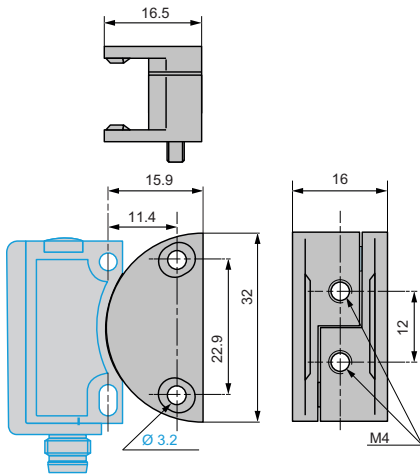


XUZARK

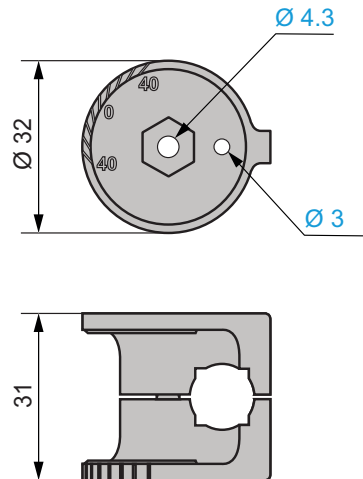


Mounting rings

XUZASB001

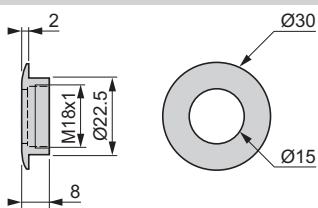

XUZASB002

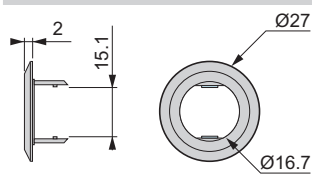

XUZASB003

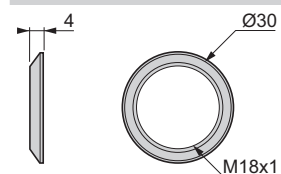


Photo-electric sensors

XU general purpose and XU Application Accessories

Reflectors



XUZC50_30

XUZC50●●



XU_511_PFR18019

XUZC60S11



XU_511_PFR18005

XUZC39



XUZCR0401CRHP

XUZCR0401

Reflectors

Description	Size	Fixing mode	Chemical resistance	Reference	Weight kg
-------------	------	-------------	---------------------	-----------	-----------

Universal (generic) devices

Rigid square reflectors	100 mm x 100 mm	2 brackets (not provided)	No	XUZC100	0.035
-------------------------	-----------------	---------------------------	----	----------------	-------

	51.5 mm x 69 mm	6 holes	No	XUZC50	0.020
--	-----------------	---------	----	---------------	-------

Rigid rectangle reflectors	45 mm x 29 mm	2 holes	No	XUZC24	0.010
----------------------------	---------------	---------	----	---------------	-------

	40 mm x 60 mm	2 holes	No	XUZC60S11	0.022
--	---------------	---------	----	------------------	-------

Rigid circular reflectors	Ø 39 mm	Adhesive	No	XUZC39	0.008
---------------------------	---------	----------	----	---------------	-------

For laser products

Rigid square reflectors	50 mm x 50 mm	6 holes	No	XUZC50HP	0.020
-------------------------	---------------	---------	----	-----------------	-------

Rigid rectangle reflectors	60 mm x 19 mm	2 holes	No	XUZCR0401HP	0.010
----------------------------	---------------	---------	----	--------------------	-------

		2 holes	Ecolab	XUZCR0401CRHP	0.010
--	--	---------	--------	----------------------	-------

For food & beverage

Rigid square reflectors	50 mm x 50 mm	6 holes	Ecolab	XUZC50CR	0.200
-------------------------	---------------	---------	--------	-----------------	-------


Cabling accessories

See pages 98 to 103.


Reflectors

Dimensions


XUZC100

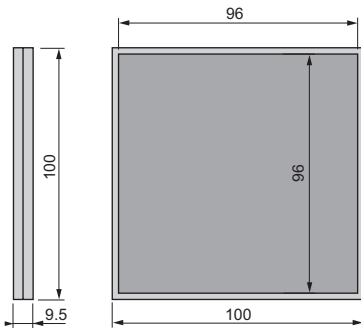


XUZC50, XUZC50HP, XUZC50CR

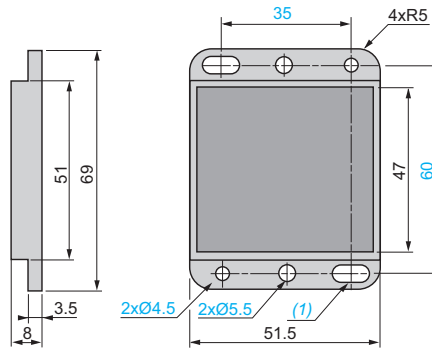


XUZC24

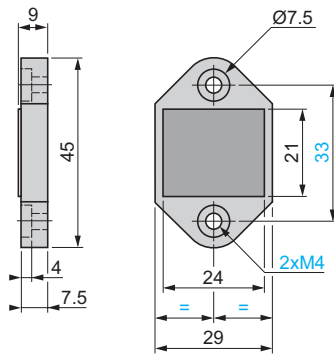


XUZC60S11

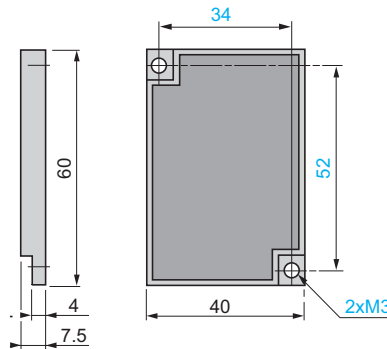

XUZC39

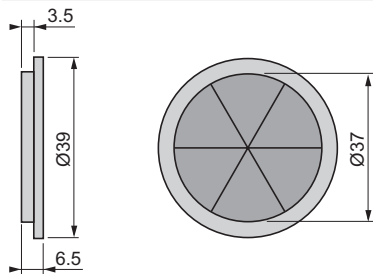

XUZCR0401HP, XUZCR0401CRHP

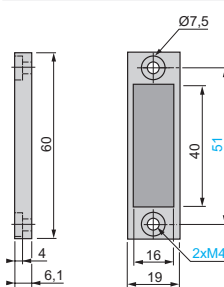


(1) 2 elongated holes Ø 4.5 x 8 for M4 screws

Note: All reflectors are IP 67 and IP 69K.

Photo-electric sensors

Cables for sensors

Pre-wired connectors

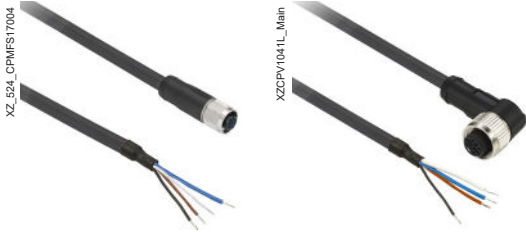

Pre-wired M8 connector, 4 conductors

PVC cables with pre-wired connector

Description	Connector type	End fittings	Length (m)	For use with sensor	Reference	Weight kg
M8 connector						
Pre-wired M8 connectors	Female, straight	4-pin	2	XUM●●●●M8, XUT●●●●M8	XZCPV0941L2	0.090
			5		XZCPV0941L5	0.200
			10		XZCPV0941L10	0.380
	Female, elbowed	4-pin	2		XZCPV1041L2	0.090
			5		XZCPV1041L5	0.200
			10		XZCPV1041L10	0.380

M12 connector

Pre-wired M12 connectors	Female, straight	4-pin	2	XUM●●●●M12, XUM●●●●P015,	XZCPV1141L2	0.090
			5	XUN●●●●M12, XUB●●●●M12,	XZCPV1141L5	0.200
			10	XUT●●●●M12, XUVU04M3●●	XZCPV1141L10	0.380
	Female, elbowed	4-pin	2		XZCPV1241L2	0.090
			5		XZCPV1241L5	0.200
			10		XZCPV1241L10	0.380



Pre-wired M12 connector, straight, 4 conductors (left) and 5 conductors (right)

PUR cables with pre-wired connector

Description	Connector type	End fittings	Length (m)	For use with sensor	Reference	Weight kg
M8 connector						
Pre-wired M8 connectors	Female, straight	4-pin	2	XUM●●●●M8, XUT●●●●M8	XZCP0941L2	0.080
			5		XZCP0941L5	0.180
			10		XZCP0941L10	0.360
	Female, elbowed	4-pin	2		XZCP1041L2	0.080
			5		XZCP1041L5	0.180
			10		XZCP1041L10	0.360

M12 connector

Pre-wired M12 connectors	Female, straight	4-pin	2	XUM●●●●M12, XUM●●●●P0●,	XZCP1141L2	0.090
			5	XUN●●●●M12, XUB●●●●M12,	XZCP1141L5	0.190
			10	XUK●●●●M12, XUVU04M3●●	XZCP1141L10	0.370
	Female, elbowed	4-pin	2		XZCP1241L2	0.090
			5		XZCP1241L5	0.190
			10		XZCP1241L10	0.370



Pre-wired M12 connector, elbowed, 4 conductors (left) and 5 conductors (right)

M12 connector, shielded

Shielded pre-wired M12 connectors	Female, straight	4-pin	2	XUM●●●●M12, XUM●●●●P0●,	XZCPB1141L2	0.200
			5	XUN●●●●M12, XUB●●●●M12, XUK●●●●M12	XZCPB1141L5	0.350
			5-pin	XUKC●●●●	XZCPB1151L2	0.114
	Female, elbowed	4-pin	5		XZCPB1151L5	0.259
			2		XZCPB1251L2	0.113
			5		XZCPB1251L5	0.258



Jumper cables, M12-M12 connectors, 4-pin/4-pin



Shielded jumper cables, M12-M12 connectors, 5-pin/5-pin



Jumper cables, M12-M12 connectors, 4-pin/4-pin



Jumper cables, M8-M8 connectors, 3-pin/3-pin



Jumper cables, M8-M8 connectors, 3-pin/4-pin or 4-pin/4-pin



Jumper cables, M8-M12 connectors, 3-pin/5-pin

PVC jumper cables

Description	Connector type		End fittings	Length (m)	For use with sensor	Reference	Weight kg
	Male	Female					
M12-M12 connectors							
PVC jumper cable XZ	M12, straight	M12, straight	4-pin/4-pin	1	XUM●●●●M12, XUM●●●●P015,	XZCRV1511041C1	0.070
				2	XUN●●●●M12, XUB●●●●M12,	XZCRV1511041C2	0.110
				5	XUT●●●●M12, XUVU04M3●●	XZCRV1511041C5	0.230
		M12, elbowed	1		XZCRV1512041C1	0.070	
	2			XZCRV1512041C2	0.110		
	5			XZCRV1512041C5	0.230		

PUR jumper cables

Description	Connector type		End fittings	Length (m)	For use with sensor	Reference	Weight kg
	Male	Female					
Shielded, M12-M12 connectors							
PUR jumper cable XZ	M12, straight	M12, straight	5-pin/5-pin	2	XUCK●●●●	XZCRB151151C2	0.123
				5		XZCRB151151C5	0.267

M12-M12 connectors


PUR jumper cable XZ	M12, straight	M12, straight	4-pin/4-pin	1	XUVU04M3●●	XZCR1511041C1	0.065
				2		XZCR1511041C2	0.095
		M12, elbowed	1		XZCR1512041C1	0.065	
	2			XZCR1512041C2	0.095		

M8-M8 connectors

PUR jumper cable XZ	M8, straight	M8, straight	3-pin/3-pin	1	XUM●●●●M8, XUT●●●●M8	XZCR2705037R1	0.065
				2		XZCR2705037R2	0.090
				1		XZCR2706037R1	0.065
		M8, elbowed	2		XZCR2709037S2	0.090	
	1			XZCR2609P2Y1	0.065		
	2			XZCR2609P2Y2	0.095		

M8-M12 connectors

PUR jumper cable XZ	M8, straight	M12, straight	3-pin/5-pin	1	XUM●●●●M8, XUT●●●●M8	XZCR2711037T1	0.065
				2		XZCR2711037T2	0.093
				1		XZCR2712037T1	0.065
		M12, elbowed	2		XZCR2712037T2	0.093	

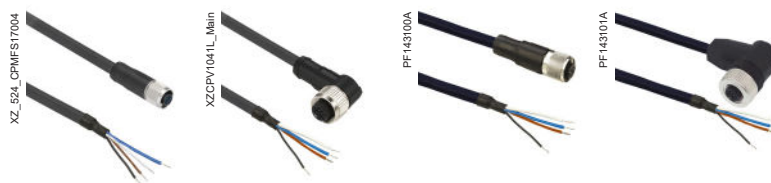

Connector type	Female, M8, straight	Female, M8, elbowed	Female, M12, straight	Female, M12, elbowed
Number of conductors	4			


References					
PVC cable	L = 2 m	XZCPV0941L2	XZCPV1041L2	XZCPV1141L2	XZCPV1241L2
	L = 5 m	XZCPV0941L5	XZCPV1041L5	XZCPV1141L5	XZCPV1241L5
	L = 10 m	XZCPV0941L10	XZCPV1041L10	XZCPV1141L10	XZCPV1241L10

Weight (kg)	0.090 (L = 2 m) 0.200 (L = 5 m) 0.380 (L = 10 m)
-------------	--


Characteristics		
Certifications	cULus	
Connection type	Screw threaded (metal clamping ring)	
Cable material	Sheath	PVC
	Conductor insulation	PP
Degree of protection	IP65, IP67	
Ambient air temperature	Static cable	-25...+80 °C
	Flexing cable	-5...+80 °C
Conductor c.s.a	4 x 0.25 mm ²	
Cable diameter	4.6 mm	
Nominal voltage	60 V ~, 75 V ~	250 V ~, 300 V ~
Nominal current	3 A	
Insulation resistance	> 10 ⁹ Ω	
Contact resistance	≤ 5 m Ω	

Connections

XZCPV0941L●,
XZCPV1041L●



XZCPV1141L●,
XZCPV1241L●



BN: Brown
WH: White
BU: Blue
BK: Black


Dimensions

XZCPV0941L●

XZCPV1041L●

XZCPV1141L●

XZCPV1241L●

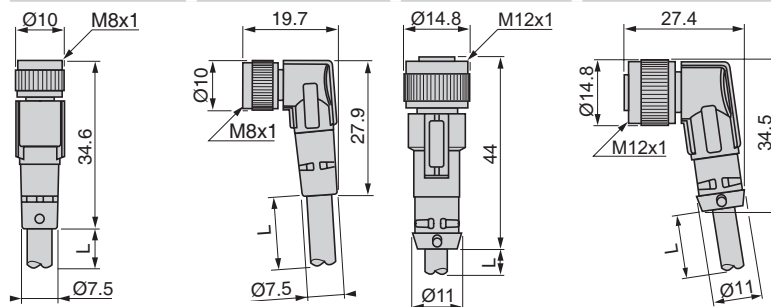

L = 2, 5 or 10 m





Connector type		Female, M8, straight	Female, M8, elbowed	Female, M12, straight	Female, M12, elbowed
Number of conductors		4			
References					
PUR cable	L = 2 m	XZCP0941L2	XZCP1041L2	XZCP1141L2	XZCP1241L2
	L = 5 m	XZCP0941L5	XZCP1041L5	XZCP1141L5	XZCP1241L5
	L = 10 m	XZCP0941L10	XZCP1041L10	XZCP1141L10	XZCP1241L10
Weight (kg)		0.080 (L = 2 m) 0.180 (L = 5 m) 0.360 (L = 10 m)		0.090 (L = 2 m) 0.190 (L = 5 m) 0.370 (L = 10 m)	
Characteristics					
Certifications		cULus			
Connection type		Screw threaded (metal clamping ring)			
Cable material	Sheath	PUR			
	Conductor insulation	PP			
Degree of protection		IP65, IP67, IP69K			
Ambient air temperature	Static cable	-40...+80 °C			
	Flexing cable	-5...+80 °C			
Conductor c.s.a.		4 x 0.34 mm ²			
Cable diameter		5.2 mm			
Nominal voltage		60 V ~, 75 V ~		250 V ~, 300 V ~	
Nominal current		4 A			
Insulation resistance		> 10 ⁹ Ω			
Contact resistance		≤ 5 m Ω			

Connections

XZCP0941L●,
XZCP1041L●

XZCP1141L●,
XZCP1241L●



BN: Brown
WH: White
BU: Blue
BK: Black





Dimensions

XZCP0941L●

XZCP1041L●

XZCP1141L●

XZCP1241L●

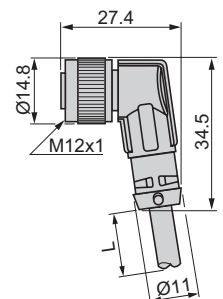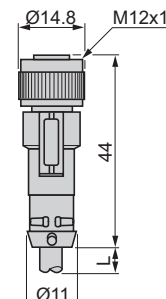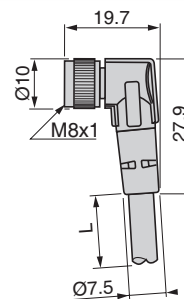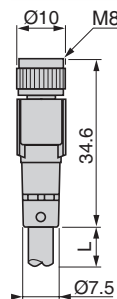

L = 2, 5 or 10 m




Connector type	Female, M12, straight	
Number of conductors	4	
References		
PUR cable	L = 2 m	XZCPB1141L2
	L = 5 m	XZCPB1141L5
Weight (kg)	0.200 (L = 2 m) 0.350 (L = 5 m)	

Characteristics		
Certifications	cULus	
Connection type	Screw threaded (metal clamping ring)	
Cable material	Sheath	PUR, shielded
	Conductor insulation	PP
Degree of protection	IP65, IP67	
Ambient air temperature	Static cable	-25...+80 °C
	Flexing cable	-5...+80 °C
Conductor c.s.a.	4 x 0.34 mm ²	
Cable diameter	5.9 mm	
Nominal voltage	250 V ~, 300 V ---	
Nominal current	4 A	
Insulation resistance	1 GΩ	
Contact resistance	5000 μOhm	

Connections


XZCPB1141L●



BN: Brown
WH: White
BU: Blue
BK: Black

Dimensions

XZCPB1141L●




L = 2 or 5 m





Connector type	Female, M12, straight	Female, M12, elbowed	
Number of conductors	5		
References			
PUR cable	L = 2 m	XZCPB1151L2	XZCPB1251L2
	L = 5 m	XZCPB1151L5	XZCPB1251L5
Weight (kg)	0.114 (L = 2 m) 0.259 (L = 5 m)	0.113 (L = 2 m) 0.258 (L = 5 m)	

Characteristics		
Certifications	cULus	
Connection type	Screw threaded (nickel clamping ring)	
Cable material	Sheath	PUR, shielded
	Conductor insulation	PP
Degree of protection	IP65, IP67, IP69K	
Ambient air temperature	Static cable	-40...+90 °C
	Flexing cable	-25...+80 °C
Conductor c.s.a.	5 x 0.34 mm ²	
Cable diameter	5.85 mm	
Nominal voltage	250 V ~, 60 V ☰	
Nominal current	4 A	
Insulation resistance	> 10 ⁹ Ω	
Contact resistance	≤ 10 m Ω	

Connections	Dimensions
XZCPB1●51L●	XZCPB1151L● XZCPB1251L●



BN: Brown
WH: White
BU: Blue
BK: Black
GR: Grey

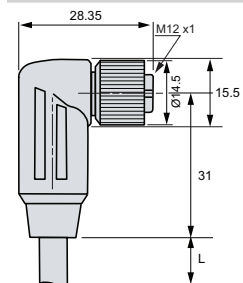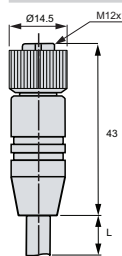

L = 2 or 5 m





Male connector type	M12, 4-pin, straight		
Female connector type	M12, 4-pin, straight	M12, 4-pin, elbowed	
Number of conductors	4		
References			
PVC cable	L = 1 m	XZCRV1511041C1	XZCRV1512041C1
	L = 2 m	XZCRV1511041C2	XZCRV1512041C2
	L = 5 m	XZCRV1511041C5	XZCRV1512041C5
Weight (kg)	0.070 (L = 1 m) 0.110 (L = 2 m) 0.230 (L = 5 m)		

Characteristics			
Certifications	cULus		
Connection type	Male and female	Screw threaded	
Cable material	Sheath	PVC	
	Conductor insulation	PP	
Degree of protection	IP65, IP67		
Ambient air temperature	Static cable	-25...+80 °C	
	Flexing cable	-5...+80 °C	
Conductor c.s.a	4 x 0.25 mm ²		
Cable diameter	4.6 mm		
Nominal voltage	250 V ~, 300 V ≍		
Nominal current	3 A		
Insulation resistance	> 10 ⁹ Ω		
Contact resistance	≤ 5 m Ω		

Dimensions

XZCRV1511041C1, XZCRV1511041C2, XZCRV1511041C5

XZCRV1512041C1, XZCRV1512041C2, XZCRV1512041C5

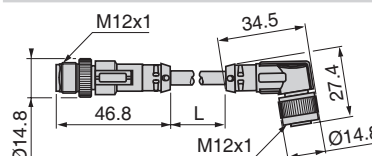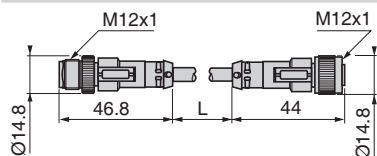

L = 2, 5 or 10 m

Connections

XZCRV1511041C●, XZCRV1512041C●




Photo-electric sensors

Cables for sensors, PUR

Jumper cables M12-M12


Shielded 5-pin/5-pin and unshielded 4-pin/4-pin



Male connector type	M12, 5-pin, straight	M12, 4-pin, straight	
Female connector type	M12, 5-pin, straight	M12, 4-pin, straight	M12, 4-pin, elbowed
Number of conductors	5	4	
References			
PUR cable	L = 1 m	–	XZCR1511041C1
	L = 2 m	XZCRB151151C2	XZCR1511041C2
	L = 5 m	XZCRB151151C5	–
Weight (kg)	0.123 (L = 2 m) 0.267 (L = 5 m)	0.065 (L = 1 m) 0.095 (L = 2 m)	

Characteristics			
Certifications		cULus	
Connection type	Male and female	Screw threaded	
Cable material	Sheath	PUR, shielded	PUR
	Conductor insulation	PP	–
Degree of protection		IP65, IP67, IP69K	
Ambient air temperature	Static cable	-40...+90 °C	-35...+90 °C
	Flexing cable	-25...+80 °C	-5...+90 °C
Conductor c.s.a		5 x 0.34 mm ²	4 x 0.34 mm ²
Cable diameter		5.85 mm ± 0.15 mm	5.2 mm
Nominal voltage		250 V ~, 60 V ---	250 V ~, 300 V ---
Nominal current		4 A	4 A
Insulation resistance		> 10 ⁹ Ω	≥ 10 ⁹ Ω
Contact resistance		≤ 10 m Ω	5000 m Ω


Dimensions

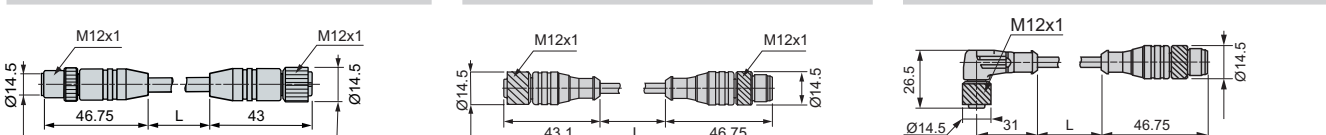

L = 2 or 5 m

L = 1 or 2 m

Connections

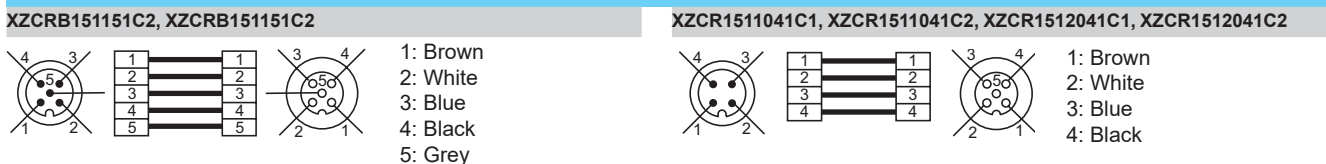




Male connector type	M8, 3-pin, straight			M8, 4-pin, straight
Female connector type	M8, 3-pin, straight	M8, 3-pin, elbowed	M8, 4-pin, straight	M8, 4-pin, straight
Number of conductors	3			

References					
PUR cable	L = 1 m	XZCR2705037R1	XZCR2706037R1	–	XZCR2609P2Y1
	L = 2 m	XZCR2705037R2	–	XZCR2709037S2	XZCR2609P2Y2
Weight (kg)	L = 1 m	0.065			
	L = 2 m	0.090			0.095


Characteristics			
Certifications		cULus	
Connection type	Male	Screw threaded and clip.	
	Female	Screw threaded. Metal clamping ring.	
Cable material	Sheath	PUR	
	Conductor insulation	PP	
Degree of protection		IP65, IP67, IP69K	
Ambient air temperature	Static cable	-35...+90 °C	
	Flexing cable	-5...+90 °C	
Conductor c.s.a.		3 x 0.34 mm ²	
Cable diameter		5.2 mm	
Nominal voltage		60 V ~, 45 V ~	30 V ~, 36 V ~
Nominal current		4 A	
Insulation resistance		> 10 ⁹ Ω	
Contact resistance		≤ 5 m Ω	

Dimensions

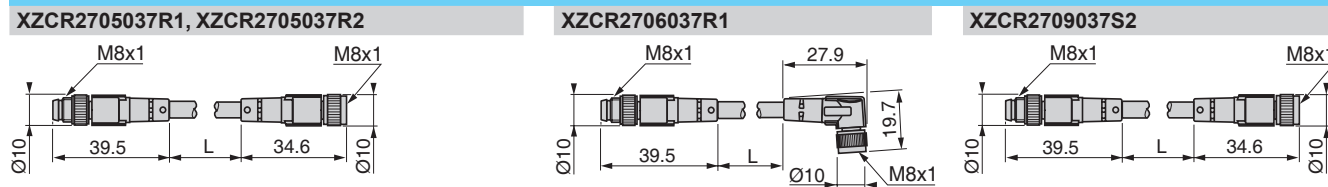

L = 1 or 2 m

Connections

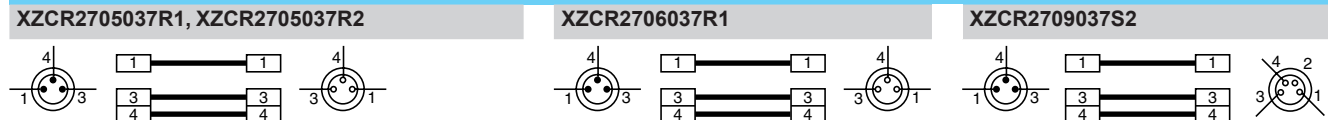






Male connector type	M8, 3-pin, straight			
Female connector type	M8, 4-pin, elbowed	M12, 5-pin, straight	M12, 5-pin, elbowed	
Number of conductors	3			
References				
PUR cable	L = 1 m	XZCR2710037S1	XZCR2711037T1	XZCR2712037T1
	L = 2 m	XZCR2710037S2	XZCR2711037T2	XZCR2712037T2
Weight (kg)	L = 1 m	0.065		
	L = 2 m	0.090	0.093	
Characteristics				
Certifications	cULus			
Connection type	Male	Screw threaded and clip.		
	Female	Screw threaded. Metal clamping ring.		
Cable material	Sheath	PUR		
	Conductor insulation	PP		
Degree of protection	IP65, IP67, IP69K			
Ambient air temperature	Static cable	-35...+90 °C		
	Flexing cable	-5...+90 °C		
Conductor c.s.a.	3 x 0.34 mm ²			
Cable diameter	5.2 mm			
Nominal voltage	60 V ~, 45 V ☰			
Nominal current	4 A			
Insulation resistance	> 10 ⁹ Ω			
Contact resistance	≤ 5 m Ω			

Dimensions

XZCR2710037S1, XZCR2710037S2

XZCR2711037T1, XZCR2711037T2

XZCR2712037T1, XZCR2712037T2

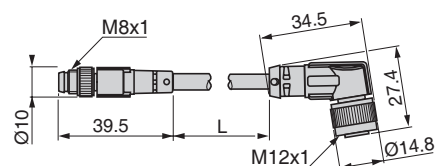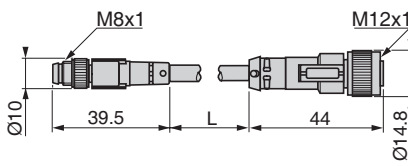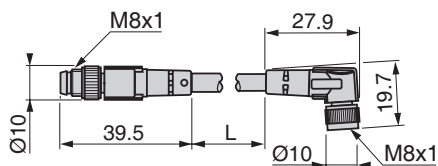



L = 1 or 2 m

Connections

XZCR2710037S1, XZCR2710037S2

XZCR2711037T1, XZCR2711037T2

XZCR2712037T1, XZCR2712037T2

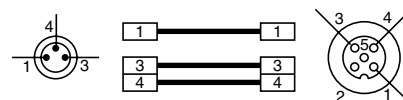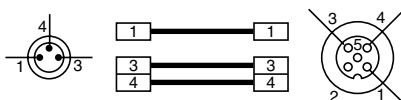

T					
TC SCTN011M11F	89	XUB5BPXNL2	25	XUB9BPXNL2	29
XG		XUB5BPXNM12	25	XUB9BPXNM12	29
XGSZ12E4503	89	XUB5BPYNM12	25	XUB9BPXWL2	29
XGSZ12E4510	89	XUB6ANXNL2	24	XUB9BPXWM12	29
XGSZ22E4503	89	XUB6ANXNM12	24	XUB9BPYNM12	29
XGSZ22E4510	89	XUB6ANXWL2	24	XUB9BPYWM12	29
XU		XUB6ANXWM12	24	XUK8ABPXM12	66, 80
XUB2AKXNL2T	21	XUB6APXNL2	24	XUKCBLAYM12	78
XUB2AKXNM12T	21	XUB6APXNM12	24	XUKCBSAYM12	78
XUB2AKXWL2T	21	XUB6APXWL2	24	XUM2AKXBL03M12T	8
XUB2AKXWM12T	21	XUB6APXWM12	24	XUM2AKXBL03M8T	8
XUB2ANXNL2	20	XUB6APYNM12	24	XUM2AKXBL2T	8
XUB2ANXNL2R	21	XUB6APYWM12	24	XUM2AKXBM8T	8
XUB2ANXNM12	20	XUB6BNXNL2	25	XUM2ANXBL03M12	8
XUB2ANXNM12R	21	XUB6BNXNM12	25	XUM2ANXBL03M12R	8
XUB2ANXWL2	20	XUB6BNXWL2	25	XUM2ANXBL03M8	8
XUB2ANXWL2R	21	XUB6BNXWM12	25	XUM2ANXBL03M8R	8
XUB2ANXWM12	20	XUB6BPXNL2	25	XUM2ANXBL2	8
XUB2ANXWM12R	21	XUB6BPXNM12	25	XUM2ANXBL2R	8
XUB2APXNL2	20	XUB6BPXWL2	25	XUM2ANXBM8	8
XUB2APXNL2R	21	XUB6BPXWM12	25	XUM2ANXBM8R	8
XUB2APXNM12	20	XUB6BPYNM12	25	XUM2APXBL03M12	8
XUB2APXNM12R	21	XUB6BPYWM12	25	XUM2APXBL03M12R	8
XUB2APXWL2	20	XUB8ANXNL2	26, 32	XUM2APXBL03M8	8
XUB2APXWL2R	21	XUB8ANXNM12	26, 32	XUM2APXBL03M8R	8
XUB2APXWM12	20	XUB8ANXWL2	32	XUM2APXBL2	8
XUB2APXWM12R	21	XUB8ANXWM12	26	XUM2APXBL2R	8
XUB2APYNM12	20	XUB8APXNL2	26, 32	XUM2APXBM8	8
XUB2APYNM12R	21	XUB8APXNM12	26	XUM2APXBM8R	8
XUB2APYWM12	20	XUB8APXWL2	26, 32	XUM2APYBL03M12	8
XUB2APYWM12R	21	XUB8APXWM12	26	XUM2APYBL03M12R	8
XUB2BKXNL2T	23	XUB8APYNM12	26	XUM2APYBM8	8
XUB2BKXNM12T	23	XUB8APYWM12	26	XUM2APYBM8R	8
XUB2BKXWL2T	23	XUB8APYWM12	26	XUM4ANXBL03M12	9
XUB2BKXWM12T	23	XUB8BNXNL2	27, 32	XUM4ANXBL03M8	9
XUB2BNXNL2	22	XUB8BNXNM12	27, 32	XUM4ANXBL2	9
XUB2BNXNL2R	23	XUB8BNXWL2	27, 32	XUM4ANXBM8	9
XUB2BNXNM12	22	XUB8BNXNM12	27, 32	XUM4APXBL03M12	9
XUB2BNXNM12R	23	XUB8BNXWL2	27, 32	XUM4APXBL03M8	9
XUB2BNXWL2	22	XUB8BNXWM12	27	XUM4APXBL2	9
XUB2BNXWL2R	23	XUB8BPXNL2	27, 32	XUM4APXBM8	9
XUB2BNXWM12	22	XUB8BPXNM12	27	XUM5ALAYL2	62, 72
XUB2BNXWM12R	23	XUB8BPXWL2	27, 32	XUM5ALAYM8	62, 72
XUB2BPXNL2	22	XUB8BPXWM12	27	XUM5ALAYP015	62, 72
XUB2BPXNL2R	23	XUB8BPYNM12	27	XUM5ANXBL03M12	9
XUB2BPXNM12	22	XUB8BPYWM12	27	XUM5ANXBL03M8	9
XUB2BPXNM12R	23	XUB9ANXNL2	28	XUM5ANXBL2	9
XUB2BPXWL2	22	XUB9ANXNM12	28	XUM5ANXBM8	9
XUB2BPXWL2R	23	XUB9ANXWL2	28	XUM5APXBL2	9
XUB2BPXWM12	22	XUB9ANXWM12	28	XUM5APXBM8	9
XUB2BPYNM12	22	XUB9APXNL2	28	XUM5APYBL03M12	9
XUB2BPYNM12R	23	XUB9APXNM12	28	XUM5APYBM8	9
XUB2BPYWM12	22	XUB9APXWL2	28	XUM6ANXBL03M12	9
XUB2BPYWM12R	23	XUB9APXWM12	28	XUM6ANXBL03M8	9
XUB5ANXNL2	24	XUB9APYNM12	28	XUM6ANXBL2	9
XUB5ANXNM12	24	XUB9APYWM12	28	XUM6ANXBM8	9
XUB5APXNL2	24	XUB9BNXNL2	29	XUM6APXBL03M12	9
XUB5APXNM12	24	XUB9BNXNM12	29	XUM6APXBL03M8	9
XUB5BNXNL2	25	XUB9BNXWL2	29	XUM6APXBL2	9
XUB5BNXNM12	25	XUB9BNXWM12	29	XUM6APXBM8	9
				XUM6APYBL03M12	9
				XUM6APYBM8	9
				XUM7ABPXL2	66, 80
				XUM7ABPXM8	66, 80
				XUM8ABAYM8	66, 80
				XUM8ABAYP015	66, 80
				XUM8ALAYL2	72
				XUM8ALAYM8	72
				XUM8ALAYP015	72
				XUM8ANXBL2	10
				XUM8ANXBM8	10
				XUM8APXBL2	10
				XUM8APXBM8	10
				XUM8PLPXM8	72
				XUM9ALAYL2	72
				XUM9ALAYM8	72
				XUM9ALAYP015	72
				XUM9ANXBL03M12	10
				XUM9ANXBL03M8	10
				XUM9ANXBL2	10
				XUM9ANXBM8	10
				XUM9APXBL03M12	10
				XUM9APXBL03M8	10
				XUM9APXBL2	10
				XUM9APXBM8	10
				XUM9APYBL03M12	10
				XUM9APYBM8	10
				XUM9PLPXM8	72
				XUMRACAYM8	62, 78
				XUMRAGAYM8	62
				XUMRAGAYP015	62
				XUMRAWAYM8	62
				XUMRAWAYP015	62
				XUMRPGAYM8	62, 63
				XUMTARAYL2	80
				XUMTARAYM8	80
				XUMTARAYP015	80
				XUMTPRPM8	80, 81
				XUN2AKXNL2T	44
				XUN2AKXNM12T	44
				XUN2ANXNL2	44
				XUN2ANXNL2R	44
				XUN2ANXNM12	44
				XUN2ANXNM12R	44
				XUN2ANXSL2	44
				XUN2APXNL2	44
				XUN2APXNL2R	44
				XUN2APXNM12	44
				XUN2APXNM12R	44
				XUN2APXSL2	44
				XUN2APYNM12	44
				XUN2APYNM12R	44
				XUN5ANXNL2	45
				XUN5ANXNM12	45
				XUN5ANXSL2	45
				XUN5APXNL2	45
				XUN5APXNM12	45
				XUN5APXSL2	45
				XUN5APYNM12	45
				XUN5APYNM12R	45
				XUN6ANXNL2	46
				XUN6ANXNM12	46
				XUN6ANXSL2	46
				XUN6APXNL2	46
				XUN6APXNM12	46
				XUN6APXSL2	46
				XUN6APYNM12	46
				XUN8ANXNL2	46
				XUN8ANXNM12	46
				XUN8ANXSL2	46
				XUN8APXNL2	46
				XUN8APXNM12	46
				XUN8APXSL2	46
				XUN8APYNM12	46
				XUN9ANXNL2	47
				XUN9ANXNM12	47
				XUN9ANXSL2	47
				XUN9APXNL2	47
				XUN9APXNM12	47
				XUN9APXSL2	47
				XUN9APYNM12	47
				XUT7ABPXL2	66, 80
				XUT7ABPXP02	66, 80
				XUT8ABAYL2	66, 80
				XUT8ABAYP02	66, 80
				XUT8ALAYL2	72
				XUT8ALAYP02	72
				XUT9ALPXL2	72
				XUT9ALPXP02	72
				XUVU04M3BL02M12	86, 87
				XUVU04M3BL2	86, 87
				XUVU04M3BM8	86, 87
				XUVU04M3NL02M12	86, 87
				XUVU04M3NL2	86, 87
				XUVU04M3NM8	86, 87
				XUVU04M3PL02M12	86, 87
				XUVU04M3PL2	86, 87
				XUVU04M3PM8	86, 87
				XUZA118	92
				XUZA218	92
				XUZA50	92
				XUZA51S	92
				XUZARK	92
				XUZARM	92
				XUZARS	92
				XUZASB001	92
				XUZASB002	92
				XUZASB003	92
				XUZASK001	92
				XUZASM02	92
				XUZASM03	92
				XUZASM04	92
				XUZASM05	11

XUZASN001	92	XZCPV0941L2	98, 100	XZIOM8AM12EY	89
XUZASN002	92			XZIOM8AM12PY	89
XUZASS	92	XZCPV0941L5	98, 100		
XUZASW001	92	XZCPV1041L10	98, 100		
XUZASW002	92				
XUZC100	96	XZCPV1041L2	98, 100		
XUZC24	96	XZCPV1041L5	98, 100		
XUZC39	96	XZCPV1141L10	98, 100		
XUZC50	96	XZCPV1141L2	98, 100		
XUZC50CR	96	XZCPV1141L5	98, 100		
XUZC50HP	96	XZCPV1241L10	98, 100		
XUZC60S11	96				
XUZCR0401CRHP	96, 97	XZCPV1241L2	98, 100		
XUZCR0401HP	96, 97	XZCPV1241L5	98, 100		
XUZDHM05	11	XZCR1511041C1	99, 105		
XUZDHM10	11	XZCR1511041C2	99, 105		
XUZDHM20	11	XZCR1512041C1	99, 105		
XUZDRM05	11	XZCR1512041C2	99, 105		
XUZDRM10	11	XZCR25K25DL2	89		
XUZDRM20	11	XZCR25K25DL5	89		
XUZDVM05	11	XZCR2609P2Y1	99, 106		
XUZDVM10	11	XZCR2609P2Y2	99, 106		
XUZDVM20	11	XZCR26K26CL2	89		
XZ		XZCR26K26CL5	89		
XZCP0941L10	98, 101	XZCR2705037R1	99, 106		
XZCP0941L2	98, 101	XZCR2705037R2	99, 106		
XZCP0941L5	98, 101	XZCR2706037R1	99, 106		
XZCP1041L10	98, 101	XZCR2709037S2	99, 106		
XZCP1041L2	98, 101	XZCR2710037S1	107		
XZCP1041L5	98, 101	XZCR2710037S2	107		
XZCP1141L10	98, 101	XZCR2711037T1	99, 107		
XZCP1141L2	98, 101	XZCR2711037T2	99, 107		
XZCP1141L5	98, 101	XZCR2712037T1	99, 107		
XZCP1241L10	98, 101	XZCR2712037T2	99, 107		
XZCP1241L2	98, 101	XZCRB151151C2	99, 105		
XZCP1241L5	98, 101	XZCRB151151C5	99, 105		
XZCPB1141L2	98, 102	XZCRV1511041C1	99, 104		
XZCPB1141L5	98, 102	XZCRV1511041C2	99, 104		
XZCPB1151L2	98, 103	XZCRV1511041C5	99, 104		
XZCPB1151L5	98, 103	XZCRV1512041C1	99, 104		
XZCPB1251L2	98, 103	XZCRV1512041C2	99, 104		
XZCPB1251L5	98, 103				
XZCPK75CL2	89				
XZCPK75CL5	89				
XZCPK75DL2	89				
XZCPK75DL5	89				
XZCPV0941L10	98, 100				

www.telemecaniquesensors.com

The information provided in this catalogue contains description of products sold by TMSS France, its subsidiaries and other affiliated companies ('Offer') with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by TMSS France, its subsidiaries and other affiliated companies for any type of damage arising out of or in connexion with (a) informational content of this catalogue not conforming with or exceeding the technical specifications, or (b) any error contained in this catalogue, or (c) any use, decision, act or omission made or taken on the basis of or in reliance on any information contained or referred to in this catalogue.

NEITHER TMSS FRANCE, ITS SUBSIDIARIES, NOR ITS OTHER AFFILIATES, AS THE CASE MAYBE, MAKE NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOGUE OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.

Telemecanique™ Sensors is a trademark of Schneider Electric Industries SAS used under license by TMSS France. Any other brands or trademarks referred to in this catalogue are property of TMSS France or, as the case may be, of its subsidiaries or other affiliated companies. All other brands are trademarks of their respective owners. This catalogue and its content are protected under applicable copyright laws and provided for informative use only.

No part of this catalogue may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of TMSS France. Copyright, intellectual, and all other proprietary rights in the content of this catalogue (including but not limited to audio, video, text, and photographs) rests with TMSS France, its subsidiaries, and other affiliated companies or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

As standards, specifications and design change from time to time, please ask for confirmation of the information given in this publication.

©2025, TMSS France, All Rights Reserved.

TMSS France SAS

Share capital: 366 931 214 €
Tour Eqho, 2 avenue Gambetta
92400 Courbevoie – France
908 125 255 RCS Nanterre

June 2025 - V3.0

TESEBRO000068EN